


Laboratory Work #3
Student: Amal Asset
Group: 12 : 00
Subject: Database

1) 200 random rows inserted into the airport table.

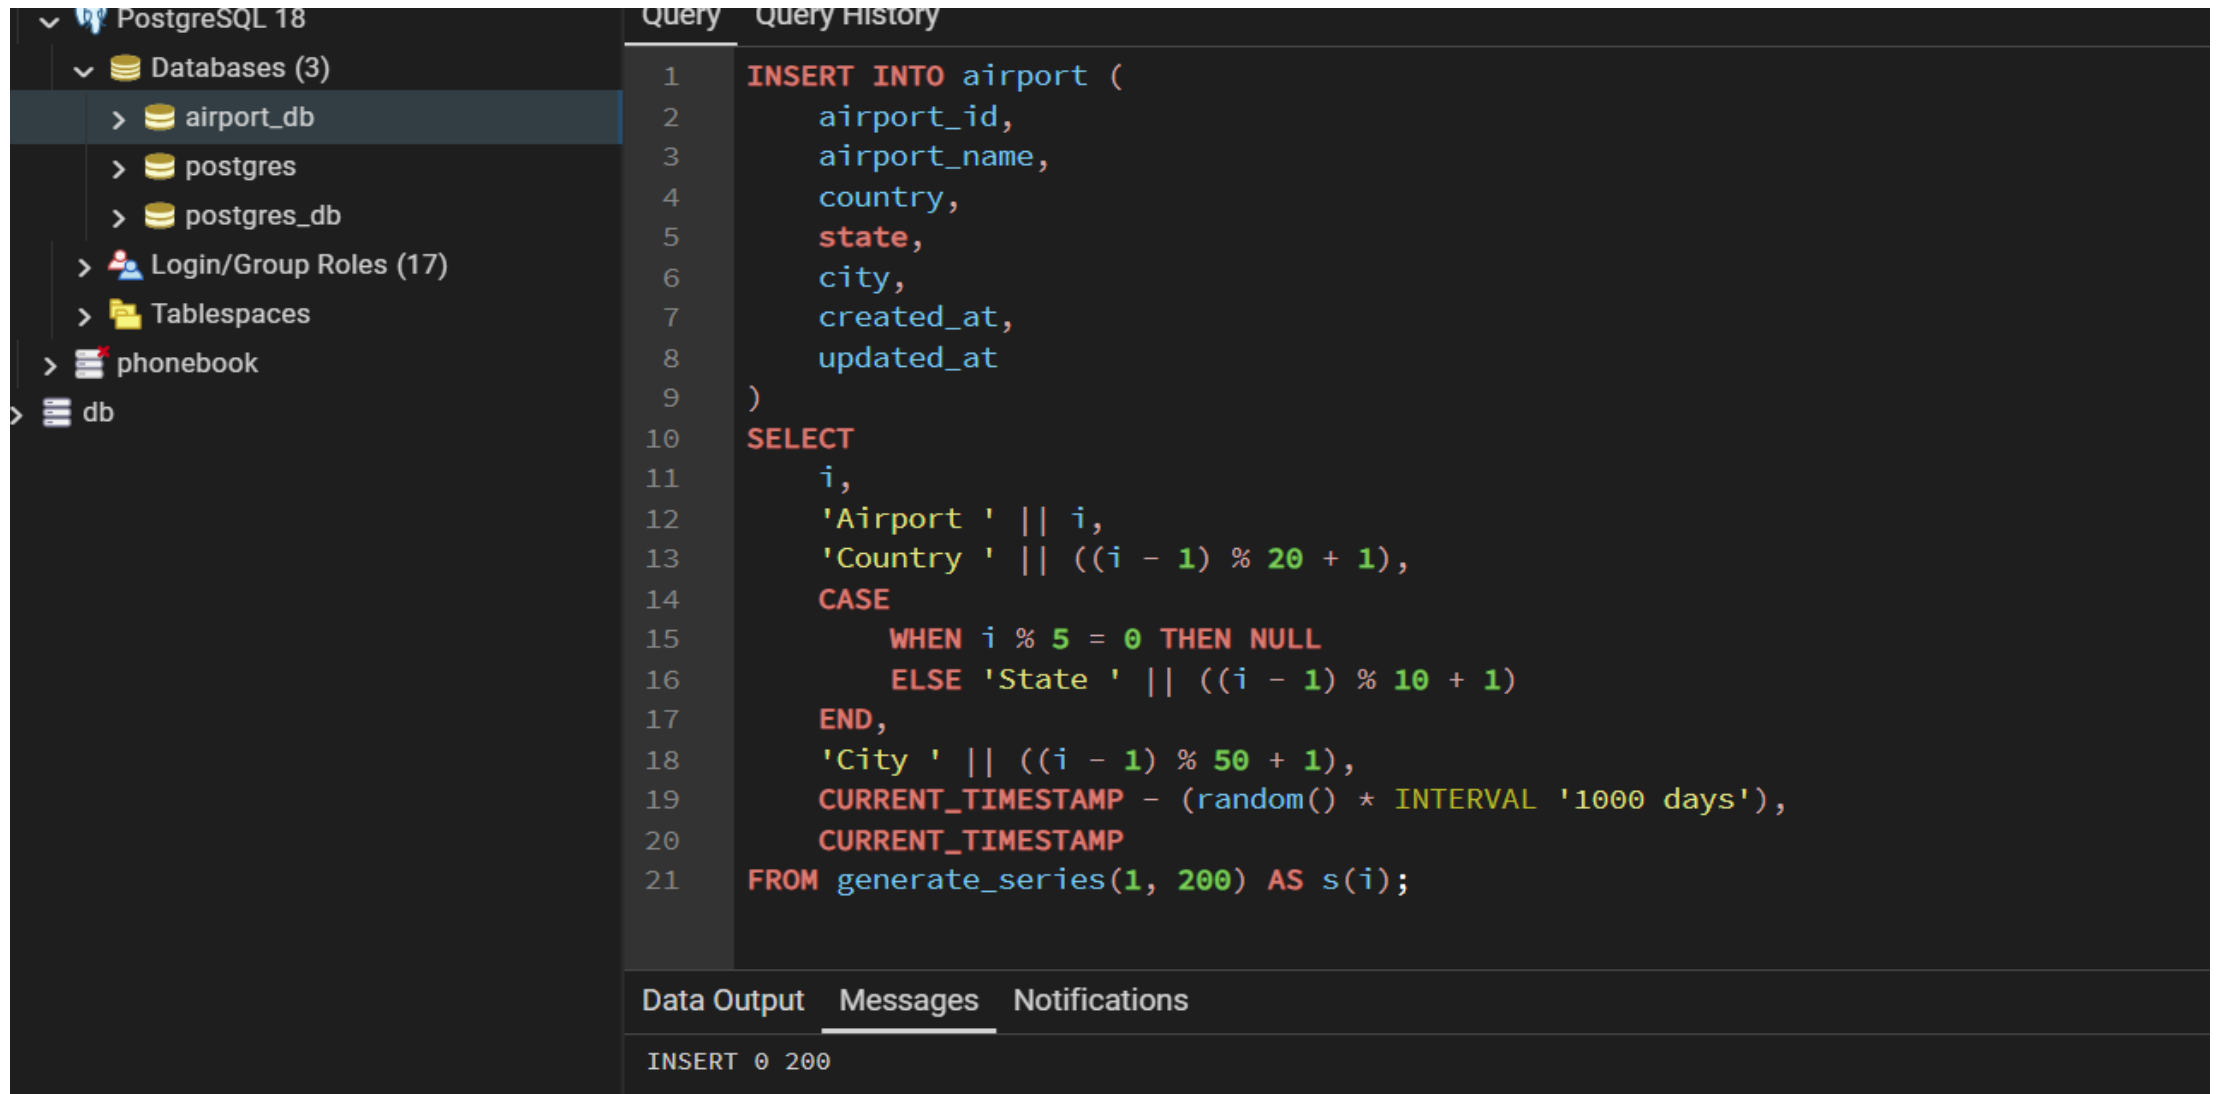

The screenshot shows a PostgreSQL 18 IDE interface. On the left, the 'Databases (3)' folder is expanded, showing 'airport_db', 'postgres', and 'postgres_db'. The 'airport_db' database is selected. The main query editor displays the following SQL code:

```
1  INSERT INTO airport (  
2      airport_id,  
3      airport_name,  
4      country,  
5      state,  
6      city,  
7      created_at,  
8      updated_at  
9  )  
10 SELECT  
11     i,  
12     'Airport ' || i,  
13     'Country ' || ((i - 1) % 20 + 1),  
14     CASE  
15         WHEN i % 5 = 0 THEN NULL  
16         ELSE 'State ' || ((i - 1) % 10 + 1)  
17     END,  
18     'City ' || ((i - 1) % 50 + 1),  
19     CURRENT_TIMESTAMP - (random() * INTERVAL '1000 days'),  
20     CURRENT_TIMESTAMP  
21 FROM generate_series(1, 200) AS s(i);
```

At the bottom of the IDE, there are three tabs: 'Data Output', 'Messages', and 'Notifications'. The 'Messages' tab is active, showing the message 'INSERT 0 200'.

2) Added KazAir airline.


```
1  INSERT INTO airline (  
2      airline_id,  
3      airline_code,  
4      name,  
5      country,  
6      created_at,  
7      updated_at  
8  )  
9  VALUES (  
10     1,  
11     'KAZ',  
12     'KazAir',  
13     'Kazakhstan',  
14     CURRENT_TIMESTAMP,  
15     CURRENT_TIMESTAMP  
16 );
```

Data Output Messages Notifications

INSERT 0 1

Query returned successfully in 83 msec.

3) Updated KazAir country to Turkey.

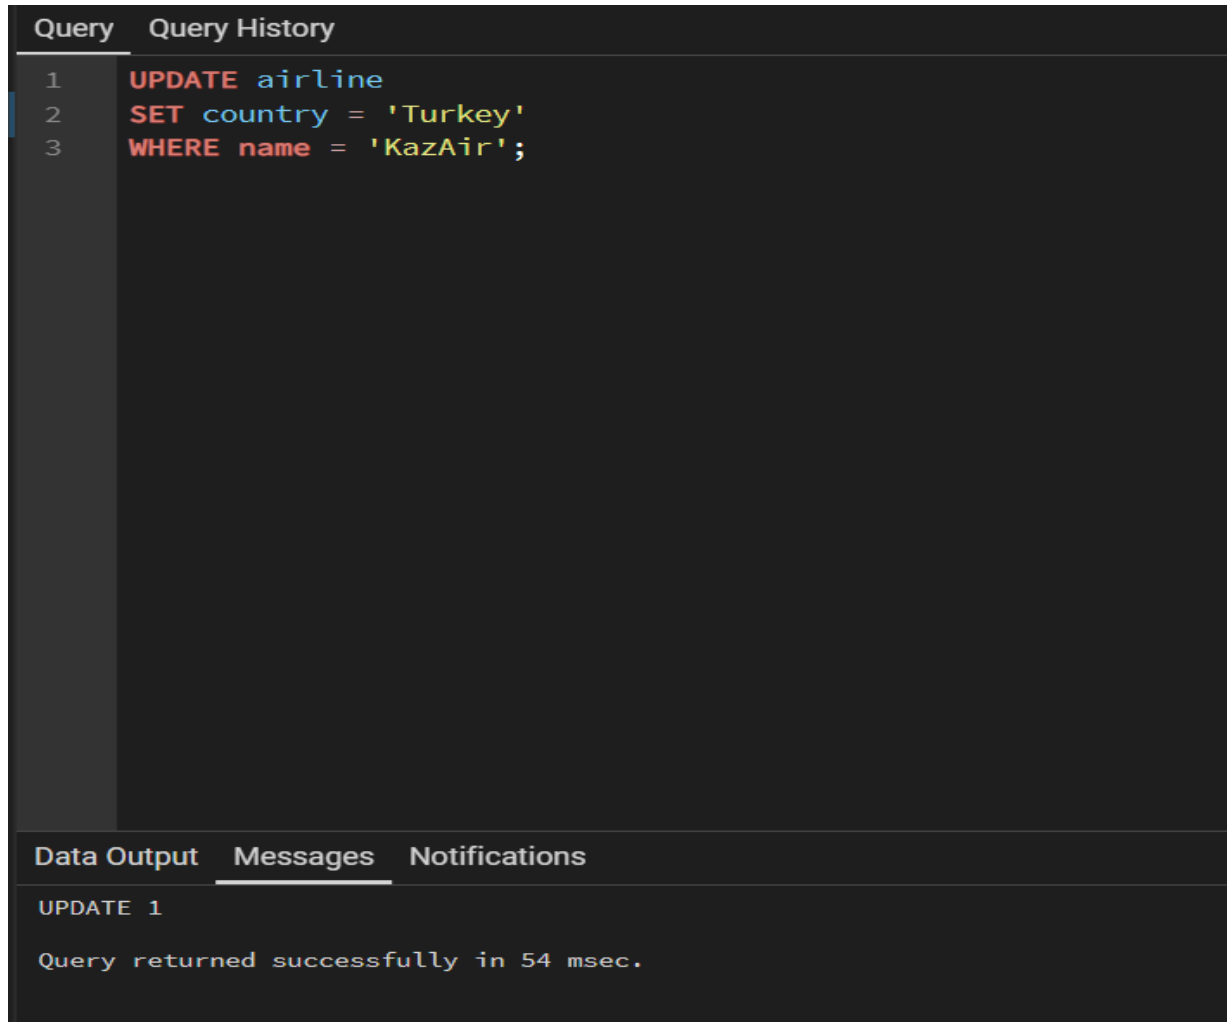

The screenshot shows a SQL query editor with a dark background. At the top, there are two tabs: 'Query' and 'Query History'. The 'Query' tab is active, displaying a three-line SQL statement: `1 UPDATE airline`, `2 SET country = 'Turkey'`, and `3 WHERE name = 'KazAir';`. The lines are numbered 1, 2, and 3 on the left. At the bottom, there are three tabs: 'Data Output', 'Messages', and 'Notifications'. The 'Messages' tab is active, showing the text 'UPDATE 1' and 'Query returned successfully in 54 msec.'

```
Query  Query History
1  UPDATE airline
2  SET country = 'Turkey'
3  WHERE name = 'KazAir';

Data Output  Messages  Notifications
UPDATE 1
Query returned successfully in 54 msec.
```

Task 4

Added three airlines: **AirEasy** from France, **FlyHigh** from Brazil, and **FlyFly** from Poland.

```
1  INSERT INTO airline (  
2      airline_id,  
3      airline_code,  
4      name,  
5      country,  
6      created_at,  
7      updated_at  
8  )  
9  VALUES  
10     (2, 'AEE', 'AirEasy', 'France', CURRENT_TIMESTAMP, CURRENT_TIMESTAMP),  
11     (3, 'FLH', 'FlyHigh', 'Brazil', CURRENT_TIMESTAMP, CURRENT_TIMESTAMP),  
12     (4, 'FLY', 'FlyFly', 'Poland', CURRENT_TIMESTAMP, CURRENT_TIMESTAMP);
```


Data Output Messages Notifications

INSERT 0 3

Query returned successfully in 52 msec.

Task 5

Deleted all flights whose scheduled arrival date was in 2024.

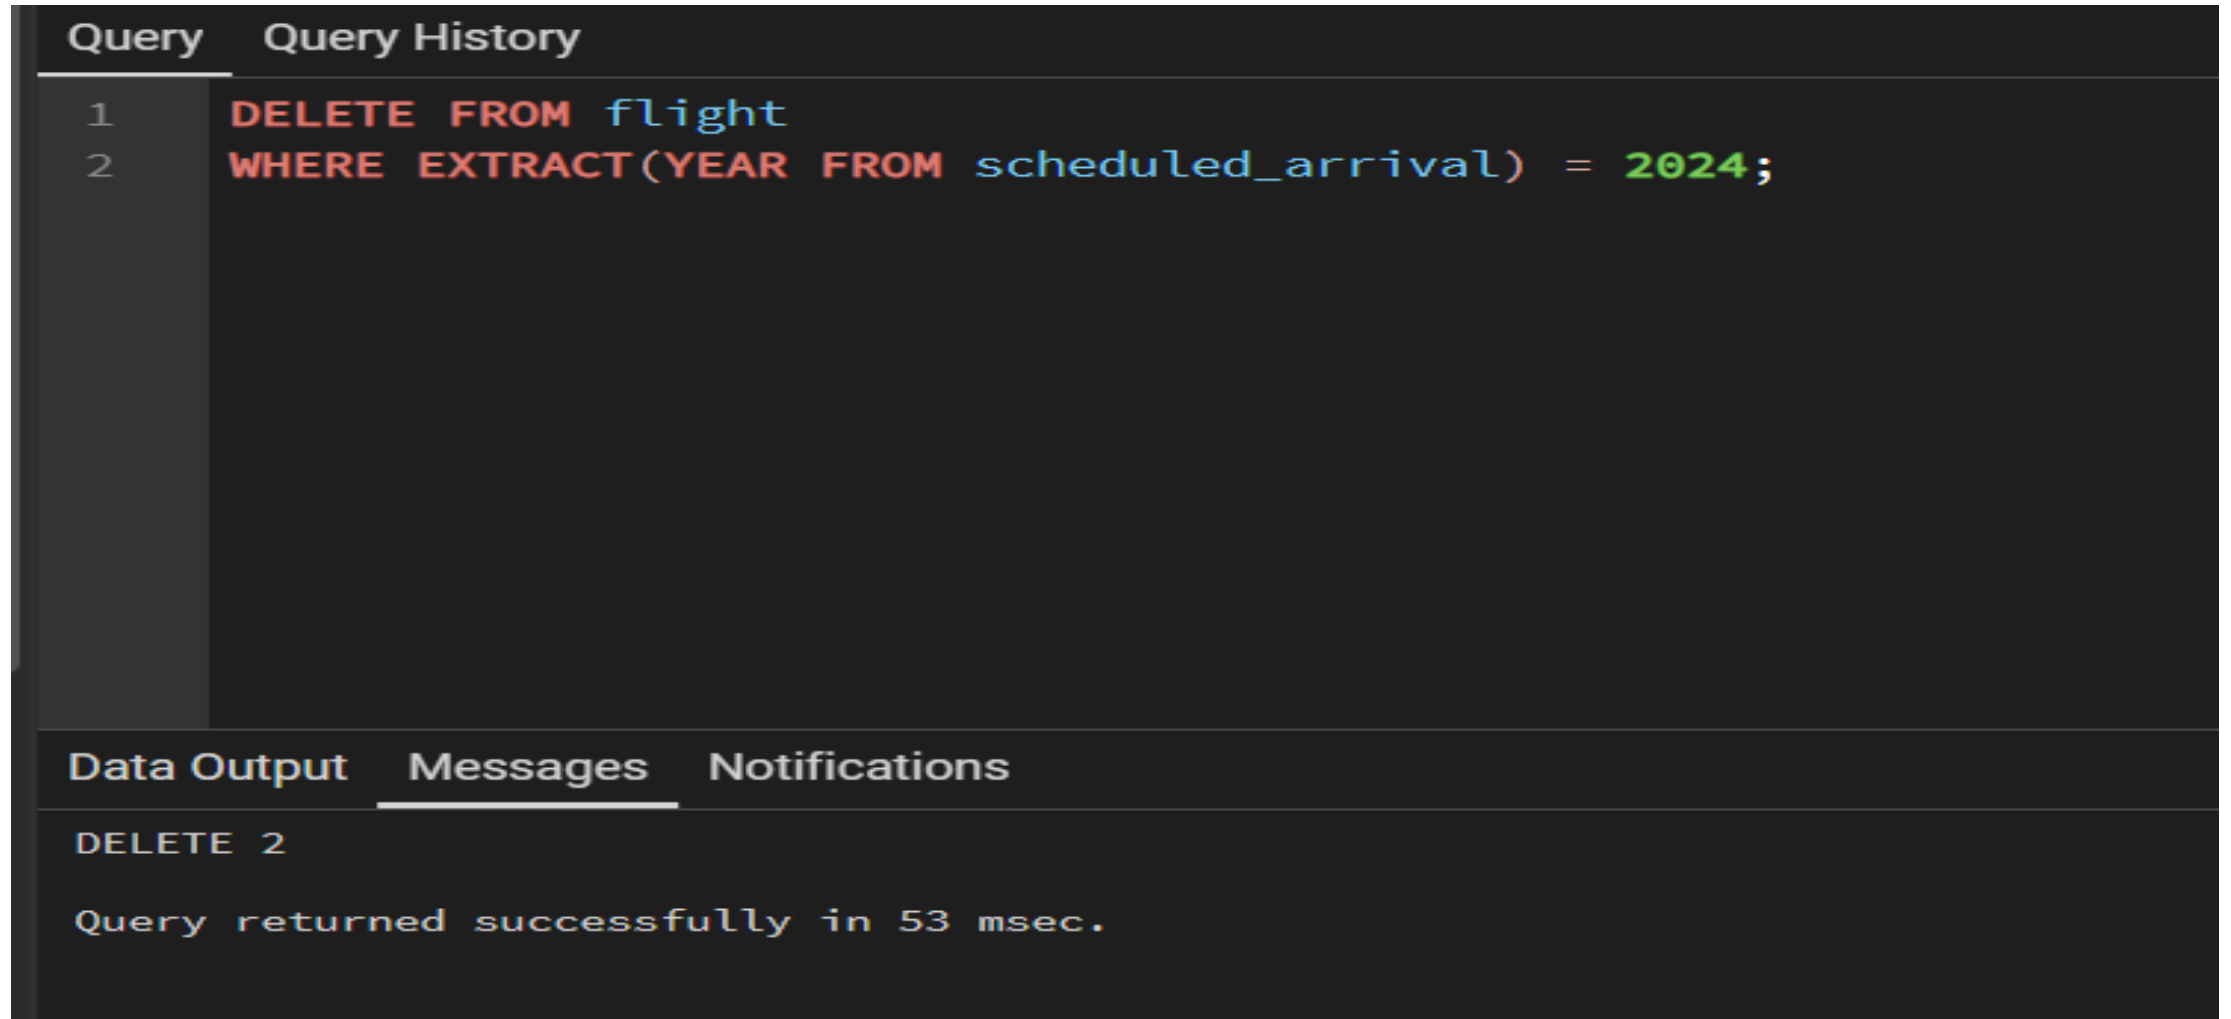


The screenshot shows a database query interface with a dark theme. At the top, there are two tabs: 'Query' and 'Query History'. The 'Query' tab is active, displaying a two-line SQL statement. Line 1 is 'DELETE FROM flight' and line 2 is 'WHERE EXTRACT(YEAR FROM scheduled_arrival) = 2024;'. Below the query editor, there are three tabs: 'Data Output', 'Messages', and 'Notifications'. The 'Messages' tab is active, showing the text 'DELETE 2' and 'Query returned successfully in 53 msec.'

```
Query  Query History
1  DELETE FROM flight
2  WHERE EXTRACT(YEAR FROM scheduled_arrival) = 2024;

Data Output  Messages  Notifications
DELETE 2
Query returned successfully in 53 msec.
```

Task 6

Increased the ticket price of all bookings by 15%.

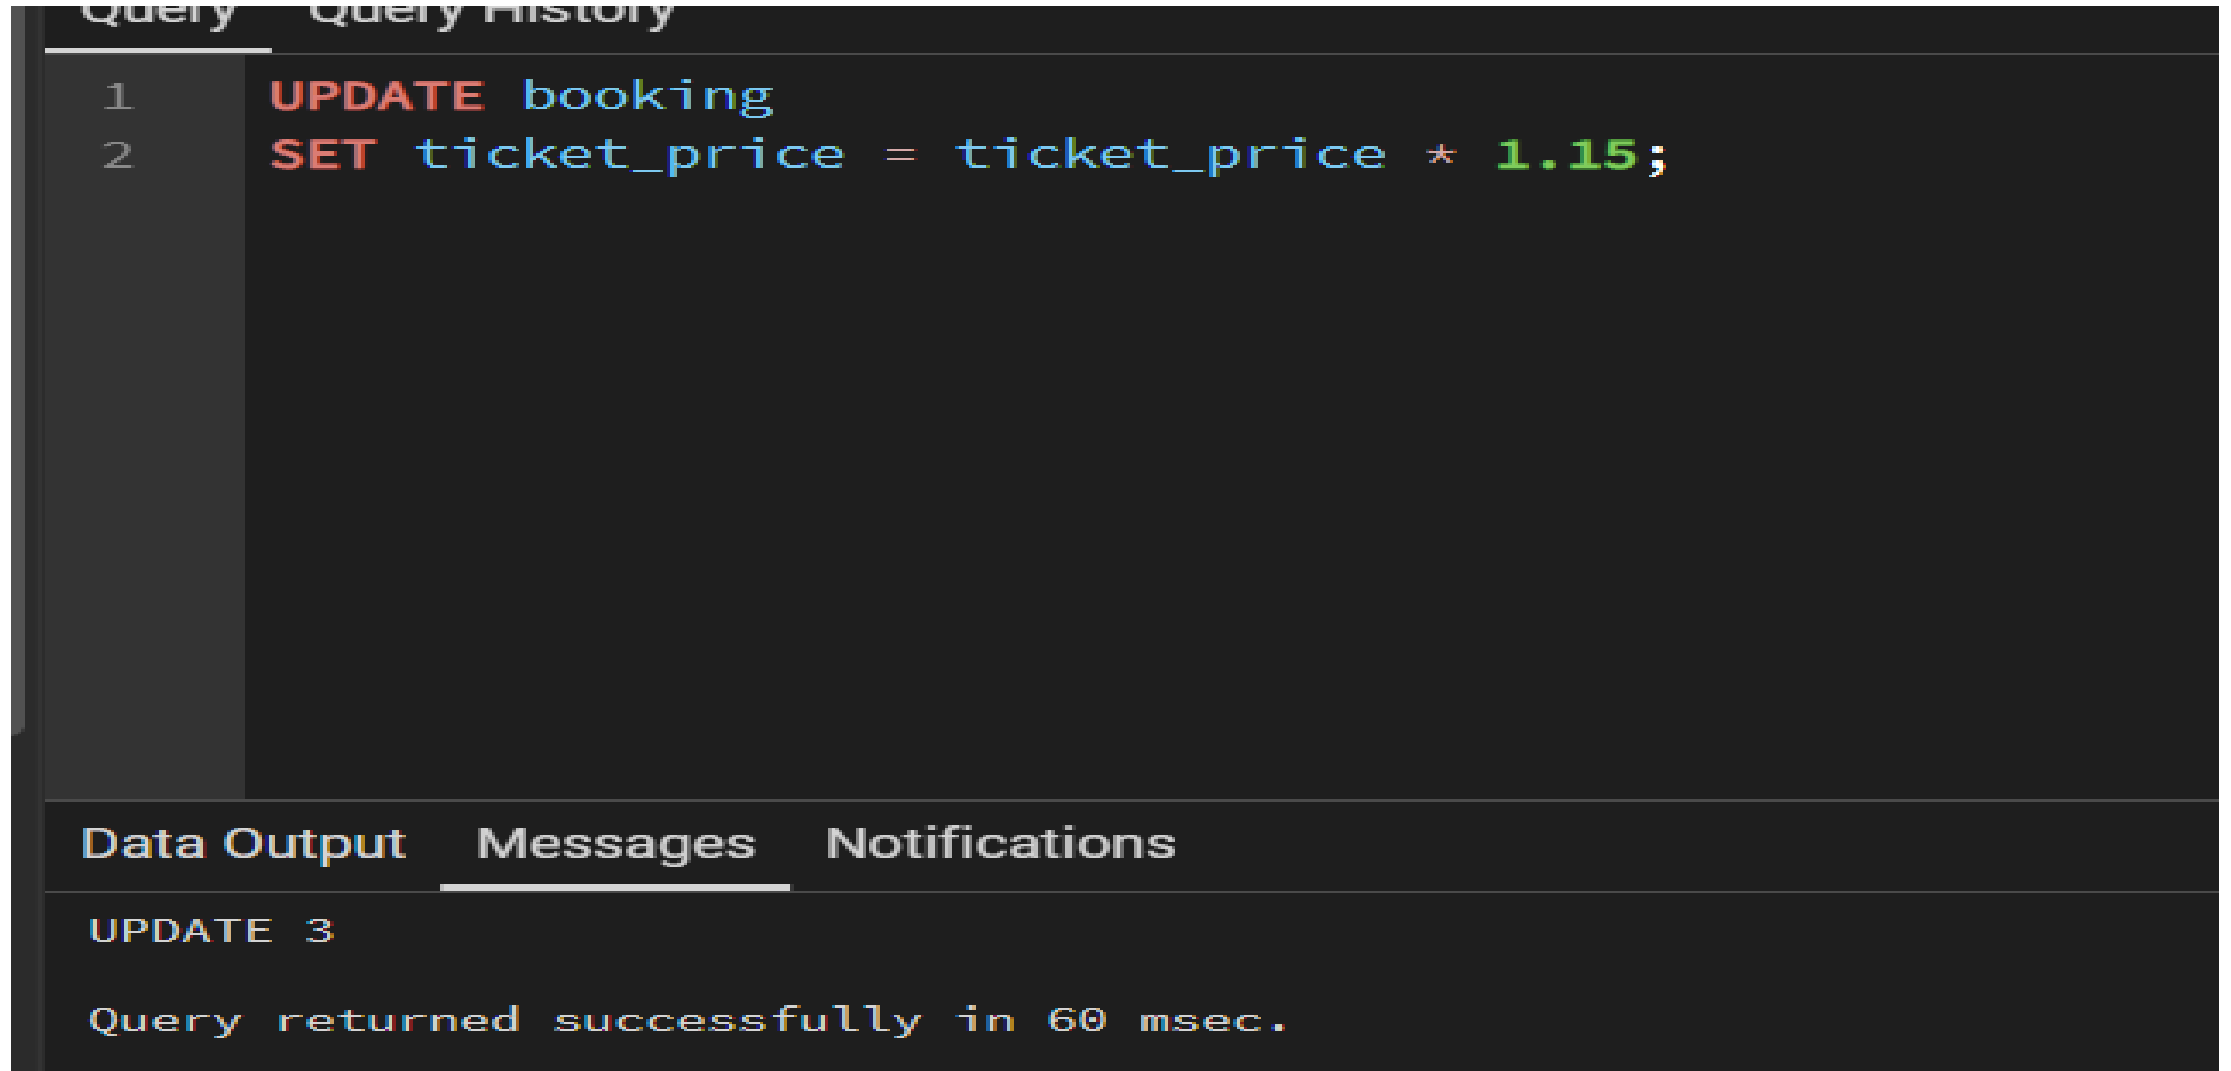

```
Query  Query History
1  UPDATE booking
2  SET ticket_price = ticket_price * 1.15;

Data Output  Messages  Notifications
UPDATE 3
Query returned successfully in 60 msec.
```

Task 7

Deleted all tickets with a price lower than 10000.

Query	Query History
1	DELETE FROM booking
2	WHERE ticket_price < 10000;

Data Output	Messages	Notifications
DELETE 1		
Query returned successfully in 62 msec.		

Task 8

Set the airline code to **UNK** for airlines with a missing (**NULL**) airline code.

Query

Query History

```
1 UPDATE airline
2 SET airline_code = 'UNK'
3 WHERE airline_code IS NULL;
```

Data Output

Messages

Notifications

UPDATE 0

Query returned successfully in 51 msec.

Task 9

Deleted baggage check records created before June 1, 2023, with the status **Not checked**.

Query	Query History
1 2 3	<pre>DELETE FROM baggage_check WHERE created_at < '2023-06-01' AND check_result = 'Not checked';</pre>

Data Output	Messages	Notifications
DELETE 1		
Query returned successfully in 50 msec.		

Task 10

Deleted airports where the state was **NULL** and the city was either **Mlawe** or **Kepuh**.

Query Query History

```
1 DELETE FROM airport
2 WHERE state IS NULL
3     AND city IN ('Mlawe', 'Kepuh');
```

Data Output Messages Notifications

DELETE 2

Query returned successfully in 105 msec.

Task 11

Inserted a new unchecked baggage inspection record and returned its `baggage_check_id` and `created_at` timestamp.

Query

Query History

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

```
INSERT INTO baggage_check (  
    baggage_check_id,  
    booking_id,  
    passenger_id,  
    check_result,  
    created_at,  
    updated_at  
)  
VALUES (  
    (SELECT COALESCE(MAX(baggage_check_id), 0) + 1 FROM baggage_check),  
    2,  
    2,  
    'Not checked',  
    CURRENT_TIMESTAMP,  
    CURRENT_TIMESTAMP  
)  
RETURNING baggage_check_id, created_at;
```

Data Output

Messages

Notifications

≡+

📄

▼

📋

▼

🗑️

🗄️

⬇️

📈

SQL

Showing rows: 1 to 1

✎

📄

	baggage_check_id [PK] integer ✎	created_at timestamp without time zone ✎
1	4	2026-09-28 23:52:50.931693

Task 12


Converted all airline country names to uppercase.

Query	Query History
1	UPDATE airline
2	SET country = UPPER(country);

Data Output	Messages	Notifications
UPDATE 4		
Query returned successfully in 70 msec.		

Task 13

Updated airline with airline_id = 5 to **Global Airways**, changed its country to **United Kingdom**, and updated the modification timestamp.

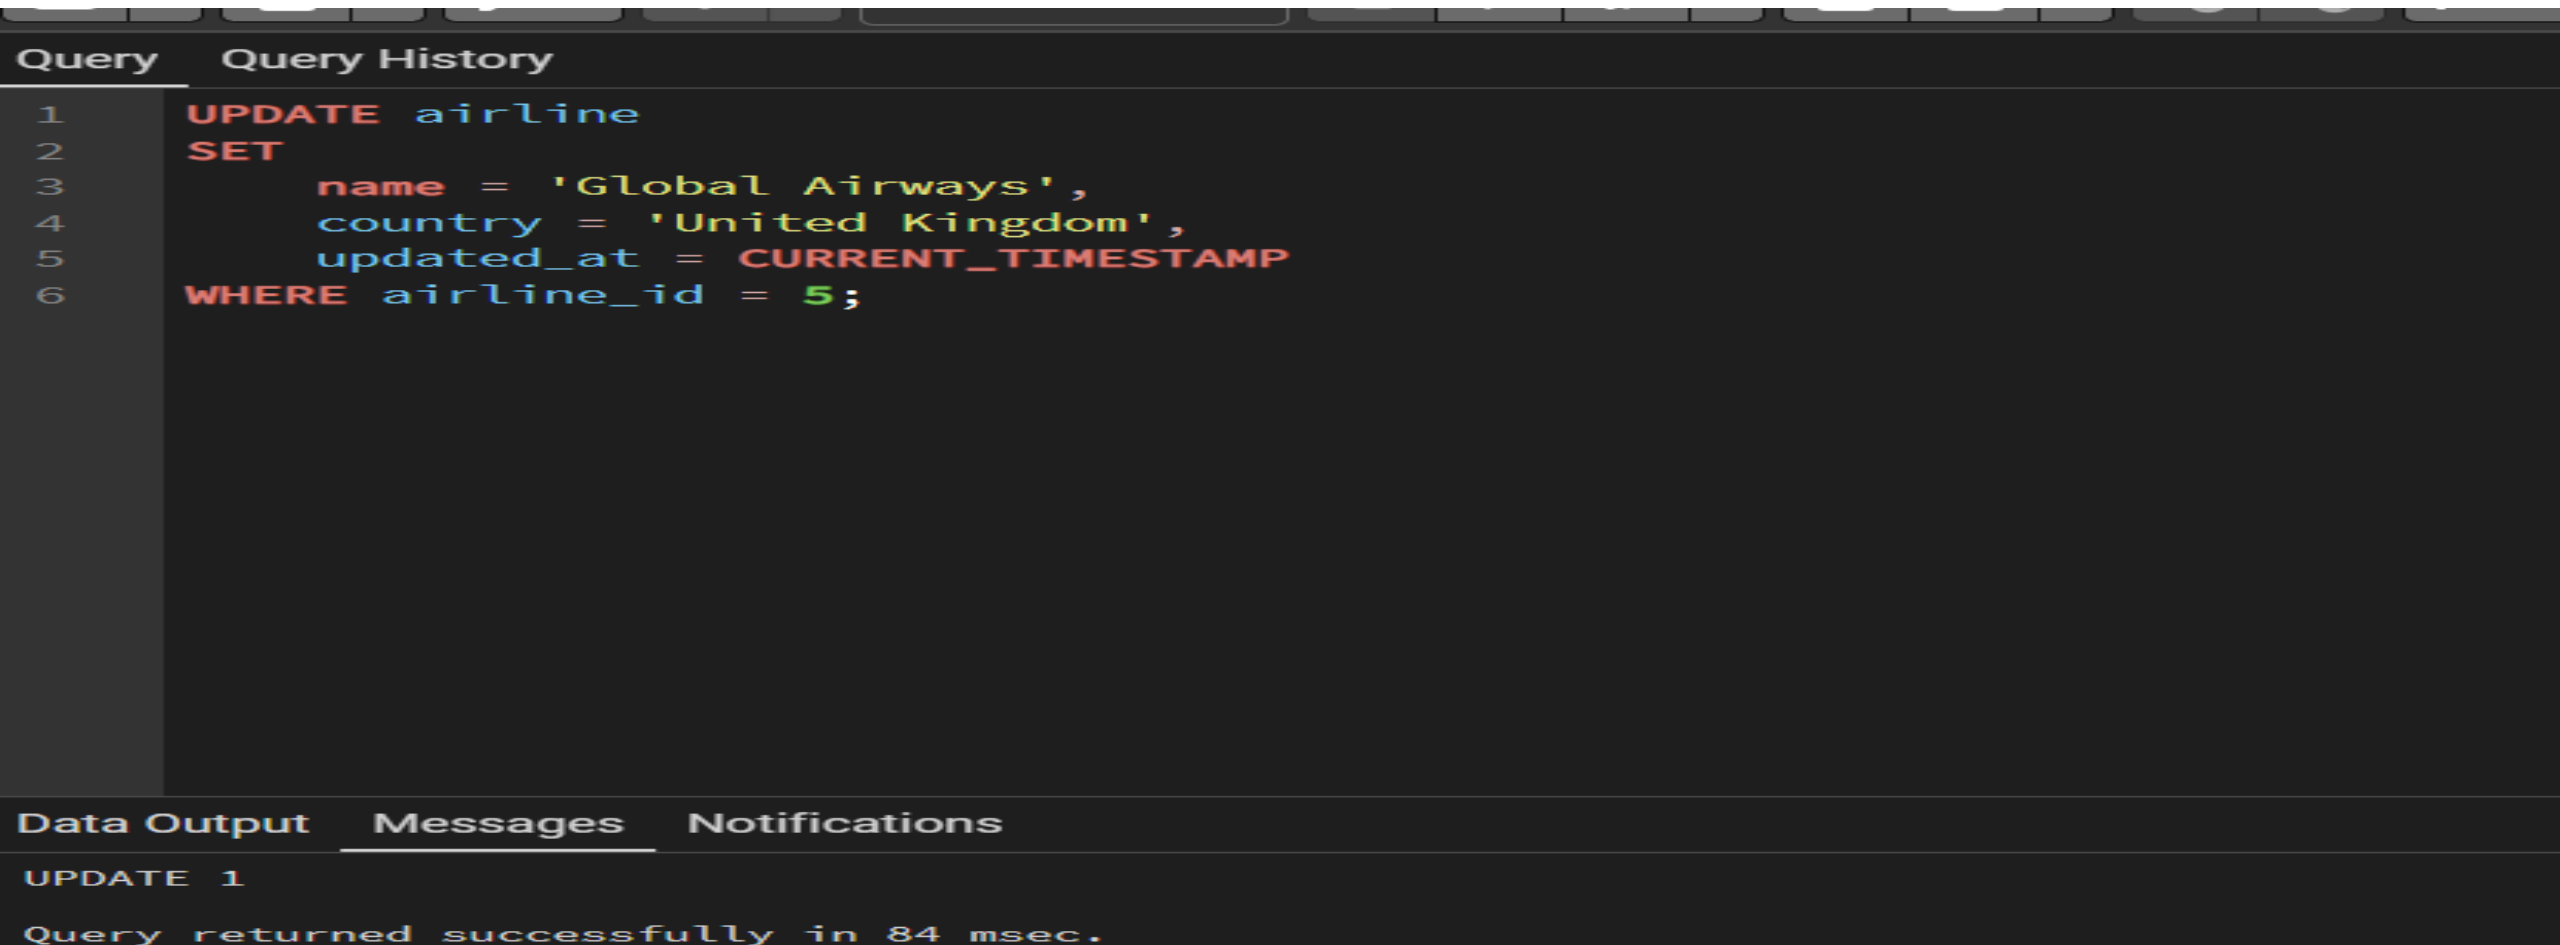


The screenshot displays a database interface with a dark theme. At the top, there are two tabs: 'Query' and 'Query History'. The 'Query' tab is active, showing a SQL UPDATE statement across six lines. The statement updates the 'airline' table, setting the 'name' to 'Global Airways', the 'country' to 'United Kingdom', and the 'updated_at' to the current timestamp, for the record where 'airline_id' is 5. Below the query editor, there are three tabs: 'Data Output', 'Messages', and 'Notifications'. The 'Messages' tab is selected, showing a confirmation message: 'UPDATE 1' followed by 'Query returned successfully in 84 msec.'

```
1 UPDATE airline
2 SET
3     name = 'Global Airways',
4     country = 'United Kingdom',
5     updated_at = CURRENT_TIMESTAMP
6 WHERE airline_id = 5;
```

UPDATE 1
Query returned successfully in 84 msec.

Task 14

Set the state to **Capital District** for airports located in Astana, London, and Tokyo.

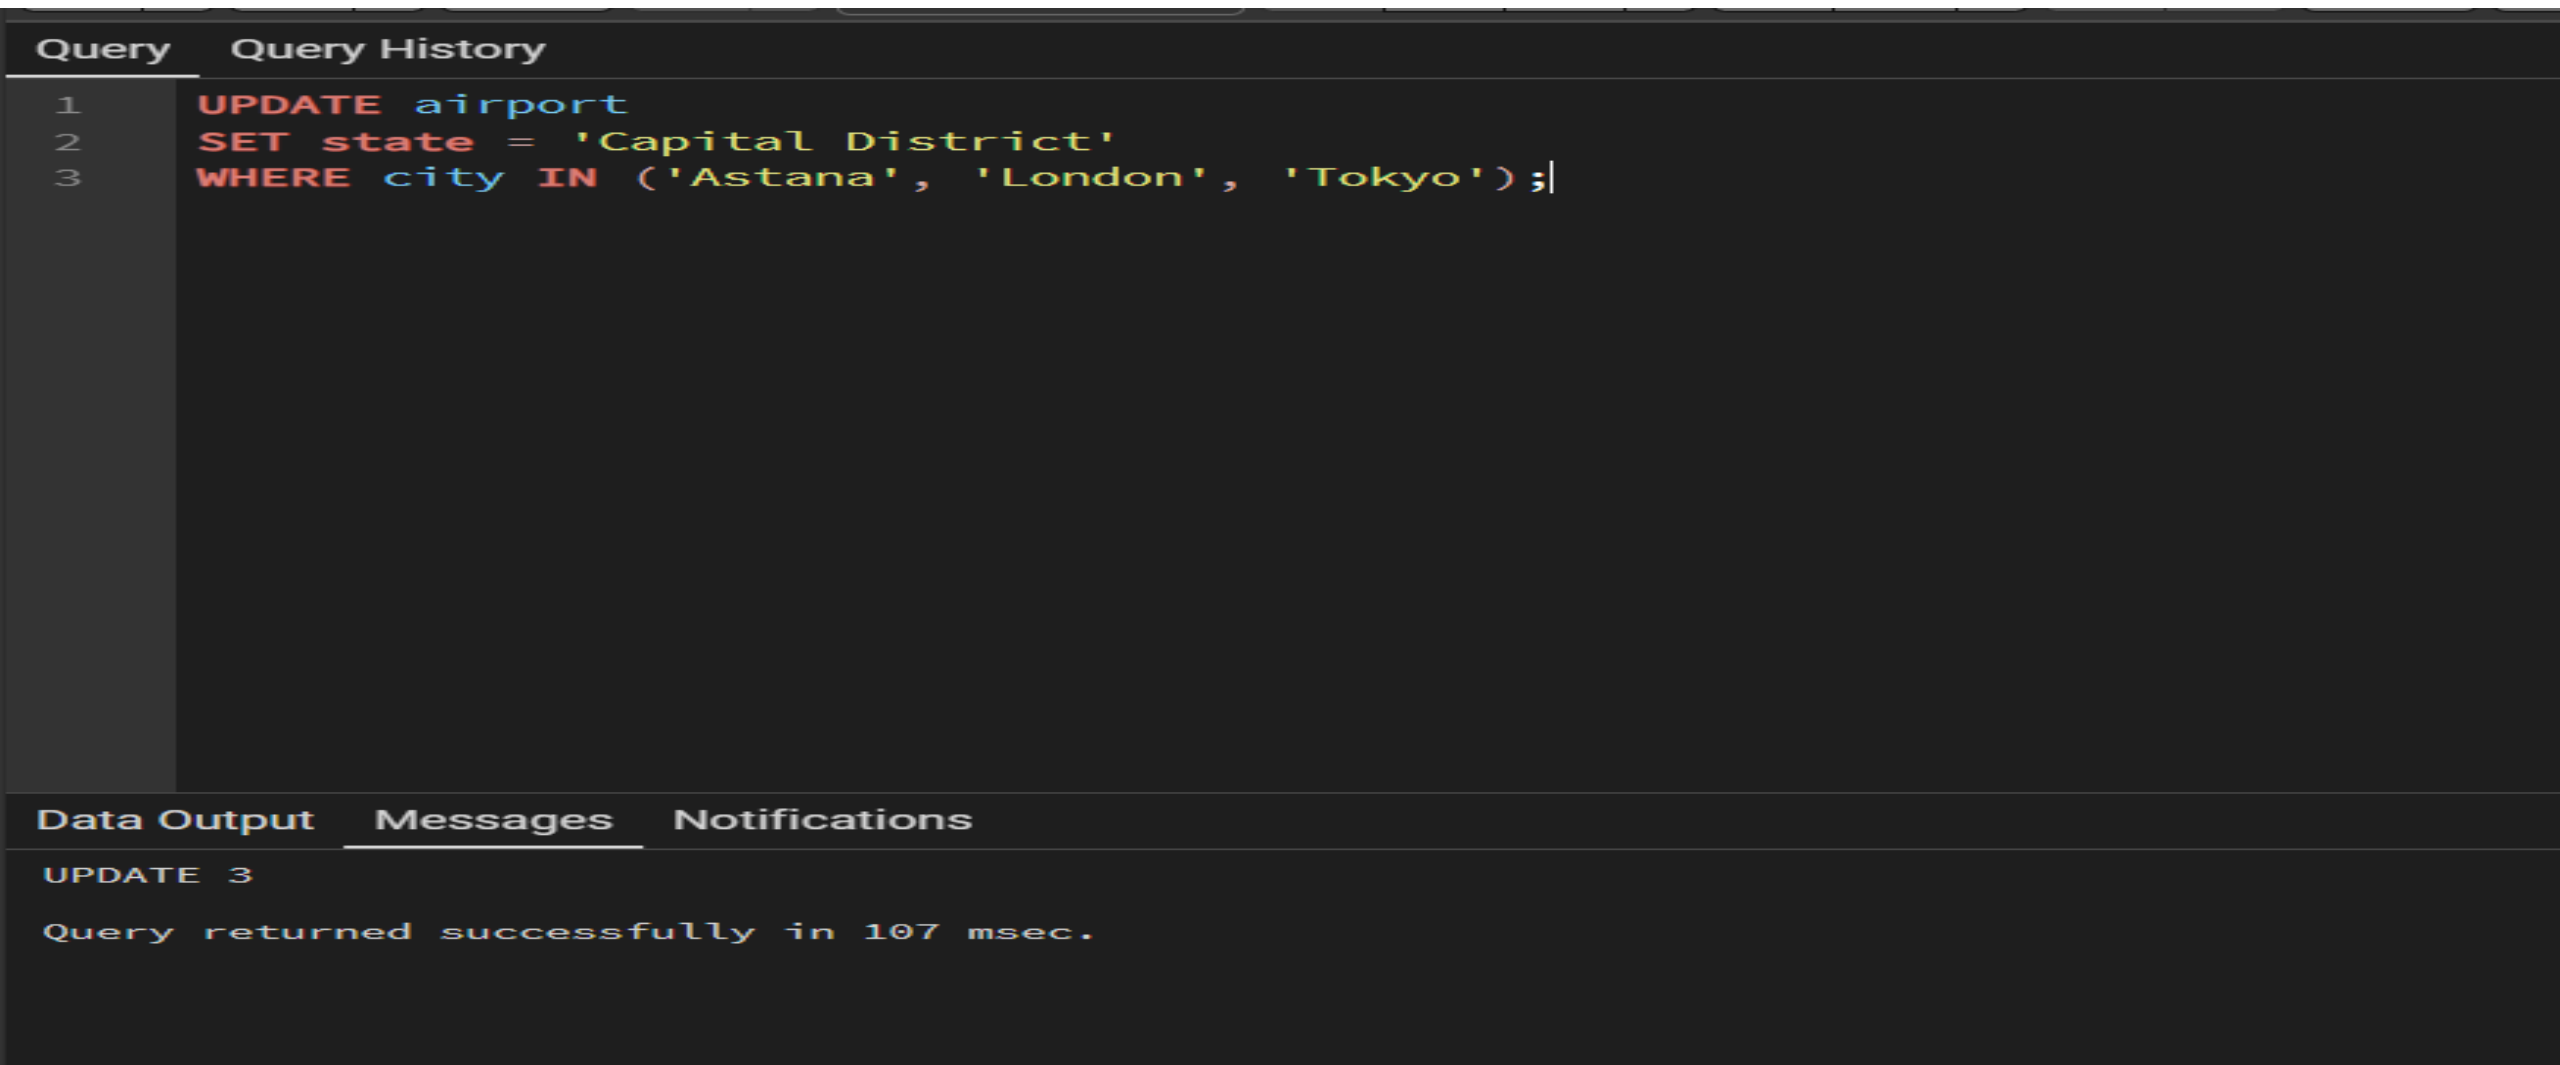

The screenshot shows a database interface with a query editor and a results window. The query editor has a tab labeled 'Query' and 'Query History'. The query text is as follows:

```
1 UPDATE airport
2 SET state = 'Capital District'
3 WHERE city IN ('Astana', 'London', 'Tokyo');
```

The results window at the bottom has tabs for 'Data Output', 'Messages', and 'Notifications'. The 'Messages' tab is selected, showing the following output:

```
UPDATE 3
Query returned successfully in 107 msec.
```

Task 15

Changed the status of all baggage checks created in March 2024 from **Not checked** to **Checked**.

Query	Query History
1 2 3 4 5 6 7	<pre>UPDATE baggage_check SET check_result = 'Checked', updated_at = CURRENT_TIMESTAMP WHERE created_at >= '2024-03-01' AND created_at < '2024-04-01' AND check_result = 'Not checked';</pre>

Data Output	Messages	Notifications
<pre>UPDATE 1 Query returned successfully in 47 msec.</pre>		