

Enctype="multipart/form-data"

```
public function store(Request $request)

$nm = $request->gambar;
$namaFile = $nm->getClientOriginalName();


$dtUpload = new Uploadgambar;
$dtUpload->nama = $request->nama;
$dtUpload->gambar = $namaFile;

$nm->move(public_path().'/img', $namaFile);
$dtUpload->save();

return redirect('data-gambar');

I
```

```
v 🧰 public
 > AdminLTE
 > Gambar
 > 🃭 vendor
                                            * @param \Illuminate\Http\Request $request
   htaccess
                                            * @return \Illuminate\Http\Response
   * favicon.ico
   index.php
                                            public function store(Request $request)
   robots.txt
 resources
                                                $nm = $request->gambar;
                                                $namaFile = $nm->getClientOriginalName();
> 📭 routes
 storage
                                                    $dtUpload = new Uploadgambar;
> 📑 tests
> 📭 vendor
                                                    $dtUpload->gambar = $namaFile;
  .editorconfig
                                                   $nm->move(public_path().'/imfg', $namaFile);
                                                   $dtUpload->save();
  ₩ .env.example
  .gitattributes
                                                   return redirect('data-gambar');
  .gitignore
```

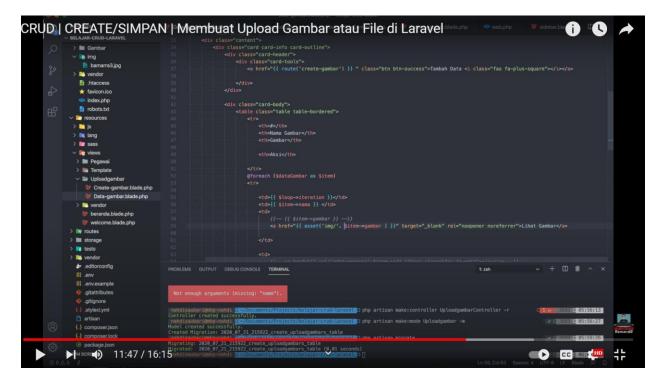

Untuk nama gambar acak atau random

```
public function store(Request $request)

snm = $request->gambar;
$namaFile = time().rand(100,999).".".\snm->getClientOriginalExtension();

tdttpland.com/snm->getClientOriginalExtension();
```

