

# 1.1\_LegacySurvey

January 18, 2018

## 1 SA13 master catalogue

### 1.1 Preparation of Legacy Survey data

The catalogue comes from `dmu0_LegacySurvey`.

In the catalogue, we keep:

- The identifier (it's unique in the catalogue);
- The position;
- The stellarity;
- The aperture fluxes. Are these aperture corrected?
- The kron magnitude to be used as total magnitude (no "auto" magnitude is provided).

We don't know when the maps have been observed. We will use the year of the reference paper.

This notebook was run with `herschelhelp_internal` version:  
04829ed (Thu Nov 2 16:57:19 2017 +0000)

```
WARNING: UnitsWarning: '1/deg^2' did not parse as fits unit: Numeric factor not supported by FITS
WARNING: UnitsWarning: 'nanomaggy' did not parse as fits unit: At col 0, Unit 'nanomaggy' not supported
WARNING: UnitsWarning: '1/nanomaggy^2' did not parse as fits unit: Numeric factor not supported
WARNING: UnitsWarning: '1/arcsec^2' did not parse as fits unit: Numeric factor not supported by FITS
```

### 1.2 I - Aperture correction

To compute aperture correction we need to determine two parameters: the target aperture and the range of magnitudes for the stars that will be used to compute the correction.

**Target aperture:** To determine the target aperture, we simulate a curve of growth using the provided apertures and draw two figures:

- The evolution of the magnitudes of the objects by plotting on the same plot aperture number vs the mean magnitude.
- The mean gain (loss when negative) of magnitude is each aperture compared to the previous (except for the first of course).

As target aperture, we should use the smallest (i.e. less noisy) aperture for which most of the flux is captured.


**Magnitude range:** To know what limits in aperture to use when doing the aperture correction, we plot for each magnitude bin the correction that is computed and its RMS. We should then use the wide limits (to use more stars) where the correction is stable and with few dispersion.

```
/opt/herschelhelp_internal/herschelhelp_internal/utils.py:76: RuntimeWarning: invalid value encountered in divide
  magnitudes = 2.5 * (23 - np.log10(fluxes)) - 48.6
/opt/herschelhelp_internal/herschelhelp_internal/utils.py:76: RuntimeWarning: divide by zero encountered in divide
  magnitudes = 2.5 * (23 - np.log10(fluxes)) - 48.6
/opt/herschelhelp_internal/herschelhelp_internal/utils.py:80: RuntimeWarning: invalid value encountered in divide
  errors = 2.5 / np.log(10) * errors_on_fluxes / fluxes
```


Out[6]: 8

```
Out[8]: array([[          nan,  27.27029708,  25.2863477 , ...,  25.63380443,
                25.96228241,  25.19478113],
               [          nan,  26.66817685,  25.13723918, ...,  24.75301796,
                25.0828956 ,  24.8186376 ],
               [          nan,  25.79887154,  25.54431579, ...,  24.37687909,
                24.57057394,  24.45939483],
               ...,
               [          nan,          nan,          nan, ...,  23.25061604,
                23.94751419,  23.56966437],
               [ 23.52432697,          nan,          nan, ...,  23.17470441,
                23.44228694,  23.45916539],
               [ 23.49245771,  25.86144971,          nan, ...,  22.67763172,
                nan,  23.7231443 ]])
```

### 1.2.1 I.a - g band

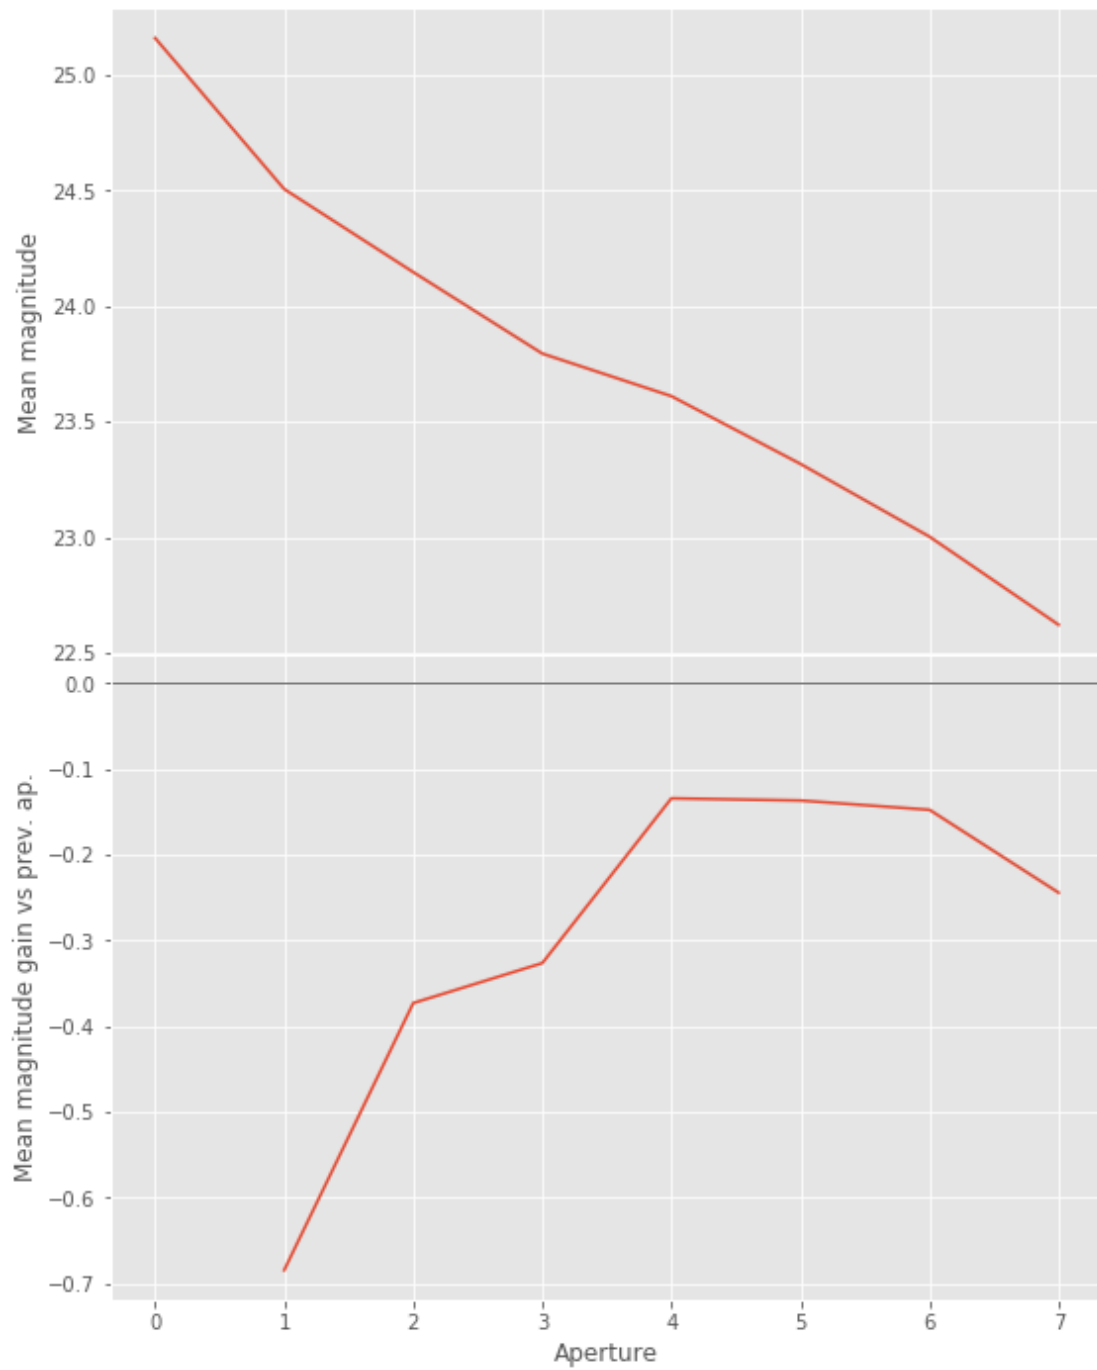


We will use aperture 5 as target.

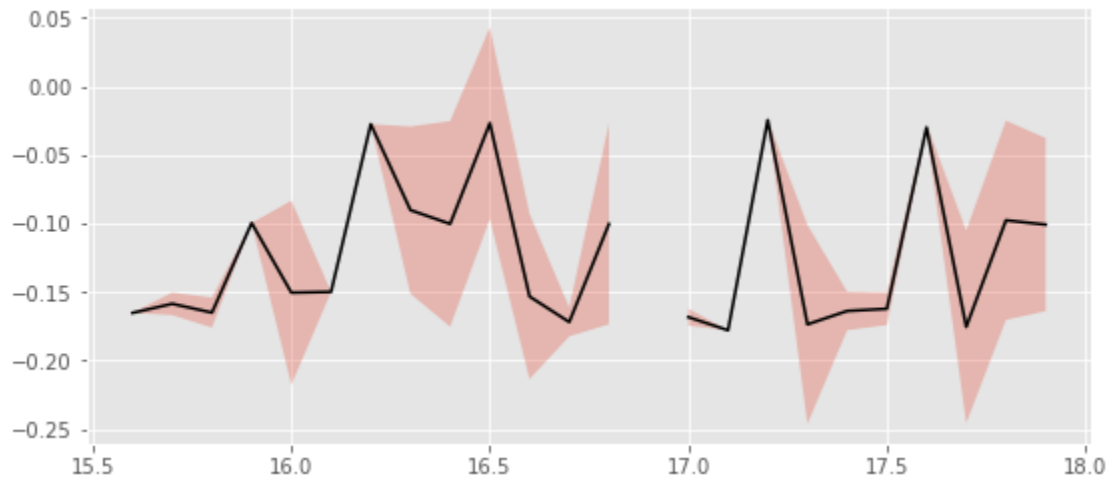


We will use magnitudes between 17.0 and 18.5

Aperture correction for g band:  
Correction: -0.15662539731054892  
Number of source used: 49  
RMS: 0.06093891487424599

### 1.2.2 I.b - r band

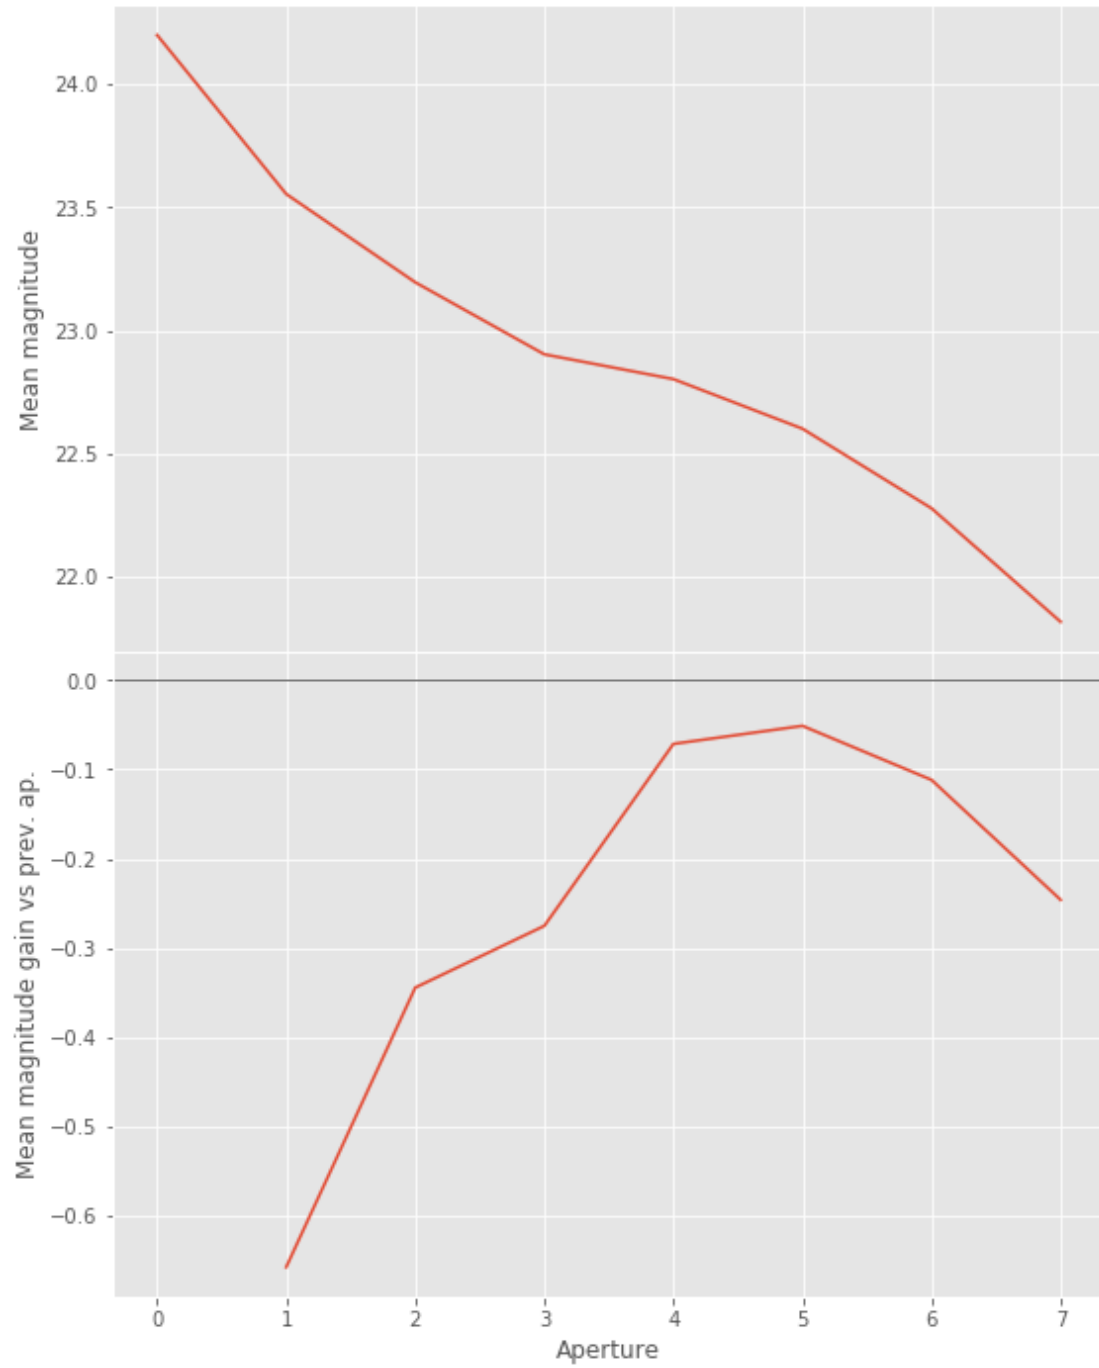


We will use aperture 5 as target.

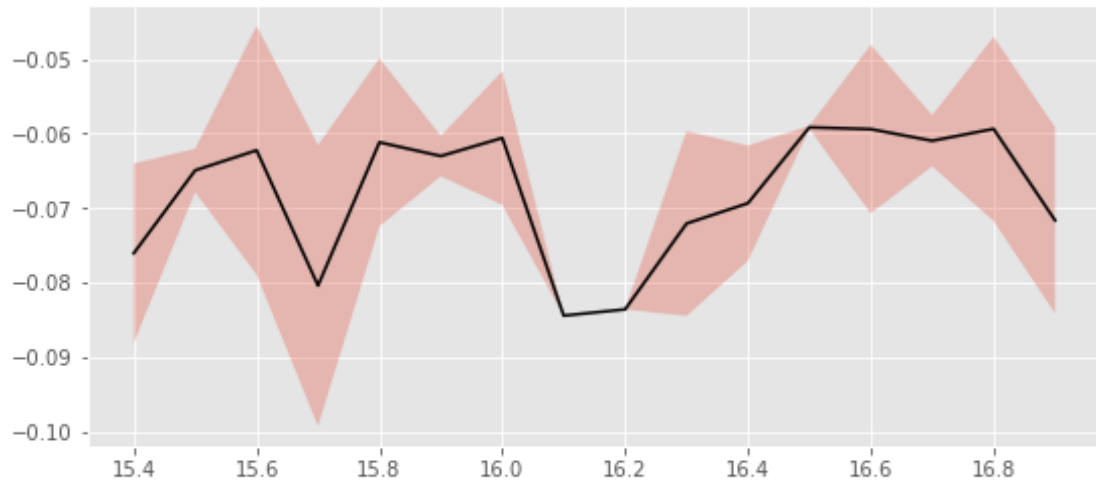


We use magnitudes between 16.5 and 18.

Aperture correction for r band:  
Correction: -0.06083346555517011  
Number of source used: 108  
RMS: 0.011034948483842937

### 1.2.3 I.c - z band

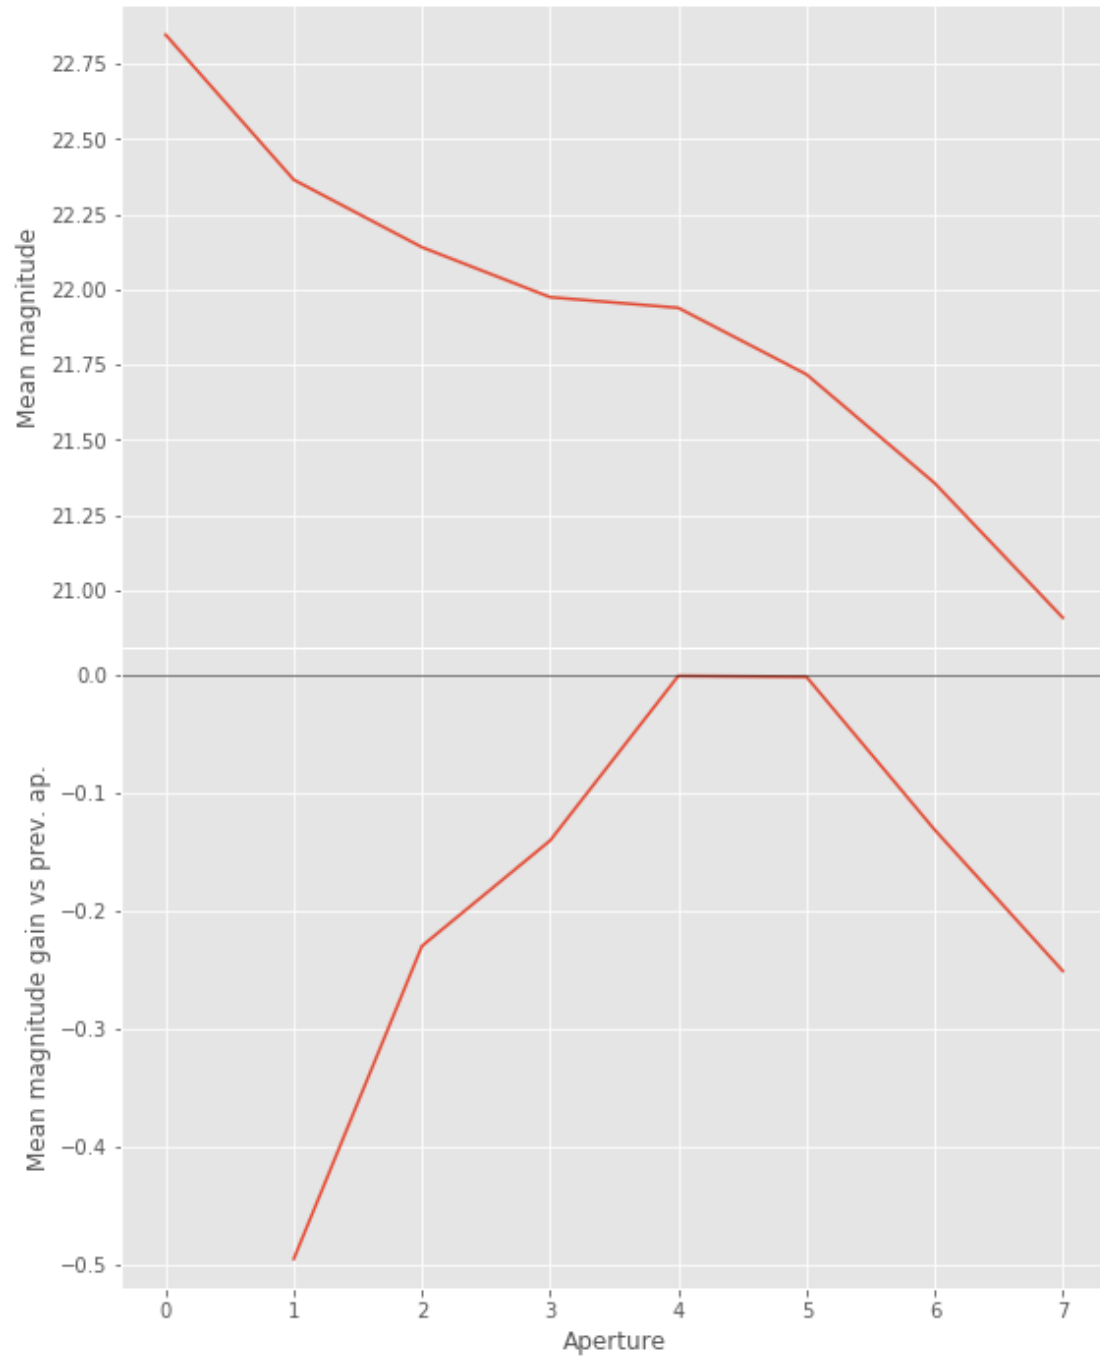

We will use aperture 5 as target.

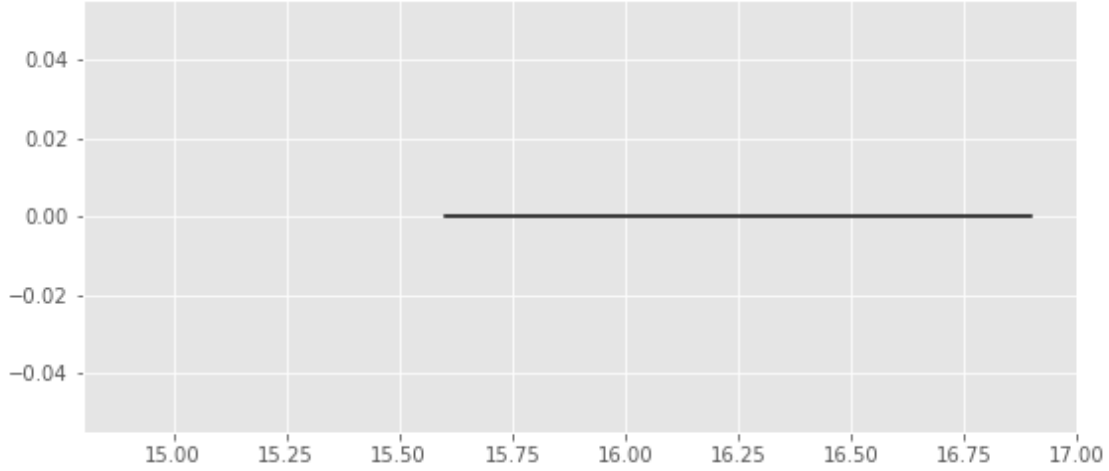

We use magnitudes between 16.0 and 17.5.

Aperture correction for z band:  
Correction: -0.03418313894711389  
Number of source used: 95  
RMS: 0.011261883161465066

### 1.3 II - Stellarity

Legacy Survey does not provide a 0 to 1 stellarity so we replace items flagged as PSF according to the following table:

$$P(star) = \frac{\prod_i P(star)_i}{\prod_i P(star)_i + \prod_i P(galaxy)_i}$$

where  $i$  is the band, and with using the same probabilities as UKDISS:

HSC flag	UKIDSS flag	Meaning	P(star)	P(galaxy)	P(noise)	P(saturated)
	-9	Saturated	0.0	0.0	5.0	95.0
	-3	Probable galaxy	25.0	70.0	5.0	0.0
	-2	Probable star	70.0	25.0	5.0	0.0
0	-1	Star	90.0	5.0	5.0	0.0
	0	Noise	5.0	5.0	90.0	0.0
1	+1	Galaxy	5.0	90.0	5.0	0.0

### 1.4 II - Column selection

```
/opt/anaconda3/envs/herschelhelp_internal/lib/python3.6/site-packages/ipykernel/__main__.py:17:
/opt/herschelhelp_internal/herschelhelp_internal/utils.py:76: RuntimeWarning: divide by zero enc
magnitudes = 2.5 * (23 - np.log10(fluxes)) - 48.6
```



```
/opt/herschelhelp_internal/herschelhelp_internal/utils.py:76: RuntimeWarning: invalid value encountered in multiply
  magnitudes = 2.5 * (23 - np.log10(fluxes)) - 48.6
/opt/herschelhelp_internal/herschelhelp_internal/utils.py:80: RuntimeWarning: divide by zero encountered in divide
  errors = 2.5 / np.log(10) * errors_on_fluxes / fluxes
```

```
Out[19]: <IPython.core.display.HTML object>
```

## 1.5 III - Removal of duplicated sources

We remove duplicated objects from the input catalogues.


The initial catalogue had 9367 sources.


The cleaned catalogue has 9258 sources (109 removed).

The cleaned catalogue has 109 sources flagged as having been cleaned


## 1.6 III - Astrometry correction


We match the astrometry to the Gaia one. We limit the Gaia catalogue to sources with a g band flux between the 30th and the 70th percentile. Some quick tests show that this give the lower dispersion in the results.

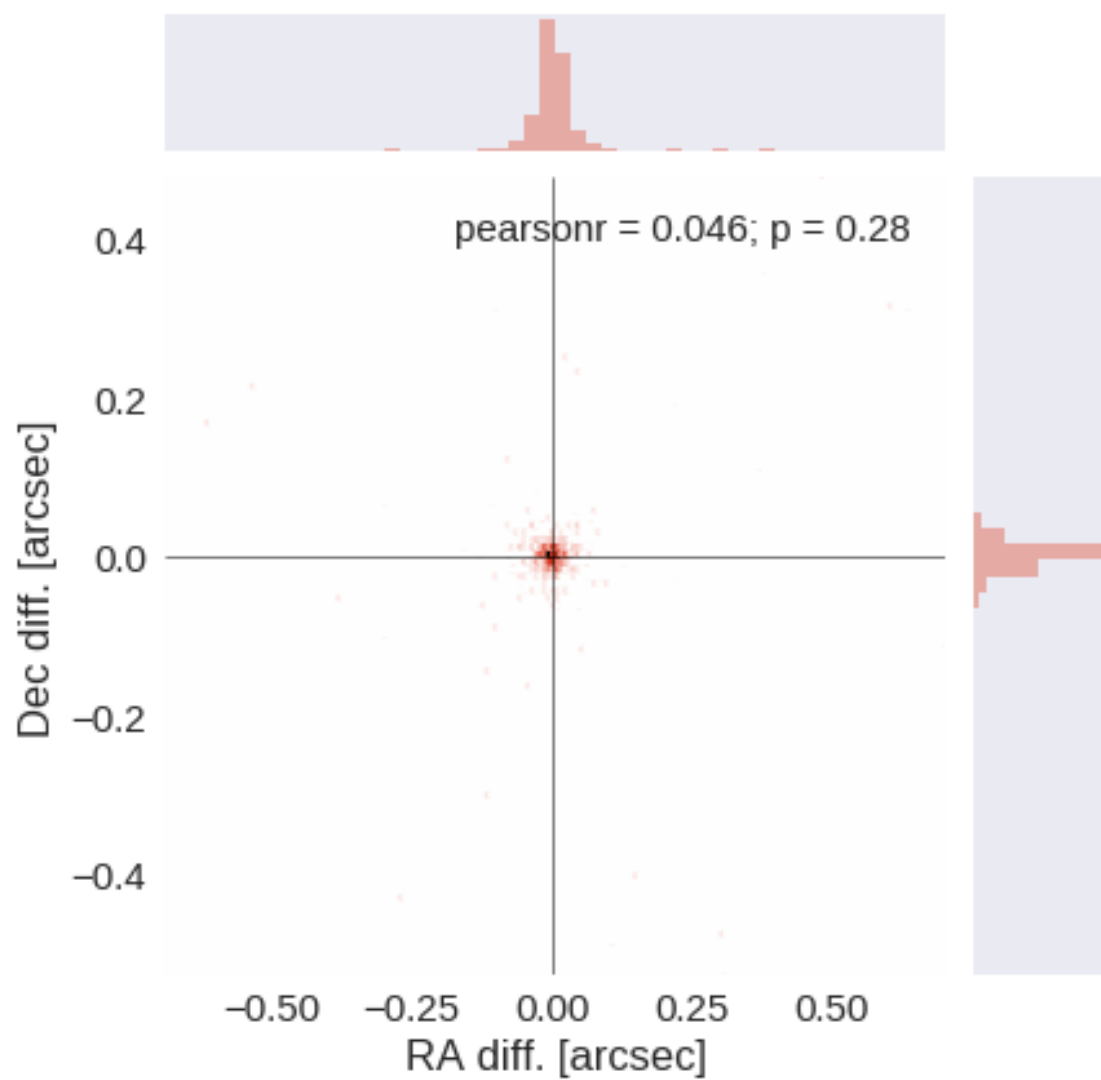

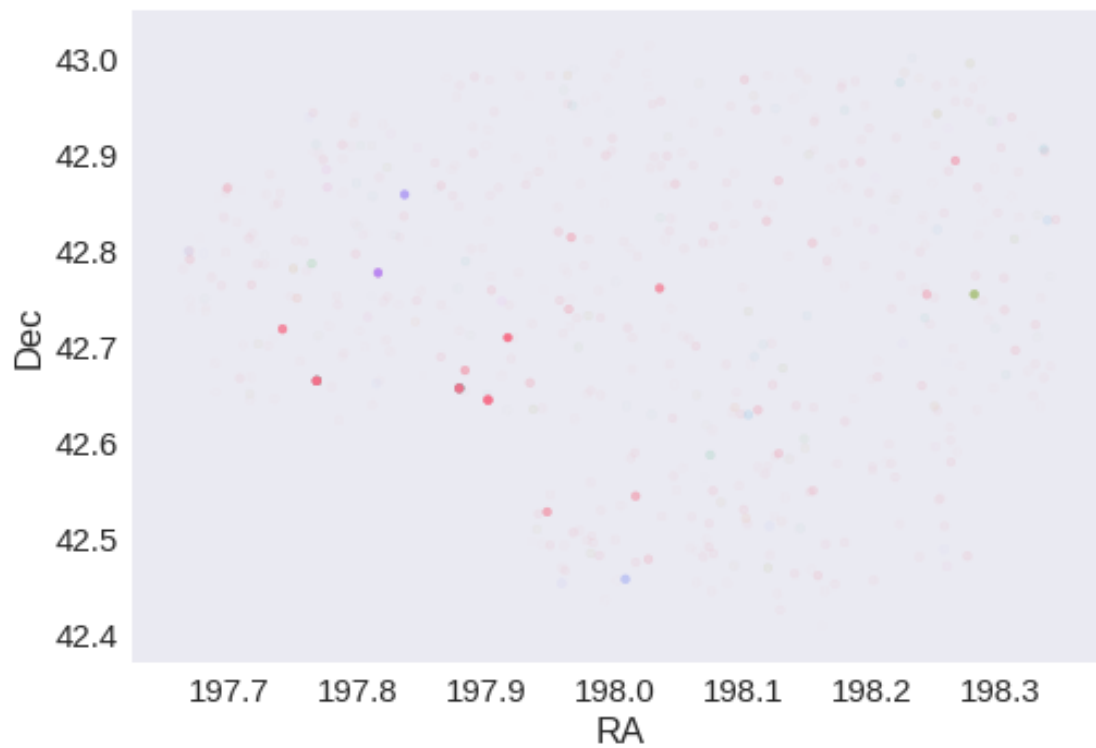

RA correction: -0.0027332342597219395 arcsec  
Dec correction: -0.0011730408644439194 arcsec

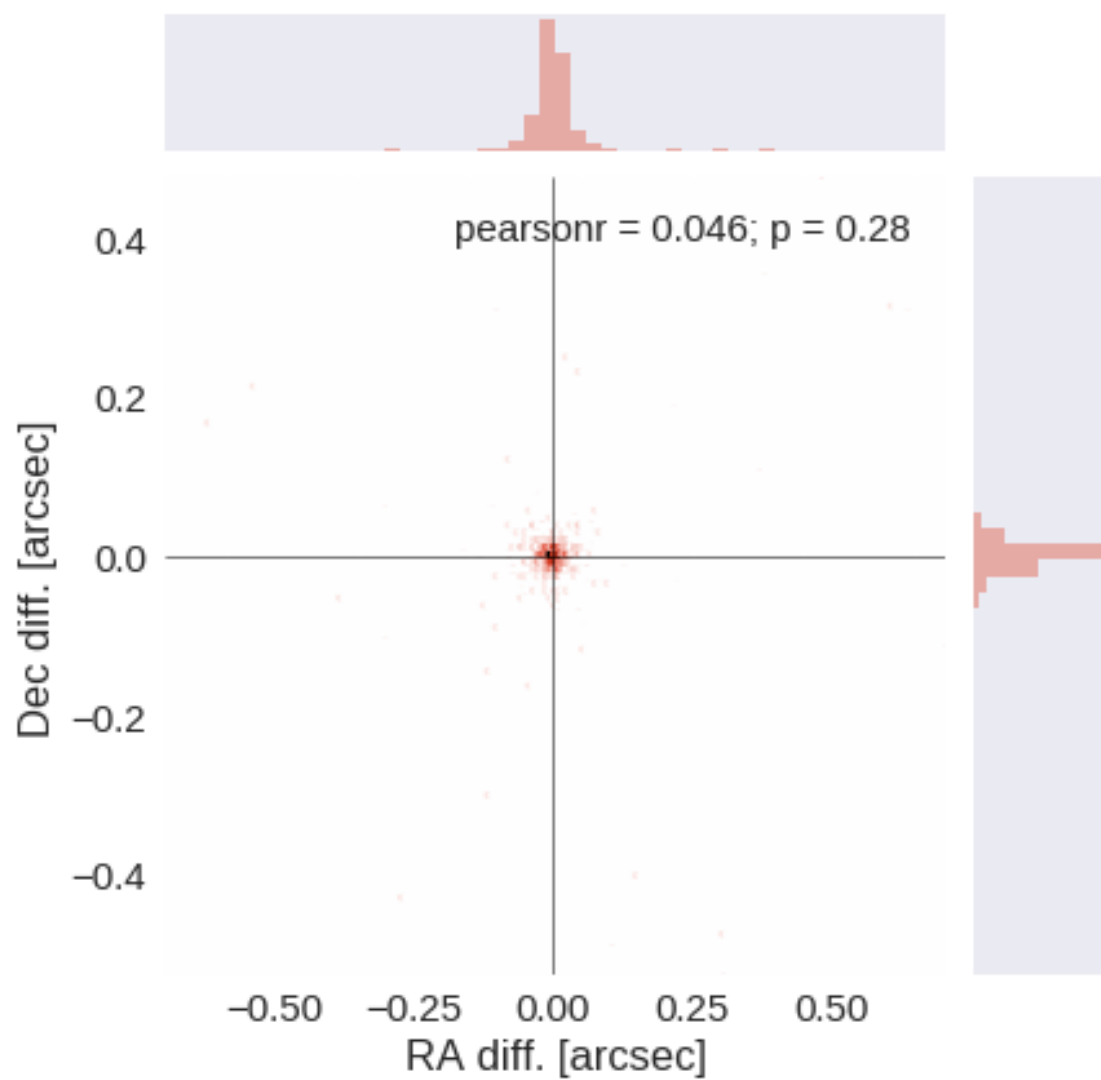

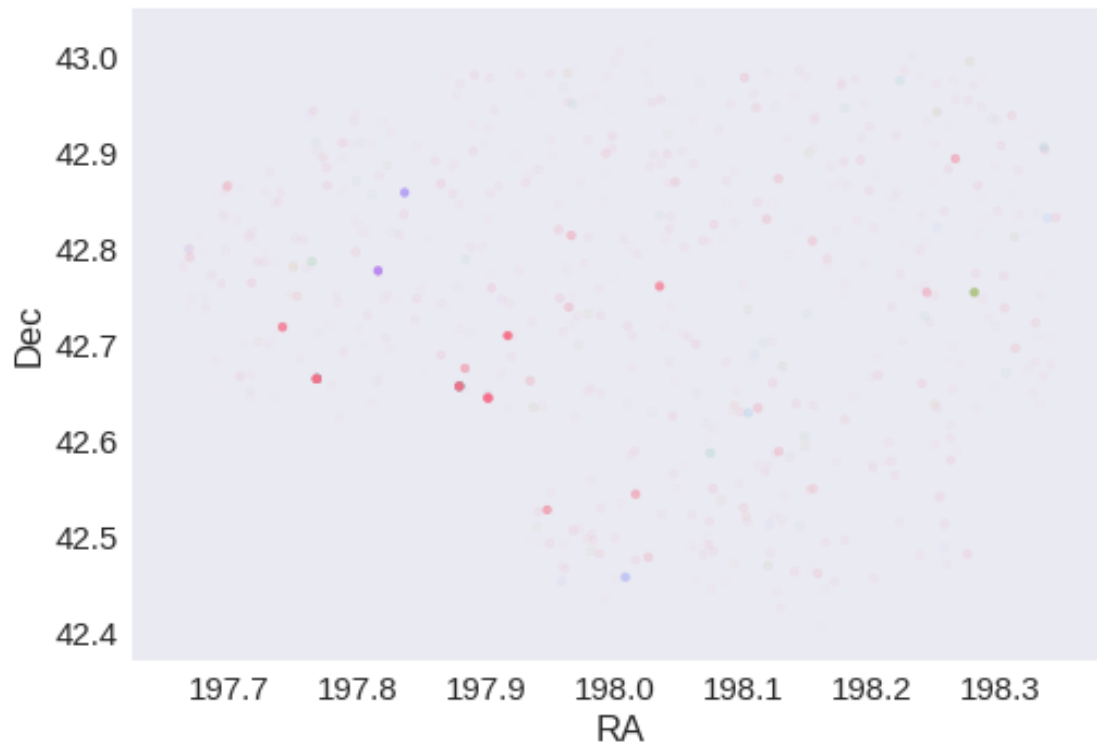

## 1.7 IV - Flagging Gaia objects

569 sources flagged.

## 2 V - Saving to disk

## 1.2\_UHS

January 18, 2018

### 1 SA13 master catalogue

#### 1.1 Preparation of UKIRT Hemisphere Survey (UHS) data

The catalogue comes from dmu0\_UHS. This is a J band only survey documented in <https://arxiv.org/pdf/1707.09975.pdf>

In the catalogue, we keep:

- The identifier (it's unique in the catalogue);
- The position;
- The stellarity;
- The magnitude for each band in aperture 4 (2 arcsec aperture corrected).
- The kron magnitude to be used as total magnitude (no "auto" magnitude is provided).

We don't know when the maps have been observed. We will use the year of the reference paper.

This notebook was run with herchelhelp\_internal version:  
04829ed (Thu Nov 2 16:57:19 2017 +0000)

#### 1.2 I - Column selection

0.925175419285

```
/opt/anaconda3/envs/herchelhelp_internal/lib/python3.6/site-packages/astropy/table/column.py:10  
Check the NumPy 1.11 release notes for more information.  
ma.MaskedArray.__setitem__(self, index, value)
```

```
Out[7]: <IPython.core.display.HTML object>
```

#### 1.3 II - Removal of duplicated sources

We remove duplicated objects from the input catalogues.

```
/opt/anaconda3/envs/herschelhelp_internal/lib/python3.6/site-packages/astropy/table/column.py:10
Check the NumPy 1.11 release notes for more information.
ma.MaskedArray.__setitem__(self, index, value)
```


The initial catalogue had 2339 sources.


The cleaned catalogue has 2095 sources (244 removed).

The cleaned catalogue has 233 sources flagged as having been cleaned

## 1.4 III - Astrometry correction


We match the astrometry to the Gaia one. We limit the Gaia catalogue to sources with a g band flux between the 30th and the 70th percentile. Some quick tests show that this give the lower dispersion in the results.

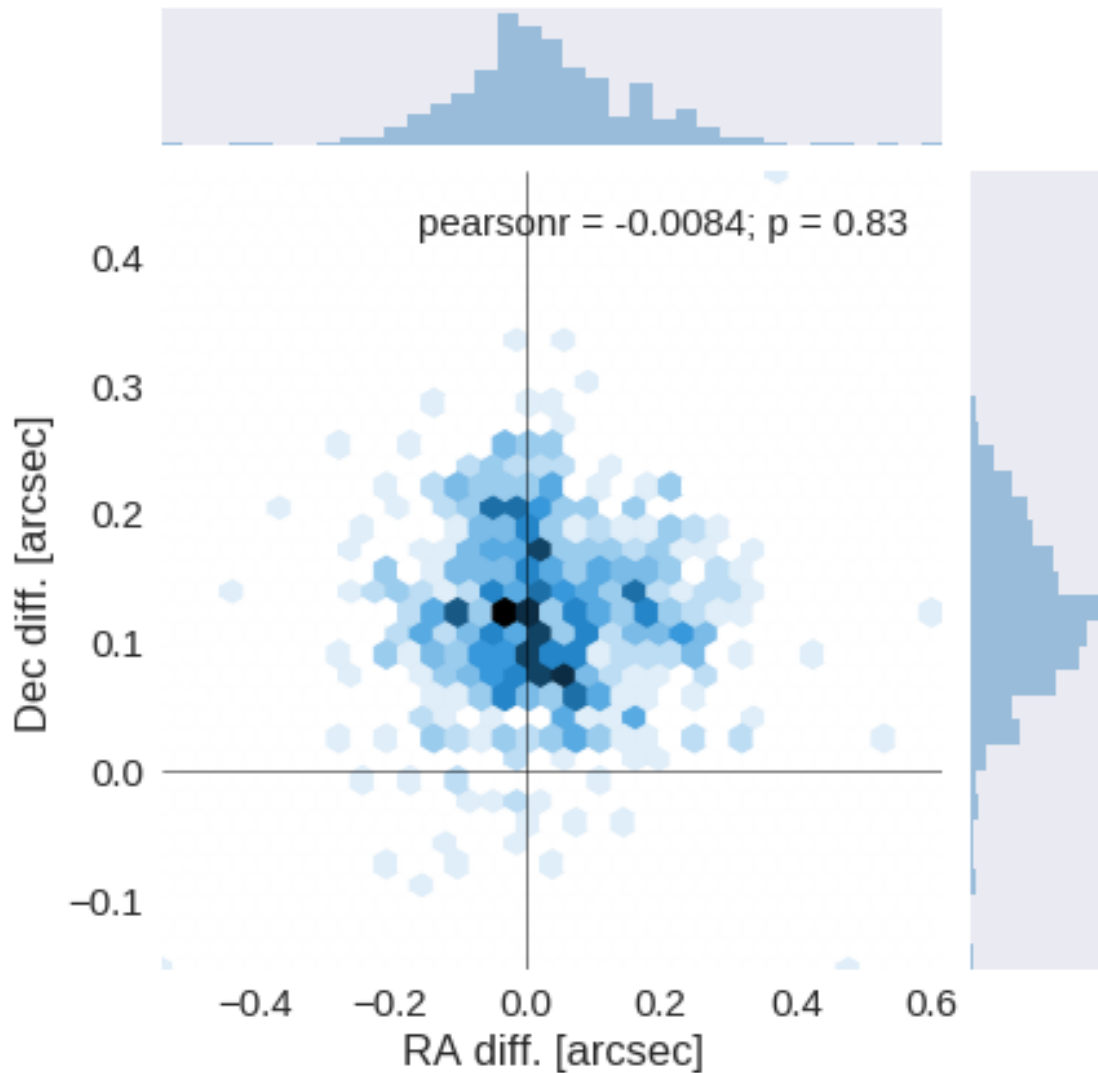


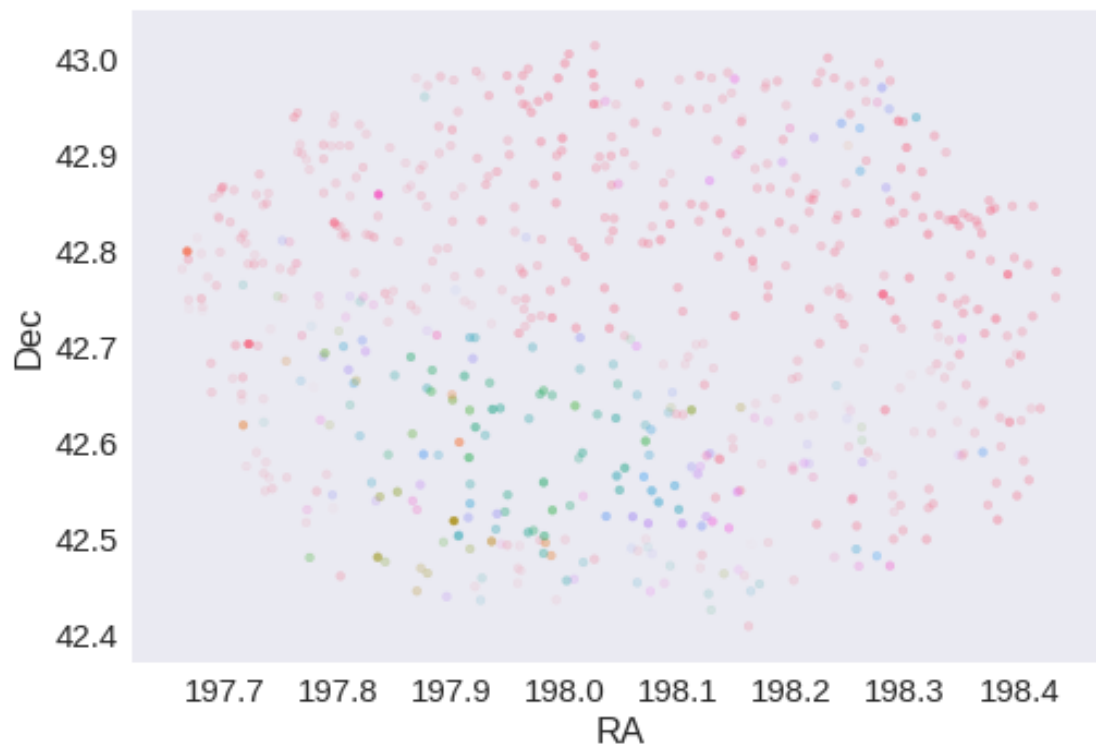

RA correction: -0.015172659647078035 arcsec  
Dec correction: -0.1216899151941675 arcsec



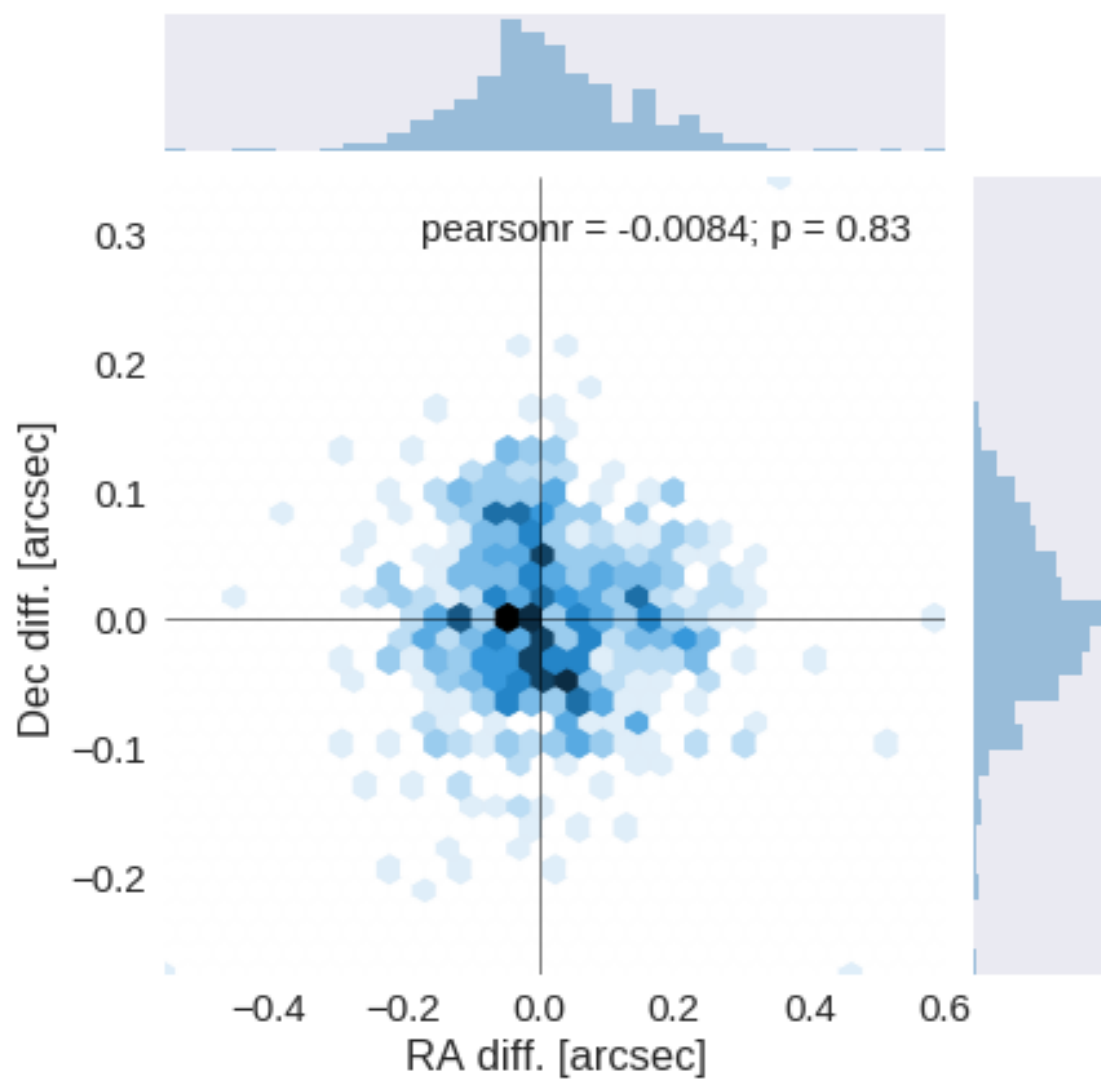

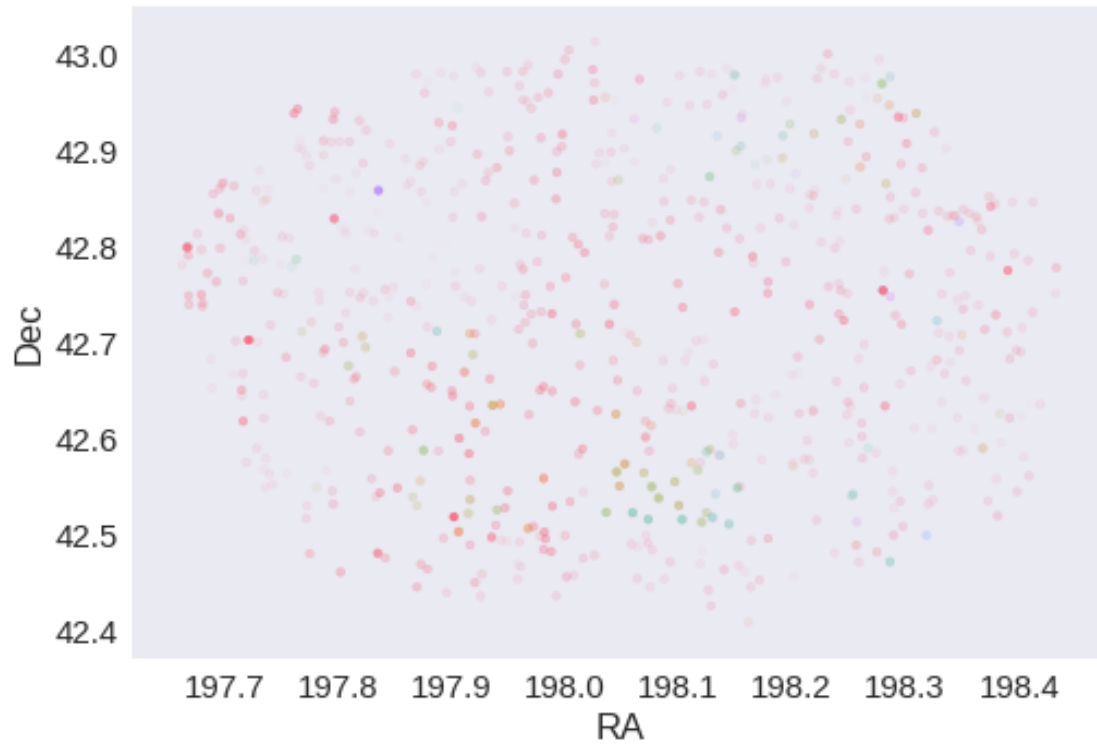

## 1.5 IV - Flagging Gaia objects

649 sources flagged.

## 2 V - Saving to disk

# 2\_Merging

January 18, 2018

## 1 SA13 master catalogue

This notebook presents the merge of the various pristine catalogues to produce HELP mater catalogue on ELAIS-N1.

This notebook was run with `herschelhelp_internal` version:  
04829ed (Thu Nov 2 16:57:19 2017 +0000)

### 1.1 I - Reading the prepared pristine catalogues


### 1.2 II - Merging tables

We first merge the optical catalogues and then add the infrared ones: WFC, DXS, SpARCS, HSC, PS1, SERVS, SWIRE.

At every step, we look at the distribution of the distances to the nearest source in the merged catalogue to determine the best crossmatching radius.

### 1.2.1 UHS

### 1.2.2 Add Legacy Survey

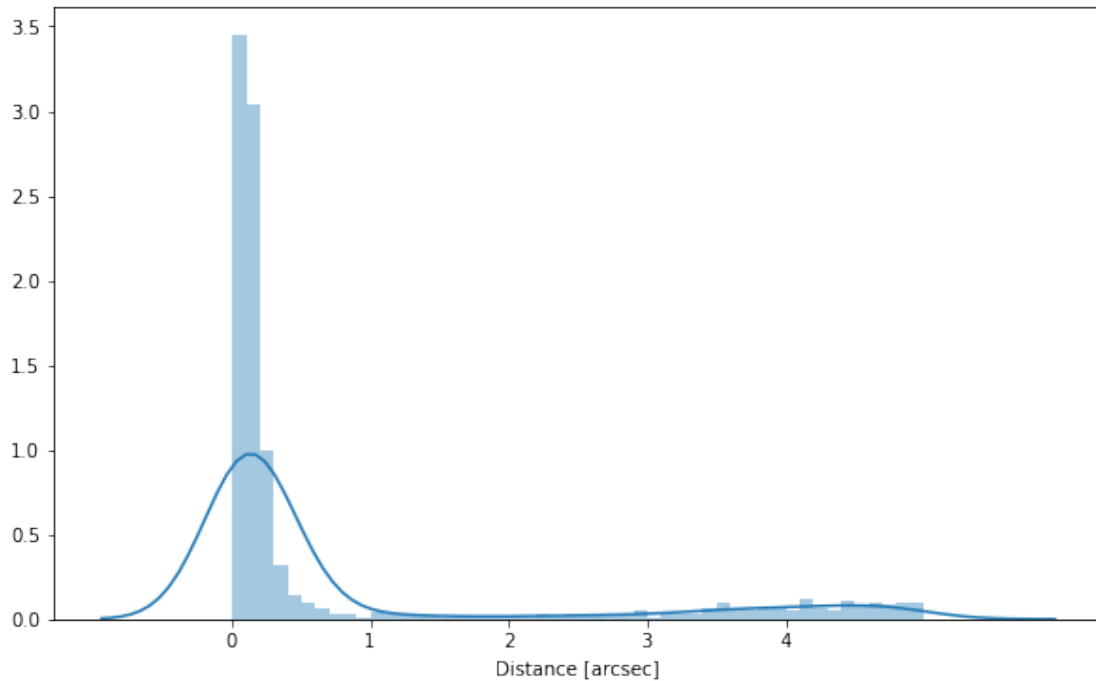

### 1.2.3 Cleaning

When we merge the catalogues, astropy masks the non-existent values (e.g. when a row comes only from a catalogue and has no counterparts in the other, the columns from the latest are masked for that row). We indicate to use NaN for masked values for floats columns, False for flag columns and -1 for ID columns.

**Out [9]:** <IPython.core.display.HTML object>

## 1.3 III - Merging flags and stellarity

Each pristine catalogue contains a flag indicating if the source was associated to a another nearby source that was removed during the cleaning process. We merge these flags in a single one.

Each pristine catalogue contains a flag indicating the probability of a source being a Gaia object (0: not a Gaia object, 1: possibly, 2: probably, 3: definitely). We merge these flags taking the highest value.

Each pristine catalogue may contain one or several stellarity columns indicating the probability (0 to 1) of each source being a star. We merge these columns taking the highest value. We keep trace of the origin of the stellarity.

`uhs_stellarity, legacy_stellarity`

## 1.4 IV - Adding E(B-V) column

## 1.5 V - Adding HELP unique identifiers and field columns

OK!

## 1.6 VI - Cross-matching with spec-z catalogue

There is currently no specz available

## 1.7 VII - Choosing between multiple values for the same filter

There are no duplicate filters

## 1.8 VIII.a Wavelength domain coverage

We add a binary flag\_optnir\_obs indicating that a source was observed in a given wavelength domain:

- 1 for observation in optical;
- 2 for observation in near-infrared;
- 4 for observation in mid-infrared (IRAC).

It's an integer binary flag, so a source observed both in optical and near-infrared but not in mid-infrared would have this flag at  $1 + 2 = 3$ .

*Note 1: The observation flag is based on the creation of multi-order coverage maps from the catalogues, this may not be accurate, especially on the edges of the coverage.*

*Note 2: Being on the observation coverage does not mean having fluxes in that wavelength domain. For sources observed in one domain but having no flux in it, one must take into consideration the different depths in the catalogue we are using.*

## 1.9 VIII.b Wavelength domain detection

We add a binary flag\_optnir\_det indicating that a source was detected in a given wavelength domain:

- 1 for detection in optical;
- 2 for detection in near-infrared;
- 4 for detection in mid-infrared (IRAC).

It's an integer binary flag, so a source detected both in optical and near-infrared but not in mid-infrared would have this flag at  $1 + 2 = 3$ .

*Note 1: We use the total flux columns to know if the source has flux, in some catalogues, we may have aperture flux and no total flux.*

To get rid of artefacts (chip edges, star flares, etc.) we consider that a source is detected in one wavelength domain when it has a flux value in **at least two bands**. That means that good sources will be excluded from this flag when they are on the coverage of only one band.

### **1.10 IX - Cross-identification table**

We are producing a table associating to each HELP identifier, the identifiers of the sources in the pristine catalogues. This can be used to easily get additional information from them.

There is no SDSS on SA13.

```
['uhs_id', 'legacy_id', 'help_id']
```

### **1.11 X - Adding HEALPix index**

We are adding a column with a HEALPix index at order 13 associated with each source.

### **1.12 XI - Saving the catalogue**

```
Missing columns: set()
```

# 3\_Checks\_and\_diagnostics

January 18, 2018

## 1 SA13 master catalogue

### 1.1 Checks and diagnostics

There is very little data on SA13 so there is very little data to compare to.

This notebook was run with herschelhelp\_internal version:  
255270d (Fri Nov 24 10:35:51 2017 +0000)


Diagnostics done using: master\_catalogue\_sa13\_20171123.fits

### 1.2 0 - Quick checks

The column merr\_ap\_bass\_g contains 479 zero or negative values!its minimum is -601.418395996093  
The column f\_bass\_g contains 681 zero or negative values!its minimum is -155.7931671142578.  
The column merr\_bass\_g contains 384 zero or negative values!its minimum is -264.1638488769531.  
The column merr\_ap\_bass\_r contains 249 zero or negative values!its minimum is -91.3707351684570  
The column f\_bass\_r contains 161 zero or negative values!its minimum is -195.38099670410156.  
The column merr\_bass\_r contains 160 zero or negative values!its minimum is -13190.6357421875.  
The column merr\_ap\_bass\_z contains 249 zero or negative values!its minimum is -550.560729980468  
The column f\_bass\_z contains 331 zero or negative values!its minimum is -171.47164916992188.  
The column merr\_bass\_z contains 150 zero or negative values!its minimum is -162.03775024414062.


### 1.3 I - Summary of wavelength domains

#### Wavelength domain observations

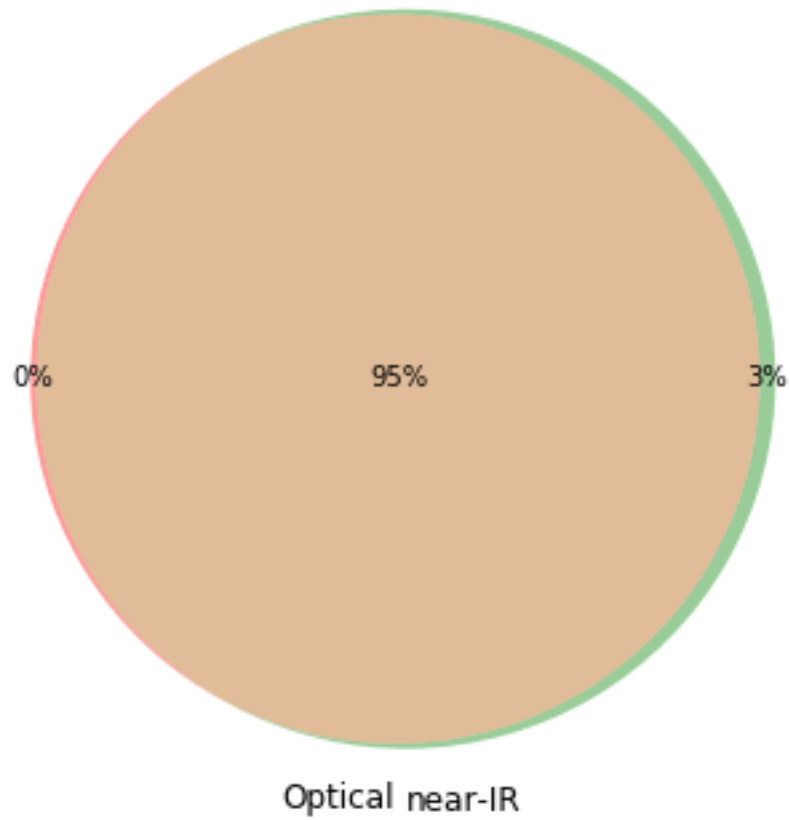



Detection of the 9,258 sources detected  
in any wavelength domains (among 9,799 sources)

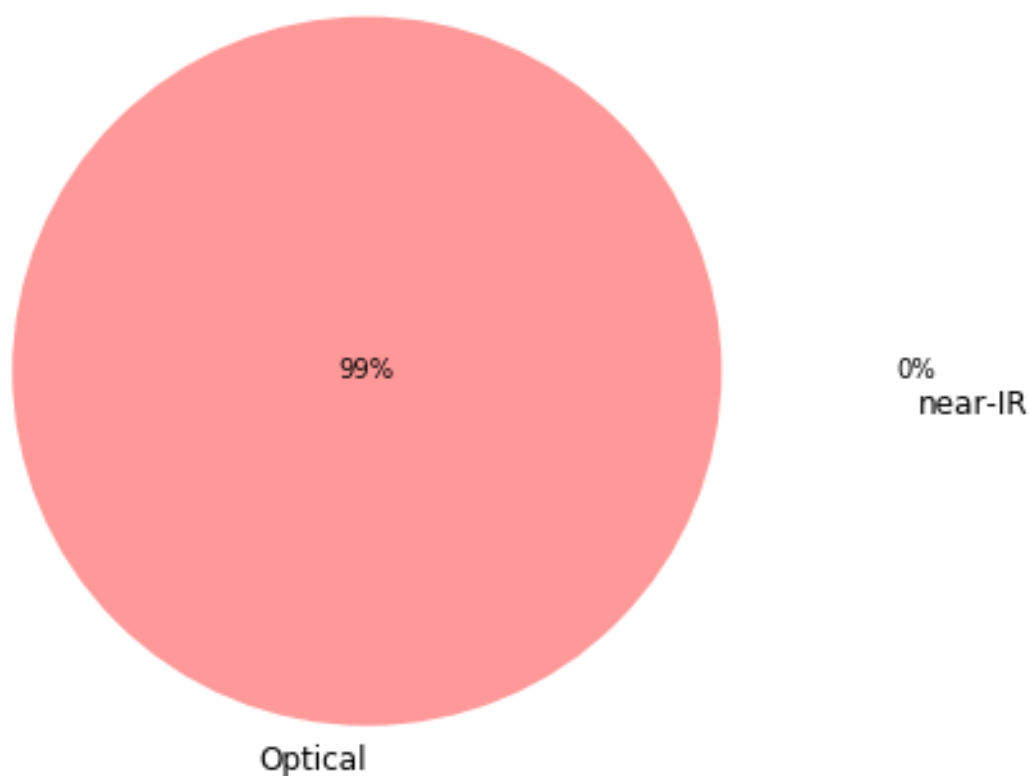


## 1.4 II - Comparing magnitudes in similar filters

The master list is composed of several catalogues containing magnitudes in similar filters on different instruments. We are comparing the magnitudes in these corresponding filters.

### 1.4.1 II.a - Comparing depths

We compare the histograms of the total aperture magnitudes of similar bands.

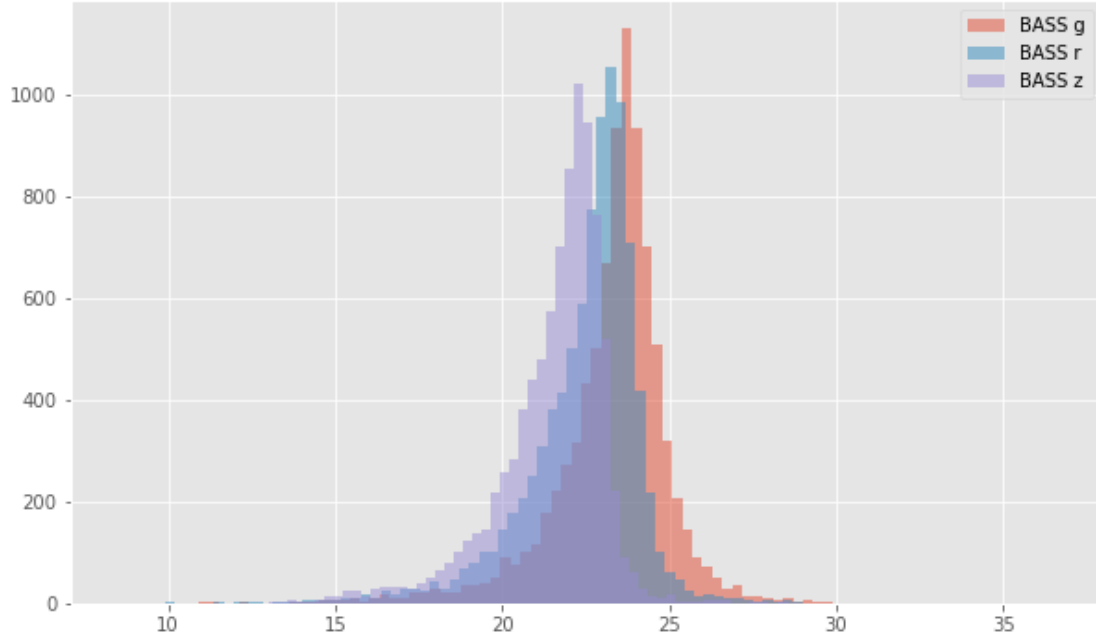

### 1.4.2 II.b - Comparing magnitudes

We compare one to one each magnitude in similar bands.

## 1.5 III - Comparing magnitudes to reference bands

Cross-match the master list to 2MASS to compare magnitudes.

### 1.5.1 III.b - Comparing J band to 2MASS


The catalogue is cross-matched to 2MASS-PSC withing 0.2 arcsecond. We compare the UKIDSS total J and K magnitudes to those from 2MASS.

The 2MASS magnitudes are “*Vega-like*” and we have to convert them to AB magnitudes using the zero points provided on [this page](#):

Band	F - 0 mag (Jy)
J	1594
H	1024
Ks	666.7

WFCAM J (total) - 2MASS J:

- Median: 0.01
- Median Absolute Deviation: 0.04
- 1% percentile: -0.7482610212613876
- 99% percentile: 0.20659443177205777

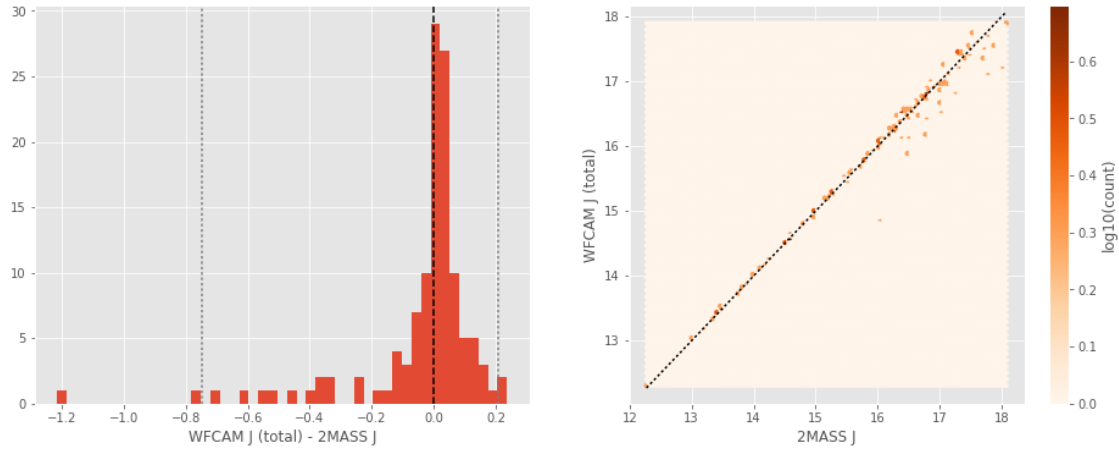

Based on the first run of the above graph it became clear that uhs requires conversion from Vega to AB.


## 1.6 Keeping only sources with good signal to noise ratio

From here, we are only comparing sources with a signal to noise ratio above 3, i.e. roughly we a magnitude error below 0.3.

*To make it easier, we are setting to NaN in the catalogue the magnitudes associated with an error above 0.3 so we can't use these magnitudes after the next cell.*

## 1.7 IV - Comparing aperture magnitudes to total ones.

Number of source used: 6940 / 9799 (70.82%)

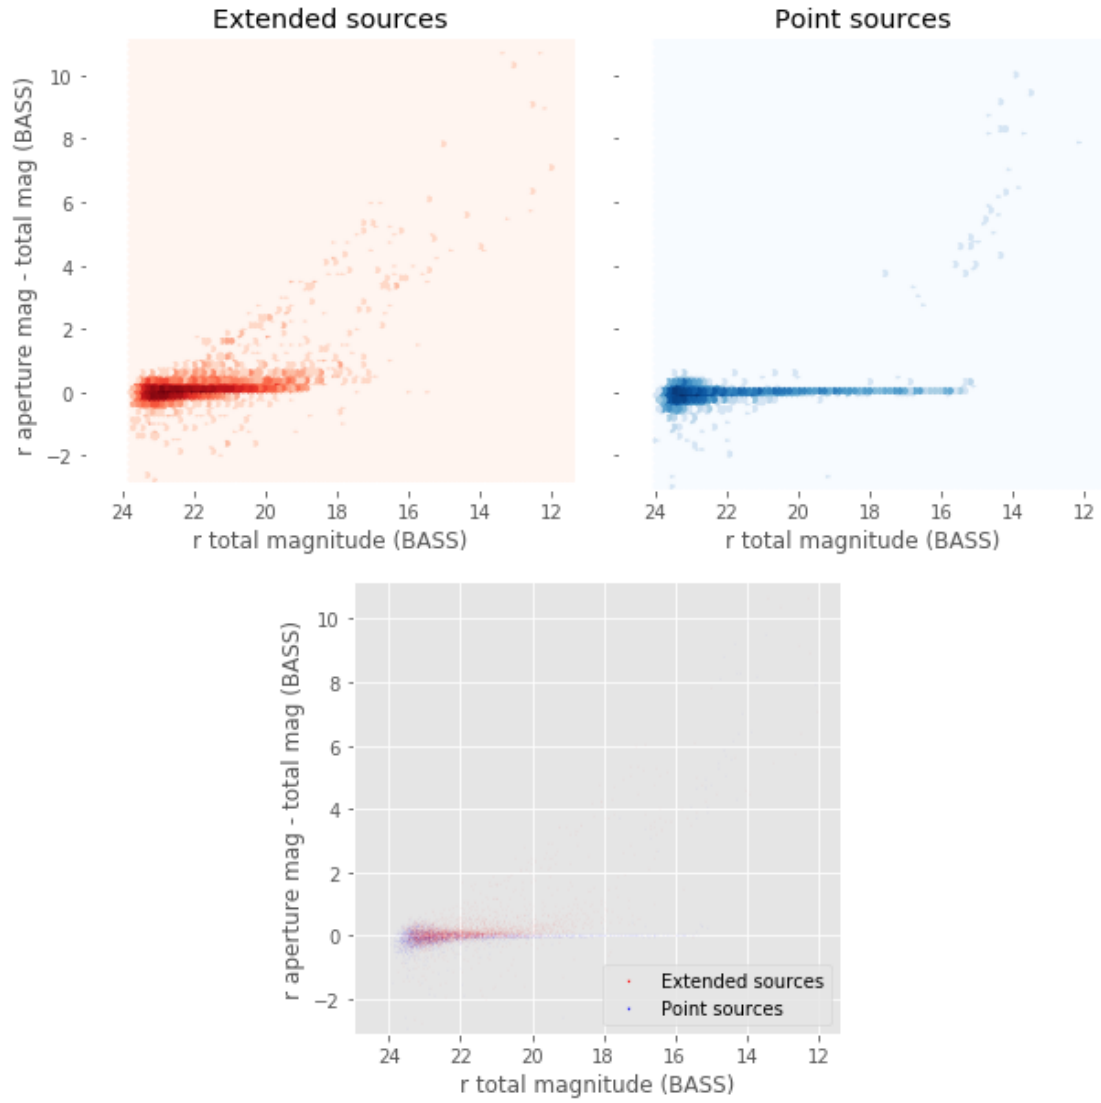

## 1.8 V - Color-color and magnitude-color plots

Number of source used: 1045 / 9799 (10.66%)

