


Orlando Camacho
Module 4.2 Assignment – My
SQL Installation
June 27, 2026

MySQL Connection

This screenshot shows my successful connection to MySQL.

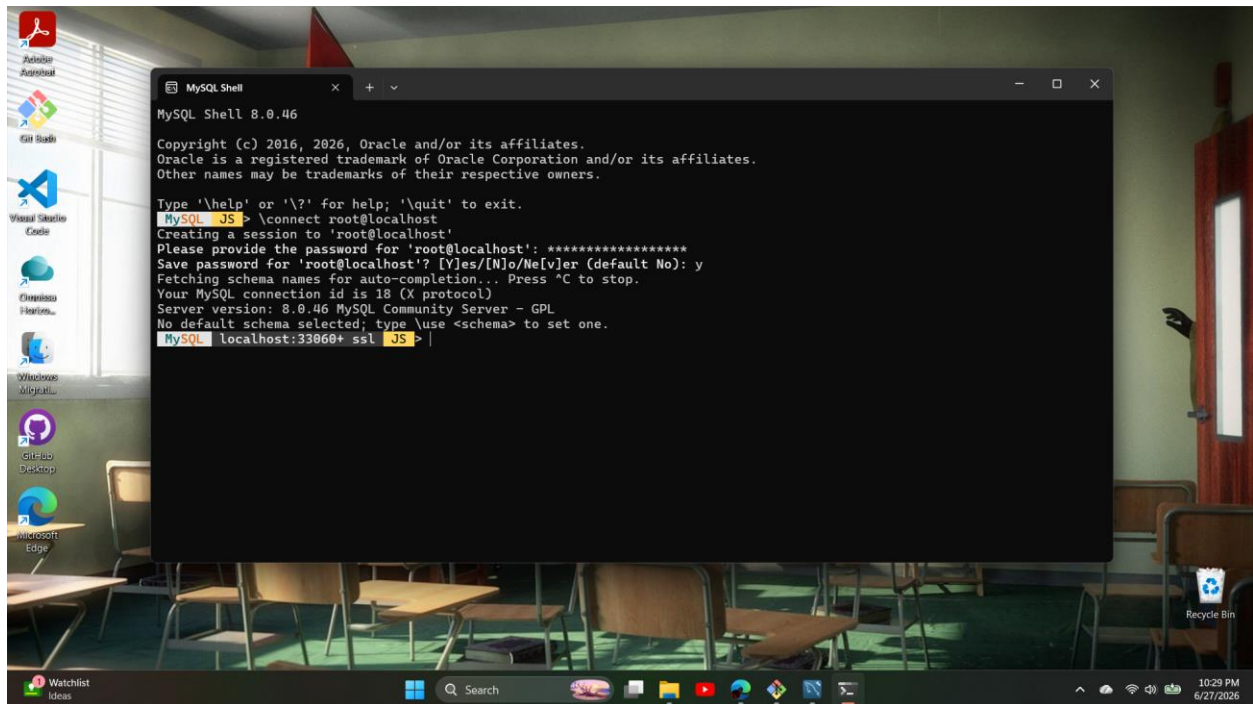

Creating the Movies Database


```
CREATE DATABASE movies;
```

This command creates a database named movies.

Showing the Databases

This screenshot confirms that the movies database was created.

Orlando Camacho
Module 4.2 Assignment – My
SQL Installation
June 27, 2026

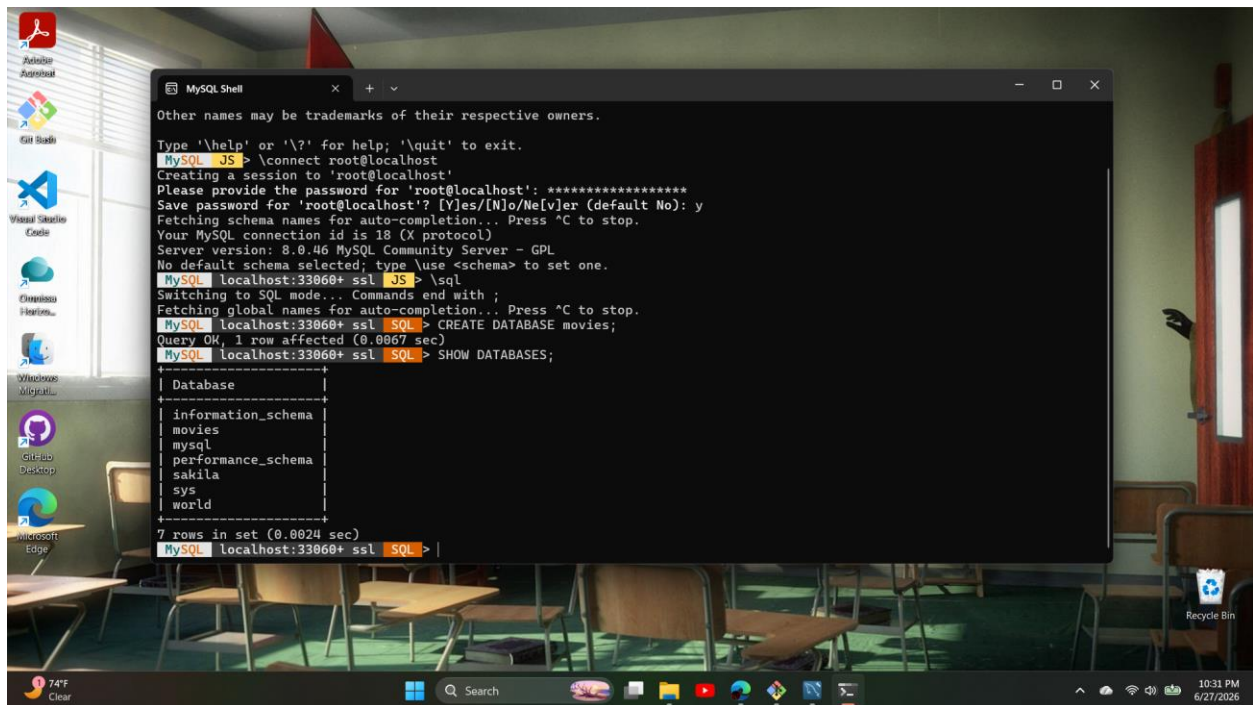

```
MySQL Shell
Other names may be trademarks of their respective owners.

Type '\help' or '\?' for help; '\quit' to exit.
MySQL JS > \connect root@localhost
Creating a session to 'root@localhost'
Please provide the password for 'root@localhost': *****
Save password for 'root@localhost'? [Y]es/[N]o/[e]vil (default No): y
Fetching schema names for auto-completion... Press ^C to stop.
Your MySQL connection id is 18 (X protocol)
Server version: 8.0.46 MySQL Community Server - GPL
No default schema selected; type 'use <schema>' to set one.
MySQL localhost:33060+ ssl JS > \sql
Switching to SQL mode... Commands end with ;
Fetching global names for auto-completion... Press ^C to stop.
MySQL localhost:33060+ ssl SQL > CREATE DATABASE movies;
Query OK, 1 row affected (0.0067 sec)
MySQL localhost:33060+ ssl SQL > SHOW DATABASES;
+-----+
| Database |
+-----+
| information_schema |
| movies |
| mysql |
| performance_schema |
| sakila |
| sys |
| world |
+-----+
7 rows in set (0.0024 sec)
MySQL localhost:33060+ ssl SQL > |
```

Function 1 - CURRENT_DATE()

SELECT CURRENT_DATE() AS Today's Date;


The **CURRENT_DATE()** function returns today's date. It can be used to automatically record the date when new records are added to a database, such as customer orders or employee information.

Orlando Camacho

Module 4.2 Assignment – My

SQL Installation

June 27, 2026

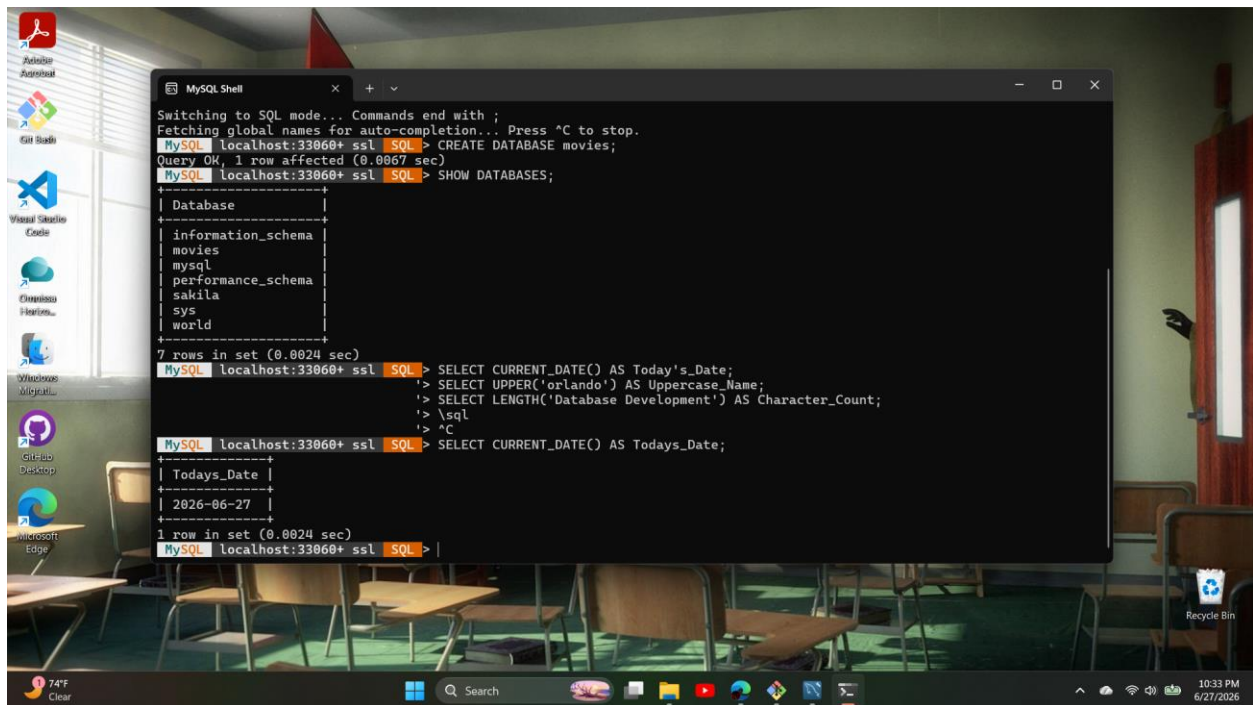


```
MySQL Shell
Switching to SQL mode... Commands end with ;
Fetching global names for auto-completion... Press ^C to stop.
MySQL localhost:33060+ ssl SQL > CREATE DATABASE movies;
Query OK, 1 row affected (0.0067 sec)
MySQL localhost:33060+ ssl SQL > SHOW DATABASES;
+-----+
| Database |
+-----+
| information_schema |
| movies            |
| mysql             |
| performance_schema |
| sakila            |
| sys               |
| world            |
+-----+
7 rows in set (0.0024 sec)
MySQL localhost:33060+ ssl SQL > SELECT CURRENT_DATE() AS Today's_Date;
+-----+
| Today's_Date |
+-----+
| 2026-06-27   |
+-----+
1 row in set (0.0024 sec)
MySQL localhost:33060+ ssl SQL > SELECT UPPER('orlando') AS Uppercase_Name;
+-----+
| Uppercase_Name |
+-----+
| ORLANDO        |
+-----+
1 row in set (0.0024 sec)
MySQL localhost:33060+ ssl SQL > SELECT LENGTH('Database Development') AS Character_Count;
+-----+
| Character_Count |
+-----+
| 24              |
+-----+
1 row in set (0.0024 sec)
MySQL localhost:33060+ ssl SQL > SELECT CURRENT_DATE() AS Todays_Date;
+-----+
| Todays_Date |
+-----+
| 2026-06-27   |
+-----+
1 row in set (0.0024 sec)
MySQL localhost:33060+ ssl SQL >
```

Function 2 - UPPER()

```
SELECT UPPER('orlando') AS Uppercase_Name;
```

Orlando Camacho
Module 4.2 Assignment – My
SQL Installation
June 27, 2026

The **UPPER()** function converts text into uppercase letters. This is useful for making text consistent and easier to compare.

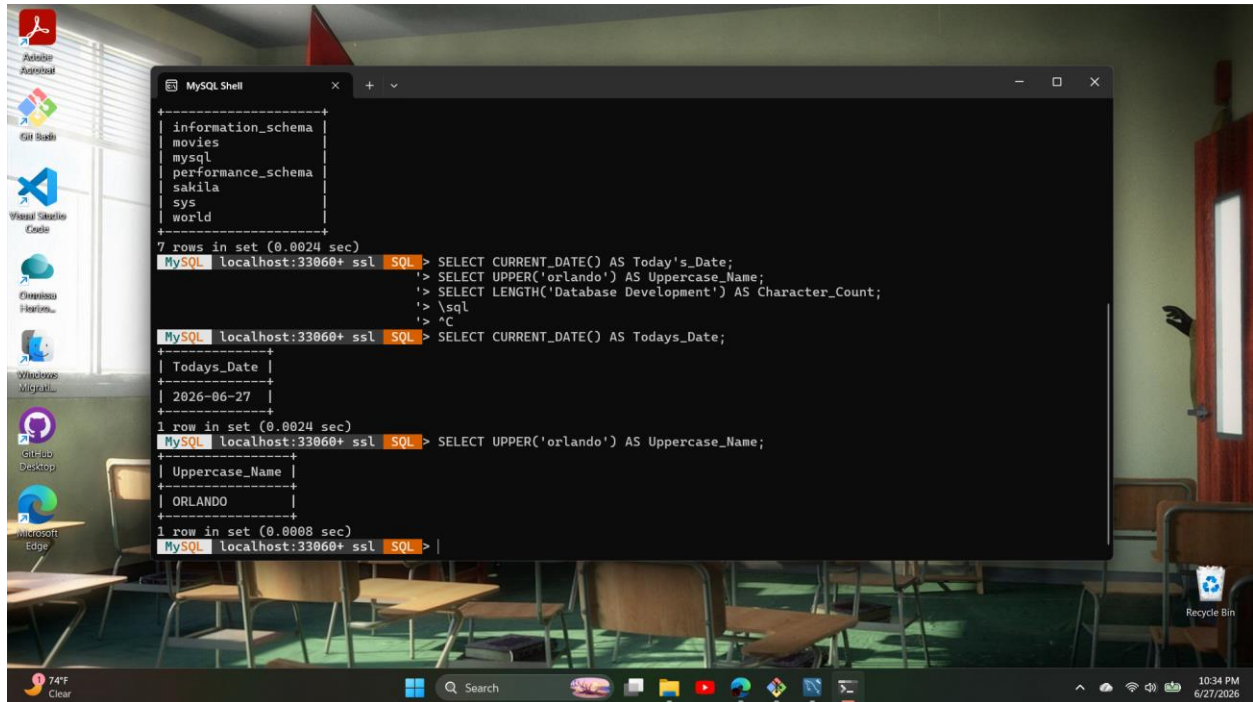

```
MySQL Shell
+-----+
| information_schema |
| movies              |
| mysql               |
| performance_schema |
| sakila              |
| sys                 |
| world               |
+-----+
7 rows in set (0.0024 sec)

MySQL localhost:33060+ ssl SQL > SELECT CURRENT_DATE() AS Today's_Date;
+-----+
| Today's_Date |
+-----+
| 2026-06-27   |
+-----+
1 row in set (0.0024 sec)

MySQL localhost:33060+ ssl SQL > SELECT UPPER('orlando') AS Uppercase_Name;
+-----+
| Uppercase_Name |
+-----+
| ORLANDO        |
+-----+
1 row in set (0.0008 sec)

MySQL localhost:33060+ ssl SQL >
```

Function 3 - **LENGTH()**

```
SELECT LENGTH('Database Development') AS Character_Count;
```


The **LENGTH()** function returns the number of characters in a string. It can be used to validate text length or check the size of user input before storing it in a database.

Orlando Camacho

Module 4.2 Assignment – My

SQL Installation

June 27, 2026

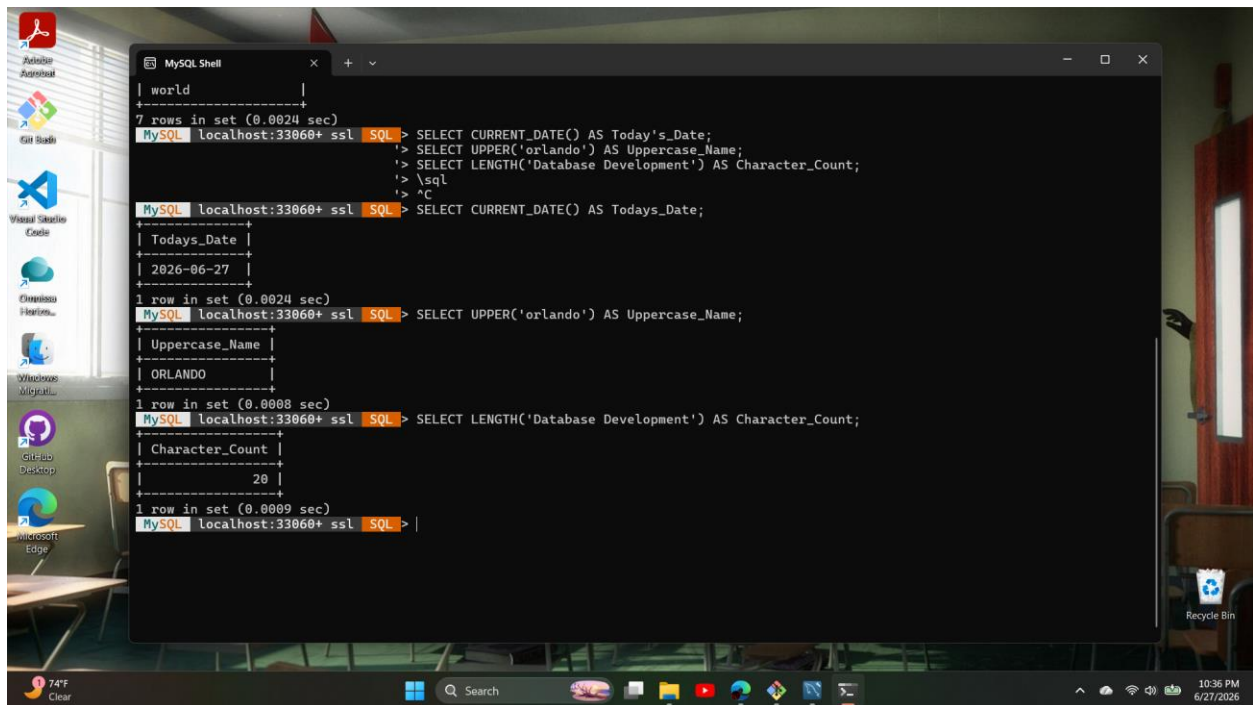

```
MySQL Shell
| world
+-----+
7 rows in set (0.0024 sec)
MySQL localhost:33060+ ssl SQL> SELECT CURRENT_DATE() AS Today's_Date;
+-----+
| Today's_Date |
+-----+
| 2026-06-27 |
+-----+
1 row in set (0.0024 sec)
MySQL localhost:33060+ ssl SQL> SELECT UPPER('orlando') AS Uppercase_Name;
+-----+
| Uppercase_Name |
+-----+
| ORLANDO |
+-----+
1 row in set (0.0008 sec)
MySQL localhost:33060+ ssl SQL> SELECT LENGTH('Database Development') AS Character_Count;
+-----+
| Character_Count |
+-----+
| 20 |
+-----+
1 row in set (0.0009 sec)
MySQL localhost:33060+ ssl SQL> |
```