## Performing Table Joins

## **QGIS** Tutorials and Tips





Author
Ujaval Gandhi
http://google.com/+UjavalGandhi

Translations by SongHyun Choi





1. ■■■■ ■■■ shapefile■ ■■■■■. ■■ ■■ --> ■■ ■■■ :menuselection:`Layer --> Add Vector Layer`■ ■■■.

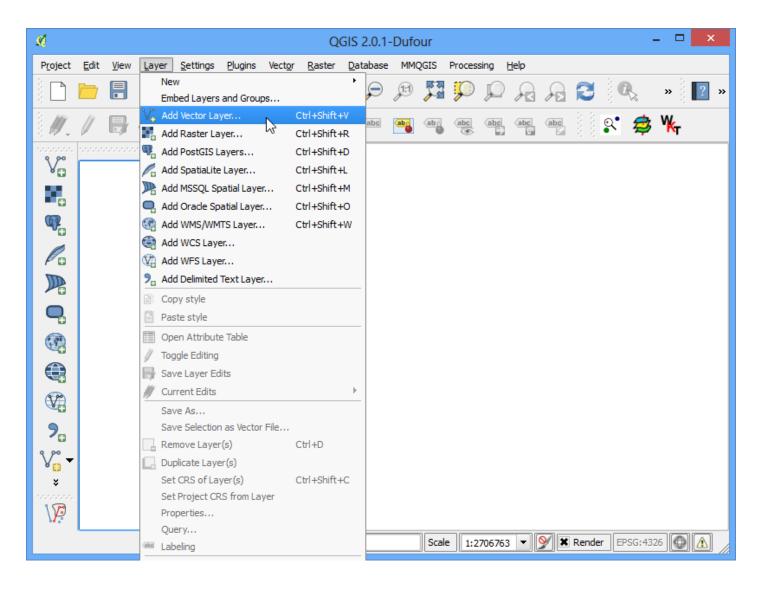

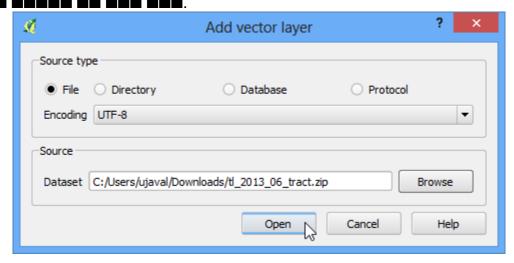


3. `tl\_2013\_06\_tract.shp`■■■■ :guilabel:`OK`■ ■■■■.

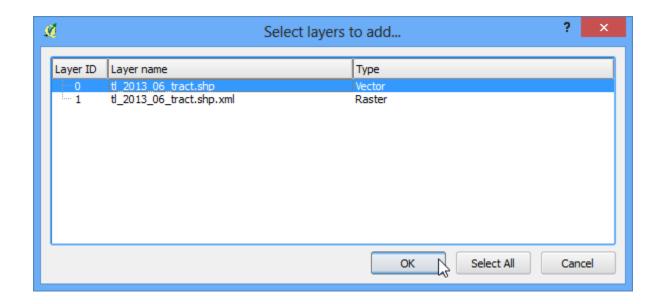


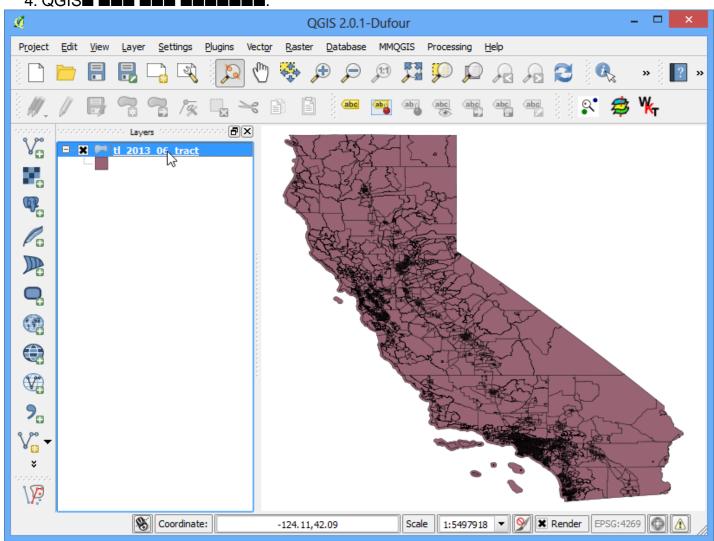


5. ■■■■ ■■■■ ■■ ■■ :guilabel: Open Attribute Table ■■■■■.

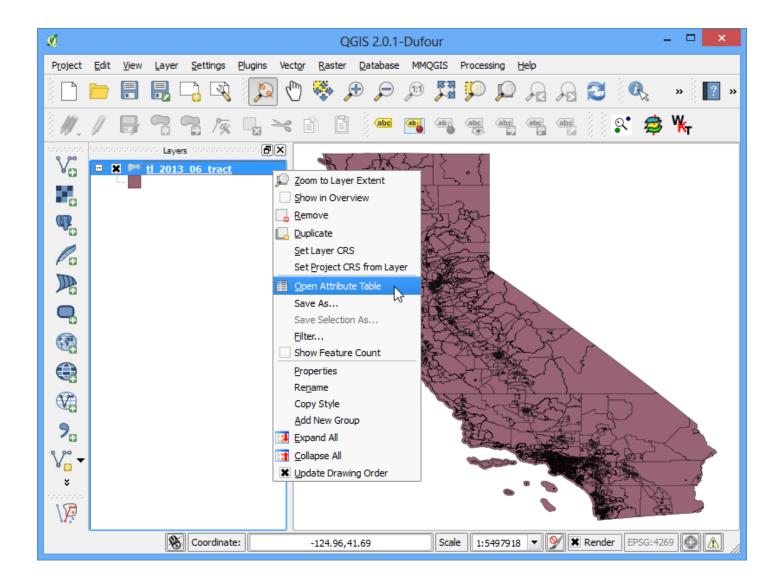


6. In shapefile with the shapefile shapefile with the shapefile with t

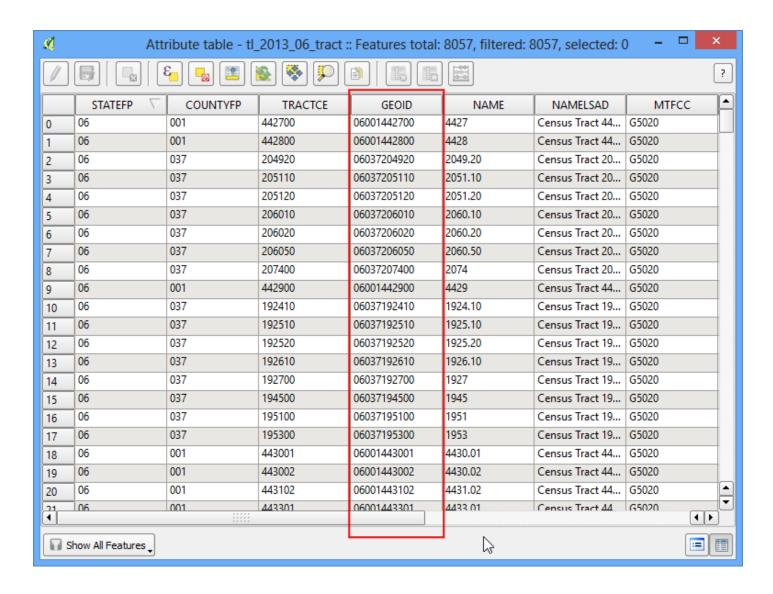


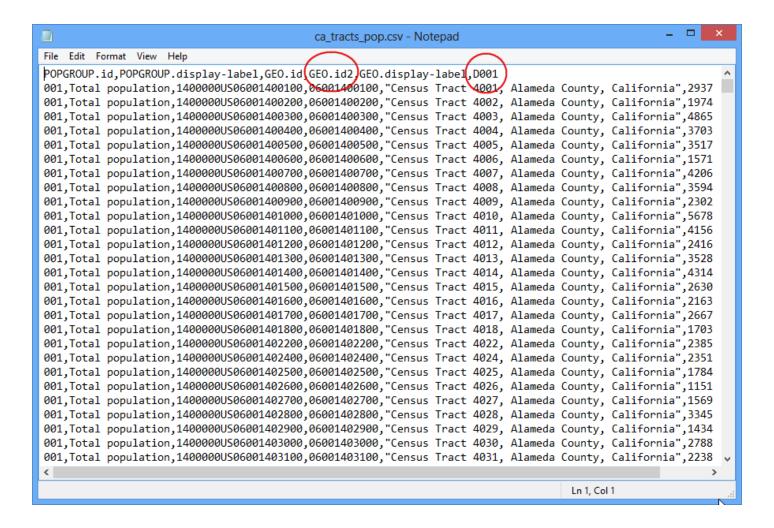


8. How have csv and and an anomal anomal and an anomal and an anomal and an anomal anomal and anomal anomal and an anomal anomal and an anomal and anomal anomal anomal and anomal anoma

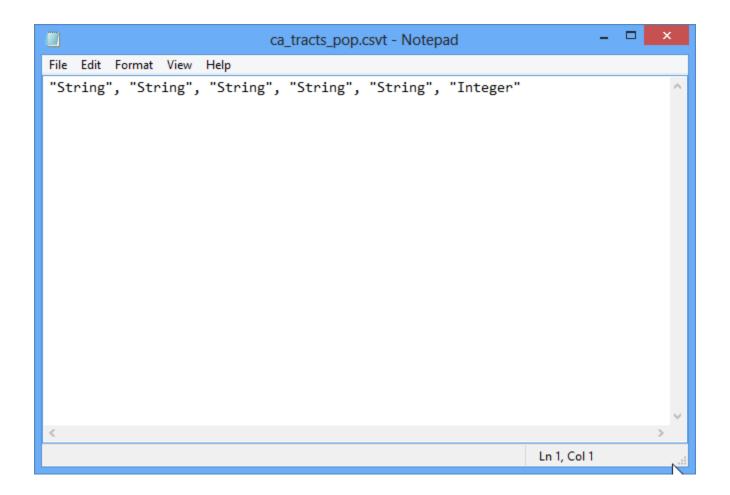

9. QGISE CSVERE BEEN BEEN BEEN SEED STATE STATE

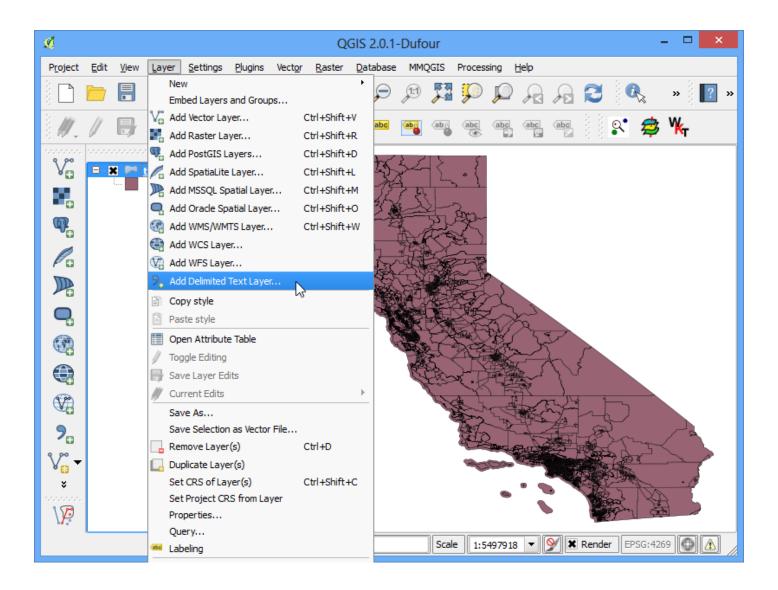


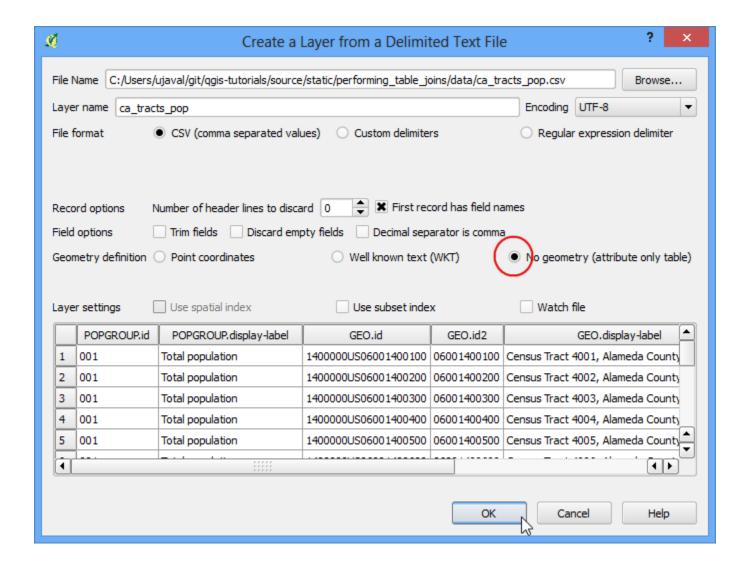


11. CSVE BE QGISE BEEF B BEEF.




12. Select the *tl\_2013\_06\_tract* layer. Right-click on it and select *Properties*.

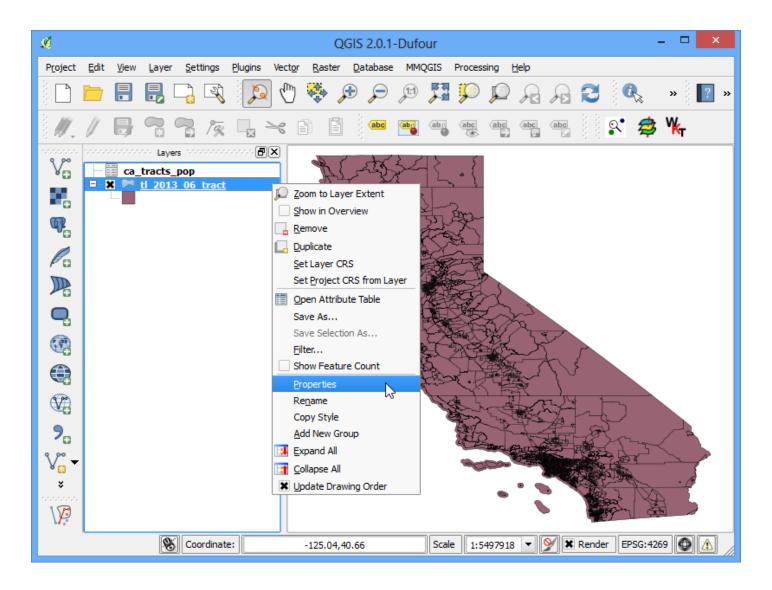



13. Layer Properties Layer Properties Joins La Joins La Layer Properties Layer Layer Layer Layer Properties Layer Layer Layer Properties Layer L

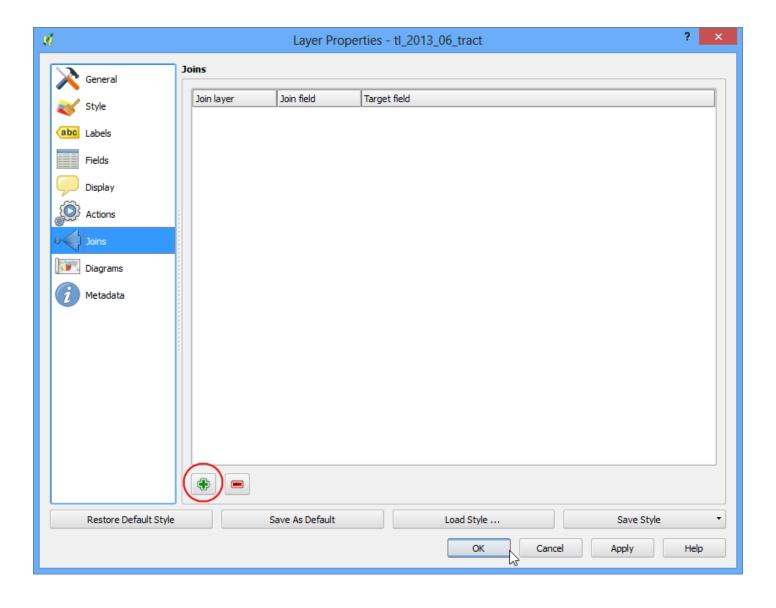


14. ■■ ■■ Add vector join ■■■■■■■ ■■ Join layer`■ `ca\_tracts\_pop`■ ■■■■■. ■■ shapefile■ CSV■■ ■■■ id■ ■■■■■■■■■■■ :guilabel:`Join field ■ ■■ ■■ :guilabel:`Target field`■ ■■ `GEO.id2`■ `GEOID`■ ■■■■■. :guilabel:`OK`■ ■■■■■.




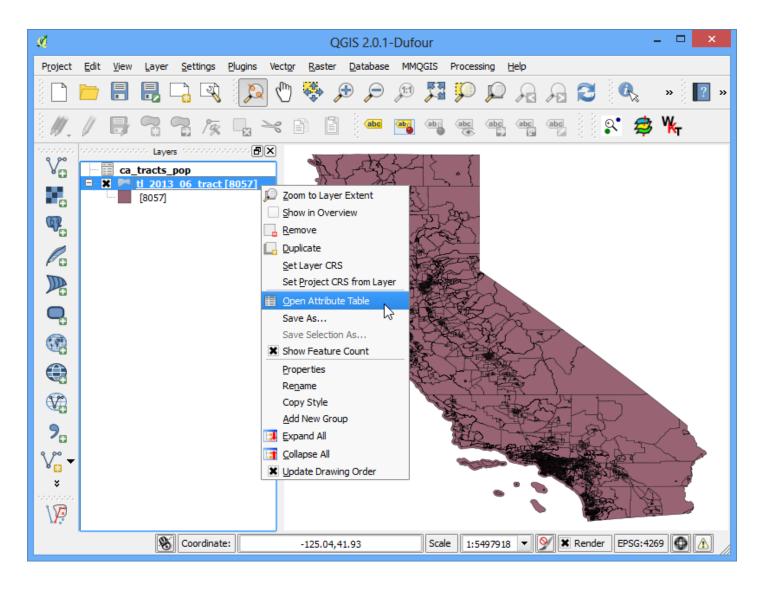


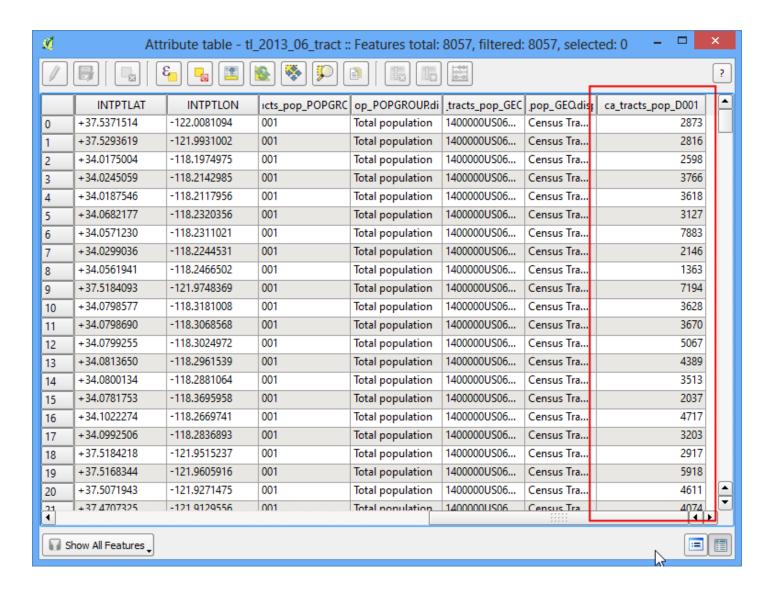

17. tl\_2013\_06\_tract ■■■■ ■■■■■ :guilabel:`Properties`■ ■■■■■.

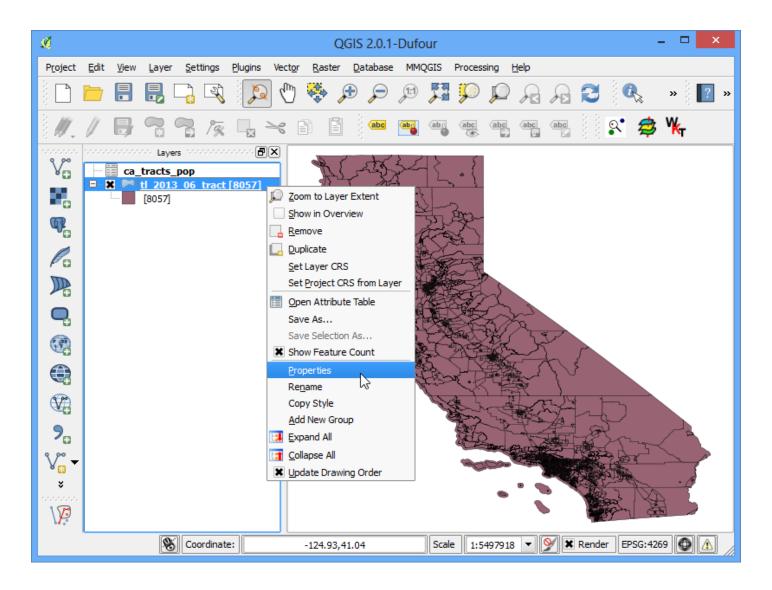

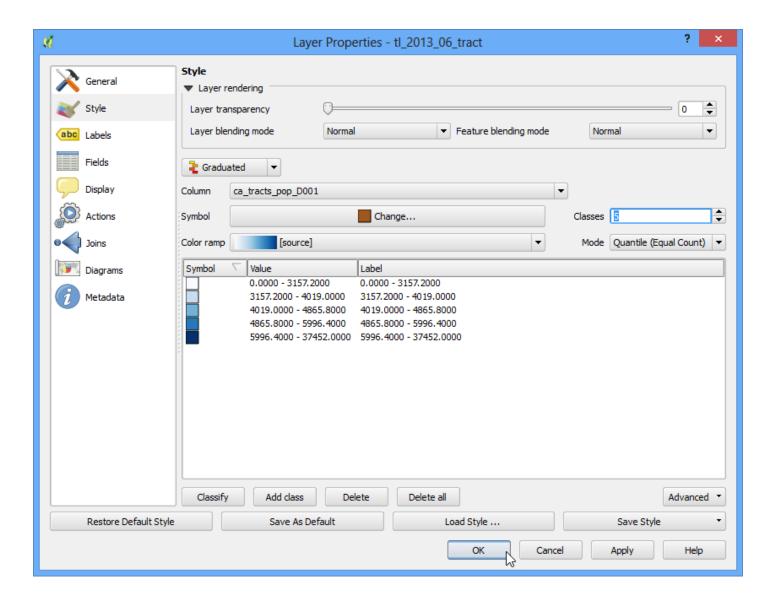

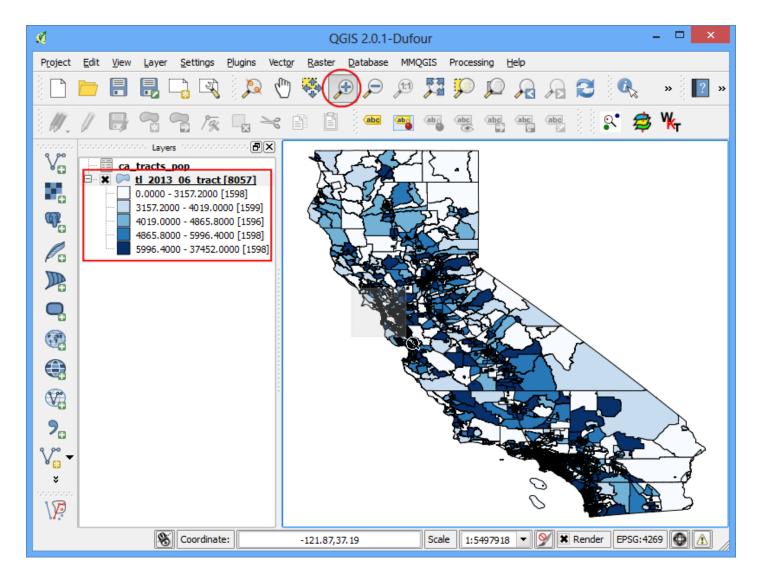

20.

