Creating Heatmaps

QGIS Tutorials and Tips




Author Ujaval Gandhi


http://google.com/+UjavalGandhi

Translations by SongHyun Choi


0000 000 0000 00 0000 0000 0000. 0000 000 00
O O O O O O O O O O O O O O O O O
Download the Surrey data.


1. 000 000 000 000 0000. 0000 CSV0000 00 0000. QGIS0 0 0000 0000(000 000 :doc:`importing_spreadsheets_csv`0 0000). 00 000 --> 0000 000 000 :menuselection:`Layer --> Add Delimited Text Layer`0 00000.

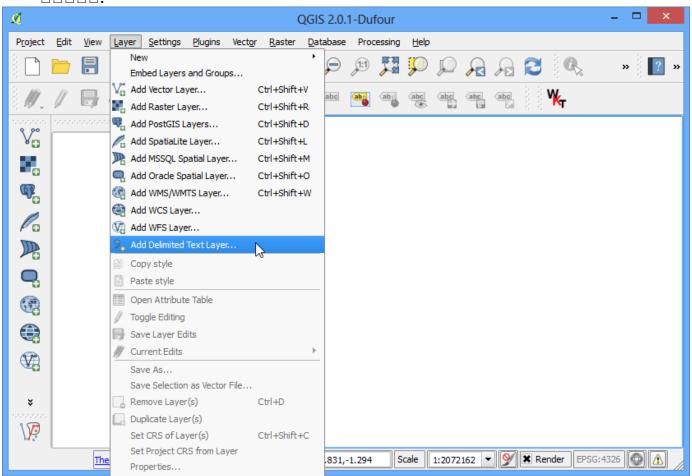

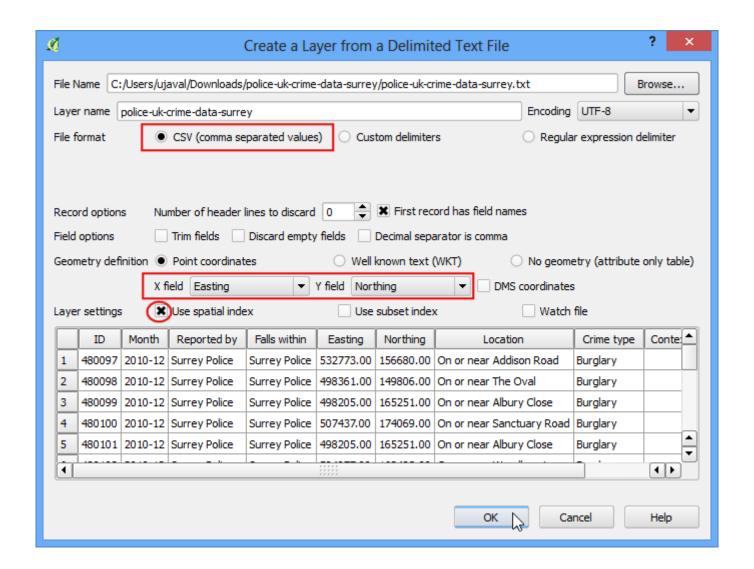



3. 000 000 0000. 0 00000 000 000 0 0000. 00 :guilabel: `Close` 0 00000.

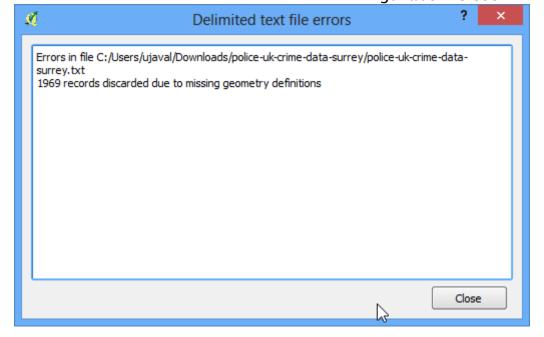

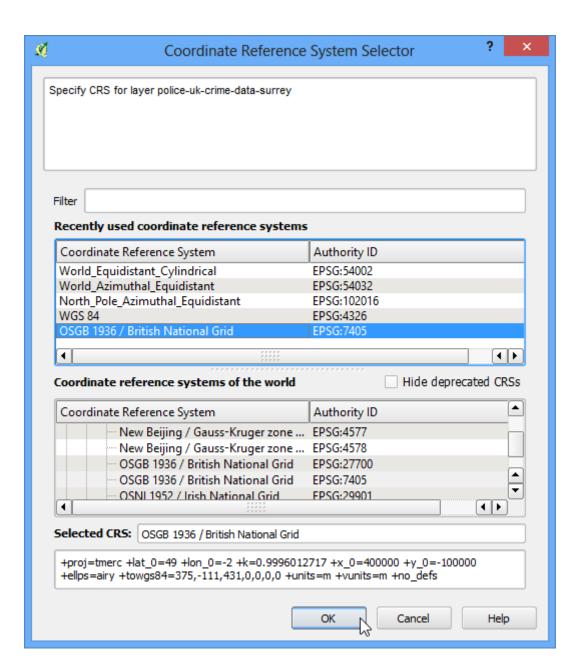

5. DD QGISD DDDD DDDDD DD DDDDD.

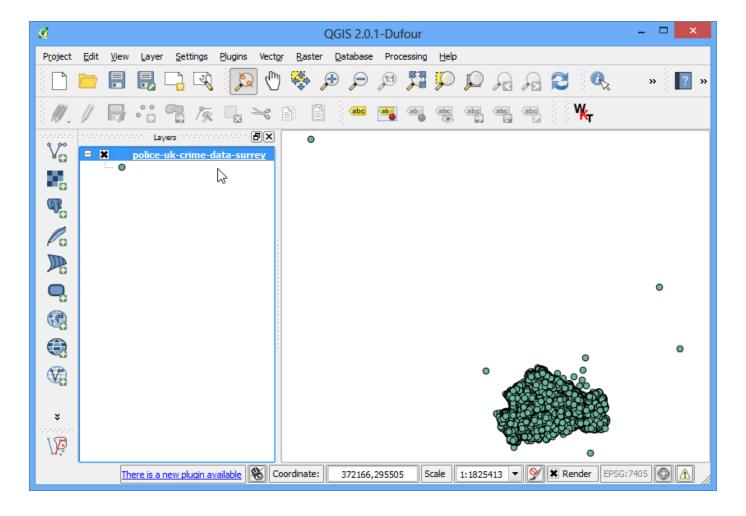


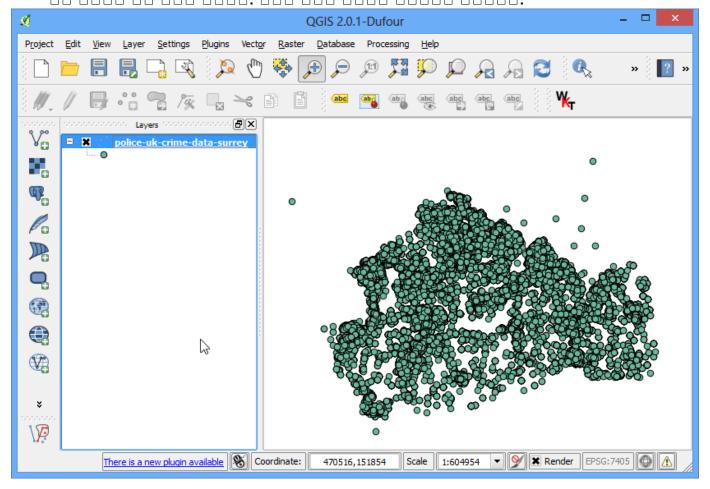


7. To create the heatmap, you need to enable a core plugin named *Heatmap*. See \(\bigcup \bi

Warning


The Heatmap plugin has a bug in QGIS 2.8.1. See this post for workarounds.

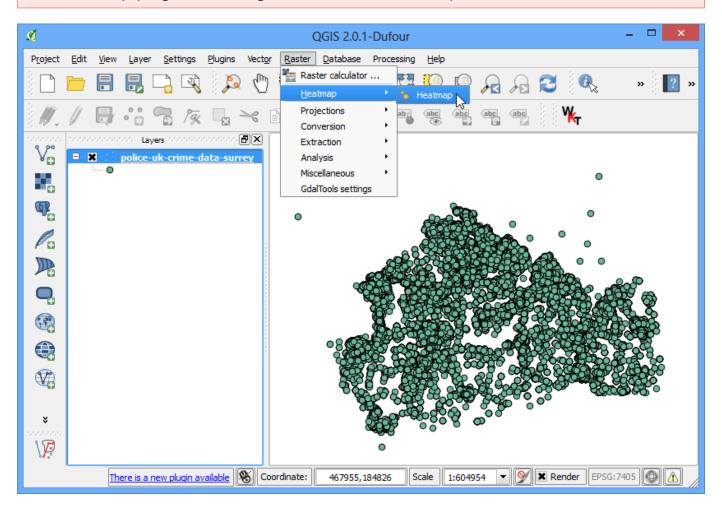



8. Documents de la completation de la completation

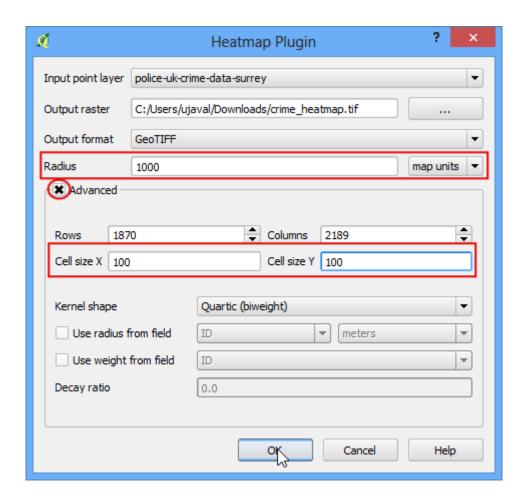


9. 00 000 0000 0000 00 0000 00 0 0000.

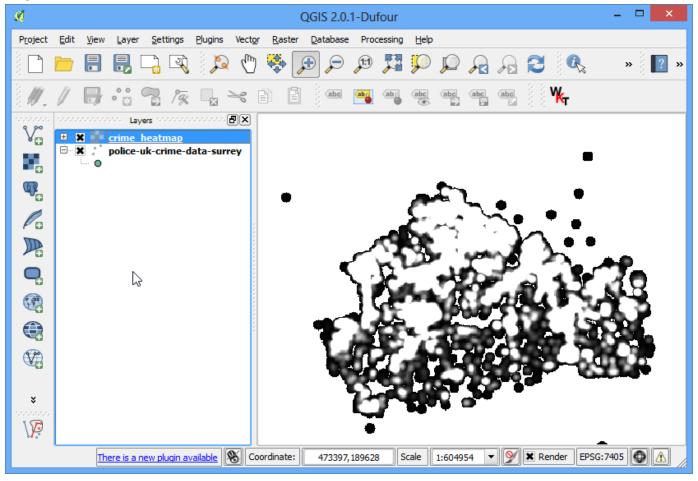


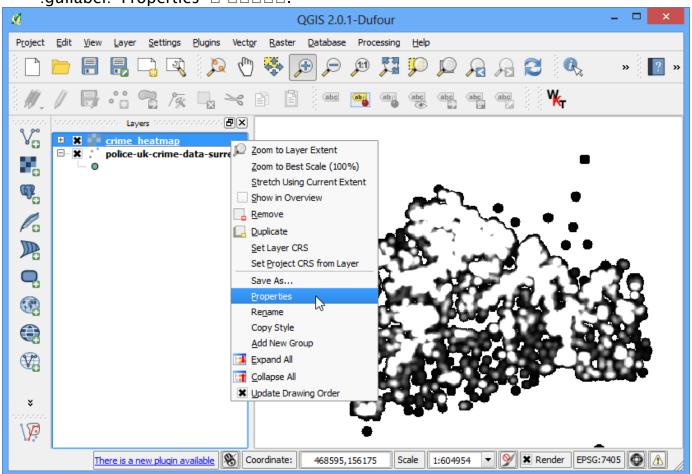


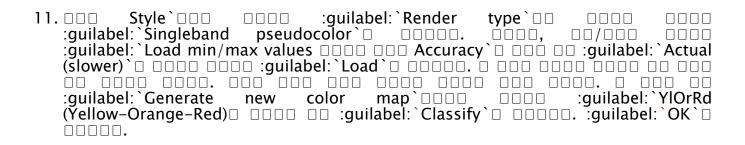


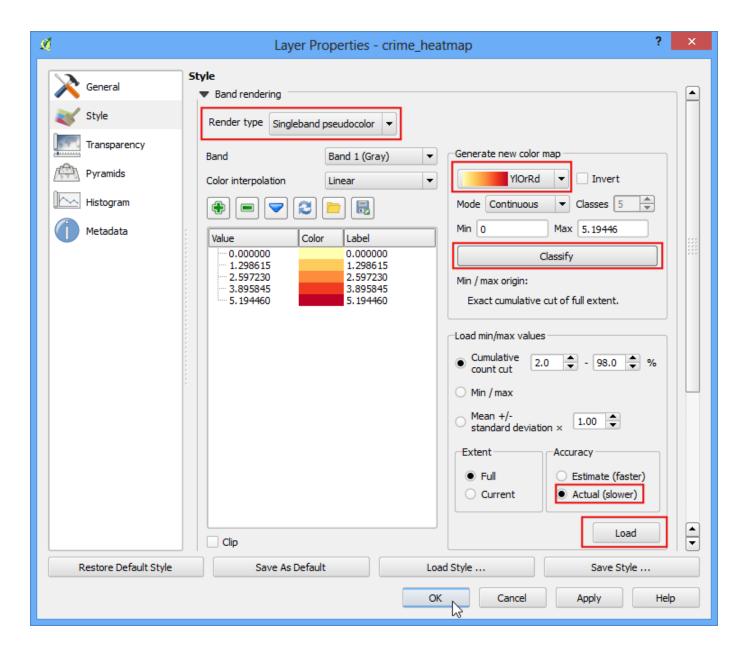



12.										
]. 🗆		
	□, [] (🗆 🗆	- 1000ı	m)□ □					
	ППП	ПП.								

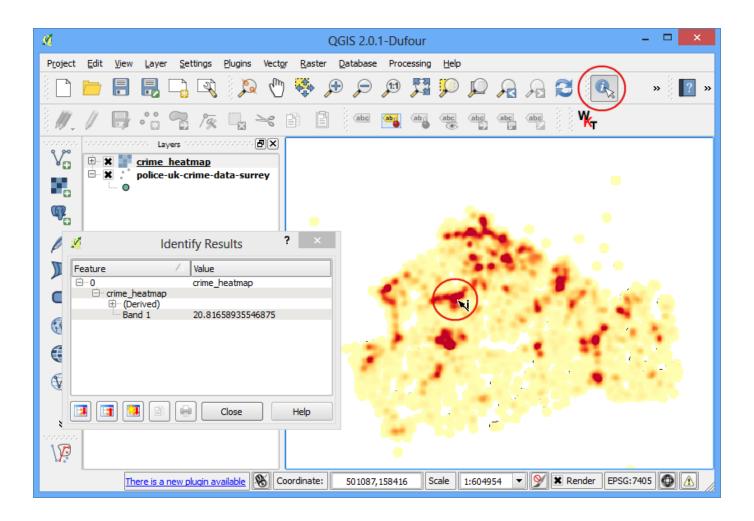

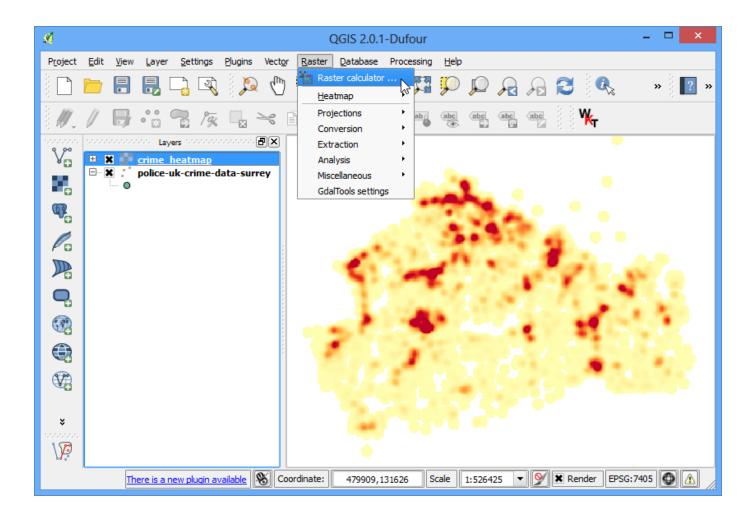





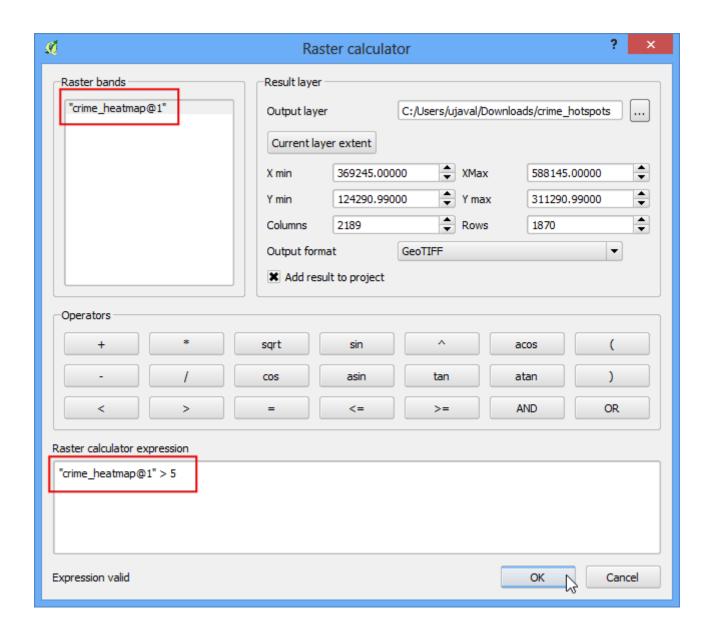


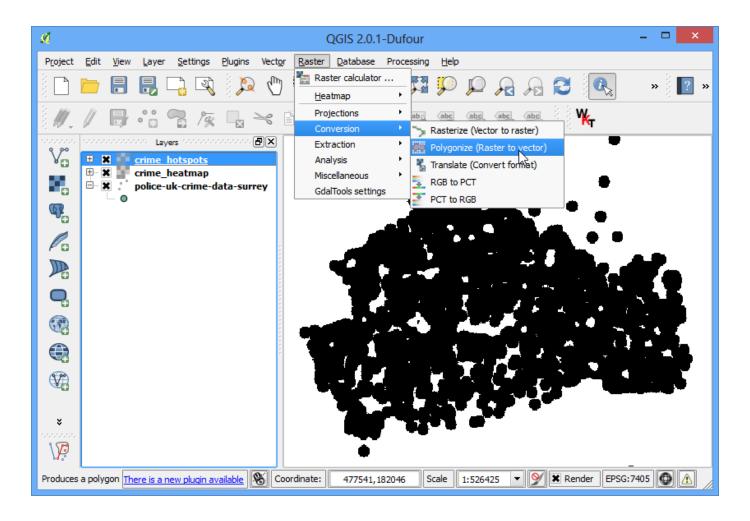



16. \(\begin{align*} \text{crime_hotspots_vector'} \\ \begin{align*} \text{click} \\ \begin{align*} \\ \begin{align*} \text{click} \\ \begin{align*} \\ \begin{align*} \text{click} \\ \begin{align*} \\ \begin{align*} \text{click} \\ \begin{align*} \\

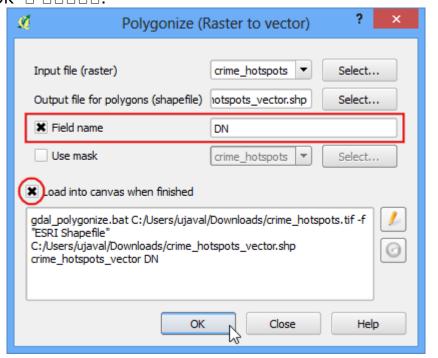


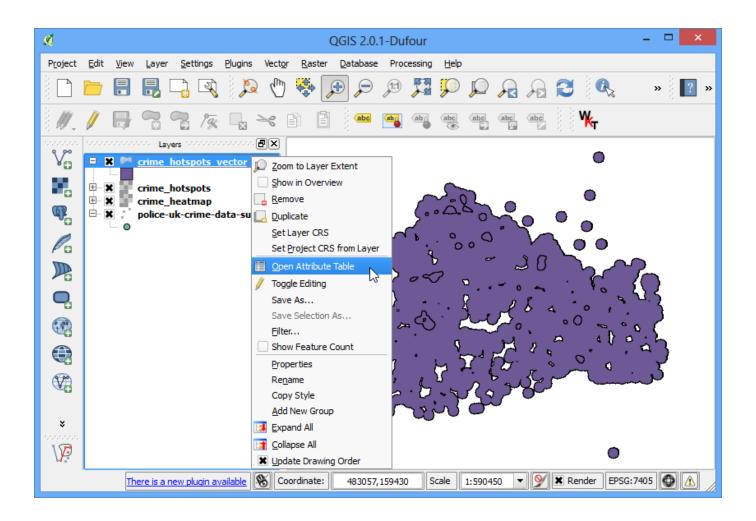

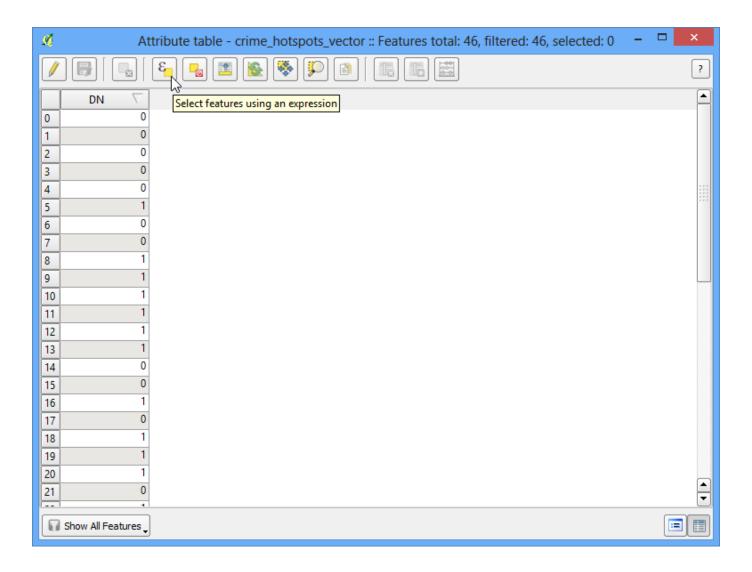

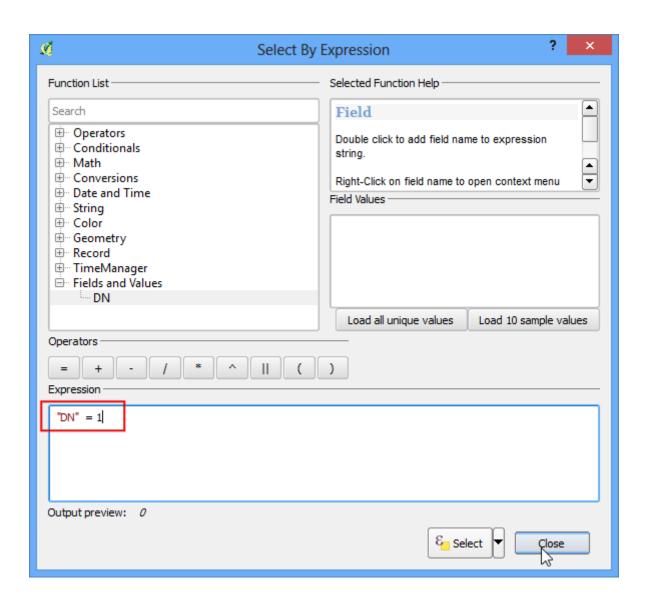

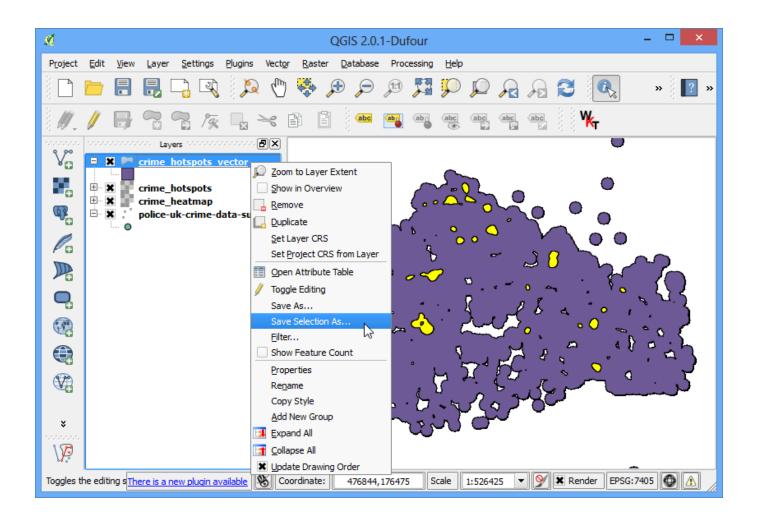

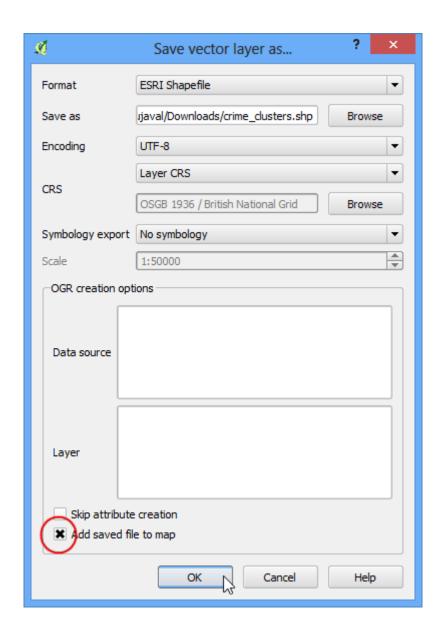

22.								
	_	intelligei	nce*□□					
	□.							

