

Bagging and Random Forests

David Rosenberg

New York University

October 29, 2016

Variance of a Mean

- Let Z_1, \dots, Z_n be independent r.v.'s with mean μ and variance σ^2 .
- Suppose we want to estimate μ .
- We could use any single Z_i to estimate μ .
- Variance of estimate would be σ^2 .
- Let's consider the average of the Z_i 's.
- Average has the same expected value but smaller variance:

$$\mathbb{E} \left[\frac{1}{n} \sum_{i=1}^n Z_i \right] = \mu \quad \text{Var} \left[\frac{1}{n} \sum_{i=1}^n Z_i \right] = \frac{\sigma^2}{n}.$$

- Can we apply this to reduce variance of prediction models?

Averaging Independent Prediction Functions

- Suppose we have B independent training sets.
- Let $\hat{f}_1(x), \hat{f}_2(x), \dots, \hat{f}_B(x)$ be the prediction models for each set.
- Define the average prediction function as:

$$\hat{f}_{\text{avg}}(x) = \frac{1}{B} \sum_{b=1}^B \hat{f}_b(x).$$

- The average prediction function has lower variance than an individual prediction function.
- But in practice we don't have B independent training sets...
- Instead, we can use **the bootstrap**....

Variability of an Estimator

- Suppose we have a random sample X_1, \dots, X_n .
- Compute some function of the data, such as

$$\hat{\mu} = \phi(X_1, \dots, X_n).$$

- We want to put error bars on $\hat{\mu}$, so we need to estimate $\text{Var}(\hat{\mu})$.
- Ideal scenario:
 - Attain B samples of size n .
 - Compute $\hat{\mu}_1, \dots, \hat{\mu}_B$.
 - The sample variance of $\hat{\mu}_1, \dots, \hat{\mu}_B$ estimates $\text{Var}(\hat{\mu})$
- Again, we don't have B samples. Only 1.

The Bootstrap Sample

Definition


A **bootstrap sample** from $\mathcal{D} = \{X_1, \dots, X_n\}$ is a sample of size n drawn *with replacement* from \mathcal{D} .

- In a bootstrap sample, some elements of \mathcal{D}
 - will show up multiple times,
 - some won't show up at all.
- Each X_i has a probability $(1 - 1/n)^n$ of not being selected.
- Recall from analysis that for large n ,

$$\left(1 - \frac{1}{n}\right)^n \approx \frac{1}{e} \approx .368.$$

- So we expect $\sim 63.2\%$ of elements of \mathcal{D} will show up at least once.

The Bootstrap Sample

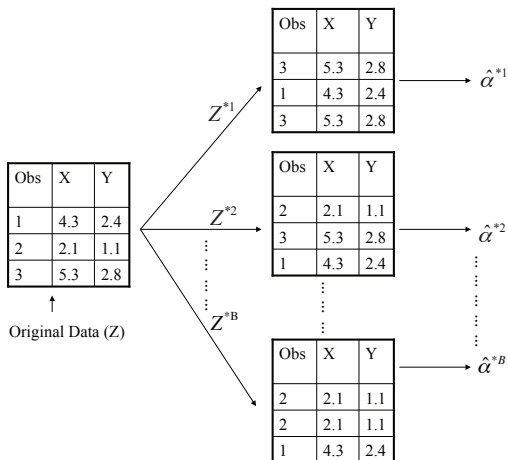

From *An Introduction to Statistical Learning, with applications in R* (Springer, 2013) with permission from the authors: G. James, D. Witten, T. Hastie and R. Tibshirani.

The Bootstrap Method

Definition

A **bootstrap method** is when you *simulate* having B independent samples by taking B bootstrap samples from the sample \mathcal{D} .




- Given original data \mathcal{D} , compute B bootstrap samples D^1, \dots, D^B .
- For each bootstrap sample, compute some function

$$\phi(D^1), \dots, \phi(D^B)$$

- Work with these values as though D^1, \dots, D^B were independent.
- **Amazing fact:** Things usually come out very close to what we'd get with independent samples.

Independent vs Bootstrap Samples

- Original sample size $n = 100$ (simulated data)
- $\hat{\alpha}$ is a complicated function of the data.
- Compare values of $\hat{\alpha}$ on
 - 1000 independent samples of size 100, vs
 - 1000 bootstrap samples of size 100



From *An Introduction to Statistical Learning, with applications in R* (Springer, 2013) with permission from the authors: G. James, D. Witten, T. Hastie and R. Tibshirani.

Bagging

- Suppose we had B independent training sets.
- Let $\hat{f}_1(x), \hat{f}_2(x), \dots, \hat{f}_B(x)$ be the prediction models from each set.
- Define the average prediction function as:

$$\hat{f}_{\text{avg}}(x) = \frac{1}{B} \sum_{b=1}^B \hat{f}_b(x).$$

- But we don't have B independent training sets.
- **Bagging** is when we use B bootstrap samples as training sets.
- Bagging estimator given as

$$\hat{f}_{\text{bag}}(x) = \frac{1}{B} \sum_{b=1}^B \hat{f}_b^*(x),$$

where \hat{f}_b^* is trained on the b 'th bootstrap sample.

- Bagging proposed by Leo Breiman (1996).

Out-of-Bag Error Estimation

- Each bagged predictor is trained on about 63% of the data.
- Remaining 37% are called **out-of-bag (OOB)** observations.
- For i th training point, let

$$S_i = \{b \mid \mathcal{D}^b \text{ does not contain } i\text{th point}\}.$$


- The **OOB prediction** on x_i is

$$\hat{f}_{\text{OOB}}(x_i) = \frac{1}{|S_i|} \sum_{b \in S_i} \hat{f}_b^*(x).$$

- The OOB error is a good estimate of the test error.
- For large enough B , OOB error is like cross validation.

Bagging Trees


- Input space $\mathcal{X} = \mathbf{R}^5$ and output space $\mathcal{Y} = \{-1, 1\}$.
- Sample size $N = 30$ (simulated data)

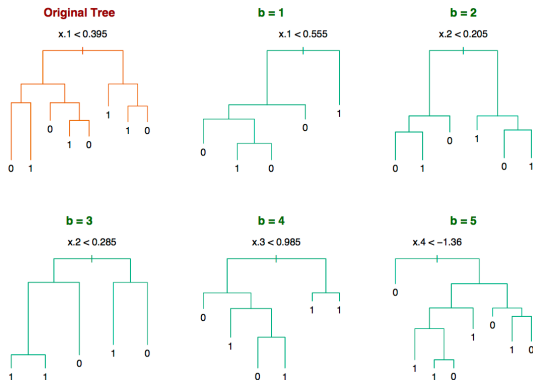

From ESL Figure 8.9

Bagging Trees

- Two ways to combine classifications: consensus class or average probabilities.

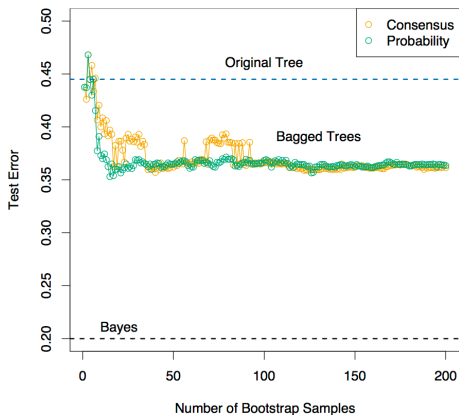

From ESL Figure 8.10

Variance of a Mean of Correlated Variables

- For Z, Z_1, \dots, Z_n i.i.d. with $\mathbb{E}Z = \mu$ and $\text{Var}Z = \sigma^2$,

$$\mathbb{E} \left[\frac{1}{n} \sum_{i=1}^n Z_i \right] = \mu \quad \text{Var} \left[\frac{1}{n} \sum_{i=1}^n Z_i \right] = \frac{\sigma^2}{n}.$$

- What if Z 's are correlated?
- Suppose $\forall i \neq j, \text{Corr}(Z_i, Z_j) = \rho$. Then

$$\text{Var} \left[\frac{1}{n} \sum_{i=1}^n Z_i \right] = \rho \sigma^2 + \frac{1-\rho}{n} \sigma^2.$$

- For large n , the $\rho \sigma^2$ term dominates – limits benefit of averaging.


Random Forest

Main idea of random forests

Use **bagged decision trees**, but modify the tree-growing procedure to reduce the correlation between trees.

- **Key step** in random forests:
 - When constructing each tree node, restrict choice of splitting variable to a randomly chosen subset of features of size m .
- Typically choose $m \approx \sqrt{p}$, where p is the number of features.
- Can choose m using cross validation.

Random Forest: Effect of m size

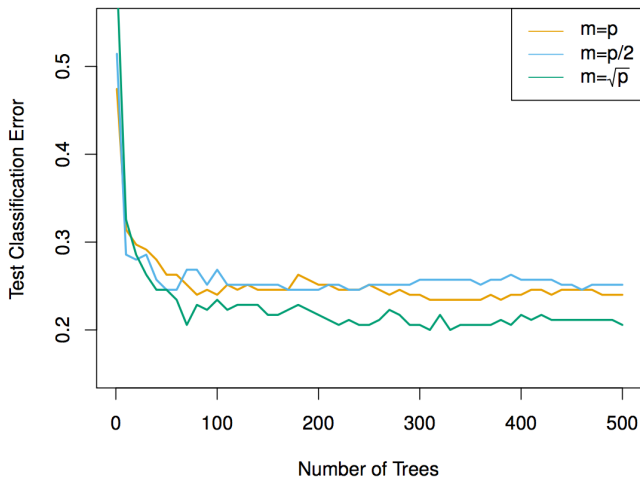

From *An Introduction to Statistical Learning, with applications in R* (Springer, 2013) with permission from the authors: G. James, D. Witten, T. Hastie and R. Tibshirani.

Random Forest: Effect of m size

- See movie in Criminisi et al's PowerPoint:
http://research.microsoft.com/en-us/um/people/antcrim/ACriminisi_DecisionForestsTutorial.pptx