

A large, two-story, light-colored building with a red-tiled roof and a central tower, surrounded by green grass and trees under a clear blue sky.

MAHARISHI UNIVERSITY of MANAGEMENT

Engaging the Managing Intelligence of Nature

Computer Science Department

**CS390 Fundamental Programming
Practices (FPP)
Professor Anne McCollum**

Lecture 13:

Working with Files and Databases

Wholeness of the Lesson

Java provides convenient tools for reading and writing files, and for accessing data stored in a database. The relationship between stored data and an executing program parallels the relationship between awareness and its interaction with the world; that interaction is most successful and rewarding if awareness is broad (corresponding to a well-designed program) and is well integrated with the laws of nature, with the ways of manifest existence (JDBC).



Summary of I/O in Java

- *Input stream:* `Reader` is the superclass of all “readers” in Java. The subclass `FileReader` class is useful for reading in data.
- *Output stream:* `PrintWriter`.
- The `File` class is can represent either a file or a directory.
- Database : *Set up the Database and Start the Server.*
 - Create a `PreparedStatement`
 - Execute the `PreparedStatement`
- *Obtain your DB driver..*

I/O Streams in Java

- Communication between a Java program and an external device or program is often accomplished using *streams*. A stream is a sequence of bytes.
- An *input stream* represents data from an input device, like the keyboard for standard input and files that are read from a hard disk.
- An *output stream* represents outbound data directed toward a destination, such as the console (standard output) or a file to be written to disk.

I/O Streams in Java

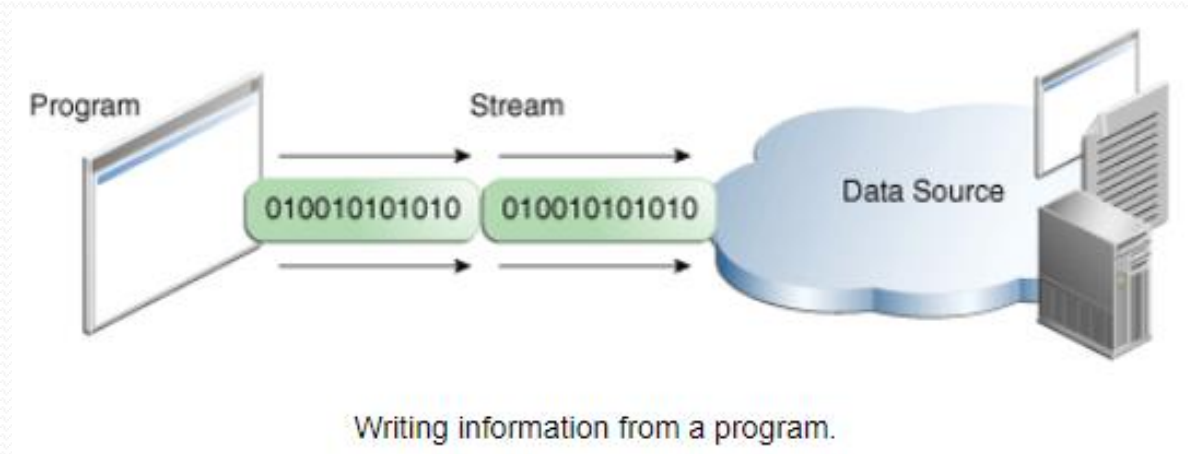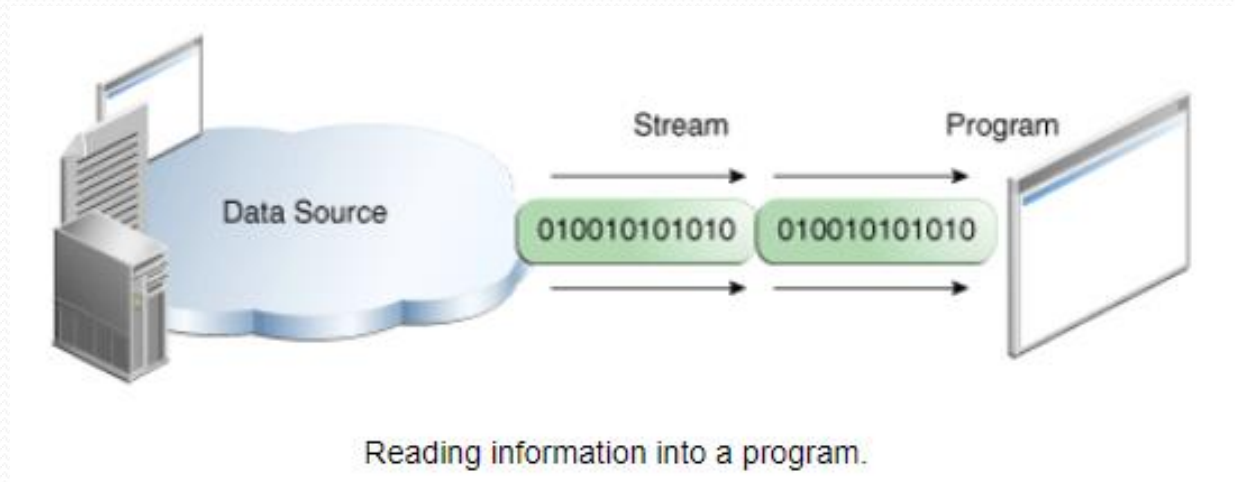

Byte Streams

- All data processed by a computer is in the form of sequences of bytes.
 - Examples: Photoshop reads in and writes an image file as a byte stream; similarly for video and audio editors.
- Java makes it possible to work directly with bytes using subclasses of `InputStream` and `OutputStream`.
- Demo shows how to read a file from the hard drive as a byte stream and then output each byte in the file. Output could be in the form of a sequence of base-10 ints; a sequence of length-8 0-1 sequences; or a sequence of hexadecimal pairs.

`lesson13.byte_streams\WorkWithBytes.java`

lesson13.byte_streams\WorkWithBytes.java

```
public static void outputBytes(String s) {  
    File file = new File(s);  
    FileInputStream fis = null;  
    List<Byte> bytes = new ArrayList<>();  
  
    // Get bytes from file:  
    try {  
        fis = new FileInputStream(file);  
        byte nextByte;  
        while ((nextByte = (byte)fis.read()) != -1) {  
            bytes.add(nextByte);  
        }  
    }  
  
    // Continued on next page...
```


lesson13.byte_streams\WorkWithBytes.java

```
// continued from previous slide
// print out binary:
System.out.print("In binary (unpadded): ");
for(int i = 0; i < bytes.size(); ++i) {
    System.out.print(Integer.toBinaryString(bytes.get(i)) + " ");
}

System.out.println();
System.out.print("  As hexadecimal: ");
for(int i = 0; i < bytes.size(); ++i) {
    System.out.print(trimHex(
        Integer.toHexString(bytes.get(i))) + " ");
}

System.out.println();
System.out.print("  As decimal nums: ");
for(int i = 0; i < bytes.size(); ++i) {
    System.out.print(bytes.get(i) + " ");
}
// See lectureCode for continuation of code
```

lesson13.byte_streams\WorkWithBytes.java

Bytes from executable ToastDll64.dll

[illegible]

As hexadecimals: 4d 5a 90 0 3 0 0 0 4 0 0 0

As decimal nums: 77 90 -112 0 3 0 0 0 4 0 0 0

Overview of I/O Streams in Java

- An `InputStream` is the raw method of getting information from a resource. It gets the data one byte at a time without performing any kind of translation. If you are reading image data, or any binary file, this is the stream to use.
- A `Reader` is designed for character streams. If the information you are reading is all text, then the `Reader` will decode the characters for you and give you unicode characters from the raw input stream. This is the stream to use for reading any type of text.
- You can wrap an `InputStream` and turn it into a `Reader` by using the `InputStreamReader` class. Example:

```
Reader reader = new InputStreamReader( inputStream,  
    StandardCharsets.UTF_8);
```

Reading/Writing Character Data

- In order for a programming language to interpret byte sequences as characters, it must rely on a *character encoding*. A familiar example of a character encoding is the ASCII table.
- A character encoding matches every character within a certain range to every byte within a certain range. In the ASCII table, the ASCII characters are matched one for one with the byte sequences

0 0 0 0 0 0 0 0 – 0 1 1 1 1 1 1 1

(0 – 127)

ASCII Encoding

Decimal	Binary	Octal	Hex	ASCII	Decimal	Binary	Octal	Hex	ASCII	Decimal	Binary	Octal	Hex	ASCII	Decimal	Binary	Octal	Hex	ASCII
0	00000000	000	00	NUL	32	00100000	040	20	SP	64	01000000	100	40	@	96	01100000	140	60	`
1	00000001	001	01	SOH	33	00100001	041	21	!	65	01000001	101	41	A	97	01100001	141	61	a
2	00000010	002	02	STX	34	00100010	042	22	"	66	01000010	102	42	B	98	01100010	142	62	b
3	00000011	003	03	ETX	35	00100011	043	23	#	67	01000011	103	43	C	99	01100011	143	63	c
4	00000100	004	04	EOT	36	00100100	044	24	\$	68	01000100	104	44	D	100	01100100	144	64	d
5	00000101	005	05	ENQ	37	00100101	045	25	%	69	01000101	105	45	E	101	01100101	145	65	e
6	00000110	006	06	ACK	38	00100110	046	26	&	70	01000110	106	46	F	102	01100110	146	66	f
7	00000111	007	07	BEL	39	00100111	047	27	'	71	01000111	107	47	G	103	01100111	147	67	g
8	00001000	010	08	BS	40	00101000	050	28	(72	01001000	110	48	H	104	01101000	150	68	h
9	00001001	011	09	HT	41	00101001	051	29)	73	01001001	111	49	I	105	01101001	151	69	i
10	00001010	012	0A	LF	42	00101010	052	2A	*	74	01001010	112	4A	J	106	01101010	152	6A	j
11	00001011	013	0B	VT	43	00101011	053	2B	+	75	01001011	113	4B	K	107	01101011	153	6B	k
12	00001100	014	0C	FF	44	00101100	054	2C	,	76	01001100	114	4C	L	108	01101100	154	6C	l
13	00001101	015	0D	CR	45	00101101	055	2D	-	77	01001101	115	4D	M	109	01101101	155	6D	m
14	00001110	016	0E	SO	46	00101110	056	2E	.	78	01001110	116	4E	N	110	01101110	156	6E	n
15	00001111	017	0F	SI	47	00101111	057	2F	/	79	01001111	117	4F	O	111	01101111	157	6F	o
16	00010000	020	10	DLE	48	00110000	060	30	0	80	01010000	120	50	P	112	01110000	160	70	p
17	00010001	021	11	DC1	49	00110001	061	31	1	81	01010001	121	51	Q	113	01110001	161	71	q
18	00010010	022	12	DC2	50	00110010	062	32	2	82	01010010	122	52	R	114	01110010	162	72	r
19	00010011	023	13	DC3	51	00110011	063	33	3	83	01010011	123	53	S	115	01110011	163	73	s
20	00010100	024	14	DC4	52	00110100	064	34	4	84	01010100	124	54	T	116	01110100	164	74	t
21	00010101	025	15	NAK	53	00110101	065	35	5	85	01010101	125	55	U	117	01110101	165	75	u
22	00010110	026	16	SYN	54	00110110	066	36	6	86	01010110	126	56	V	118	01110110	166	76	v
23	00010111	027	17	ETB	55	00110111	067	37	7	87	01010111	127	57	W	119	01110111	167	77	w
24	00011000	030	18	CAN	56	00111000	070	38	8	88	01011000	130	58	X	120	01111000	170	78	x
25	00011001	031	19	EM	57	00111001	071	39	9	89	01011001	131	59	Y	121	01111001	171	79	y
26	00011010	032	1A	SUB	58	00111010	072	3A	:	90	01011010	132	5A	Z	122	01111010	172	7A	z
27	00011011	033	1B	ESC	59	00111011	073	3B	;	91	01011011	133	5B	[123	01111011	173	7B	{
28	00011100	034	1C	FS	60	00111100	074	3C	<	92	01011100	134	5C	\	124	01111100	174	7C	
29	00011101	035	1D	GS	61	00111101	075	3D	=	93	01011101	135	5D]	125	01111101	175	7D	}
30	00011110	036	1E	RS	62	00111110	076	3E	>	94	01011110	136	5E	^	126	01111110	176	7E	~
31	00011111	037	1F	US	63	00111111	077	3F	?	95	01011111	137	5F	_	127	01111111	177	7F	DEL

Reading Characters from a Byte Stream

- Java's encoding scheme is able to translate ASCII codes to the correct characters, so it is possible to read a text file or read user input from standard input by directly reading the bytes of the stream and converting each byte to a character -- as long as only **ASCII** characters are used.

See LectureCode method: `lesson13.readWriteEncodings.Main.justAscii`

- However, if any of the bytes in the input stream are **non-ASCII**, bytes will be rendered as chars **using the default encoding**, and the resulting chars may not match the original characters. (Examples: Chinese characters, special chars in other languages, ...)

See LectureCode: `lesson13.readWriteEncodings.Main`

- Not every character (in any encoding) can be represented by single bytes. Example: Chinese characters usually require 2 bytes (in unicode).

See LectureCode: `lesson13.chars_from_byte_streams.CharsFromBytes`

- Useful Conversions See LectureCode `lesson13.readWriteEncodings.simple`

NOTE: When the source code was zipped into the LectureCode file, some of the complex single characters were broken up or converted into more than one character.

```
//to get the utf-8 bytes (in binary) for 好, use getBytes
printArrayAsBytes("好".getBytes());
//to reassemble the bytes to obtain '好',
//create new String from the byte array (uses utf-8 by default)
System.out.println(new String("好".getBytes()));
//to see the precise unicode value of '好', use getCodePoint
System.out.println("好".codePointAt(0));
//to assemble '好' from the exact unicode value, cast to a char
System.out.println((char)("好".codePointAt(0)));
```


Java Character Streams

- A *character stream* is a byte stream that has been created using some character encoding (like ISO-8859-1, UTF-8, UTF-16). (Note: UTF-8 and UTF-16 are ways of representing unicode characters, which represent all characters using 20-bit codes)
- Character Stream Example: The bytes in a text file (created by Notepad for example) have been generated by translating characters into bytes using some character encoding.
- To accurately read a character stream, the encoding used to store the file must be used to read in the file. (Note: As you saw in previous slide, ASCII uses two bytes per character. Other encodings use more bits to represent one character.)
- In practice, to read character streams, use a subclass of Reader (rather than an `InputStream`). To write character streams, use a subclass of `Writer` (rather than an `OutputStream`).
- Sample code for Readers and Writers can be found at `lesson13.readersandwriters.Main`

Simple Summary of Differences Java Character Streams

- `InputStream.read()` returns byte values between 0 and 255 equivalent to the raw contents of the byte stream.
- `Reader.read()` return the character value which is between 0 and 65357 (because there are 65358 different unicode code values.)

Readers

InputStreams are used to read bytes from a stream (binary data such as images, video and serialized objects.) Readers, on the other hand, are character streams which are best for reading character data. You can turn an InputStream into a Reader by using the InputStreamReader class.

From the JDK 10:

An InputStreamReader is a bridge from byte streams to character streams: It reads bytes and decodes them into characters using a specified charset.

- Reader **is the superclass** of all “readers” in Java.
- InputStreamReader **converts raw bytes** from some input source to character data,
- BufferedReader **organizes data stored in a Reader object** to be read in convenient ways.

Example. We have a file `text.txt` containing the line of text
“This is a Chinese character: 你.”

(See code on the next slide.)

```
try {
    InputStream stream1 = System.in;
    InputStream stream2 = new FileInputStream("text.txt");
    BufferedReader reader1 =
        new BufferedReader(new InputStreamReader(stream1));
    BufferedReader reader2 =
        new BufferedReader(
            new InputStreamReader(stream2, "UTF-8"));
    System.out.println(reader2.readLine());
    System.out.print("Type something: ");
    System.out.println(reader1.readLine());
    reader1.close();
    reader2.close();
    stream1.close();
    stream2.close();
}
catch (IOException e) {
    System.out.println(e.getMessage());
}

//output
This is a Chinese character: 你.
Type something: hi
hi
```

Note: Since text.txt was saved using UTF-8 encoding (this is a safe assumption for text files), we specify the encoding to be used by InputStreamReader to be UTF-8. (Actually, the default encoding used by InputStreamReaders is, on most systems, already UTF-8.)

- If there is no clear need to convert from raw bytes to characters (as there is when reading from `System.in`), typically use `BufferedReader`. The concept of an “input stream” is part of the functionality of Readers, so the developer never needs to work with the low level of bytes (unless a file to be read has a non-standard encoding).
- If you need to change the character encoding of the Reader, you need to do this in an `InputStreamReader` – `BufferedReader` does not support a change of character set.

Use the following Examples as models for how to read text files – the default encoding UTF-8 is almost always the right choice.

Exercise 13.1 – What is the difference?

//uses a FileReader

```
try {
    FileReader reader = new FileReader("text.txt");
    BufferedReader bufreader = new BufferedReader(reader);
    String line = null;
    while( (line = bufreader.readLine()) != null) {
        System.out.println(line);
    }
    bufreader.close();
    reader.close();
}
catch(IOException e) {
    e.printStackTrace();
}
```

//uses a Scanner

```
try {
    Scanner sc = new Scanner(new File("text.txt"));
    String line = null;
    while(sc.hasNextLine()) {
        line = sc.nextLine();
        System.out.println(line);
    }
    sc.close();
}
catch(IOException e) {
    e.printStackTrace();
}
```


Exercise 13.1 – The difference from JDK

//FileReader

```
FileReader reader = new FileReader("text.txt");
```

JDK: Convenience class for reading character files. The constructors of this class assume that the default character encoding and the default byte-buffer size are appropriate. To specify these values yourself, construct an `InputStreamReader` on a `FileInputStream`.

//Scanner

```
Scanner sc = new Scanner(new File("text.txt"));
```

JDK: A simple text scanner which can parse primitive types and strings using regular expressions.

A `Scanner` breaks its input into tokens using a delimiter pattern, which by default matches whitespace. The resulting tokens may then be converted into values of different types using the various `next` methods.

Writers

- Similarly, there is an **OutputStreamWriter** that converts raw bytes to a Unicode character stream as output. Convenience methods in a `PrintWriter` make it possible to format output using `print`, `println`, and `printf` methods, familiar from `System.out`.

Note: **PrintWriter** (`BufferedReader`)
allows you to specify the character encoding (unlike

Example:

```
try {
    OutputStream stream1 = System.out;
    OutputStream stream2 = new FileOutputStream("text2.txt");
    PrintWriter writer1 =
        new PrintWriter(new OutputStreamWriter(stream1));
    PrintWriter writer2 =
        new PrintWriter(new OutputStreamWriter(stream2,
            StandardCharsets.UTF_8));
    writer1.println("output to console with chinese: 你");
    writer2.println("output to file with chinese: 你");
    writer1.close();
    writer2.close();
    stream1.close();
    stream2.close();
}
catch (IOException e) {
    System.out.println(e.getMessage());
}
```

- When there is no need to work with bytes directly, `PrintWriter` can be used without reference to the conversion class `OutputStreamWriter` (you can always specify a character encoding in a `PrintWriter`, so for character streams there is rarely a need to use `OutputStreamWriter`).

The following example is a model for writing text data.

```
try{
    //Specifying the character encoding is optional
    PrintWriter writer =
        new PrintWriter("text3.txt", "UTF-8");
    writer.printf("Output this character %c to %s",'你',"file");
    writer.close();
}
catch (IOException e) {
    System.out.println(e.getMessage());
}
```


Reminder from Lesson 2: If you copy the code from the example below and save it in the Eclipse IDE, it will give you the error message shown in this dialog:

The “Select First Character” button highlights the Chinese character ‘你’ in the following line of code:

```
writer.printf("Output this character %c to  
%s", '你', "file");
```

The “Save as UTF-8” button will save the file and allow you to run the code properly.

Note: If the file is compressed, it could lose this UTF-8 format.

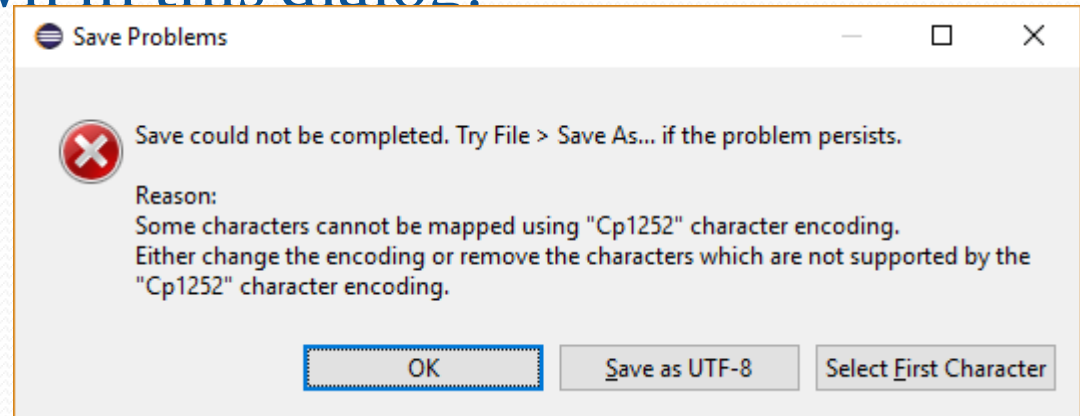

The File Class


- The `File` class is an abstraction that represents either a file or a directory on the native system's directory system.
- Methods available in `File` include:
 - `boolean isFile`
 - `boolean isDirectory`
 - `boolean exists`
 - `String getAbsolutePath`
 - `String getParent`
 - `File getParentFile`
 - `boolean mkdir`
 - `boolean mkdirs`
 - `boolean delete`

Main Point

Reading a File in Java is accomplished by using a `FileReader` (or `Scanner`). Writing to a file is accomplished by using a `FileWriter`. More generally, "input" in human life is handled by the senses; "output" is handled by the organs of action. Both have their source in the field of pure creative intelligence.

Interacting with a Database Using JDBC

JDBC provides an API for interacting with a database using SQL – part of the JDK distribution.

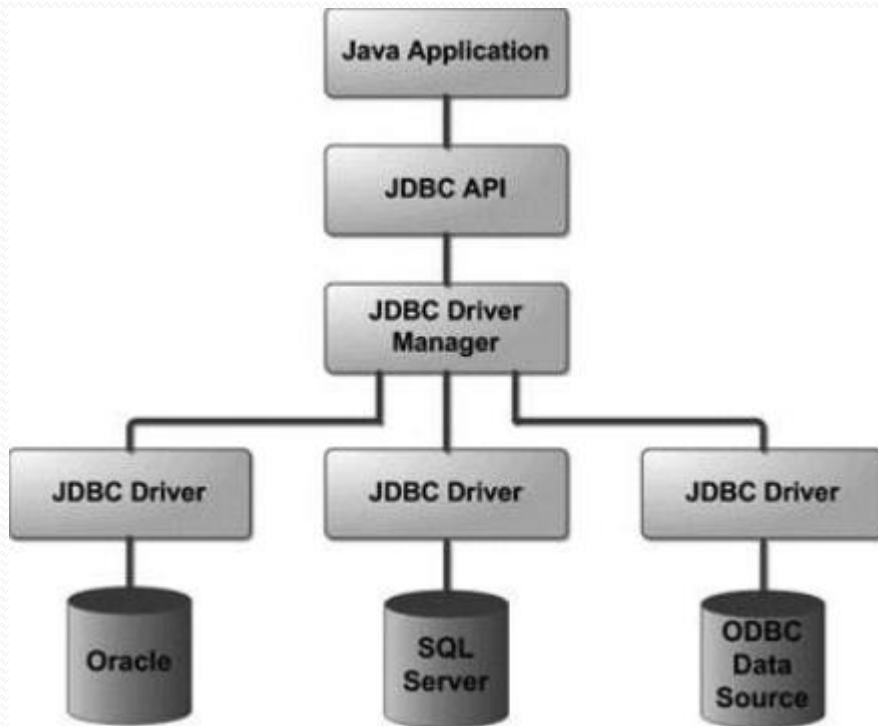


1. To access a database, client code uses the JDBC API to get a connection, create and execute a statement, and get results
2. To communicate with a particular database, a vendor-specific *JDBC driver* is provided and registered with Java's `DriverManager` class
3. Commands made via the JDBC API involve interaction with the `DriverManager`. Ultimately, an SQL statement is sent to the DBMS for execution and the results are returned to the caller.

Steps for Working with a Database

- *Set up the Database and Start the Server.* (See the folder `setup/mysql` folder. Work through the steps of `SetupAndUsage.pdf` if this has not been done yet.)
- *Obtain your DB driver.* A db driver is provided by the db vendor and often takes the form of a jar file that is added as an external library. For the mysql dbms, we use `mysql-connector-java-5.1.20-bin.jar`.
- *Code*
 - Use Java's `DriverManager` to get a `Connection`; this step automatically registers the driver in the `DriverManager`. You must tell JDBC the database, username, and password, along with the driver information in the form of a *db url*.
 - Use the `Connection` object to create a `PreparedStatement`, which is a wrapper for a SQL command
 - Execute the `PreparedStatement` with either `executeQuery` or `executeUpdate`
 - Reads (using `executeQuery`) will return a `ResultSet` which you use to read the data you requested in a usable form.

Adding the Driver

- In this course we use the MySql DBMS.
- The driver is provided in the form of a jar file
 - Typical example: mysql-connector-java-5.1.20-bin.jar
- Add the driver as an external jar to your project JdbcPractice as shown here:

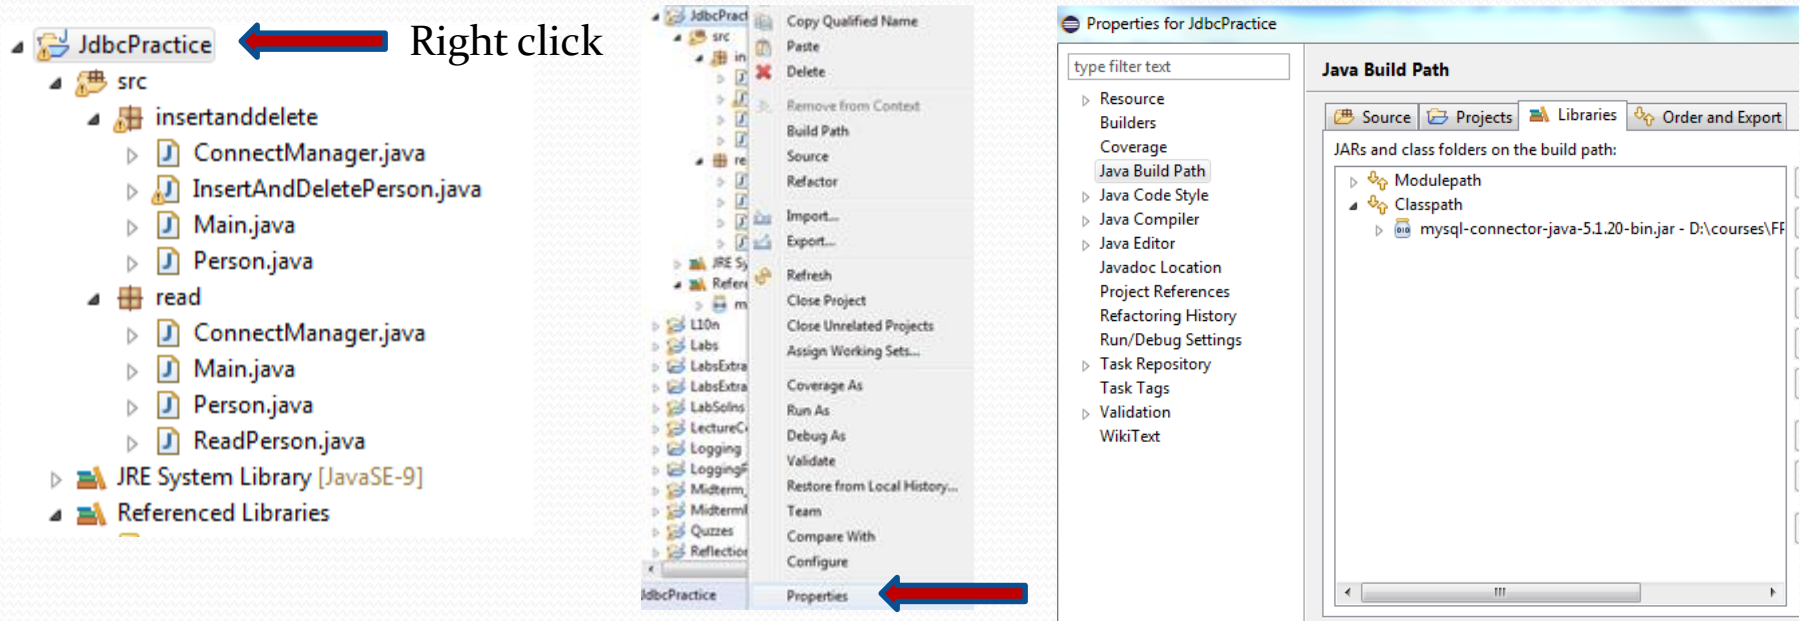

Registering the Driver and Getting the Connection

```
public class ConnectManager {  
    private static final String DB_URL = "jdbc:mysql:///FppDb";  
    private static final String USERNAME = "root";  
    private static final String PASSWORD = "";  
    public static Connection getConnection() throws SQLException {  
        Connection conn = DriverManager.getConnection(DB_URL, USERNAME,  
            PASSWORD);  
        System.out.println("Got connection...");  
        return conn;  
    }  
}
```

Creating a PreparedStatement

```
conn = DriverManager.getConnection();  
String query = "SELECT * FROM Person WHERE firstName = ?";  
PreparedStatement stat = conn.prepareStatement(query);  
stat.setString(1, firstName);
```

1. Begin by getting the `Connection` object `conn`
2. Be ready with your SQL command
3. The `prepareStatement` method of `Connection` puts your SQL in compiled form. `PreparedStatement`s may accept parameters, whose values may be filled in later. Pre-compilation of SQL is a security measure (prevents SQL-Injection attacks and can be more efficient)
4. Use the `setString` (and other similar methods) to set parameter values in the `PreparedStatement`
5. The statement is now ready to be executed.

Execute the Statement

```
stat.executeUpdate() //for inserts, updates, and deletes  
ResultSet rs = stat.executeQuery() //for reads
```

When a read is done, a `ResultSet` is returned. The client class then unpacks the `ResultSet` to obtain the desired data.

Process ResultSet (for reads)

```
private List<Person> populatePersonList(ResultSet rs) throws SQLException {  
    List<Person> list = new ArrayList<>();  
    String id = null;  
    String firstName = null;  
    String lastName = null;  
    String ssn = null;  
    while(rs.next()) {  
        id = rs.getString("id").trim();  
        firstName = rs.getString("firstname").trim();  
        lastName = rs.getString("lastname").trim();  
        ssn = rs.getString("ssn").trim();  
        list.add(new Person(id, firstName, lastName, ssn));  
    }  
    return list;  
}
```

See Demos

The LectureCode has many demos for lesson13. See packages:

- files (a simple demo),
- database,
- readersandwriters (previously in slides)
- readWriteEncodings (previously in slides)

The Java project `JdbcPractice` is in a separate zip file in the same folder as the LectureCode.

Exercise 13.2

The files in the `read` package from the `JdbcProject` have been copied into the package `lesson13.exercise 2`. Add a method call `findStreet()` in the `main` method of `Main` that reads from the `fppdb` database all street names of addresses belonging to persons having `ssn = 535811101`.

Implement by making a call to the `ReadPerson` class; in that class, assign a `sql` statement to `query4` and implement the (unimplemented) method `getStreetNames(ssn)`, which will execute your `query4` to return the required street names in a `List`.

Hint: Create your query first and try it out on the `mysql` client. Once your query is correct, write the Java code.

Important: Make sure you have added the `mysql` driver jar to the `InClassExercises` project and that your `mysql` server is running.

Solution

//Inside class ReadPerson :

private String query4 =

"select street from address a, person p where p.ssn=? and p.id=a.id";

public List<String> getStreetNames(String ssn) throws SQLException {

Connection conn = null;

try {

conn = ConnectManager.getConnection();

PreparedStatement stat = conn.prepareStatement(query4);

stat.setString(1, ssn);

System.out.println(stat);

ResultSet rs = stat.executeQuery();

return populateStreetList(rs);

} catch(SQLException e) {

LOG.warning("SQLException thrown:\n" + e.getMessage());

throw e;

} finally { etc...

}

}

private List<String> populateStreetList(ResultSet rs) throws SQLException {

List<String> streetNames = new ArrayList<>();

while(rs.next()) {

streetNames.add(rs.getString("street"));

}

return streetNames;

}

Main Point

JDBC provides an API for interacting with a database using SQL. To interact efficiently with a database, you typically use the database vendor's driver that allows communication between the JVM and the database. This is reminiscent of the Principle of Diving – once the initial conditions have been met, a good dive is automatic. (Here, the initial conditions are correct configuration of the data source and code to load the database driver; once the set up is right, interacting with the database is "effortless".)

Connecting the Parts of Knowledge With the Wholeness of Knowledge

Expansion of consciousness leads to expanded territory of influence

1. Since Java is an OO language, it supports storage and manipulation of data within appropriate objects.
 2. To work with real data effectively, Java supports interaction with external data stores (databases) through the use of various JDBC drivers, and the JDBC API.
-
3. **Transcendental Consciousness:** TC is the field of truth, the field of Sat. "Know that by which all else is known." -- Upanishads
 4. **Wholeness moving within itself:** In Unity Consciousness, the final truth about life is realized in a single stroke of knowledge.

