bslenterprise26@gmail.com

BSL Enterprise

Rise Above Expectations

BSL ENTERPRISE

Rise Above Expectations

Table of content

About Company

Our Mission

Our Vision

Our Products

Future Plans

Metrics and Performance

Conclusion

BSL ENTERPRISE

Rise Above Expectations

Industrial Lifting Solutions Engineered for Reliability

We deliver reliable industrial lifting and material handling solutions designed for performance, safety, and efficiency.

Our range includes hydraulic lifts, scissor lifts, goods elevators, and customized lifting systems for Trading and logistics sectors .

With a commitment to quality and timely service, BSL Enterprise ensures dependable solutions for the modern industry

HYDRAULIC LIFTS |GOODS ELEVATORS | SCISSOR PLATFORMS |CUSTOM SYSTEMS

Serving Trading • Warehousing • Logistics

BSL ENTERPRISE

Rise Above Expectations

Redefining Industrial Lifting with Innovation & Reliability

Mission

To deliver reliable, high-performance lifting and material-handling solutions that enhance safety, efficiency, and productivity. We are committed to quality engineering, timely delivery, and long-term customer partnerships.

Vision

To become a globally trusted leader in industrial lifting solutions, recognized for innovation, service excellence, and dependable performance.

Engineering precision.
Certified safety.
Uncompromising performance

BSL ENTERPRISE

Rise Above Expectations

Our Products

Fixed Scissor lift

Mobile Scissor lift

Manual Scissor lift

BSL ENTERPRISE

Rise Above Expectations

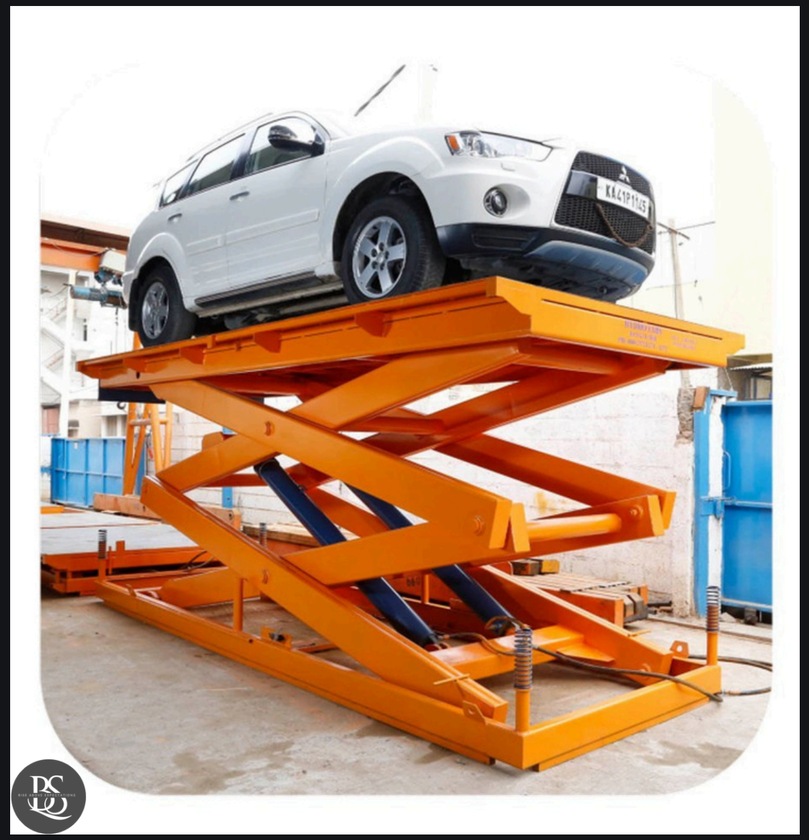

Car Lift

Vertical Car Lift

High Rise Car Lift

BSL ENTERPRISE

Rise Above Expectations

Hydraulic Vertical
Goods Left Single Mast

Hydraulic Vertical
Goods Left Double Mast

Single Mast Aerial
Working Platform

Double Mast Aerial
Working Platform

BSL ENTERPRISE

Rise Above Expectations

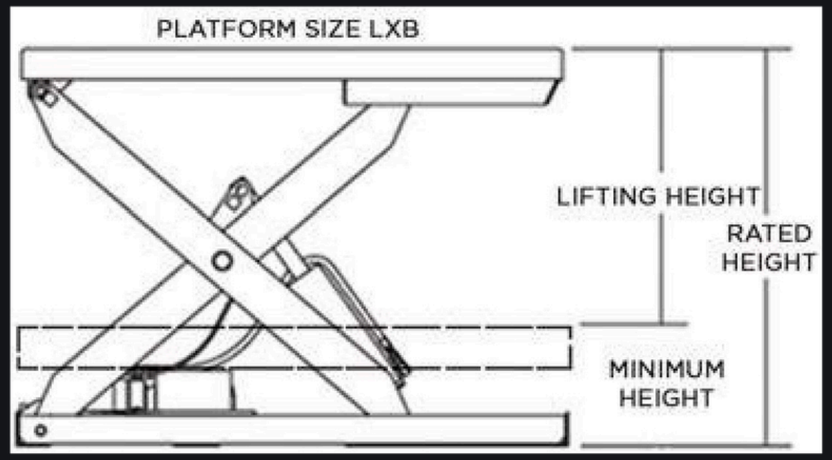

Hydraulic Scissor Lift

MODEL	LOAD CAPACITY (kg)	LIFTING HEIGHT (H2)	RATED HEIGHT (H1) (mm)	MINIMUM HEIGHT (H1) (mm)	PLATFORM SIZE L x B (mm)	MOTOR POWER (kW)
SINGLE SCISSOR						
BSLS 1-1.6	1000	1600	2050	450	2500 x 2000	2.2
BSLS 2-1.6	2000	1600	2050	450	2500 x 2000	3.7
BSLS 3-1.6	3000	1600	2100	500	2500 x 2000	3.7
BSLS 4-1.8	4000	1800	2400	600	3000 x 2000	7.5
BSLS 5-2.2	5000	2200	2800	600	4000 x 2000	5.5
BSLS 5-3	5000	3000	3650	650	5000 x 2000	5.5
BSLS 6-3	6000	3000	3650	650	5000 x 2000	7.5
BSLS 8-2.5	8000	2500	3200	700	4000 x 2000	7.5
BSLS 10-1.7	10000	1700	2300	600	5500 x 2500	7.5
DOUBLE SCISSOR						
BSLS 1-2.5	1000	2500	3150	650	2000 x 2000	2.2
BSLS 2-3	2000	3000	3700	700	2500 x 2000	3.7
BSLS 3-3.5	3000	3500	4200	700	3000 x 2000	3.7
BSLS 4-4.5	4000	4500	5300	800	4500 x 2000	5.5
BSLS 4-5.5	4000	5500	6400	900	5000 x 2000	5.5
BSLS 5-6.5	5000	6500	7500	1000	6000 x 2000	7.5
THREE SCISSOR						
BSLS 1-3.6	1000	3600	4400	800	2000 x 2000	3.7
BSLS 2-3.6	2000	3600	4500	900	2000 x 2000	3.7
BSLS 2.5-3.6	2500	3600	4600	1000	2000 x 2000	5.5
BSLS 1-5.5	1000	5500	6500	1000	3000 x 2000	3.7
BSLS 2-5.5	2000	5500	6700	1200	3000 x 2000	5.5
BSLS 2-7.5	2000	7500	8700	1200	4000 x 2000	5.5
BSLS 3-7.5	3000	7500	8700	1200	4000 x 2000	7.5
BSLS 3-9	3000	9000	10200	1200	5000 x 2500	7.5
BSLS 3.5-10.5	3500	10500	11700	1200	5500 x 2500	7.5
FOUR SCISSOR						
BSLS 1-4.5	1000	4500	5700	1200	2000 x 2000	3.7
BSLS 1.5-5	1500	5000	6400	1400	2500 x 2000	5.5
BSLS 2-6.5	2000	6500	8000	1500	3000 x 2000	5.5
BSLS 1-6	1000	6000	7200	1200	3000 x 2500	5.5
BSLS 1.5-6	1500	8000	9500	1500	3500 x 2000	5.5
BSLS 1-9.5	1000	9500	10700	1200	4000 x 2000	5.5
FIVE SCISSOR						
BSLS .5-1.2	500	13200	12000	1200	4000 x 2000	3.7
BSLS 1.1.3	1000	13400	12500	1400	4000 x 2000	5.5
BSLS 1.1.3	1500	13400	12500	1400	5000 x 2500	5.5

BSL ENTERPRISE

Rise Above Expectations

Hydraulic Scissor Lift

Stationary or Fixed Hydraulic Scissor Lift table is a kind of Hydraulic elevator specially designed to lift cargo in storerooms, factories and warehouses. It is designed with guide mechanism to ensure the stable lifting. It can replace elevator to lift goods up to a certain storey

Advantages:

1. Large Carrying Capacity
2. Easy Operation
3. Reliable Performance
4. It is adaptable to high frequency continuous running.

Characterized:

1. Soild Structure
2. Stable lifting
3. Easy installation
4. Easy and low maintenance
5. Long Service Life

BSL ENTERPRISE

Rise Above Expectations

Loading & Unloading Lift

Loading and Unloading truck without a dock with this heavy duty scissor lift. Save time and reduces manhours where there are no docks. Checkered plate deck is made of heavy gauge steel fro hard use. Complete with upper travel limit switch, and overload relief valve, Prewire Control pannel includes overload relay. Built for years of daily use, with minimum maintenance.

Features:

1. Rugged design
2. State-of-the-art Components
3. Engineered for maximum safety & efficiency

BSL ENTERPRISE

Rise Above Expectations

Mobile Scissor Lift

Mechanism:

- Mobile Scissor lift adopt scissor type mechanic structure to bring satbility after being elevated .
- The wide operation platform and high loading ability has made wider aloft work arrange and is suitable for simultaneous multi-worker operation.
- There are variety of forms of power needed for lift: phase 220V power, three phase 380V AC power, DC(12V, 24V, 36V, and 48V, 60V) and DC Dual-purpose.
- Equipment load 300 kg to 1000kg.

Product Use:

- Mobile Scissor lift is widely used for high-altitude equipment installation, maintenance, cleaning, inspection, decoration and so on.
- The Mobile lift tables are widely used in ware house, airport, railway station, factories, exhibition halls, hotel, shopping malls, stadiums and other place of high altitude.
- Also used for transfer of goods of height difference and truck loading and unloading.

BSL ENTERPRISE

Rise Above Expectations

Mobile Scissor Lift

MODEL	LOAD CAPACITY (kg)	MAXIMUM HEIGHT (H1) (mm)	MINIMUM HEIGHT (H1) (mm)	PLATFORM SIZE L x B (mm)	ELEVATING SPEED (mm/sec)	SELF WEIGHT (KG)
BSL 0.3-6	300	6000	1250	2000 x 1200	60-70	1100
BSL 0.5-6	500	6000	1300	2000 x 1200	60-70	1250
BSL 1-6	1000	6000	1450	2000 x 1200	60-70	1600
BSL 0.3-9	300	9000	1650	2000 x 1200	60-70	1850
BSL 0.5-9	500	9000	1700	2000 x 1200	60-70	2050
BSL 1-9	1000	9000	1500	2500 x 1200	60-70	2250
BSL 0.3-11	300	11000	1650	2500 x 1200	60-70	2800
BSL 0.5-11	500	11000	1650	2500 x 1200	60-70	3000
BSL 0.3-12	300	12000	1650	2600 x 1200	60-70	3000
BSL 0.5-12	500	12000	1650	2600 x 1200	60-70	3200
BSL 0.3-14	300	14000	1850	2800 x 1200	60-70	3400
BSL 0.5-14	5000	14000	1850	2800 x 1200	60-70	3600

BSL ENTERPRISE

Rise Above Expectations

Car Lift

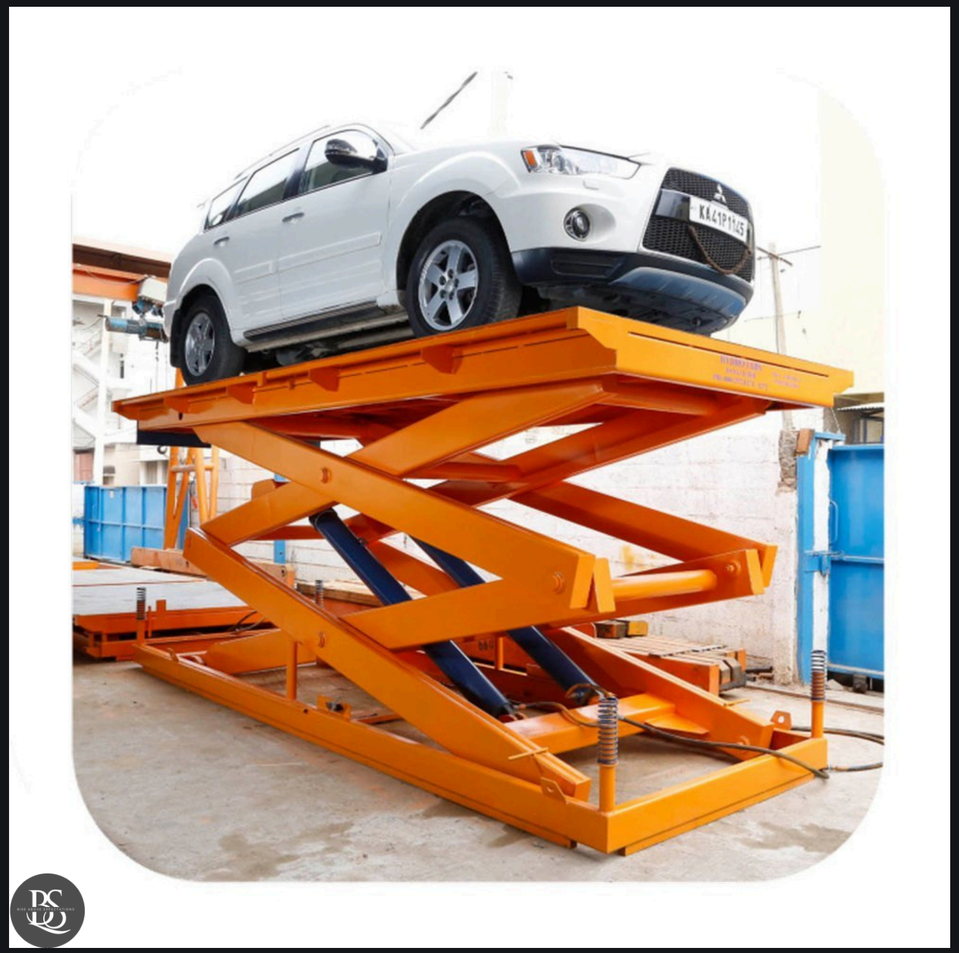

Features:

High precision hydraulic transmission, stable opertion, simple opertion, low failure rate, high strength, long service life, high safety factor, double chain hoist, lifting safety and stable, can adjust the screw, ensure the platform level, car smooth lift, large capacity pump, lifiting speed, low noise, beautiful appearance, structure.

Applicability:

Auto 4S shop, large repair factory, large parking lot, for the vehicle to improve or three-dimensional parking, can also be used as the good to upgrade.

BSL ENTERPRISE

Rise Above Expectations

Car Lift’s

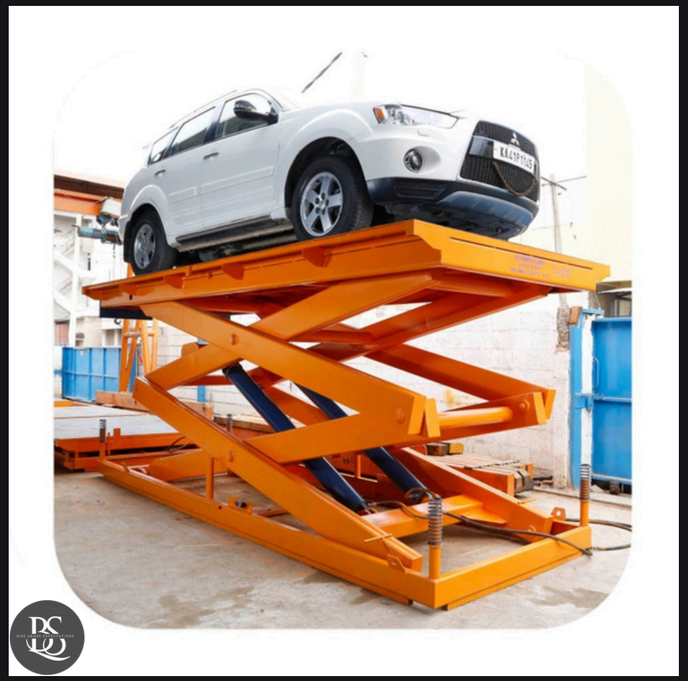

BSL ENTERPRISE

Rise Above Expectations

Aerial Working Platform - Single Mast

About :

They are generally used for temporary, flexible access purposses such as maintenance and construction work or for emergency access, which distinguishes them from permanent access equipmwnt such as elevators. Aluminium alloy aerial working platform is made up of high strength high qualilty aluminium alloy materials.

An aerial work platform(AWP), also known as an aerial device, elevating work platform(EWP), bucket truck or mobile elevating work platform(MEWP) is a mechanical device used to provide temporary access for people or equipment to inaccessible areas, usually at height.

MODEL	LOAD CAPACITY (kg)	MAXIMUM PLATFORM HEIGHT (m)	MAXIMUM WORKING HEIGHT (m)	PLATFORM SIZE L x B (m)	MOTOR POWER (kW)	POWER SUPPLY (V/HZ)	OVERALL DIMENSION (m)	SELF WEIGHT (KG)
BSL-WP-4	150	4	5.7	0.63 X 64	0.75	AC 220/50 HZ	1.42 x 0.84 x 1.92	385
BSL-WP-6	150	6	7.7	0.63 X 64	0.75	AC 220/50 HZ	1.42 x 0.84 x 1.92	415
BSL-WP-8	150	8	9.7	0.63 X 64	0.75	AC 220/50 HZ	1.42 x 0.84 x 1.92	450
BSL-WP-9	125	9	10.7	0.63 X 64	0.75	AC 220/50 HZ	1.42 x 0.84 x 1.92	490
BSL-WP-10	125	10	11.7	0.63 X 64	0.75	AC 220/50 HZ	1.42 x 0.84 x 1.92	490

BSL ENTERPRISE

Rise Above Expectations

Aerial Working Platform - Double Mast

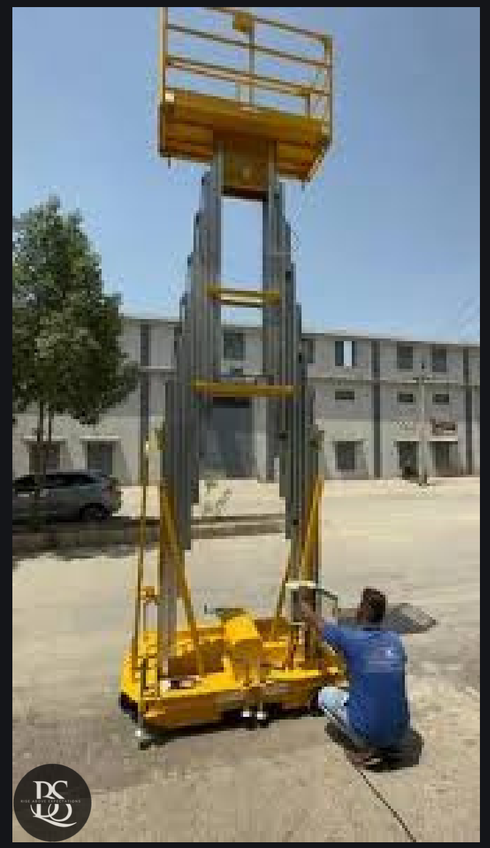

About :

The lift uses mast column to support the working platform. It is very flexible, light and easy to use. Extensively used in hotel, cinema, car shop, restaurants, airport, station, exhibition hall and for cleaning and maintenance at height. Multi column, aluminium alloy aerial working platfrom has advantages of beautiful, small size, light weight, balance lifitng, safe and reliable.

MODEL	LOAD CAPACITY (kg)	MAXIMUM PLATFORM HEIGHT (m)	MAXIMUM WORKING HEIGHT (m)	PLATFORM SIZE L x B (m)	MOTOR POWER (kW)	POWER SUPPLY (V/HZ)	OVERALL DIMENSION (m)	SELF WEIGHT (KG)
BSL-DM-4-100	150	4	5.7	0.63 X 64	0.75	AC 200/50 HZ	1.42 x 0.84 x 1.92	385
BSL-DM-6-100	150	6	7.7	0.63 X 64	0.75	AC 200/50 HZ	1.42 x 0.84 x 1.92	415
BSL-DM-8-100	150	8	9.7	0.63 X 64	0.75	AC 200/50 HZ	1.42 x 0.84 x 1.92	450
BSL-DM-9-100	125	9	10.7	0.63 X 64	0.75	AC 200/50 HZ	1.42 x 0.84 x 1.92	490
BSL-DM-10-100	125	10	11.7	0.63 X 64	0.75	AC 200/50 HZ	1.42 x 0.84 x 1.92	490
BSL-DM-6-200	300	6	7.7	1.23 X 0.61	1.6	AC 200/50 HZ	1.54 x 0.82 x 1.81	530
BSL-DM-8-200	300	8	9.7	1.23 X 0.61	1.6	AC 200/50 HZ	1.54 x 0.82 x 1.81	570
BSL-DM-9-200	250	9	10.7	1.38 X 0.61	1.6	AC 200/50 HZ	1.80 x 0.86 x 1.85	728
BSL-DM-10-200	250	10	11.7	1.38 X 0.61	1.6	AC 200/50 HZ	1.80 x 0.86 x 1.85	728
BSL-DM-12-200	200	12	13.7	1.38 X 0.61	1.6	AC 200/50 HZ	1.80 x 0.86 x 2.10	825
BSL-DM-12-300	200	12	13.7	1.53 X 0.88	1.5	AC 200/50 HZ	1.78 x 1.10 x 2.32	960
BSL-DM-14-300	250	14	15.7	1.53 X 0.88	1.5	AC 200/50 HZ	1.90 x 1.10 x 2.32	980
BSL-DM-15-300	250	15	16.7	1.53 X 0.88	1.5	AC 200/50 HZ	2.00 x 1.25 x 2.68	1065
BSL-DM-14-400	250	14	15.7	1.40 X 0.88	1.5	AC 200/50 HZ	1.90 x 1.10 x 2.52	1360
BSL-DM-16-400	250	16	17.7	1.45 X 0.90	1.5	AC 200/50 HZ	2.28 x 1.35 x 2.82	1520

BSL ENTERPRISE

Rise Above Expectations

Hydraulic Vertical Goods Lift - Single Mast

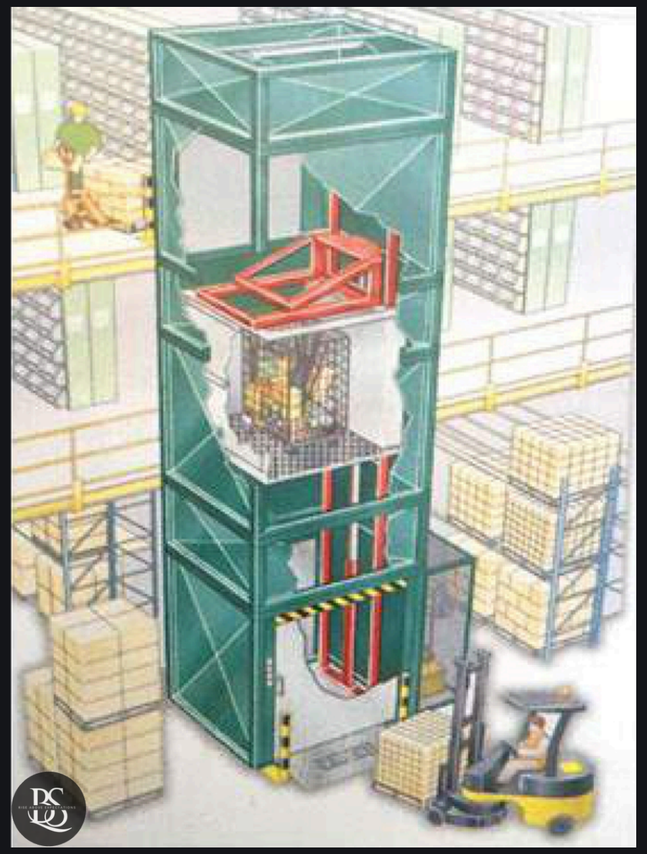

About :

Goods lift is non scissors type lifting platform suitable for multi layer industrial plants, restaurants and transport of good between floors.

Advance hydraulic system and good control mode minimize the failure rate.

Manual descending, emergency stop button, convenient, fast and practical in case of power failure.

Features:

1. Smooth Movement
2. Single Opertion
3. Hydraulic and Electric protection
4. Economic and Convenient Transmission

BSL ENTERPRISE

Rise Above Expectations

Hydraulic Vertical Goods Lift - Double Mast

BSL ENTERPRISE

Rise Above Expectations

Hydraulic Vertical Goods Lift

MODEL	Mast Type	Load Capacity	Lifting Height (mm)	Platform Size (mm)	Motor Power (kW)
BSL-SM 0.5-3	SINGLE	500	3000	1200 x 1600	2.2
BSL-SM 0.5-4	SINGLE	500	4000	1200 x 1600	2.2
BSL-SM 0.5-5	SINGLE	500	5000	1500 x 1500	3.7
BSL-SM 0.5-7	SINGLE	500	7000	1500 x 2000	3.7
BSL-SM 0.5-9	SINGLE	500	9000	1500 x 1500	3.7
BSL-SM 1-3	SINGLE	1000	3000	1500 x 1500	3.7
BSL-DM 2-4	DOUBLE	2000	4000	2000 x 2000	3.7
BSL-DM 3-4.5	DOUBLE	3000	4500	2000 x 3000	5.5
BSL-DM 4-5	DOUBLE	4000	5000	2500 x 5000	5.5
BSL-DM 5-5	DOUBLE	5000	5000	2500 x 5500	7.5
BSL-DM 1-5	DOUBLE	1000	5000	2000 x 2000	5.5
BSL-DM 2-6	DOUBLE	2000	6000	2500 x 2000	5.5
BSL-DM 3-6	DOUBLE	3000	6000	2000 x 3000	7.5
BSL-DM 1-7	DOUBLE	1000	7000	2000 x 3000	7.5
BSL-DM 2-8	DOUBLE	2000	8000	2500 x 4000	7.5
BSL-DM 3-8	DOUBLE	3000	8000	2500 x 5000	11
BSL-DM 1-9	DOUBLE	1000	9000	2000 x 3000	5.5
BSL-DM 2-10	DOUBLE	2000	10000	2000 x 2500	7.5
BSL-DM 3-12	DOUBLE	3000	12000	2500 x 5500	11
BSL-DM 4-12	DOUBLE	1000	14000	2000 X 2000	11

BSL ENTERPRISE

Rise Above Expectations

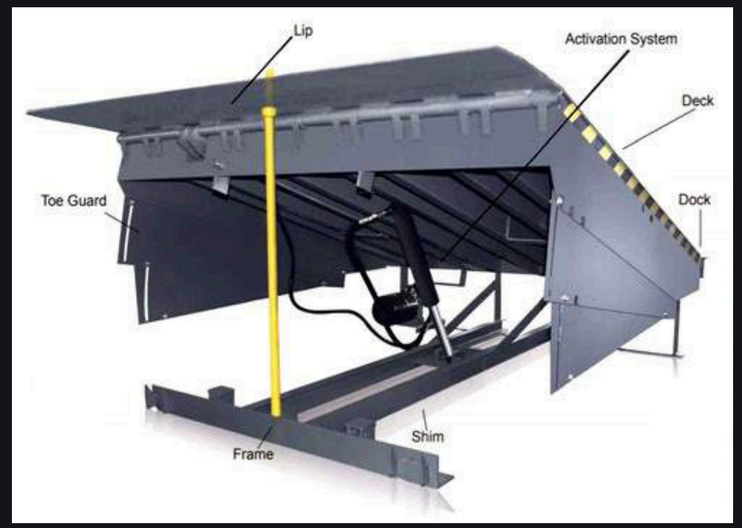

Fixed Dock Leveler

About :

This is Also Called Stationary Dock Leveler, Which is variously usedbin logistics, warehouse work as accessory equipment. The dock levelers can be fixed in the pit that is deserved in the platform, and it will adjust the height to the cargo truck. This equipment can save labour and promote the efficiency safely and conveniently. The stationary yard ramp is operated easily with electricity and hydraulic power. They are usually used in: warehouse, big enterprise, station, postal, distribution work, etc.

MODEL	LOAD CAPACITY (kg)	PLATFORM SIZE L x B (MM)	MOTOR POWER	LIP BOARD SIZE (MM)
BSL-SD-06	6000	2500 X 2100	0.75	400
BSL-SD-08	8000	2500 X 2100	0.75	400
BSL-SD-10	10000	2500 X 2100	1.5	400
BSL-SD-12	12000	2500 X 2100	1.5	400

BSL ENTERPRISE

Rise Above Expectations

Movable Dock Ramp

About :

Movable dock ramp is special accessory equipment which can realize Rapid loading and unloading the goods, forklift and other handing truck can directly come into the carriage to quickly load or unload goods, The working efficiency is greatly increased. The movable Dock Ramp with manual hydraulic control, needn’t other power and almost needn’t maintenance. Tires can be let down when you need to move the dock ramp. Tires can be raised to lift-off when the ramp is in use.

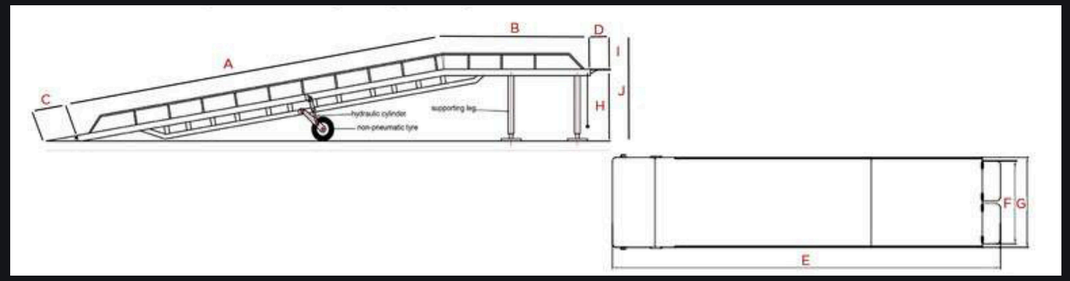

MODEL	LOAD CAPACITY (kg)	PLATFORM SIZE L x B (MM)									
		A	B	C	D	E	F	G	H	I	J
BSL-06	6000	6000	3000	1000	300	10300	1800	2100	1200	400	1600
BSL-08	8000	6000	3000	1000	300	10300	1800	2100	1200	400	1600
BSL-10	10000	7000	3000	1000	300	11300	1800	2100	1200	400	1600

RISE ABOVE EXPECTATIONS

Thank you

Kundli, sonepat, Haryana, 131028

+91-9817174951

bslenterprise26@gmail.com