

High-Performance Order Matching Engine — Project Overview

46,500+ lines of C++20 | 85 headers | 13 source files | 75 test files | 396 CTest targets

A C++20 low-latency matching engine drawing on institutional exchange design principles, built for sub-150ns processing latency and horizontal scalability.

1. Executive Summary


This is a C++20 low-latency order matching engine with institutional-grade architecture drawing on exchange design principles. It implements O(1) price-level lookup via `FlatPriceMap`, lock-free MPSC queues, thread-per-symbol horizontal scaling, CRC-32 journaling with deterministic replay, four wire protocols (FIX 4.2/4.4, OUCH 4.2, ITCH 5.0, SBE) over both real TCP and UDP transports, MoldUDP64 multicast with gap-recovery retransmission service, TLA+-verified safety invariants, cross-host log replication, and a complete operational stack including config management, webhook alerting, Prometheus metrics, and Docker deployment.


Codebase Statistics

Metric	Count
Total C++ LOC	~46,500
Header files (<code>include/</code>)	85
Source files (<code>src/</code>)	13
Test files	75
Individual test cases	396 CTest targets
TLA+ specifications	12 (454M+ states verified)
Documentation files	6 (plus architecture/benchmark docs)

2. Core Engine Architecture

System Topology

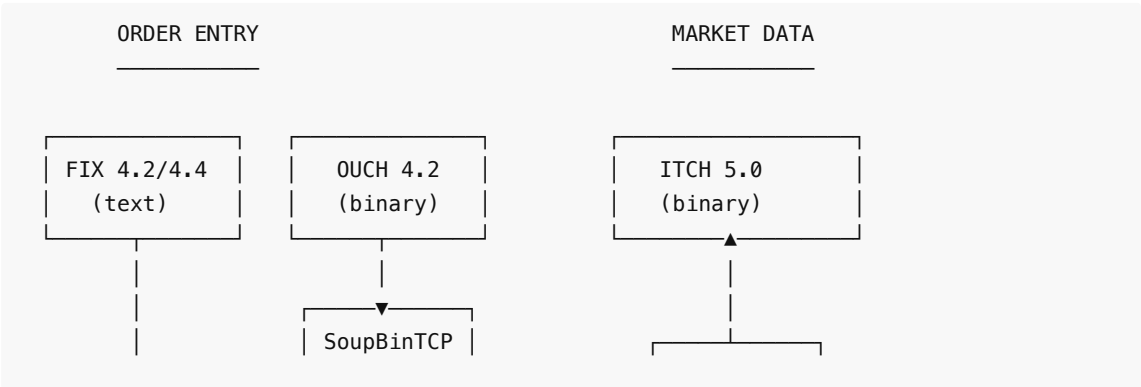

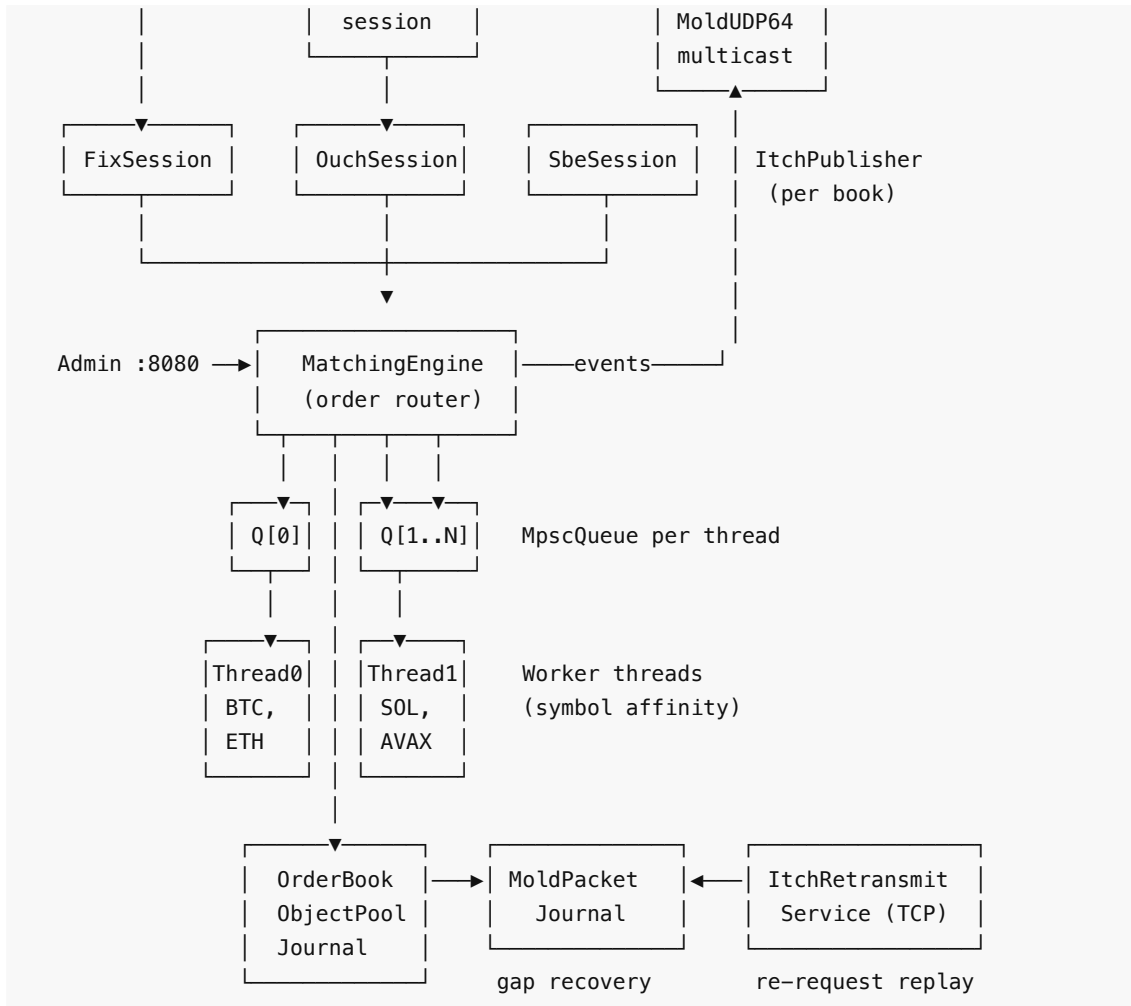

Order Types Supported

- **Standard:** Limit, Market
- **Time-In-Force:** IOC (Immediate-or-Cancel), FOK (Fill-or-Kill), DAY, GTD (Good-Til-Date)
- **Conditional:** Stop, StopLimit, TrailingStop
- **Institutional:** Pegged, Iceberg (hidden quantity), Hidden, PostOnly, MIT, MOC, LOC
- **Match Algorithms:** Price-Time FIFO and Pro-Rata allocation with LMM/DMM floor guarantee (40% of available qty) and rounding-remainder priority

Core Data Structures

Component	Purpose	Complexity
FlatPriceMap	Price-level lookup by tick index	O(1) insert/lookup
FlatHashMap	Robin-Hood open-addressing hash map	O(1) amortized
IntrusiveList	Doubly-linked order queue per price level	O(1) insert/remove
ObjectPool	Pre-allocated slab allocator for order nodes	O(1) alloc/dealloc
RingBuffer	Cache-line aligned lock-free ring buffer	O(1) push/pop
MpscQueue	Multi-producer, single-consumer lock-free queue	O(1) push/pop

3. Concurrency & Networking

Thread-Per-Symbol Partitioning

N worker threads with independent lock-free `MpscQueue` ring buffers. Orders are deterministically routed by `hash(symbolId) % numThreads`, eliminating cross-thread contention on the hot path.

Multi-Protocol Order Entry

All four protocols dispatch into the same `MatchingEngine`.

- **FIX 4.2 / 4.4**: ASCII text + checksum, full session-layer state machine. `TransactTime` validation and version negotiation per accepted `BeginString`.
- **OUCH 4.2**: NASDAQ binary order entry, big-endian fixed-width.
- **SBE (Simple Binary Encoding)**: FIX-TG schema-driven binary (CME / ICE style). Forward and backward compatibility. Encode speed of ~1 ns/op.
- **SoupBinTCP**: TCP envelope wrapping OUCH on the wire.

Market Data Stack

- **ITCH 5.0 Publisher**: Converts engine events to ITCH 5.0 frames.
- **MoldUDP64 Multicast**: Batched publisher with MTU auto-flush + gap-detecting subscriber.
- **Gap Recovery**: Bounded ring of journaled MoldUDP64 messages backing a SoupBinTCP-over-TCP retransmission service.
- **Shared Memory IPC**: L2 market data distribution to co-located consumers via `shm_open`.

4. Regulatory & Risk Management

Feature	Implementation
Self-Match Prevention (SMP)	Cancel-Taker strategy — prevents wash trading
Circuit Breakers	Configurable % price-band breach enters a short LULD-style volatility auction (orders accumulate without continuous matching until the reopening uncross) rather than a hard halt; emits a <code>breaker_trip</code> audit event
OTR Monitoring	Real-time Order-to-Trade ratio tracking per participant
Kill Switch	Instant cancellation of all orders per participant across all symbols
Pre-Trade Risk Limits	Max order size, notional value, and position limits per participant
Rate Limiting	Token-bucket throttling at ingress (configurable rate + burst); <code>RateLimiter::reconfigure()</code> live-updates default rate/burst and clears all participant buckets — called on <code>SIGHUP</code>
Queue Backpressure	Rejects orders when queue exceeds configurable threshold (default 80%)
LMM/DMM Privileges	<code>ParticipantRole</code> enum; ProRata 40% floor guarantee to LMM/DMM orders; remainder priority

5. Microstructure Research Infrastructure

A self-contained quantitative research layer that runs against the live matching engine, enabling empirical microstructure analysis and strategy development.

Component	Purpose
SimulationDriver	Multi-agent market simulator (NoiseTrader, MarketMaker, InformedTrader)
MicrostructureMetrics / ResearchHarness	Snapshot collection and research session management
VPINCalculator	Volume-Synchronized Probability of Informed Trading
SpreadDecomposition	Huang-Stoll and Glosten-Harris decomposition (adverse selection, inventory, order processing components)
OrderFlowAnalytics	Roll spread, queue imbalance signal, logistic fill-probability model
ImpactModel	Almgren-Chriss + square-root market impact laws
ExecutionAnalytics / OptimalExecution	Almgren-Chriss execution schedule, arrival-price and VWAP slippage
CalibrationPipeline	Nelder-Mead minimization of spread decomposition residuals
BacktestEngine	Historical tape replay against research models
SignalGenerator	Multi-factor composite signal (momentum, spread, VPIN, imbalance)
PaperTrader	Signal-driven IOC order submission with position and P&L tracking
ResearchDashboard / ResearchSerializer	Result visualization and persistence

6. Reliability & High Availability

CRC-32 Journaling

- Write-ahead log with atomic CRC-32 integrity on every entry.
- Crash recovery: replay stops at first corrupted/truncated record.
- Atomic checkpoint: snapshots active book state, rewrites journal.
- Deterministic replay via virtual clock (`setExpiryClock(ClockFn)`).
- Auto-rotation: `OB_JOURNAL_MAX_SIZE_MB` env var triggers `engine.checkpoint()` from the main loop when `Journal::needsCheckpoint()` fires.

Cross-Host Log Replication (wired end-to-end)

- `ReplicationCoordinator` — TCP log-shipping from primary to backup, instantiated in `src/main.cpp` driven by `OB_NODE_ROLE` / `OB_PRIMARY_HOST` / `OB_JOURNAL_PATH` env vars.
- `Journal::onCommit` hook ships each fsync-durable batch to the backup; backup's `applyReplicatedEntry` writes to its own journal so the replica is durable across its own restarts.

- `HeartbeatMonitor` — configurable failure detection timeout.
- `LeaderLease` + `LeaseGrant` propagation — primary broadcasts lease state every heartbeat tick; backup's `tryAcquire` is fenced on local lease expiry, not just heartbeat miss. Prevents split brain under partial network failure (verified by 19-scenario chaos suite: partition, asymmetric partition, 30% packet loss, +30s clock skew — 0 split brain in all).
- Transport auto-reconnect — `receiveLoop` re-runs `connectTo()` against saved host/port after socket loss; ~3 ms recovery in chaos tests. Reconnect uses exponential backoff: 500ms → 30s cap, resets to base on successful connect.
- Snapshot catchup on join — primary streams every resting order via `MatchingEngine::streamSnapshot` when a backup connects; idempotent on receiver.
- Automatic backup promotion on combined heartbeat-miss + lease-expiry; `setReplayModeAllBooks(false)` flips backup into a live primary.

7. Observability & Operations

Observability Features

- **Structured Logging:** Pluggable `StructuredSink` API (Null, JSON Stderr, Capturing). 7 typed `obSink().log()` events wired in `OrderBook.cpp` (accepted/cancelled/rejected/fill/breaker/state); backends hot-swappable via typed helpers in `StructuredLog.h`.
- **Prometheus Metrics:** `MetricsRegistry` with `/prometheus` text-exposition endpoint. Tracks order flow, queue depth, latencies, and journal health.
- **Webhook Alerting:** `AlertDispatcher` with targets for Slack, PagerDuty, or HTTP webhooks.

Admin HTTP Server (Port 8080)

Endpoint	Purpose
GET <code>/health</code>	K8s liveness probe
GET <code>/readyz</code>	K8s readiness probe — HTTP 503 until warmup, then 200; auth-exempt; separate from liveness <code>/health</code>
GET <code>/metrics</code>	Internal counters (JSON)
GET <code>/prometheus</code>	Prometheus text exposition
GET <code>/book?symbolId=0</code>	L2 order book snapshot
GET <code>/otr?participantId=1</code>	Order-to-trade ratio

8. Performance Benchmarks

Measured using `HonestBenchmark` — a single deterministic order flow (50K orders, seed=42) fed through three paths on Apple Silicon ARM64, Clang C++20 -O3 -march=native. Numbers below are verified from a **fresh clone of commit 5228158** ; P50 is the stable per-operation figure, while throughput is wall-clock and sensitive to machine load. (Per-order/per-fill structured logging is sink-gated, so the hot path stays allocation-free when no log sink is attached.)

Three-Path Latency (identical order flow)

Path	What's Included	P50	P99	Throughput
Core matching	OrderBook + STP + WashTrade + LULD	125 ns	~500 ns	~5.0M ops/s
Engine wrapper	+ sequence alloc, rate limiter	125 ns	~500 ns	~5.5M ops/s
Full-stack journal	+ GroupCommit (batch=64, fdatsync)	~958 ns	~8 ms (fdatsync)	~7K ops/s

Binary Codec Microbenchmark

Codec	Message	ns/op	M ops/s
OUCH 4.2	EnterOrder encode (49B)	112.0	8.9
ITCH 5.0	AddOrder encode (36B)	34.1	29.4
SBE	NewOrderV1 encode (32B)	1.0	1015
SBE	NewOrderV1 decode (32B)	0.5	2128

9. Verification & Testing

Test Suite — 75 Executables, 396 CTest Targets

The testing infrastructure includes Unit, Functional, Integration, Chaos, Property, Shadow, and Benchmark testing categories across 75 test executables and 396 CTest targets. Key mechanisms:

- **Shadow Mode:** Dual-book divergence detection, validating FIFO compliance.
- **Fault Injection:** 10+ injection points (short-writes, pool exhaustion, EAGAIN injection) with zero-cost overhead in production.
- **Coverage-Guided Fuzzing:** libFuzzer harness for protocol parsing and order flow.
- **Sanitizers:** ASan, UBSan, and TSan checks integrated into CI/CD.

Formal Verification (TLA+)

12 TLA+ specifications, model-checked with TLC:

- **MatchingEngine.tla** : 454M states verified. Zero violations for `NoNegativeQuantity` , `FIFO_Preservation` , and `GTD_Expiry_Correctness` .
- **Replication.tla** : Realistic lease-propagation model (no god-mode `~primaryAlive` guard on `BackupPromote` ; promotion requires both heartbeat-miss AND local-lease-expiry). 1373 → 4192 states verified at `MaxEntries=6` → `10` , zero violations. A bug-injected variant (lease check stripped) reproduces split brain in 188 states, confirming the verification is genuine.
- **MpscQueue.tla** : Lock-free ring buffer linearizability.
- **SnapshotLocked.tla** : Mutex torn-snapshot prevention.

10. File Structure

include/	85 header files – core logic and networking
src/	13 source files – thin compilation units
tests/	75 test files, 396 CTest targets
benchmarks/	9 benchmark binaries
fuzz/	9 files – coverage-guided fuzzing harnesses
spec/	TLA+ formal specifications (12 specs)
tools/	CLI tools and data utilities
config/	Example configuration files
docs/	Runbooks, CapacityPlanning, ProductionReadiness

11. Remaining Work

The system is architecturally complete. The main remaining gaps require specialized hardware not typically available in standard environments:

- **x86 Bare Metal Benchmarks:** Needs multi-socket EC2 c5.metal instance.
 - **Kernel Bypass Networking:** DPDK and io_uring seams are prepared, but require specific NICs (e.g., Solarflare/Onload) and tuning.
 - **Replication.tla Verification:**  done — see Verification section above. The original "not yet verified" footnote is obsolete.
 - **Wire-to-Wire Latency Validation:** Requires a multi-host test rig with hardware timestamping.
-

Developed for professional quantitative trading systems. C++20 · ~46,500 LOC · 75 test executables · 396 CTest targets · 19 multi-container chaos scenarios · 454M TLA+ states verified on MatchingEngine.tla · 12 TLA+ specifications