CREATORCONNECT · CODLY360 · MODULE E

Messaging, Real-Time Chat & *Moderation*

Production UI design set for screens E01 through E12, covers conversations inbox, message requests, brief-linked chat threads, attachment sharing, and trust/safety moderation. Built on the approved design system: cream background (#FAF6EF), primary yellow bubbles (#FFD64A), bold Archivo typography with Instrument Serif Italic accents.

00 Scope & SOW §14 Architecture


What this module covers: Complete visual design and screen architecture for **Conversations List (SCR-039)**, **One-to-One Chat Thread (SCR-040)**, **Chat Attachment Previews (SCR-041)**, **Message Requests**, and **Safety & Moderation Dialogs (DLG-013 to DLG-016)**.


Real-Time Socket.IO Protocol (SOW §14): Live two-way communication supporting typing status, delivery/read timestamps, real-time message arrival, and multimedia file transfer via Cloudflare R2 / AWS S3.


Trust & Anti-Circumvention Gating: Unconnected users are placed in a quarantined "Requests" tab. Contact information (phone numbers, email addresses, off-platform payment links) is shielded until a mutual connection or assignment collaboration is accepted.

01 Screens — Conversations & Inbox

E01 to E03 · primary inbox, message requests & empty state

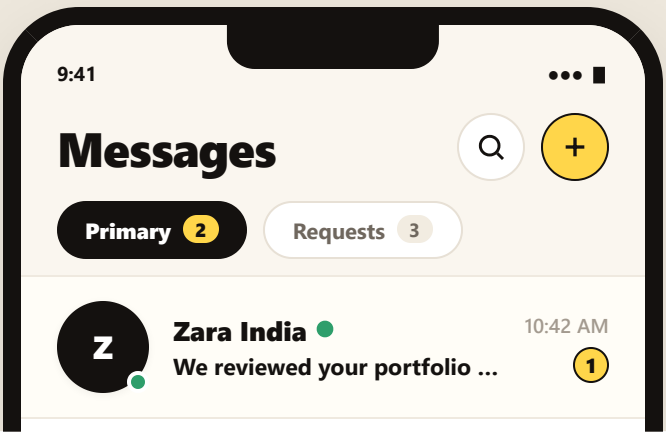


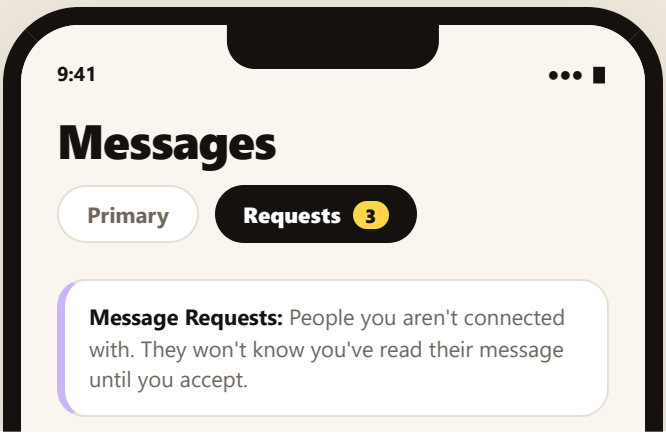

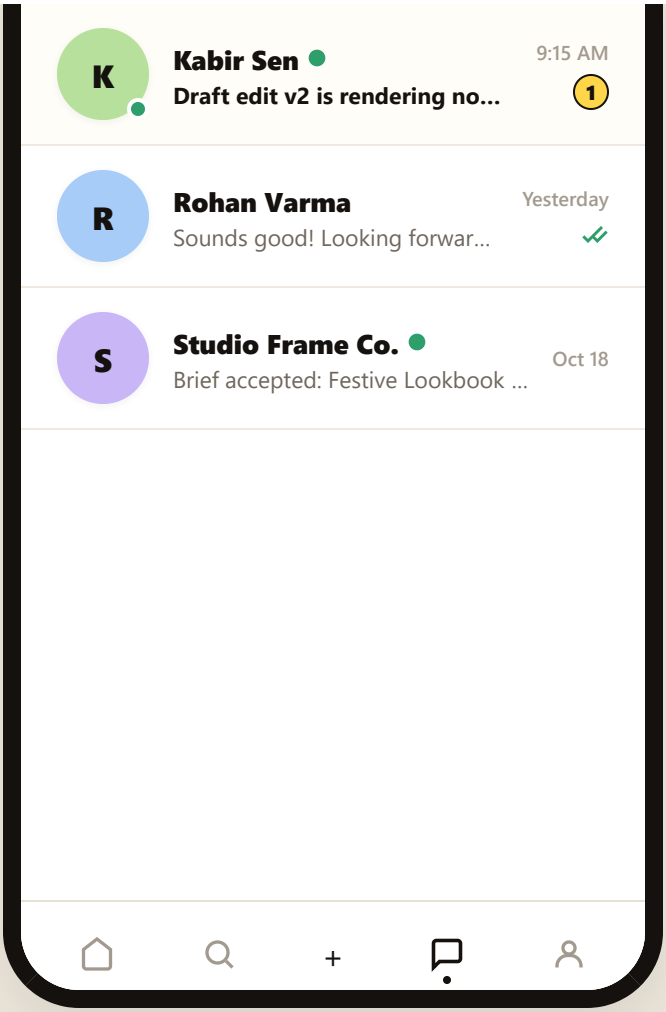


E01 **Conversations List (SCR-039)**


Primary messages inbox. Segregates active conversations from quarantined requests, displays online status indicators, and supports instant unread badge counts.

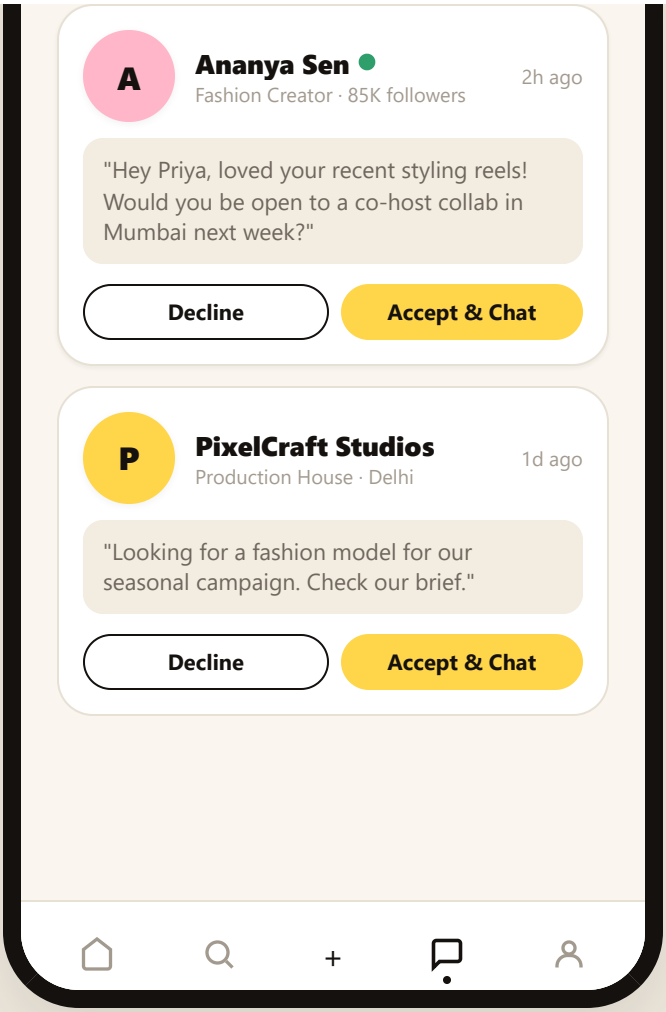

E02 **Message Requests Inbox**

Quarantine tab for inbound messages from unverified/unconnected accounts. Provides frictionless Accept / Decline decisions without triggering read receipts.

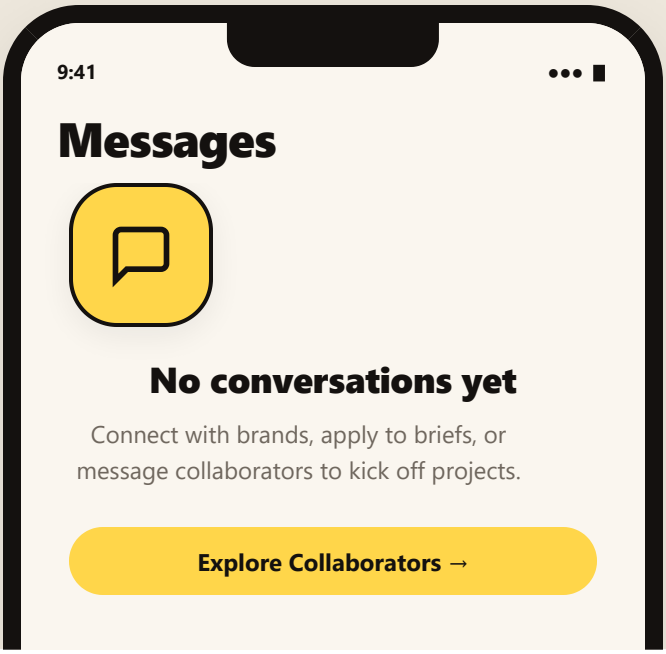

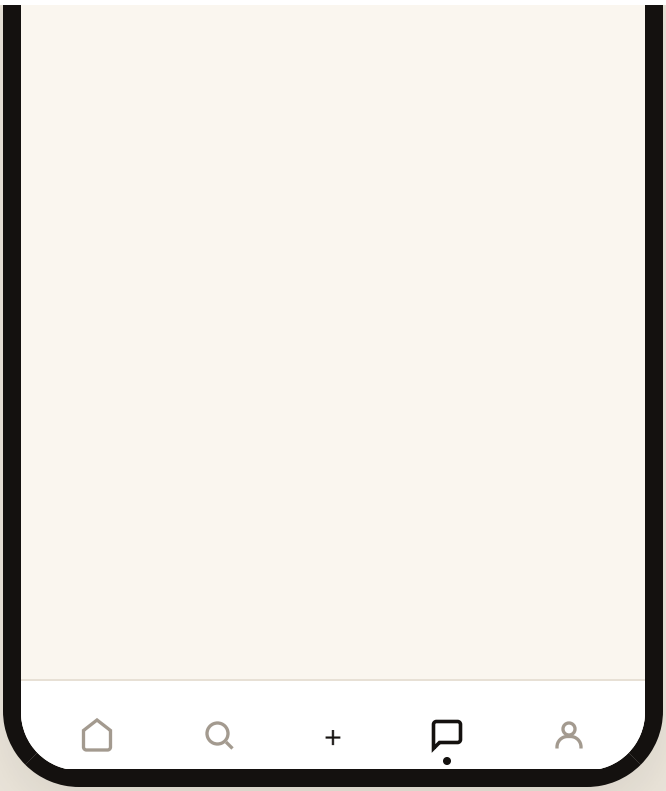



E03 **Messages — Empty State**


Zero-message state guiding new users toward discovery and assignment applications.

02 Screens — One-to-One Chat Thread (SCR-040)

E04 to E06 · brief-linked messaging, typing indicator & pending request thread

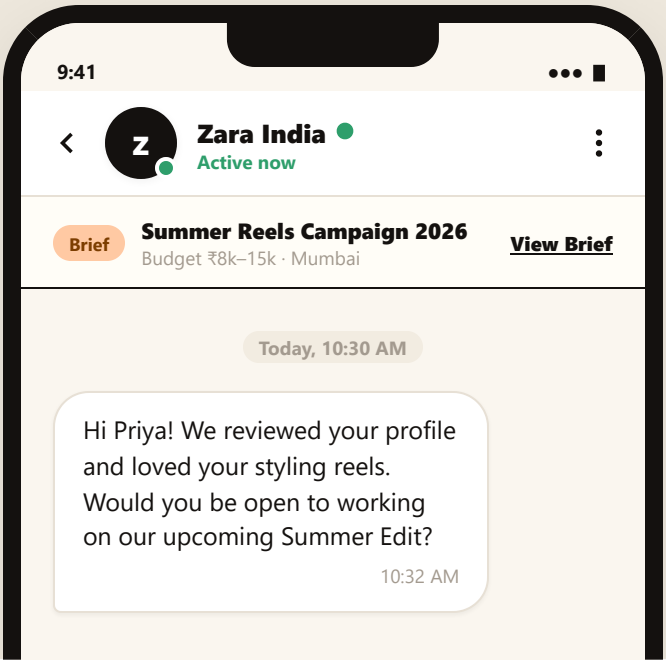


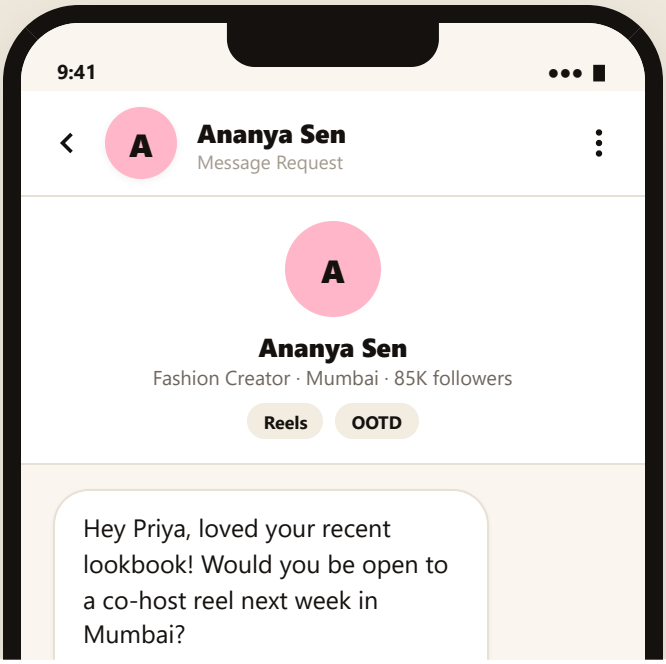

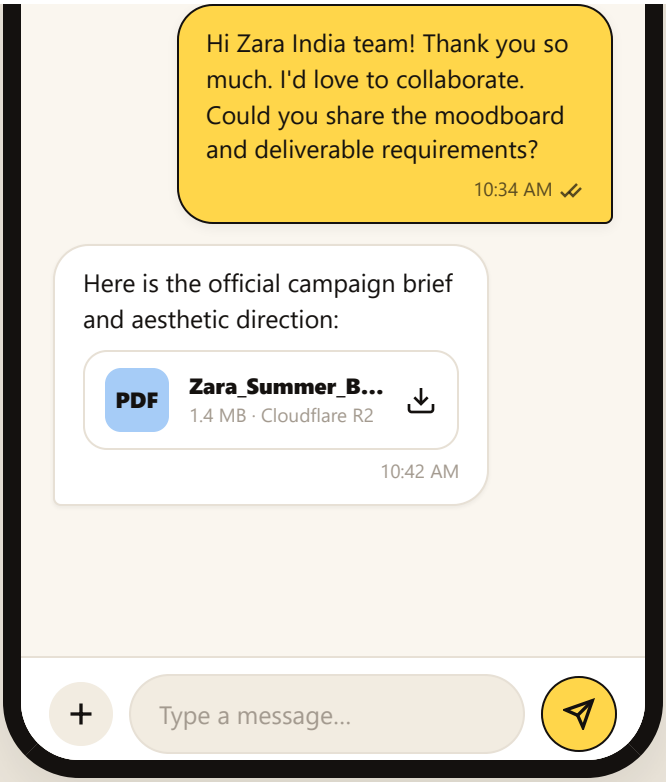


E04 **One-to-One Chat Thread**


Core chat viewport (SOW §14). Features pinned collaboration brief context, yellow user bubbles, double read receipt ticks, and secure R2 file transfers.

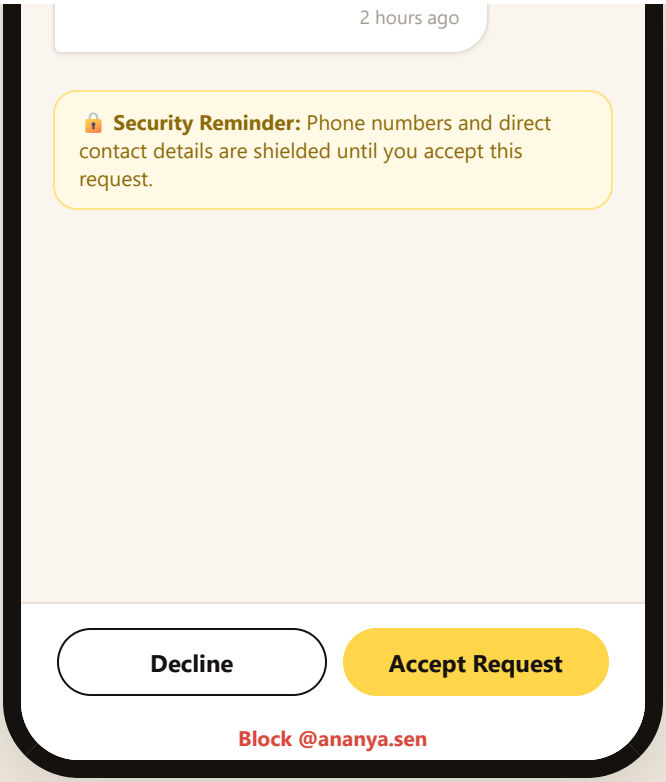

E05 **Chat Thread — Message Request State**

Pending message thread. Input field is locked until explicit acceptance. Includes caller summary card and safety anti-circumvention warning.

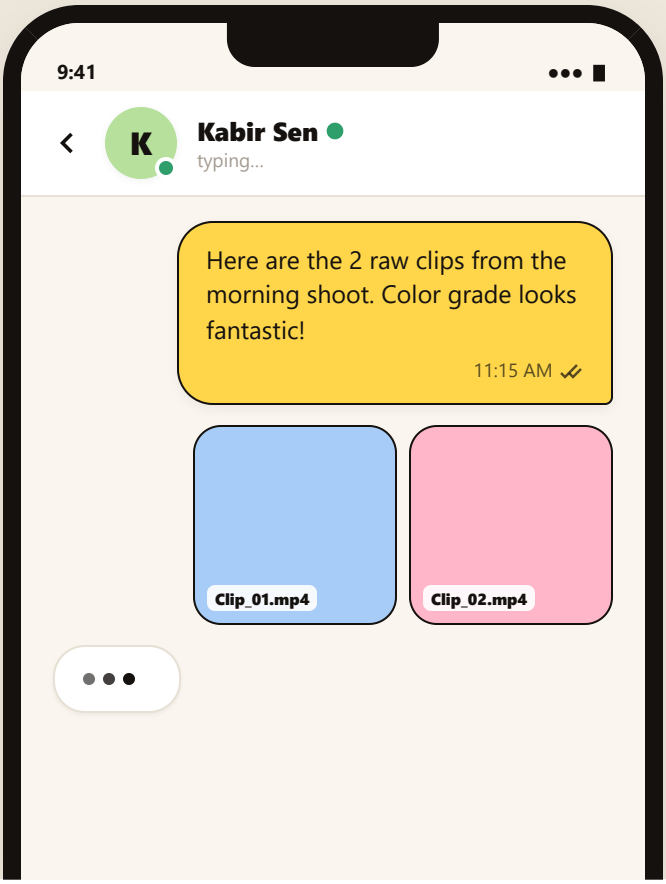

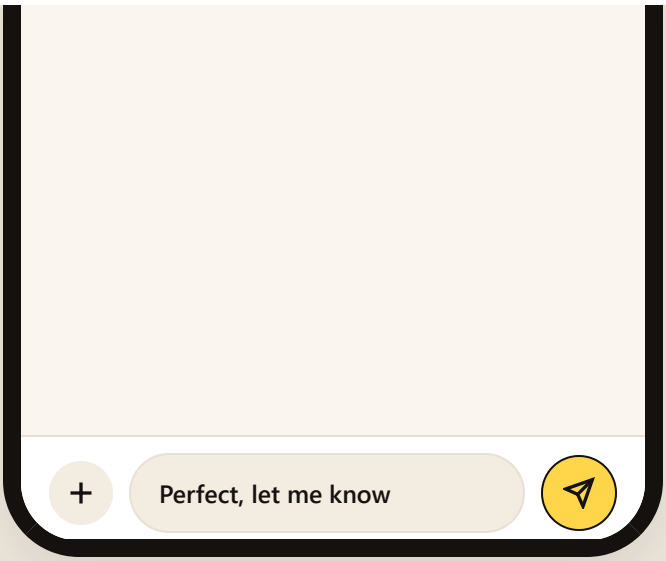



E06 **Chat Thread — Typing & Media**

Active socket messaging showing live typing dots, multimedia thumbnails, and instant status updates.

03 Dialogs & Attachment Previews

E07 to E12 · media previews, attachment picker & chat moderation

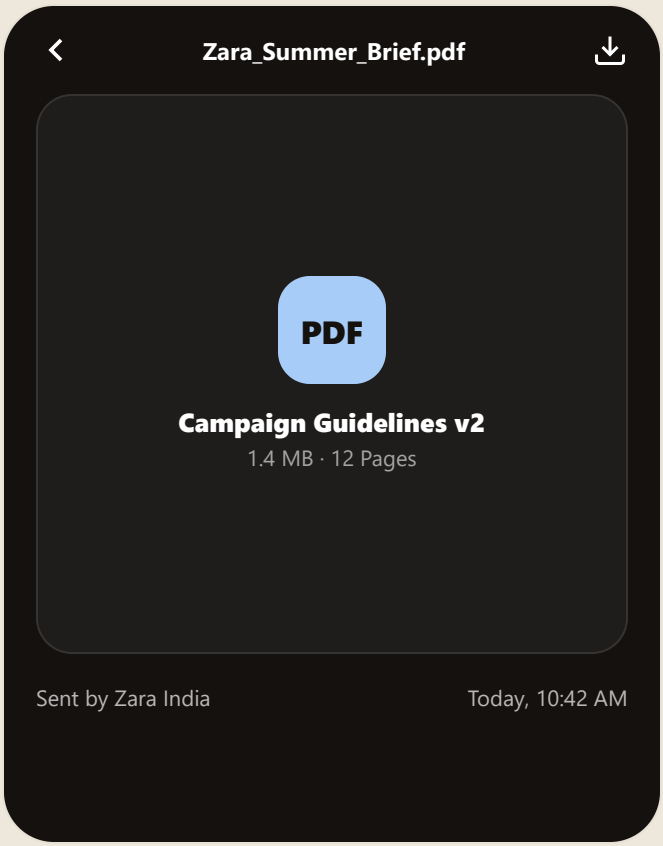

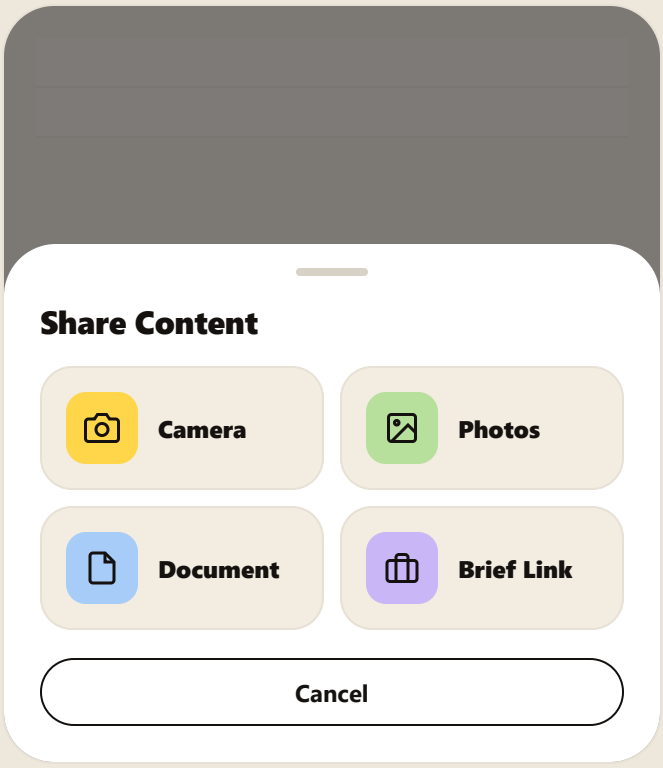

DLG-016 **Attachment Picker Sheet**

SCR-041 **Attachment Preview**


Full-screen document/media viewer supporting documents, photos, and moodboards uploaded via Cloudflare R2.

Bottom sheet enabling camera capture, media selection, PDF upload, and embedded brief referencing.




DLG-013 **Delete Message Dialog**

Confirmation dialog for message revocation with both local and bilateral deletion options.

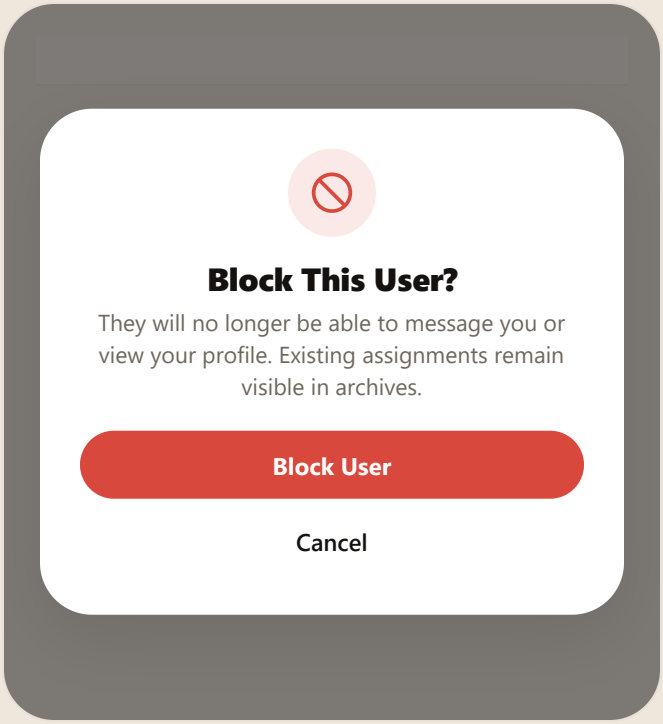

DLG-015 **Block User Dialog**

Destructive action sheet permanently cutting real-time communication channels per SOW §14.

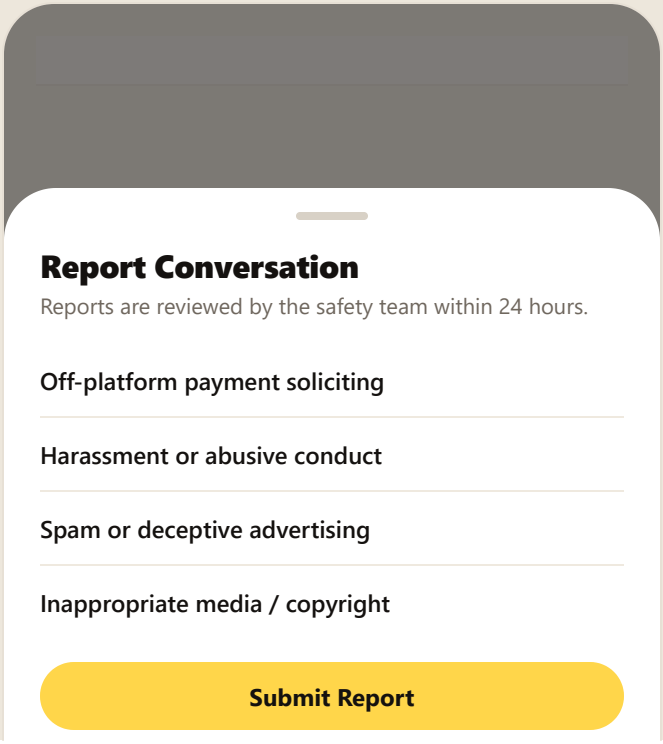

Cancel

DLG-014 **Report User Sheet**

Incident escalation form routing chat transcripts directly to the Admin Panel moderation queue.

04 Backend REST & Socket.IO Mapping (SOW §14)

Contracted protocol & schema architecture

SCREEN / ACTION	METHOD / PROTOCOL	ENDPOINT / SOCKET EVENT	PAYLOAD / PARAMETERS	STATUS & HANDSHAKE
E01 Conversations List	REST (Fastify)	`GET /api/v1/conversations`	`tab=primary|requests, cursor, limit=20`	SOW §14 · Cached in Redis
E04 Real-time Message	Socket.IO	`emit('message:send')`	`{ conversationId, recipientId, content, attachmentId, briefId }`	SOW §14 · Real-Time Delivery
E04 Message Status	Socket.IO	`emit('message:read')`	`{ messageId, conversationId, readAt }`	SOW §14 · Read Receipts
E06 Typing Indicator	Socket.IO	`emit('chat:typing')`	`{ conversationId, isTyping: true|false }`	SOW §14 · Ephemeral State
E02 Resolve Request	REST	`POST /api/v1/conversations/:id/accept`	`{ accept: true|false }`	SOW §14 · Moves to Primary
E08 Media Upload	REST → R2	`POST /api/v1/media/upload-url`	`{ filename, mimeType, sizeBytes, purpose: "CHAT" }`	SOW §27 · Cloudflare R2
E11 Block Contact	REST	`POST /api/v1/users/block`	`{ targetUserId, reason }`	SOW §14 · Immediate Revocation

05 Implementation & Security Rules

1. Pre-Acceptance Anti-Circumvention Rule: Inbound messages in the Requests tab cannot trigger push notifications containing plaintext body, nor can they transmit active hyperlinks or raw 10-digit phone numbers until the receiver taps "Accept".

2. Pinned Brief Context: When a conversation is initiated from an assignment card (Module D or G), the `conversation.assignmentId` foreign key pins the brief banner to the top of the chat thread, ensuring both parties have continuous visibility into the agreed scope and commercial budget.

3. Socket Reconnection & Offline Queue: The Flutter mobile client stores unsent messages in a local Hive queue with pending status clock icons. Upon network reconnection, the socket reconnects with exponential backoff and flushes the queue via `POST /api/v1/conversations/sync`.