



AROR UNIVERSITY
OF ART, ARCHITECTURE,
DESIGN & HERITAGE,
SUKKUR, SINDH

Agile Software Development

Prof. Dr. Faheem Akhtar Rajput



Rapid software development

- Rapid development and delivery is now often the most important requirement for software systems
 - Businesses operate in a fast-changing requirement and it is practically impossible to produce a set of stable software requirements
 - Software has to evolve quickly to reflect changing business needs.
- Rapid software development
 - Specification, design, and implementation are inter-leaved
 - The system is developed as a series of versions with stakeholders involved in version evaluation
 - User interfaces are often developed using an IDE and graphical toolset.



Rapid software development

- Plan-driven development is essential for some types of system but does not meet these business needs.
- Rapid software development become known as agile development or agile methods.
- Agile development methods emerged in the late 1990s whose aim was to radically reduce the delivery time for working software systems
- These agile methods are designed to produce useful software quickly.
- All of the agile methods that have been proposed share a number of common characteristics of the system.

Common characteristics

1. The process of specification, design, and implementation is interleaved.
 - There is no detailed system specification, and design documentation is minimized or generated automatically by the programming environment used to implement the system.
 - The user requirements document is an outline definition of the most important characteristics of the system.
2. The system is developed in a series of increments.
 - End-user and other system stakeholders are involved in specifying and evaluating each increment.
 - They may propose changes to the software and new requirements that should be implemented in a later version of the system.
3. Extensive tool support is used to support the development process.
 - Tools that may be used include automated testing tools, tools to support configuration management and system integration, and tools to automate user interface production.

Agile approach

- Agile methods are incremental development methods in which the increments are small, and, typically, new releases of the system are created and made available to customers every two or three weeks.
- Agile approaches to software development consider design and implementation to be the central activities in the software process.
- They incorporate other activities, such as requirement elicitation and testing, into design and implementation.
- By contrast, a plan-driven approach to software engineering identifies separate stages in the software process with output associated with each stage.
 - The output from one stage is a basis for planning the following process activities.



Plan-driven and agile development


■ Plan-driven development

- A plan-driven approach to software engineering is based around separate development stages, with the outputs to be produced at each of these stages planned in advance.
- Not necessarily waterfall model—plan-driven, incremental development is possible
- Iteration occurs within activities.

■ Agile development

- Specification, design, implementation, and testing are inter-leaved, and the outputs from the development process are decided through a process of negotiation during the software development process.

Plan-driven and agile specification

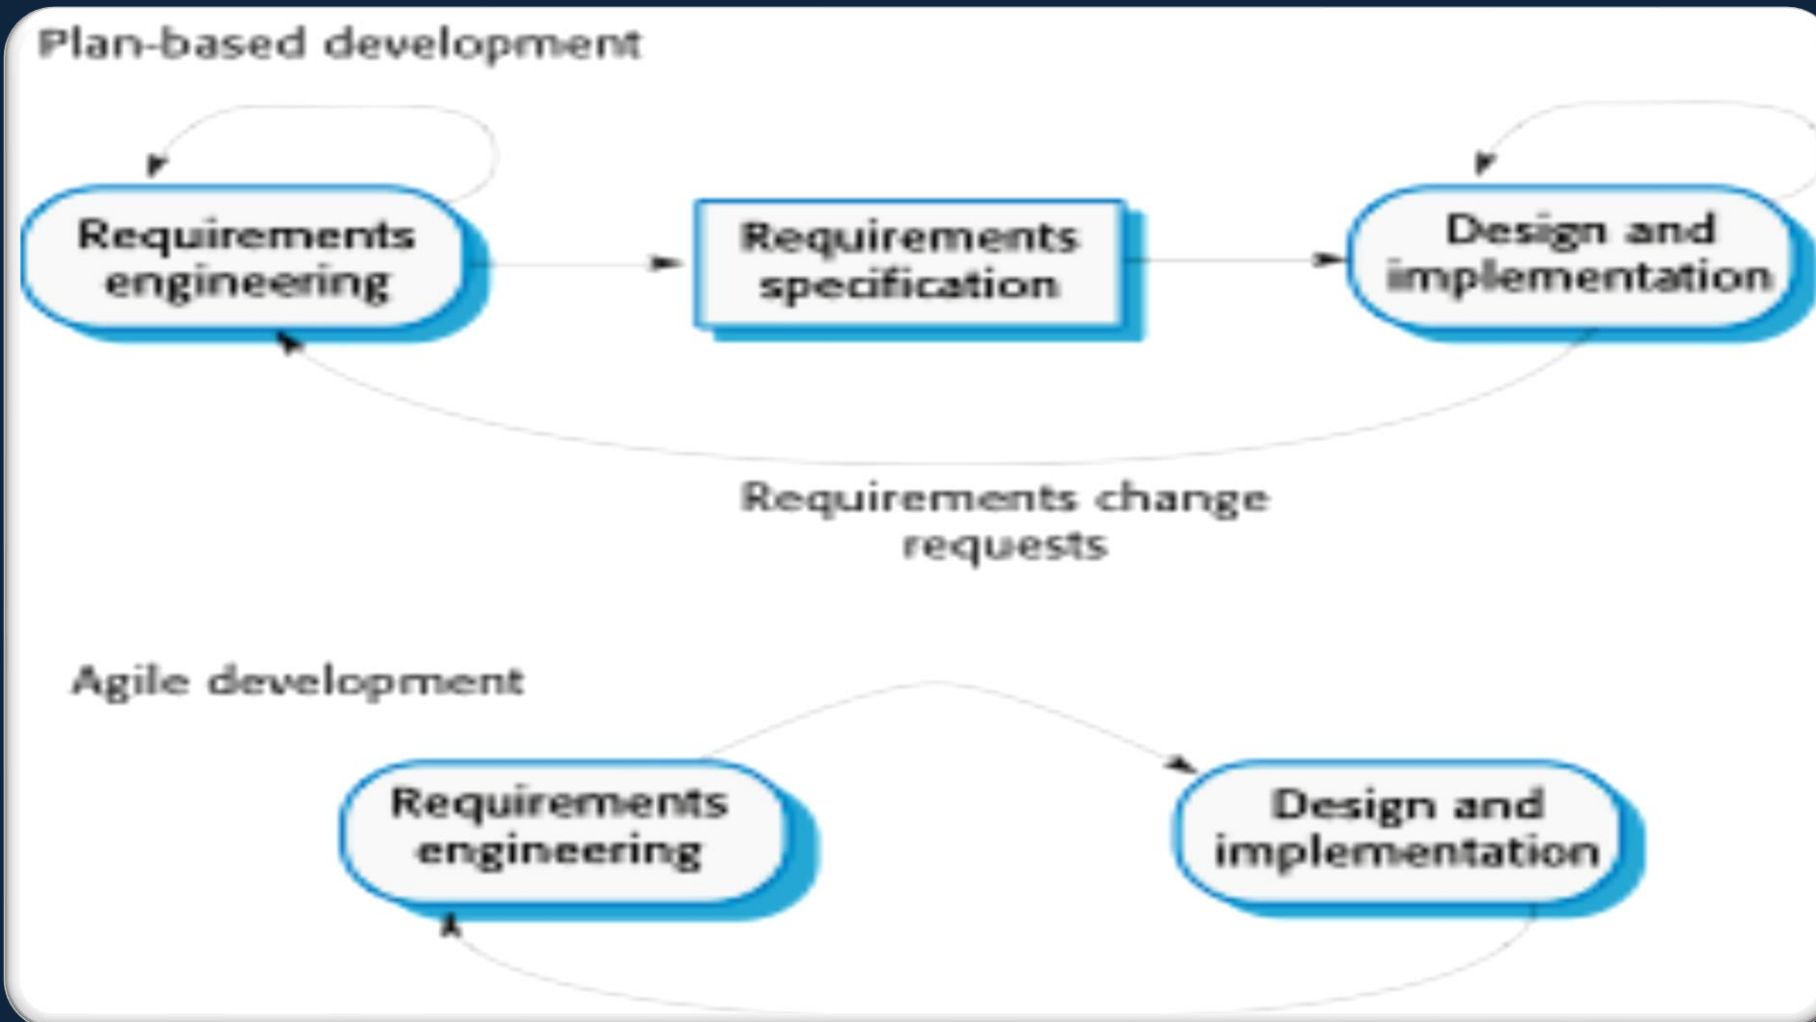

Plan-driven Approach

- Plan plan-driven approach was developed for software developed by large teams, working for different companies.
- Teams were often geographically dispersed and worked on the software for long periods of time.
- Plan-driven approaches involve a significant overhead in planning, designing, and documenting the system.
- This overhead is justified when the work of multiple development teams has to be coordinated, when the system is a critical system, and when many different people will be involved in maintaining the software over its lifetime.
- However, when this heavyweight, plan-driven development approach is applied to small and medium-sized business systems, the overhead involved is so large that it dominates the software development process.



Agile methods

- Dissatisfaction with the overheads involved in software design methods of the 1980s and 1990s led to the creation of agile methods. These methods:
 - Focus on the code rather than the design
 - They are based on an iterative approach to software development
 - They are intended to deliver working software quickly and evolve this quickly to meet changing requirements.
- The aim of agile methods is to reduce overheads in the software process (e.g. by limiting documentation) and to be able to respond quickly to changing requirements without excessive rework.

Agile manifesto

- The philosophy behind agile methods is reflected in the agile manifesto issued by the leading developers of these methods.
- *We are uncovering better ways of developing software by doing it and helping others do it.*
- *Through this work we have come to value:*
 - *Individuals and interactions **over** processes and tools*
 - *Working software **over** comprehensive documentation*
 - *Customer collaboration **over** contract negotiation*
 - *Responding to change **over** following a plan*
- *That is, while there is value in the items on the right, we value the items on the left more.*

The principles of agile methods

Principle	Description
Customer involvement	Customers should be closely involved throughout the development process. Their role is provide and prioritize new system requirements and to evaluate the iterations of the system.
Incremental delivery	The software is developed in increments, with the customer specifying the requirements to be included in each increment.
People not process	The skills of the development team should be recognized and exploited. Team members should be left to develop their own ways of working without prescriptive processes.
Embrace change	Expect the system requirements to change and so design the system to accommodate these changes.
Maintain simplicity	Focus on simplicity in both the software being developed and in the development process. Wherever possible, actively work to eliminate complexity from the system.



Agile method applicability

- Agile methods have been particularly successful for two kinds of system development:
 - Product development where a software company is developing a small or medium-sized product for sale.
 - Virtually all software products and apps are now developed using an agile approach.
 - Custom system development within an organization, where there is a clear commitment from the customer to become involved in the development process, and where there are not a lot of external rules and regulations that affect the software.
- Because of their focus on small, tightly integrated teams, there are problems in scaling agile methods to large systems.


Agile development Techniques

- The idea underlying agile methods was developed around the same time by a number of different people in the 1990s.
- However, perhaps the most significant approach to changing software development culture was the development of Extreme Programming (XP).
- The name was coined by Kent Beck (Beck 1998) because the approach was developed by pushing recognized good practice, such as iterative development, to “extreme” levels.



Extreme programming


- Perhaps the best-known and most widely used agile method.
- Extreme Programming (XP) takes an ‘extreme’ approach to iterative development.
 - New versions may be built several times per day.
 - Increments are delivered to customers every 2 weeks.
 - All tests must be run for every build, and the build is only accepted if the tests run successfully.

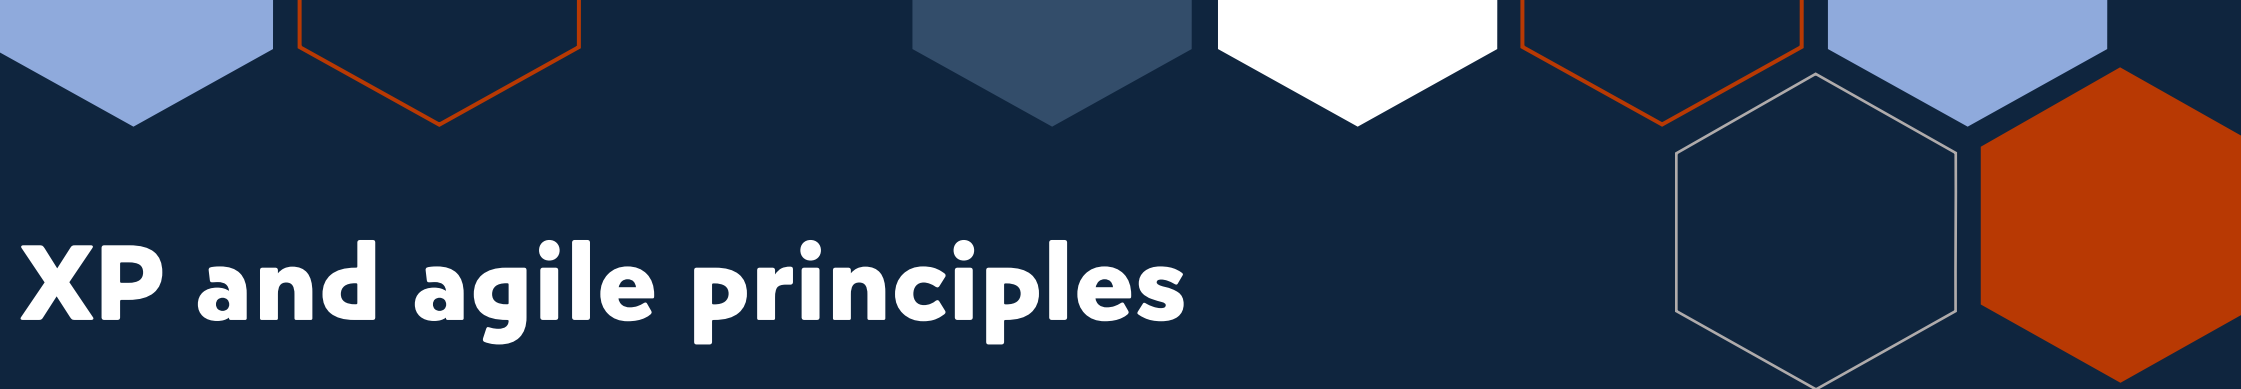

XP and agile principles

- Incremental development is supported through small, frequent system releases.
- Customer involvement means full-time customer engagement with the team.
- People do not process through pair programming, collective ownership, and a process that avoids long working hours.
- Change is supported through regular system releases.
- Maintaining simplicity through constant refactoring of code.

The extreme programming release cycle

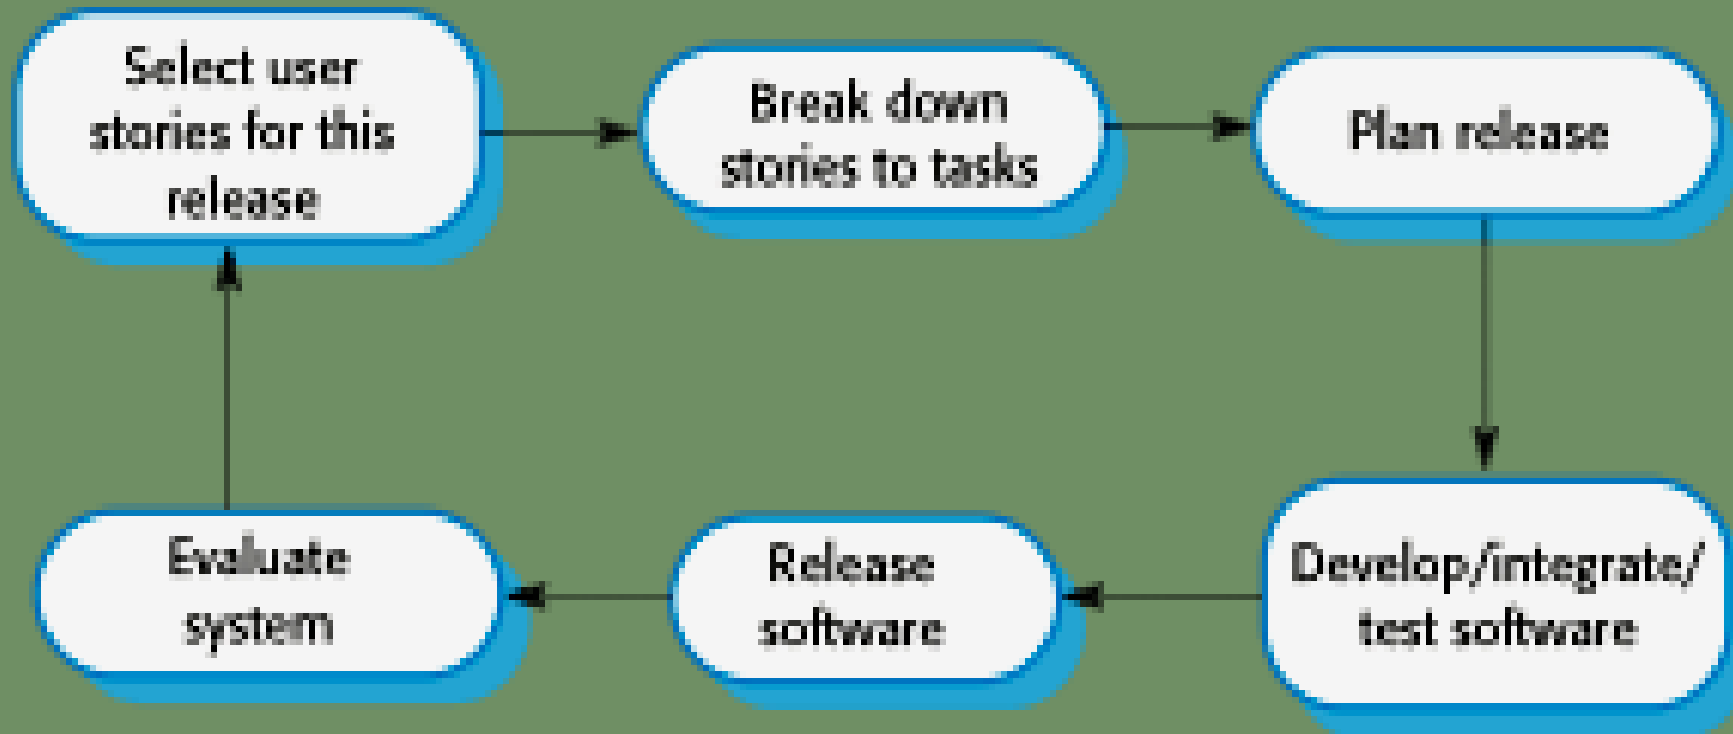



XP programming


- In XP, requirements are expressed as scenarios (called user stories), which are implemented directly as a series of tasks.
- Programmers work in pairs and develop tests for each task before writing the code.
- All tests must be successfully executed when new code is integrated into the system.
- There is a short time gap between releases of the system.

Extreme programming practices (a)

Principle or practice	Description
Incremental planning	Requirements are recorded on “story cards” and the stories to be included in a release are determined by the time available and their relative priority. The developers break these stories into development ‘Tasks’. See Figures 3.5 and 3.6.
Small releases	The minimal useful set of functionality that provides business value is developed first. Releases of the system are frequent and incrementally add functionality to the first release.
Simple design	Enough design is carried out to meet the current requirements and no more.
Test-first development	An automated unit test framework is used to write tests for a new piece of functionality before that functionality itself is implemented.
Refactoring	All developers are expected to refactor the code continuously as soon as possible code improvements are found. This keeps the code simple and maintainable.

Extreme programming practices (b)

Principle or practice	Description
Pair programming	Developers work in pairs, checking each other's work and providing support to always do a good job.
Collective ownership	The pairs of developers work on all areas of the system, so that no islands of expertise develop and all the developers take responsibility for all of the code. Anyone can change anything.
Continuous integration	As soon as the work on a task is complete, it is integrated into the whole system. After any such integration, all the unit tests in the system must pass.
Sustainable pace	Large amounts of overtime are not considered acceptable as the net effect is often to reduce code quality and medium term productivity
On-site customer	A representative of the end-user of the system (the customer) should be available full time for the use of the XP team. In an extreme programming process, the customer is a member of the development team and is responsible for bringing system requirements to the team for implementation.

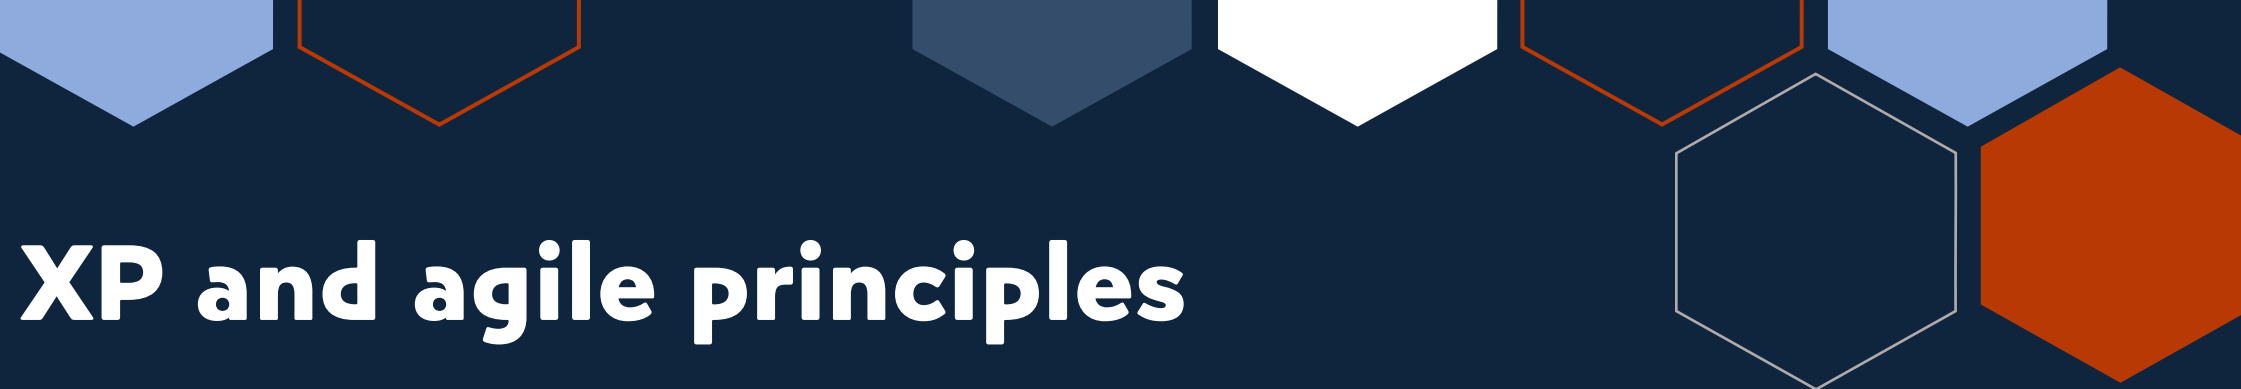

XP and agile principles

- Incremental development is supported through small, frequent system releases.
- Customer involvement means full-time customer engagement with the team.
- People not process through pair programming, collective ownership and a process that avoids long working hours.
- Change supported through regular system releases.
- Maintaining simplicity through constant refactoring of code.

Practical issues in agile methods

- In practice, the application of Extreme programming as originally proposed has proved to be more difficult than anticipated.
- It cannot be readily integrated with the management practices and culture of most businesses.
- Therefore, companies adopting agile methods pick and choose those XP practices that are most appropriate for their way of working.
- Sometimes they are incorporated into their own development processes but, more commonly, they are used in conjunction with management-focused agile methods such as Scrum



Influential XP practices

- Extreme programming has a technical focus and is not easy to integrate with management practice in most organizations.
- Consequently, while agile development uses practices from XP, the method as originally defined is not widely used.
- Key practices
 - User stories for specification
 - Refactoring
 - Test-first development
 - Pair programming



User stories for requirements

- In XP, a customer or user is part of the XP team and is responsible for making decisions on requirements.
- User requirements are expressed as scenarios or user stories.
- These are written on cards and the development team break them down into implementation tasks. These tasks are the basis of the schedule and cost estimates.
- The customer chooses the stories for inclusion in the next release based on their priorities and the schedule estimates.

A 'prescribing medication' story

Prescribing medication

Kate is a doctor who wishes to prescribe medication for a patient attending a clinic. The patient record is already displayed on her computer, so she clicks on the medication field and can select '**current medication**', '**new medication**', or '**formulary**'.

If she selects '**current medication**', the system asks her to check the dose. If she wants to change the dose, she enters the new dose and then confirms the prescription.

If she chooses '**new medication**', the system assumes that she knows which medication to prescribe. She type the first few letters of the drug name. the system displays a list of possible drugs starting with these letters. She chooses the required medication and the system responds by asking her to check that the selected is correct. She enters the dose and then confirms the prescription.

If she chooses '**formulary**', the system displays a search box for the approved formulary. She can then search for the drug required. She selects the drug and is asked to check that the medication is correct. She enters the dose then confirms the prescription.

The system always checks that the dose is within the approved range. If it isn't. Kate is asked to change the dose.

After Kate has confirmed the prescription, it will be displayed for checking. She either clicks '**OK**' or '**Change**'. If she clicks '**OK**', the prescription is recorded on the audit database. Of she clicks on '**Change**', she re-enters the '**Prescribing medication**' process.

User stories for requirements

- User stories may be used in planning system iterations.
- Once the story card has been developed, the development team breaks these down into tasks and estimates the efforts and resources required for implementing each task.
- This usually involves discussion with the customer to refine the requirements.
- The customer then prioritizes the stories for implementation, choosing stories that can be used immediately to deliver useful business support.

Examples of task cards for prescribing medication

Task 1: Change dose of prescribed drug

Task 2: Formulary selection

Task 3: Dose checking

Dose checking is a safety precaution to check that the doctor has not prescribed a dangerously small or large dose.

Using the formulary id for the generic drug name, lookup the formulary and retrieve the recommended maximum and minimum dose.

Check the prescribed dose against the minimum and maximum. If outside the range, issue an error message saying that the dose is too high or too low. If within the range, enable the 'Confirm' button.

Advantages and disadvantages of User stories for requirements

- The idea of user stories is a powerful one—people find it much easier to relate to these stories than to a conventional requirements document or use cases.
- User stories can be helpful in getting users involved in suggesting requirements during an initial pre-development requirements elicitation activity.
- The principal problem with user stories is completeness.
- It is difficult to judge if enough user stories have been developed to cover all of the essential requirements of a system.
- It is difficult to judge if a single story gives a true picture of an activity.
- Experienced users are often so familiar with their work that they leave things out when describing it.



XP and change

- Conventional wisdom in software engineering is to design for change. It is worth spending time and effort anticipating changes, as this reduces costs later in the life cycle.
- XP, however, maintains that this is not worthwhile as changes cannot be reliably anticipated.
- Rather, it proposes constant code improvement (refactoring) to make changes easier when they have to be implemented.



Refactoring

- The programming team looks for possible software improvements and makes these improvements even where there is no immediate need for them.
- This improves the understandability of the software and so reduces the need for documentation.
- Changes are easier to make because the code is well-structured and clear.
- However, some changes require architecture refactoring, and this is much more expensive.

Examples of refactoring

- Re-organization of a class hierarchy to remove duplicate
- Tidying up and renaming attributes and methods to make them easier to understand.
- The replacement of inline code with calls to methods that have been included in a program library.



Testing in XP

- Testing is central to XP and XP has developed an approach where the program is tested after every change has been made.
- XP testing features:
 - Test-first development.
 - Incremental test development from scenarios.
 - User involvement in test development and validation.
 - Automated test harnesses are used to run all component tests each time that a new release is built.



Test-first development

- Writing tests before code clarifies the requirements to be implemented.
- Tests are written as programs rather than data so that they can be executed automatically. The test includes a check that it has executed correctly.
 - Usually relies on a testing framework such as Junit.
- All previous and new tests are run automatically when new functionality is added, thus checking that the new functionality has not introduced errors.



Customer involvement

- The role of the customer in the testing process is to help develop acceptance tests for the stories that are to be implemented in the next release of the system.
- The customer who is part of the team writes tests as development proceeds. All new code is therefore validated to ensure that it is what the customer needs.
- However, people adopting the customer role have limited time available and so cannot work full-time with the development team. They may feel that providing the requirements was enough of a contribution and so may be reluctant to get involved in the testing process.

Test case description for dose checking

Test 4: Dose checking

Input:

1. A number in mg representing a single dose of the drug.
2. A number representing the number of single doses per day.

Tests:

1. Test for inputs where the single dose is correct but the frequency is too high.
2. Test for inputs where the single dose is too high and too low.
3. Test for inputs where the single dose * frequency is too high and too low.
4. Test for inputs where single dose * frequency is in the permitted range.

Output:

OK or error message indicating that the dose is outside the safe range.



Test automation

- Test automation means that tests are written as executable components before the task is implemented
 - These testing components should be stand-alone, should simulate the submission of input to be tested and should check that the result meets the output specification. An automated test framework (e.g. Junit) is a system that makes it easy to write executable tests and submit a set of tests for execution.
- As testing is automated, there is always a set of tests that can be quickly and easily executed
 - Whenever any functionality is added to the system, the tests can be run and problems that the new code has introduced can be caught immediately.

Problems with test-first development

- Programmers prefer programming to testing, and sometimes they take shortcuts when writing tests. For example, they may write incomplete tests that do not check for all possible exceptions that may occur.
- Some tests can be very difficult to write incrementally. For example, in a complex user interface, it is often difficult to write unit tests for the code that implements the ‘display logic’ and workflow between screens.
- It is difficult to judge the completeness of a set of tests. Although you may have a lot of system tests, your test set may not provide complete coverage.



Pair programming

- In XP, programmers work in pairs, sitting together to develop code.
- This helps develop common ownership of code and spreads knowledge across the team.
- It serves as an informal review process as each line of code is looked at by more than 1 person.
- It encourages refactoring as the whole team can benefit from this.
- Measurements suggest that development productivity with pair programming is similar to that of two people working independently.



Pair programming

- In pair programming, programmers sit together at the same workstation to develop the software.
- Pairs are created dynamically so that all team members work with each other during the development process.
- The sharing of knowledge that happens during pair programming is very important as it reduces the overall risks to a project when team members leave.
- Pair programming is not necessarily inefficient and there is evidence that a pair working together is more efficient than 2 programmers working separately.

Advantages of pair programming

- It supports the idea of collective ownership and responsibility for the system.
 - Individuals are not held responsible for problems with the code. Instead, the team has collective responsibility for resolving these problems.
- It acts as an informal review process because each line of code is looked at by at least two people.
- It helps support refactoring, which is a process of software improvement.
 - Where pair programming and collective ownership are used, others benefit immediately from the refactoring, so they are likely to support the process.



Agile project management

- The principal responsibility of software project managers is to manage the project so that the software is delivered on time and within the planned budget for the project.
- The standard approach to project management is plan-driven. Managers draw up a plan for the project showing what should be delivered, when it should be delivered, and who will work on the development of the project deliverables.
- Agile project management requires a different approach, which is adapted to incremental development and the particular strengths of agile methods.



Scrum

- Like every other professional software development process, agile development has to be managed so that the best use is made of the time and resources available to the team.
- To address this issue, the Scrum agile method was developed (Schwaber and Beedle 2001; Rubin 2013) to provide a framework for organizing agile projects and, to some extent at least, provide external visibility of what is going on.
- The developers of Scrum wished to make clear that Scrum was not a method for project management in the conventional sense, so they deliberately invented new terminology, such as ScrumMaster, which replaced names such as project manager.




Scrum

- The Scrum approach is a general agile method but its focus is on managing iterative development rather than specific agile practices.
- There are three phases in Scrum.
 - The initial phase is an outline planning phase where you establish the general objectives for the project and design the software architecture.
 - This is followed by a series of sprint cycles, where each cycle develops an increment of the system.
 - The project closure phase wraps up the project, completes required documentation such as system help frames and user manuals, and assesses the lessons learned from the project.

• ■

The Scrum process

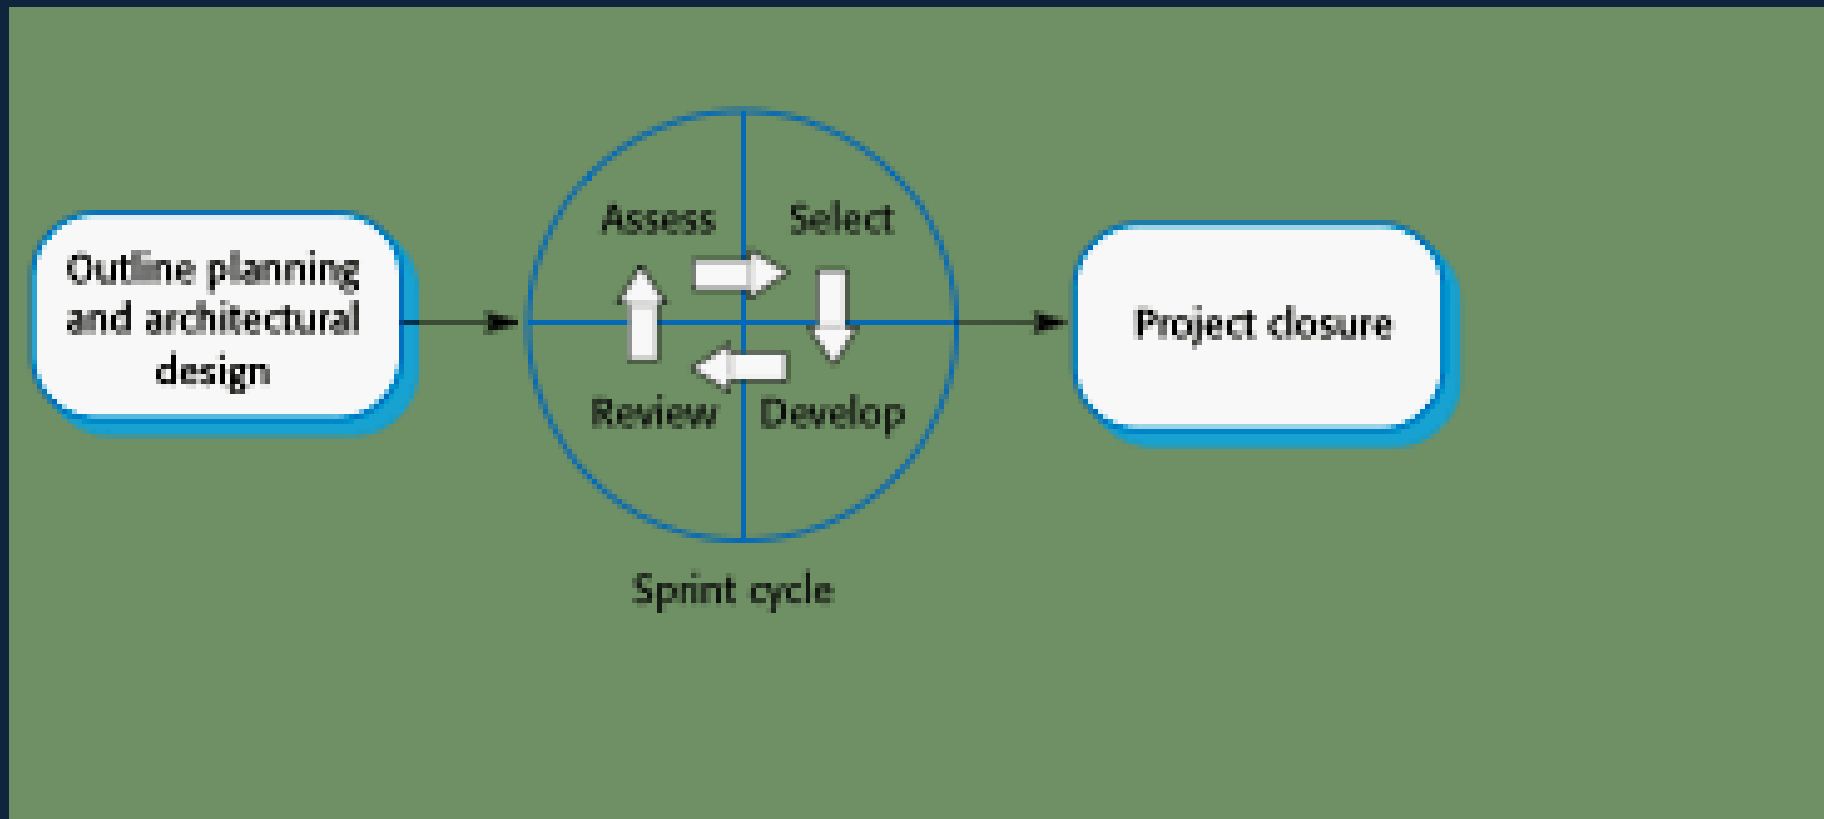

Scrum terminology (a)

Scrum Term	Definition
Development team	A self-organizing group of software developers, which should be no more than 7 people. They are responsible for developing the software and other essential project documents.
Potentially shippable product increment	The software increment that is delivered from a sprint. The idea is that this should be 'potentially shippable' which means that it is in a finished state and no further work, such as testing, is needed to incorporate it into the final product. In practice, this is not always achievable.
Product backlog	This is a list of 'to do' items which the Scrum team must tackle. They may be feature definitions for the software, software requirements, user stories or descriptions of supplementary tasks that are needed, such as architecture definition or user documentation.
Product owner	An individual (or possibly a small group) whose job is to identify product features or requirements, prioritize these for development and continuously review the product backlog to ensure that the project continues to meet critical business needs. The Product Owner can be a customer but might also be a product manager in a software company or other stakeholder representative.

Scrum terminology (b)


Scrum Term	Definition
Scrum	A daily meeting of the Scrum team that reviews progress and prioritizes work to be done that day. Ideally, this should be a short face-to-face meeting that includes the whole team.
ScrumMaster	The ScrumMaster is responsible for ensuring that the Scrum process is followed and guides the team in the effective use of Scrum. He or she is responsible for interfacing with the rest of the company and for ensuring that the Scrum team is not diverted by outside interference. The Scrum developers are adamant that the ScrumMaster should not be thought of as a project manager. Others, however, may not always find it easy to see the difference.
Sprint	A development iteration. Sprints are usually 2-4 weeks long.
Velocity	An estimate of how much product backlog effort that a team can cover in a single sprint. Understanding a team's velocity helps them estimate what can be covered in a sprint and provides a basis for measuring improving performance.



The Sprint cycle

- Sprints are fixed length, normally 2–4 weeks. They correspond to the development of a release of the system in XP.
- The starting point for planning is the product backlog, which is the list of work to be done on the project.
- The selection phase involves all of the project team who work with the customer to select the features and functionality to be developed during the sprint.

Scrum sprint cycle

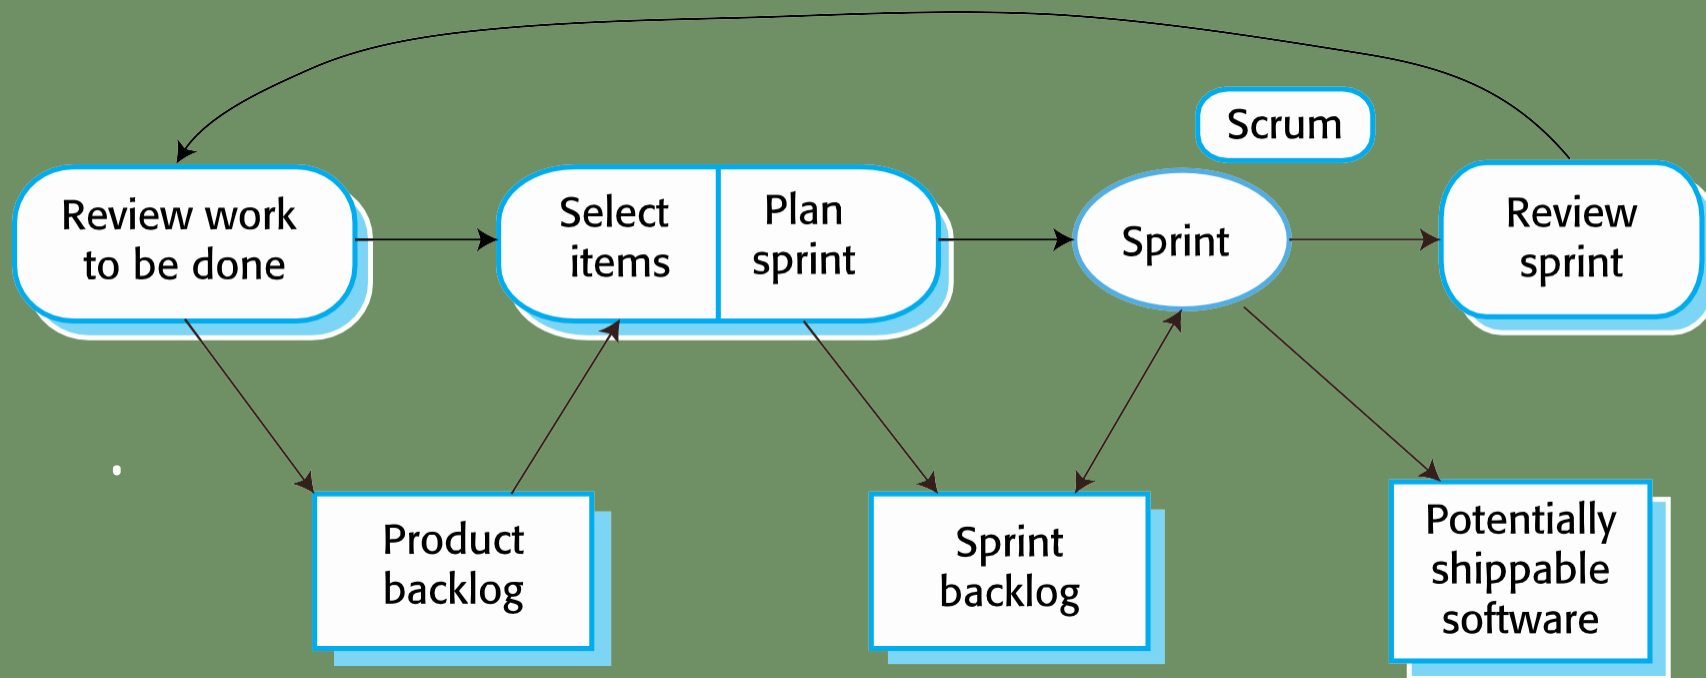

The Sprint cycle (Cont.)

- Once these are agreed, the team organize themselves to develop the software. During this stage the team is isolated from the customer and the organization, with all communications channelled through the so-called 'Scrum master'.
- The role of the Scrum master is to protect the development team from external distractions.
- At the end of the sprint, the work done is reviewed and presented to stakeholders. The next sprint cycle then begins.



Teamwork in Scrum

- The ‘Scrum master’ is a facilitator who arranges daily meetings, tracks the backlog of work to be done, records decisions, measures progress against the backlog and communicates with customers and management outside of the team.
- The whole team attends short daily meetings where all team members share information, describe their progress since the last meeting, problems that have arisen and what is planned for the following day.
 - This means that everyone on the team knows what is going on and, if problems arise, can re-plan short-term work to cope with them.



Scrum benefits


- The product is broken down into a set of manageable and understandable chunks.
- Unstable requirements do not hold up progress.
- The whole team have visibility of everything and consequently team communication is improved.
- Customers see on-time delivery of increments and gain feedback on how the product works.
- Trust between customers and developers is established and a positive culture is created in which everyone expects the project to succeed.



Distributed Scrum

- Scrum, as originally designed, was intended for use with co-located teams where all team members could get together every day in stand-up meetings.
- However, much software development now involves distributed teams, with team members located in different places around the world.
- This allows companies to take advantage of lower cost staff in other countries, makes access to specialist skills possible, and allows for 24-hours development, with work going on in different time zones.
- Consequently, there have been development of Scrum for distributed development environment and multi-team working.

Distributed Scrum

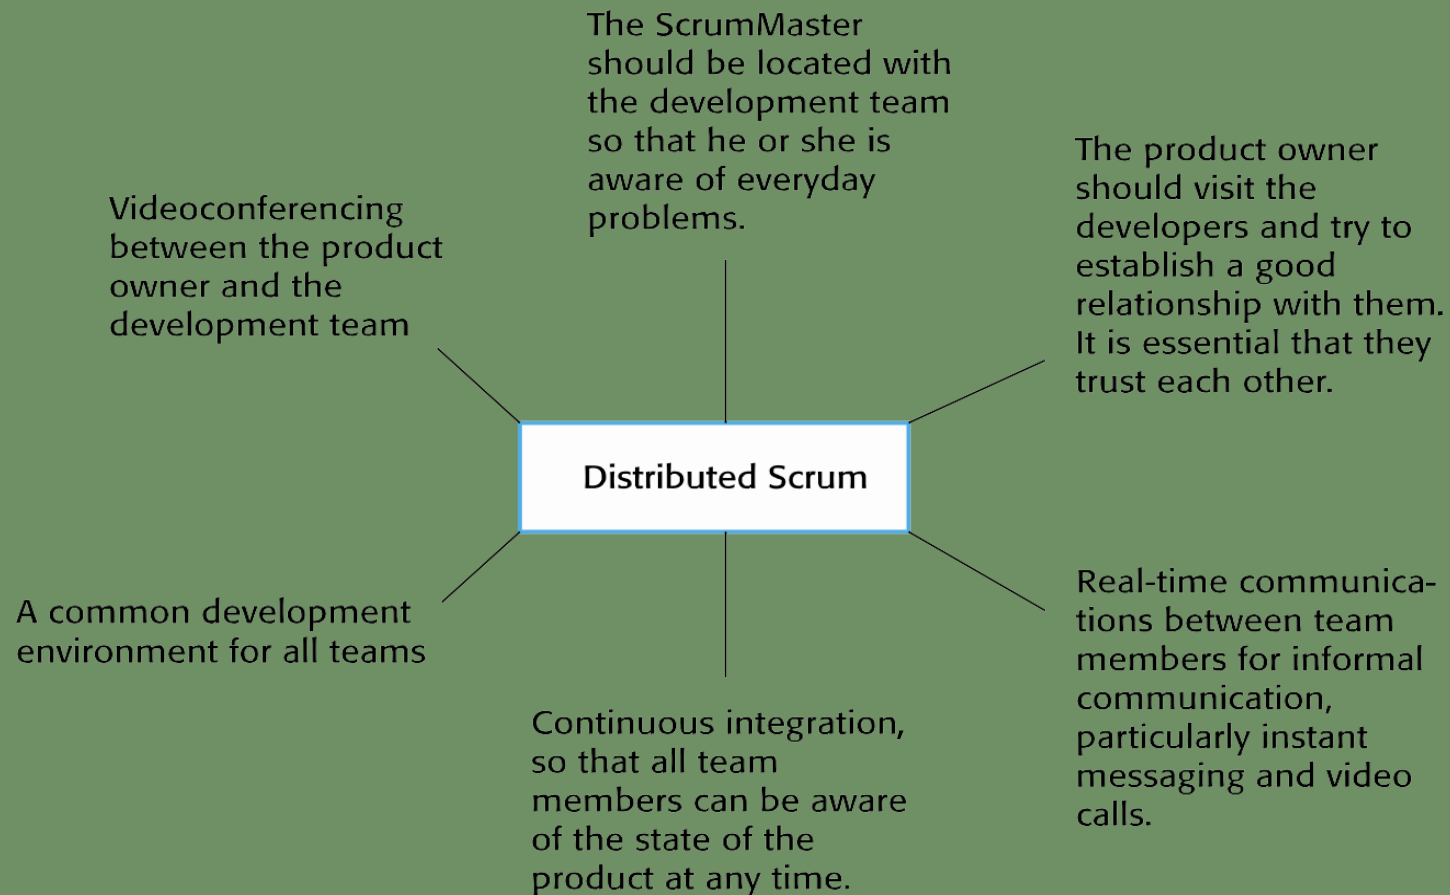



Scaling agile methods

- Agile methods have proved to be successful for small and medium-sized projects that can be developed by a small co-located team.
- It is sometimes argued that the success of these methods comes because of improved communications, which is possible when everyone is working together.
- Scaling up agile methods involves changing these to cope with larger, longer projects where there are multiple development teams, perhaps working in different locations.



Scaling out and scaling up

- ‘Scaling up’ is concerned with using agile methods for developing large software systems that cannot be developed by a small team.
- ‘Scaling out’ is concerned with how agile methods can be introduced across a large organization with many years of software development experience.
- When scaling agile methods, it is essential to maintain agile fundamentals
 - Flexible planning, frequent system releases, continuous integration, test-driven development, and good team communication.

Practical problems with agile methods

- The informality of agile development is incompatible with the legal approach to contract definition that is commonly used in large companies.
- Agile methods are most appropriate for new software development rather than software maintenance. Yet the majority of software costs in large companies come from maintaining their existing software systems.
- Agile methods are designed for small co-located teams yet much software development now involves worldwide distributed teams.



Contractual issues

- Most software contracts for custom systems are based around a specification, which sets out what has to be implemented by the system developer for the system customer.
- However, this precludes interleaving specification and development as is the norm in agile development.
- A contract that pays for developer time rather than functionality is required.
 - However, this is seen as a high risk may many legal departments because what has to be delivered cannot be guaranteed.

Agile methods and software maintenance

- Most organizations spend more on maintaining existing software than they do on new software development. So, if agile methods are to be successful, they have to support maintenance as well as original development.
- Two key issues:
 - Are systems that are developed using an agile approach maintainable, given the emphasis in the development process of minimizing formal documentation?
 - Can agile methods be used effectively for evolving a system in response to customer change requests?
- Problems may arise if original development team cannot be maintained.

Agile maintenance

- Key problems are:
 - Lack of product documentation
 - Keeping customers involved in the development process
 - Maintaining the continuity of the development team
- Agile development relies on the development team knowing and understanding what has to be done.
- For long-lifetime systems, this is a real problem as the original developers will not always work on the system.

Agile and plan-driven methods

- Most projects include elements of plan-driven and agile processes. Deciding on the balance depends on:
 - Is it important to have a very detailed specification and design before moving to implementation? If so, you probably need to use a plan-driven approach.
 - Is an incremental delivery strategy, where you deliver the software to customers and get rapid feedback from them, realistic? If so, consider using agile methods.
 - How large is the system that is being developed? Agile methods are most effective when the system can be developed with a small co-located team who can communicate informally. This may not be possible for large systems that require larger development teams so a plan-driven approach may have to be used.


Agile principles and organizational practice

Principle	Practice
Customer involvement	This depends on having a customer who is willing and able to spend time with the development team and who can represent all system stakeholders. Often, customer representatives have other demands on their time and cannot play a full part in the software development. Where there are external stakeholders, such as regulators, it is difficult to represent their views to the agile team.
Embrace change	Prioritizing changes can be extremely difficult, especially in systems for which there are many stakeholders. Typically, each stakeholder gives different priorities to different changes.
Incremental delivery	Rapid iterations and short-term planning for development does not always fit in with the longer-term planning cycles of business planning and marketing. Marketing managers may need to know what product features several months in advance to prepare an effective marketing campaign.

Agile principles and organizational practice (Cont.)

Principle	Practice
Maintain simplicity	Under pressure from delivery schedules, team members may not have time to carry out desirable system simplifications.
People not process	Individual team members may not have suitable personalities for the intense involvement that is typical of agile methods, and therefore may not interact well with other team members.

Agile and plan-based factors

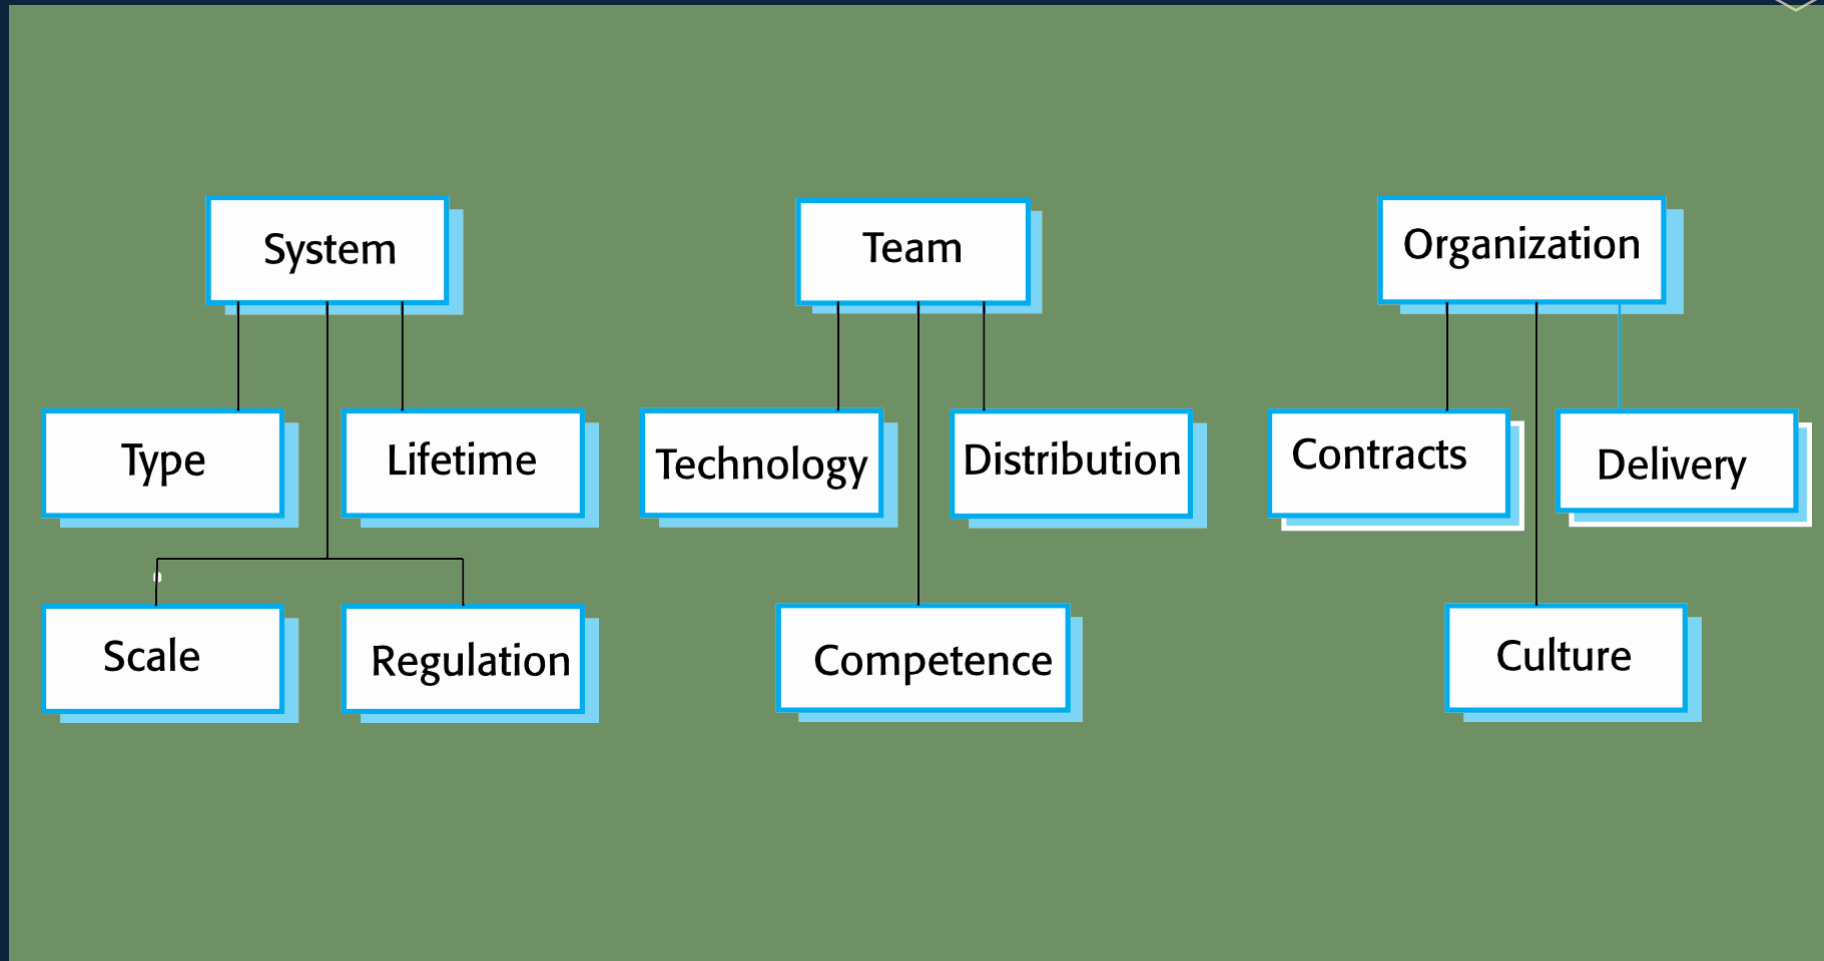

System issues

- How large is the system being developed?
 - Agile methods are most effective a relatively small co-located team who can communicate informally.
- What type of system is being developed?
 - Systems that require a lot of analysis before implementation need a fairly detailed design to carry out this analysis.
- What is the expected system lifetime?
 - Long-lifetime systems require documentation to communicate the intentions of the system developers to the support team.
- Is the system subject to external regulation?
 - If a system is regulated you will probably be required to produce detailed documentation as part of the system safety case.



People and teams

- How good are the designers and programmers in the development team?
 - It is sometimes argued that agile methods require higher skill levels than plan-based approaches in which programmers simply translate a detailed design into code.
- How is the development team organized?
 - Design documents may be required if the team is distributed.
- What support technologies are available?
 - IDE support for visualisation and program analysis is essential if design documentation is not available.



Organizational issues

- Traditional engineering organizations have a culture of plan-based development, as this is the norm in engineering.
- Is it standard organizational practice to develop a detailed system specification?
- Will customer representatives be available to provide feedback of system increments?
- Can informal agile development fit into the organizational culture of detailed documentation?

Agile methods for large systems


- Large systems are usually collections of separate, communicating systems, where separate teams develop each system. Frequently, these teams are working in different places, sometimes in different time zones.
- Large systems are ‘brownfield systems’, that is, they include and interact with a number of existing systems. Many of the system requirements are concerned with this interaction and so don’t really lend themselves to flexibility and incremental development.
- Where several systems are integrated to create a system, a significant fraction of the development is concerned with system configuration rather than original code development.



Large system development

- Large systems and their development processes are often constrained by external rules and regulations limiting the way that they can be developed.
- Large systems have a long procurement and development time. It is difficult to maintain coherent teams who know about the system over that period as, inevitably, people move on to other jobs and projects.
- Large systems usually have a diverse set of stakeholders. It is practically impossible to involve all of these different stakeholders in the development process.

Factors in large systems

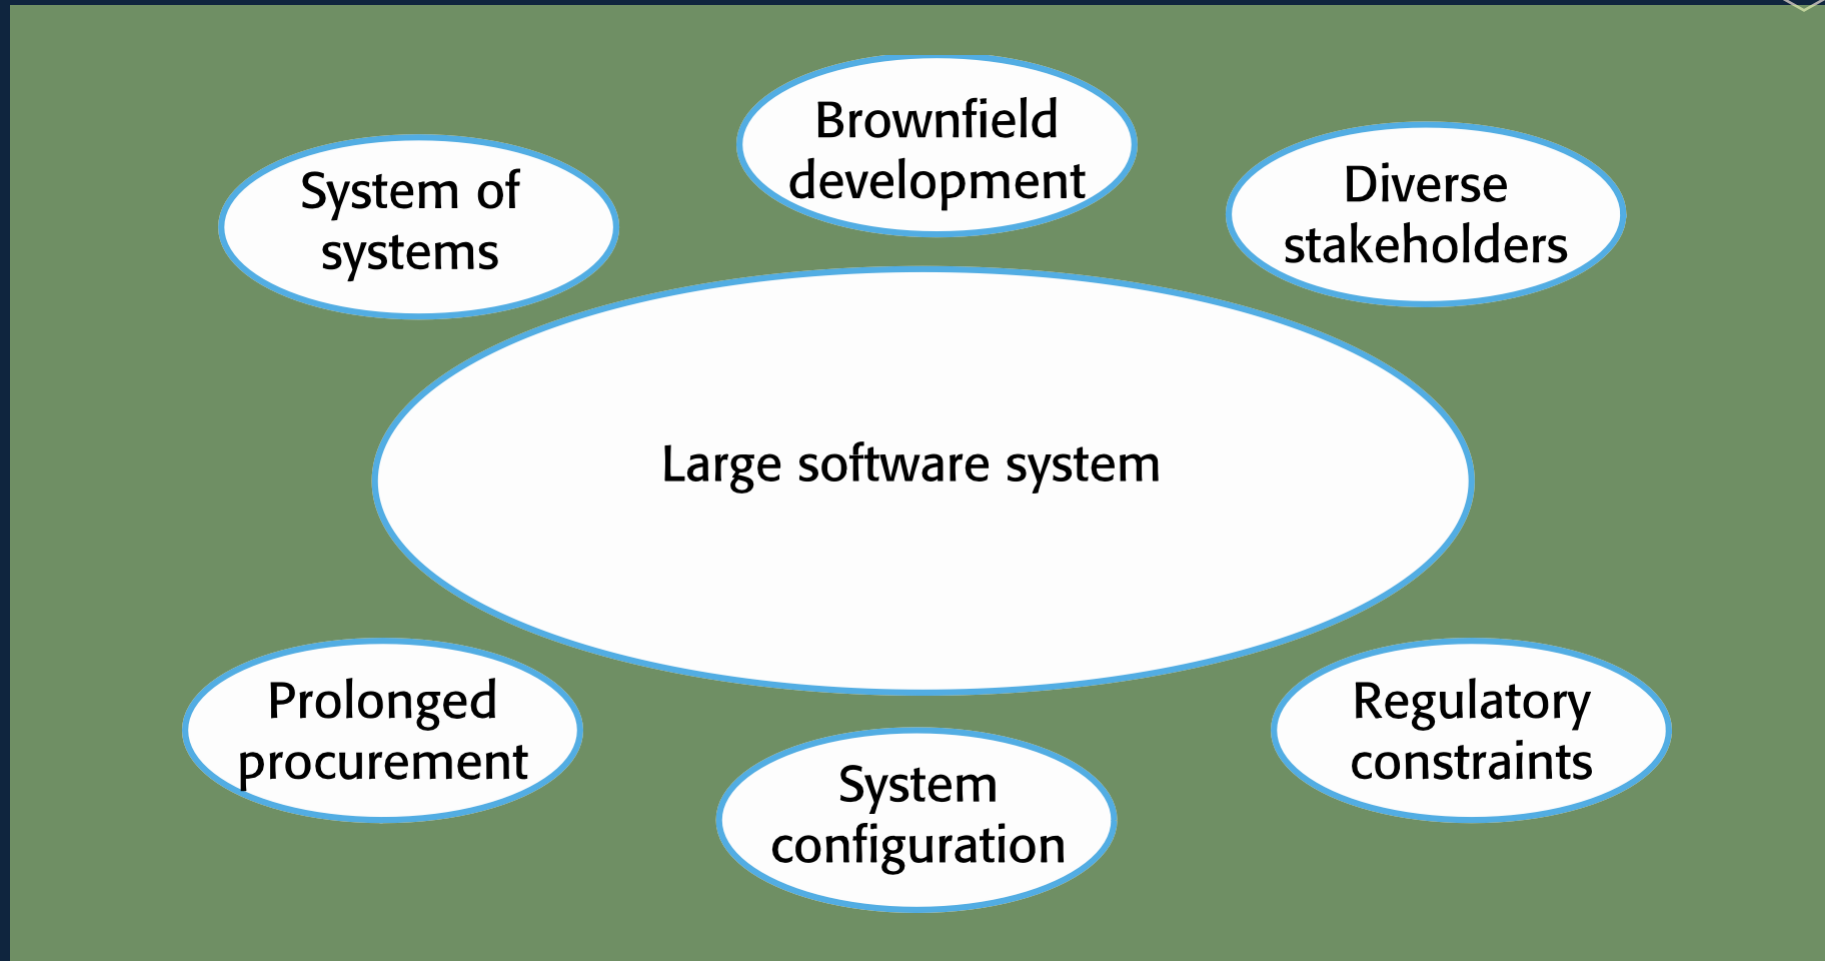

Factors in large systems (Cont.)

- Large systems are usually systems of systems—collection of separate communicating systems, where separate teams develop each system.
 - Frequently, these teams are working in different places, sometimes in different time zones .
 - It is practically impossible for each team to have a view of the whole system.
 - Consequently, their priorities are usually to complete their part of the system without regard for wider system issues.


Factors in large systems (Cont.)

- Large systems are brownfield systems: that is , they include and interact with a number of existing systems.
 - Many of the system requirements are concerned with this interaction and so don't really lend themselves to flexibility and incremental development.
- Where several systems are integrated to create a system, a significant fraction of the development is concerned with system configuration rather than original code development.
 - This is not necessarily compatible with incremental development and frequent system integration.
- Large systems and their development processes are often constrained by external rules and regulations limiting the way they can be developed, that require certain types of system documentation to produced, and so on.

Factors in large systems (Cont.)

- Large systems have a long procurement and development time.
 - It is difficult to maintain coherent teams who know about the system over that period as, inevitably, people move on to other jobs and projects.
- Large systems usually have a diverse set of stakeholders with different perspectives and objectives.
 - For example, nurses and administrators may be the end-users of a medical system, but senior medical staff, hospital managers, and others, are also stakeholders in the system.
 - It is practically impossible to involve all of these different stakeholders in the development process.

IBM's agility at scale model

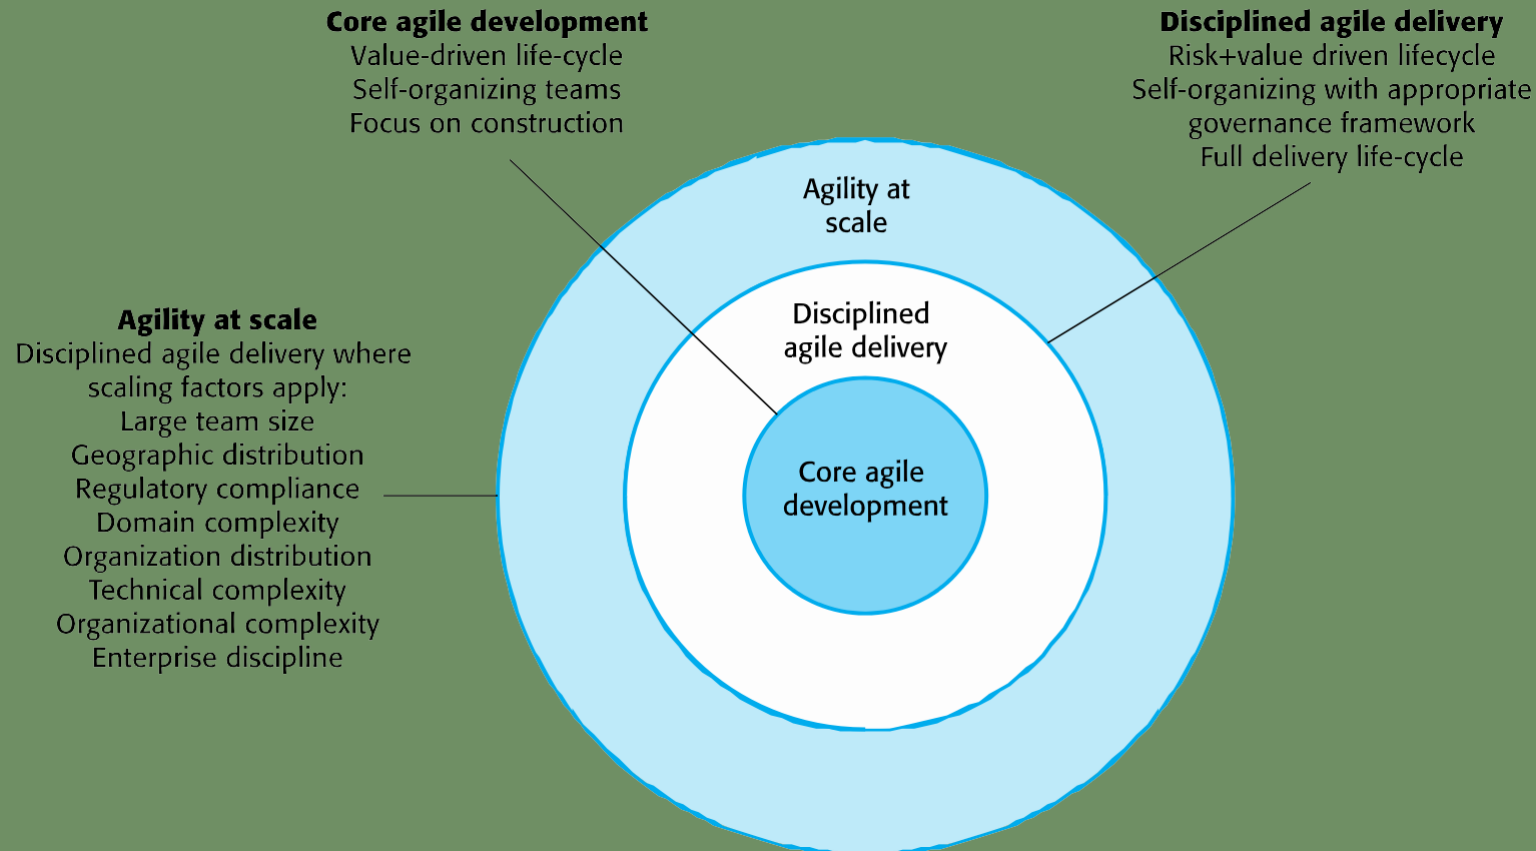



Scaling up to large systems

- A completely incremental approach to requirements engineering is impossible.
- There cannot be a single product owner or customer representative.
- For large systems development, it is not possible to focus only on the code of the system.
- Cross-team communication mechanisms have to be designed and used.
- Continuous integration is practically impossible. However, it is essential to maintain frequent system builds and regular releases of the system.



Multi-team Scrum

- *Role replication*
 - Each team has a Product Owner for their work component and ScrumMaster.
- *Product architects*
 - Each team chooses a product architect and these architects collaborate to design and evolve the overall system architecture.
- *Release alignment*
 - The dates of product releases from each team are aligned so that a demonstrable and complete system is produced.
- *Scrum of Scrums*
 - There is a daily Scrum of Scrums where representatives from each team meet to discuss progress and plan work to be done.

Agile methods across organizations

- Project managers who do not have experience of agile methods may be reluctant to accept the risk of a new approach.
- Large organizations often have quality procedures and standards that all projects are expected to follow and, because of their bureaucratic nature, these are likely to be incompatible with agile methods.
- Agile methods seem to work best when team members have a relatively high skill level. However, within large organizations, there are likely to be a wide range of skills and abilities.
- There may be cultural resistance to agile methods, especially in those organizations that have a long history of using conventional systems engineering processes.



Key points

- Agile methods are incremental development methods that focus on rapid development, frequent releases of the softwares, reducing process overheads, and producing high-quality code. They involve the customer directly in the development process.
- The decision on whether to use an agile or a plan- driven approach to development should depend on the type of software being developed, the capabilities of the development team, and the culture of the company developing the system.



Key points

- Extreme programming is a well-known agile method that integrates a range of good programming practices such as frequent releases of the software, continuous software improvement, and customer participation in the development team.
- Agile methods are incremental development methods that focus on rapid software development, frequent releases of the software, reducing process overheads by minimizing documentation, and producing high-quality code.
- Agile development practices include
 - User stories for system specification
 - Frequent releases of the software,
 - Continuous software improvement
 - Test-first development
 - Customer participation in the development team.



Key points

- A particular strength of extreme programming is the development of automated tests before a program feature is created. All tests must successfully execute when an increment is integrated into a system.
- Scrum is an agile method that provides a project management framework.
 - It is centred round a set of sprints, which are fixed time periods when a system increment is developed.
- Many practical development methods are a mixture of plan-based and agile development.



Key points

- The Scrum method is an agile method that provides a project management framework. It is centred round a set of sprints, which are fixed time periods when a system increment is developed.
- **Scaling agile methods for large systems is difficult.**
 - Large systems need up-front design and some documentation and organizational practice may conflict with the informality of agile approaches.

A decorative pattern of hexagons in various shades of blue, orange, and white, arranged in a honeycomb-like structure on the left side of the slide.

Thank you

Prof. Dr. Faheem Akhtar Rajput