



AROR UNIVERSITY
OF ART, ARCHITECTURE,
DESIGN & HERITAGE,
SUKKUR, SINDH

Software Testing

Prof. Dr. Fahim Akhtar Rajput



Program testing

- Testing is intended to show that a program does what it is intended to do and to discover program defects before it is put into use.
- When you test software, you execute a program using artificial data.
- You check the results of the test run for errors, anomalies or information about the program's non-functional attributes.
- Can reveal the presence of errors NOT their absence.
- Testing is part of a more general verification and validation process, which also includes static validation techniques.

Program testing goals

- To demonstrate to the developer and the customer that the software meets its requirements.
 - For custom software, this means that there should be at least one test for every requirement in the requirements document.
 - For generic software products, it means that there should be tests for all of the system features, plus combinations of these features, that will be incorporated in the product release.
- To discover situations in which the behavior of the software is incorrect, undesirable or does not conform to its specification.
 - Defect testing is concerned with rooting out undesirable system behavior such as system crashes, unwanted interactions with other systems, incorrect computations and data corruption.



Validation and defect testing


- The first goal leads to **validation testing**
 - You expect the system to perform correctly using a given set of test cases that reflect the system's expected use.
- The second goal leads to **defect testing**
 - The test cases are designed to expose defects. The test cases in defect testing can be deliberately obscure and need not reflect how the system is normally used.



Testing process goals

- Validation testing
 - To demonstrate to the developer and the system customer that the software meets its requirements
 - A successful test shows that the system operates as intended.
- Defect testing
 - To discover faults or defects in the software where its behavior is incorrect or not in conformance with its specification
 - A successful test is a test that makes the system perform incorrectly and so exposes a defect in the system.

An input output model of program testing

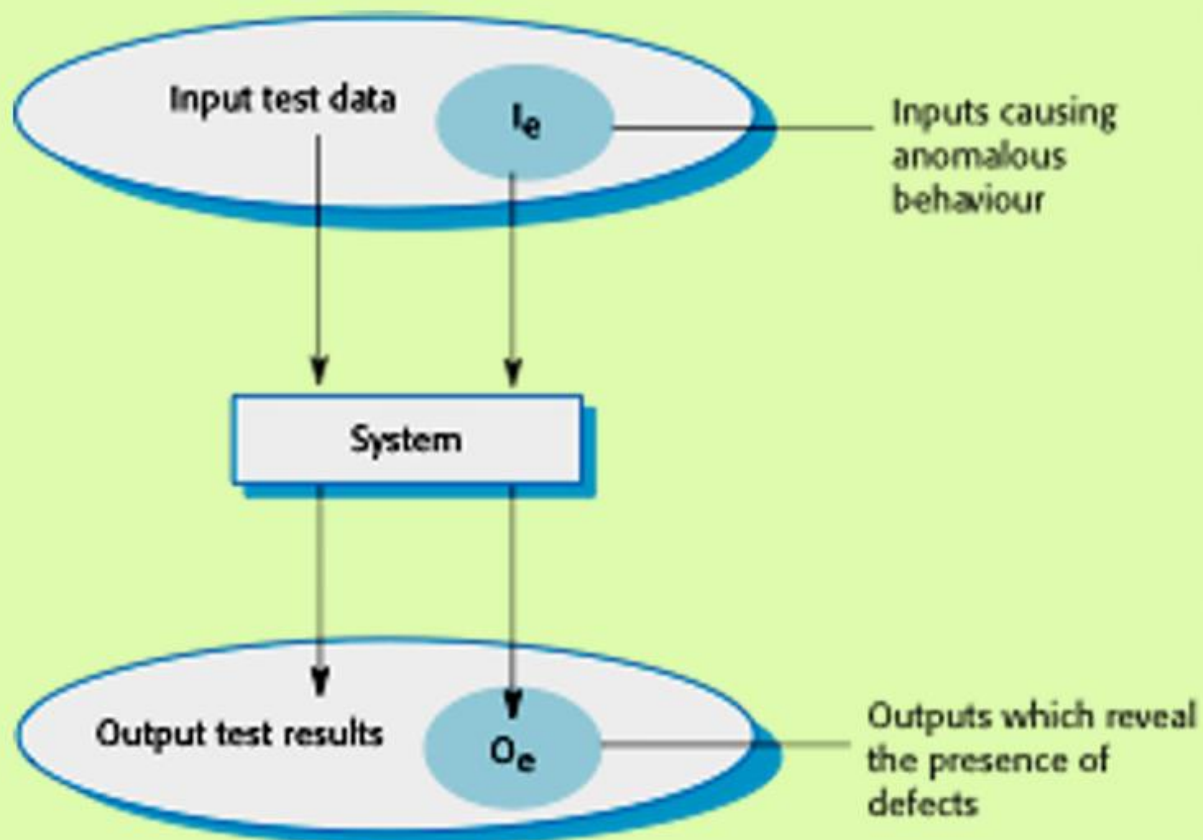

- Think of the system being tested as a black box.
- The system accept input from some input set **I** and generates outputs in an output **O**.
- Some of the output will be erroneous.
- These are the outputs in set O_e that are generated by the system in response to inputs in the set I_e .
- The priority in the defect testing is to find those inputs in the set I_e because these reveal problems with the system.
- Validation testing involves testing with correct inputs that are outside I_e .
- These stimulate the system to generate the expected correct outputs.



Testing process goals

- Testing cannot demonstrate that the software is free of defects or that it will behave as specified in every circumstance.
- It is always possible that a test you have overlooked could discover further problems with the system. Testing
- As Edsger Dijkstra, an early contributor to the development of software engineering, eloquently stated (Dijkstra 1972): “*can only show the presence of errors, not their absence*”
- Testing is part of a broader process of software verification and validation (V & V).



Verification vs. Validation

- **Verification:**
 - "Are we building the product right".
 - The software should conform to its specification.
- **Validation:**
 - "Are we building the right product".
 - The software should do what the user really requires.



Verification vs. Validation

- Verification and validation processes are concerned with checking that software being developed meets its specification and delivers the functionality expected by the people paying for the software.
- These checking processes start as soon as requirements become available and continue through all stages of the development process.



Verification vs. Validation

- Software verification is the process of checking that the software meets its stated functional and non-functional requirements.
- Validation is a more general process.
- The aim of software validation is to ensure that the software meets the customer's expectations.
- It goes beyond checking conformance with the specification to demonstrating that the software does what the customer expects it to do.
- Validation is essential because, as discussed in Chapter 4, statements of requirements do not always reflect the real wishes or needs of system customers and users



Goals of verification and validation process

- The goal of verification and validation process is to establish confidence that the software system is “*fit for purposes*”.
- This means that the system must be good enough for its intended use.
- The level of the required confidence depends on the system’s purpose, the expectations of the system users, and the current marketing environment for the system.



V & V Confidence

- Aim of V & V is to establish confidence that the system is ‘fit for purpose’.
- Depends on system’s purpose, user expectations and marketing environment
 - **Software purpose**
 - The level of confidence depends on how critical the software is to an organisation.
 - **User expectations**
 - Users may have low expectations of certain kinds of software.
 - **Marketing environment**
 - Getting a product to market early may be more important than finding defects in the program.



V & V confidence

- Aim of V & V is to establish confidence that the system is ‘fit for purpose’.
- Depends on system’s purpose, user expectations and marketing environment
 - Software purpose
 - The more critical the software, the more important it is that it is reliable.
 - For example, the level of confidence required for software used to control a safety-critical system is much higher than that required for a demonstrator system that prototypes new product ideas.

V & V confidence

- Depends on system's purpose, user expectations and marketing environment
 - User expectations
 - Because of their previous experiences with buggy, unreliable software, users sometimes have low expectations of software quality.
 - They are not surprised when their software fails.
 - When a new system is installed, users may tolerate failures because the benefits of use outweigh the costs of failure recovery.
 - However, as a software product becomes more established, users expect it to become more reliable.
 - Consequently, more thorough testing of later versions of the system may be required.



V & V confidence


- Depends on system's purpose, user expectations and marketing environment
 - Marketing environment
 - When a software company brings a system to market, it must take into account competing products, the price that customers are willing to pay for a system, and the required schedule for delivering that system.
 - In a competitive environment, the company may decide to release a program before it has been fully tested and debugged because it wants to be the first into the market.
 - If a software product or app is very cheap, users may be willing to tolerate a lower level of reliability.



Inspections and testing

- In software testing, the verification and validation process may involve software inspections and reviews.
 - Inspections and reviews analyze and check the system requirements, design models, the program source code, and even proposed system tests.
 - **Software inspections** Concerned with analysis of the static system representation to discover problems (static verification)
 - May be supplement by tool-based document and code analysis.
 - **Software testing** Concerned with exercising and observing product behaviour (dynamic verification)
 - The system is executed with test data and its operational behaviour is observed.

Inspections and testing

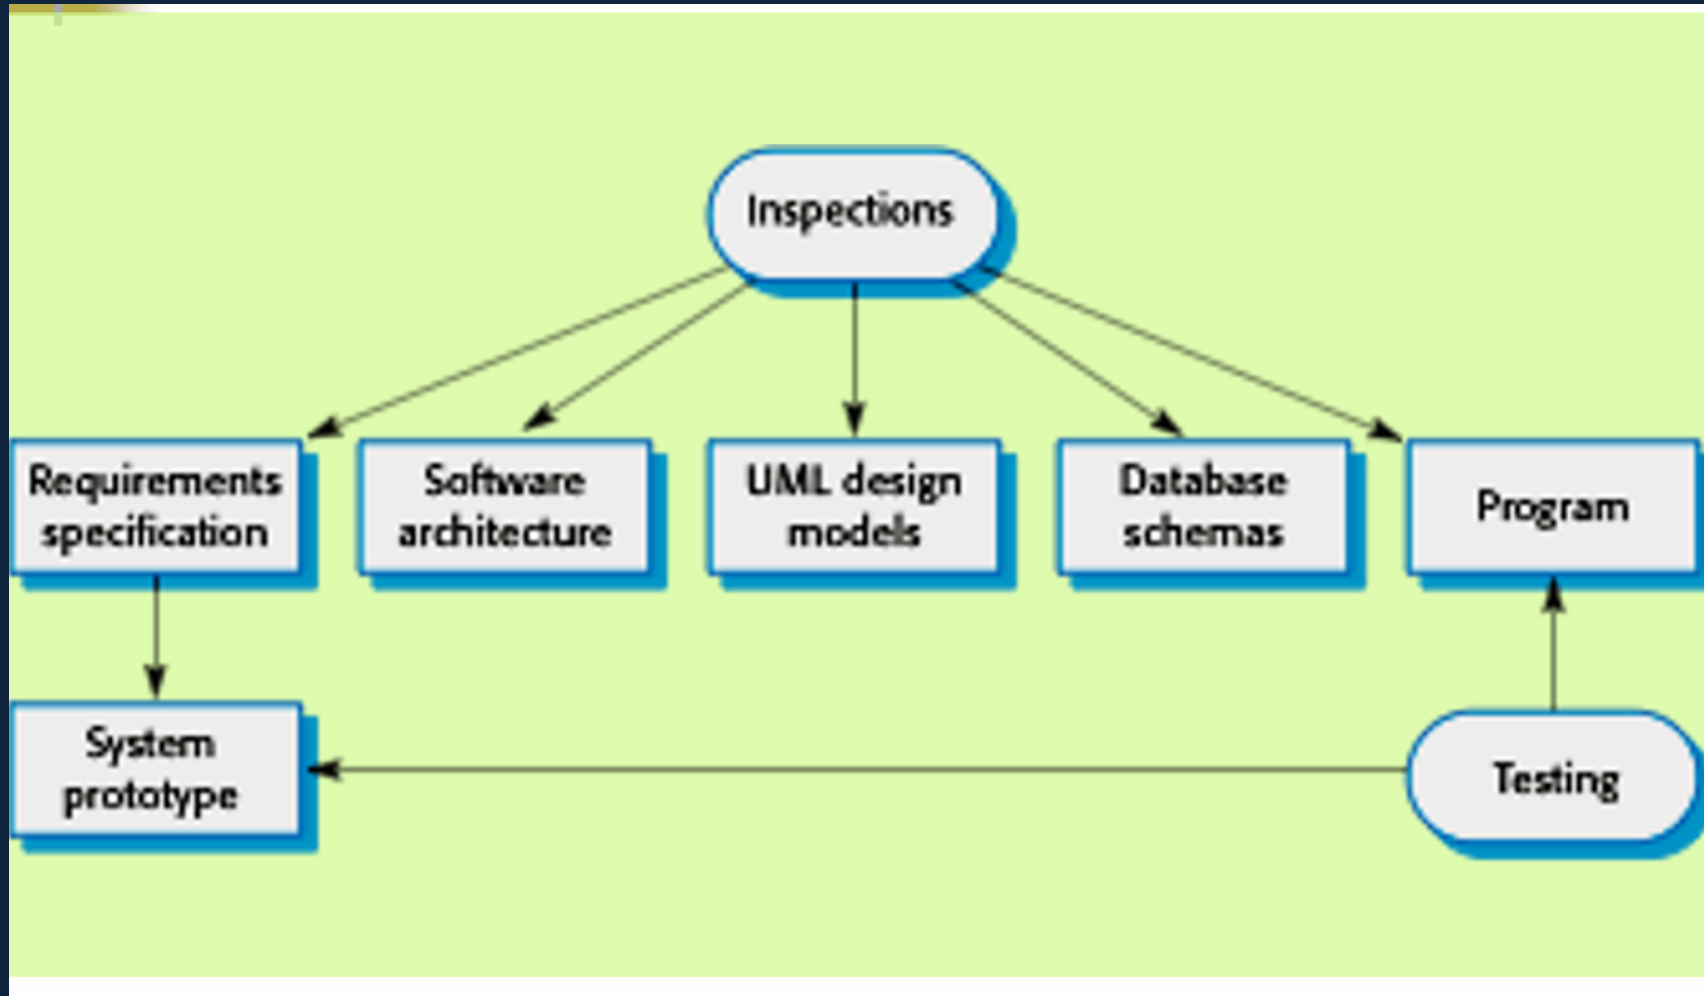



Software inspections

- These involve people examining the source representation with the aim of discovering anomalies and defects.
- Inspections not require execution of a system so may be used before implementation.
- They may be applied to any representation of the system (requirements, design, configuration data, test data, etc.).
- They have been shown to be an effective technique for discovering program errors.



Advantages of inspections

- During testing, errors can mask (hide) other errors. Because inspection is a static process, you don't have to be concerned with interactions between errors.
- Incomplete versions of a system can be inspected without additional costs. If a program is incomplete, then you need to develop specialized test harnesses to test the parts that are available.
- As well as searching for program defects, an inspection can also consider broader quality attributes of a program, such as compliance with standards, portability and maintainability.



Inspections and testing

- However, inspections cannot replace software testing.
- Inspections are not good for discovering defects that arise because of unexpected interactions between different parts of a program, timing problems, or problems with system performance.
- In small companies or development groups, it can be difficult and expensive to put together a separate inspection team as all potential team members may also be developers of the software.



Inspections and testing

- Inspections and testing are complementary and not opposing verification techniques.
- Both should be used during the V & V process.
- Inspections can check conformance with a specification but not conformance with the customer's real requirements.
- Inspections cannot check non-functional characteristics such as performance, usability, etc.

A model of the software testing process



Figure 8.3 is an abstract model of the traditional testing process, as used in plan driven development.

- Test cases are specifications of the inputs to the test and the expected output from the system (the test results), plus a statement of what is being tested.
- Test data are the inputs that have been devised to test a system. Test data can sometimes be generated automatically, but automatic test case generation is impossible.
- People who understand what the system is supposed to do must be involved to specify the expected test results.
- However, test execution can be automated. The test results are automatically compared with the predicted results, so there is no need for a person to look for errors and anomalies in the test run.



Stages of testing

- **Development testing**, where the system is tested during development to discover bugs and defects.
 - System designers and programmers are likely to be involved in the testing process.
- **Release testing**, where a separate testing team test a complete version of the system before it is released to users.
 - The aim of release testing is to check that the system meets the requirements of the system stakeholders.
- **User testing**, where users or potential users of a system test the system in their own environment.
 - Acceptance testing is one type of user testing where the customer formally tests a system to decide if it should be accepted from the system supplier or if further development is required.



Stages of testing

- In practice, the testing process usually involves a mixture of manual and automated testing.
- In manual testing, a tester runs the program with some test data and compares the results to their expectations. They note and report discrepancies to the program developers.
- In automated testing, the tests are encoded in a program that is run each time the system under development is to be tested.
- This is faster than manual testing, especially when it involves regression testing—re-running previous tests to check that changes to the program have not introduced new bugs.

Development testing

- Development testing includes all testing activities that are carried out by the team developing the system.
 - The tester of the software is usually the programmer who developed that software.
 - Some development processes use programmer/tester pairs where each programmer has an associated tester who develops tests and assists with the testing process.
 - For critical systems, a more formal process may be used, with a separate testing group within the development team.
 - This group is responsible for developing tests and maintaining detailed records of test results.
- Development testing is primarily a defect testing process, where the aim of testing is to discover bugs in the software.
- It is therefore usually interleaved with debugging—the process of locating problems with the code and changing the program to fix these problems.

Development testing

- There are three stages of development testing:
 - **Unit testing**, where individual program units or object classes are tested. Unit testing should focus on testing the functionality of objects or methods.
 - **Component testing**, where several individual units are integrated to create composite components. Component testing should focus on testing component interfaces.
 - **System testing**, where some or all of the components in a system are integrated and the system is tested as a whole. System testing should focus on testing component interactions.



Unit testing

- Unit testing is the process of testing program components, such as methods or object classes.
- Individual functions or methods are the simplest type of component.
- Your tests should be calls to these routines with different input parameters.
- When you are testing object classes, you should design your tests to provide coverage of all of the features of the object.
 - This means that you should test all operations associated with the object; set and check the value of all attributes associated with the object; and put the object into all possible states.
 - This means that you should simulate all events that cause a state change.



Unit testing

- Unit testing is the process of testing individual components in isolation.
- It is a defect testing process.
- Units may be:
 - Individual functions or methods within an object
 - Object classes with several attributes and methods
 - Composite components with defined interfaces used to access their functionality.

Object class testing

- Complete test coverage of a class involves
 - Testing all operations associated with an object
 - Setting and interrogating all object attributes
 - Exercising the object in all possible states.
- Inheritance makes it more difficult to design object class tests as the information to be tested is not localised.

The weather station object interface

WeatherStation

identifier

reportWeather ()

reportStatus ()

powerSave (instruments)

remoteControl (commands)

reconfigure (commands)

restart (instruments)

shutdown (instruments)

It has a single attribute, which is its identifier. This is a constant that is set when the weather station is installed.

You therefore only need a test that checks if it has been properly set up.

You need to define test cases for all of the methods associated with the object such as reportWeather and reportStatus.

Ideally, you should test methods in isolation, but, in some cases, test sequences are necessary.

For example, to test the method that shuts down the weather station instruments (shutdown), you need to have executed the restart method.

Weather station testing

- Need to define test cases for report Weather, calibrate, test, startup and shutdown.
- Using a state model, identify sequences of state transitions to be tested and the event sequences to cause these transitions
- For example:
 - Shutdown > Configuring Running > > Running Shutdown
 - Running > Collecting > > Testing Running > > Transmitting Summarizing > Running
 - > Running



Automated testing

- Whenever possible, unit testing should be automated so that tests are run and checked without manual intervention.
- In automated unit testing, you make use of a test automation framework (such as JUnit) to write and run your program tests.
- Unit testing frameworks provide generic test classes that you extend to create specific test cases. They can then run all of the tests that you have implemented and report, often through some GUI, on the success or otherwise of the tests.



Automated test components

- A **setup part**, where you initialize the system with the test case, namely the inputs and expected outputs.
- A **call part**, where you call the object or method to be
- An **assertion part** where you compare the result of the call with the expected result. If the assertion evaluates to true, the test has been successful if false, then it has failed.



Unit test effectiveness

- The test cases should show that, when used as expected, the component that you are testing does what it is supposed to do.
- If there are defects in the component, these should be revealed by test cases.
- This leads to 2 types of unit test case:
 - The first of these should reflect normal operation of a program and should show that the component works as expected.
 - The other kind of test case should be based on testing experience of where common problems arise. It should use abnormal inputs to check that these are properly processed and do not crash the component.



Testing strategies

- Partition testing, where you identify groups of inputs that have common characteristics and should be processed in the same way.
 - You should choose tests from within each of these groups.
- Guideline based testing, where you use testing guidelines to choose test cases.
 - These guidelines reflect previous experience of the kinds of errors that programmers often make when developing components.



Partition testing

- Input data and output results often fall into different classes where all members of a class are related.
- Each of these classes is an **equivalence partition** or domain where the program behaves in an equivalent way for each class member.
- Test cases should be chosen from each partition.

Equivalence partitions testing

- Equivalence partitioning is a technique of software testing in which input data is divided into partitions of valid and invalid values, and it is mandatory that all partitions must exhibit the same behavior.
- If a condition of one partition is true, then the condition of another equal partition must also be true, and if a condition of one partition is false, then the condition of another equal partition must also be false.

Equivalence partitions testing

- When you use the specification of a system to identify equivalence partitions, this is called black box testing.
- You don't need any knowledge of how the system works.
- It is sometimes useful to supplement the black box tests with “box testing,” where you look at the code of the program to find other possible tests. white
- For example, your code may include exceptions to handle incorrect inputs. You can use this knowledge to identify “exception partitions”—different ranges where the same exception handling should be applied.



Partition testing

- Equivalence partitioning is an effective approach to testing because it helps account for errors that programmers often make when processing inputs at the edges of partitions.
- You can also use testing guidelines to help choose test cases.
- Guidelines encapsulate knowledge of what kinds of test cases are effective for discovering errors.

Testing guidelines (sequences)

- For example, when you are testing programs with sequences, arrays, or lists, guidelines that could help reveal defects include:
- Test software with sequences which have only a single value.
 - Programmers naturally think of sequences as a made up of several values, and sometimes they embed this assumption in their programs. Consequently, if presented with a single-value sequence, a program may not work properly.
- Use sequences of different sizes in different tests.
 - This decreases the chances that a program with defects will accidentally produce a correct output because of some accidental characteristics of the input.
- Derive tests so that the first, middle and last elements of the sequence are accessed.
 - This approach reveals problems at partition boundaries.
- Test with sequences of zero length.

General testing guidelines


- Whittaker's book (Whittaker 2009) includes many examples of guidelines that can be used in test-case design.
- Some of the most general guidelines that he suggest are:
 - Choose inputs that force the system to generate all error messages
 - Design inputs that cause input buffers to overflow
 - Repeat the same input or series of inputs numerous times
 - Force invalid outputs to be generated
 - Force computation results to be too large or too small.



Component testing

- Software components are often composite components that are made up of several interacting objects.
 - For example, in the weather station system, the reconfiguration component includes objects that deal with each aspect of the reconfiguration.
- You access the functionality of these objects through the defined component interface.
- Testing composite components should therefore focus on showing that the component interface behaves according to its specification.
 - You can assume that unit tests on the individual objects within the component have been completed.

Interface testing

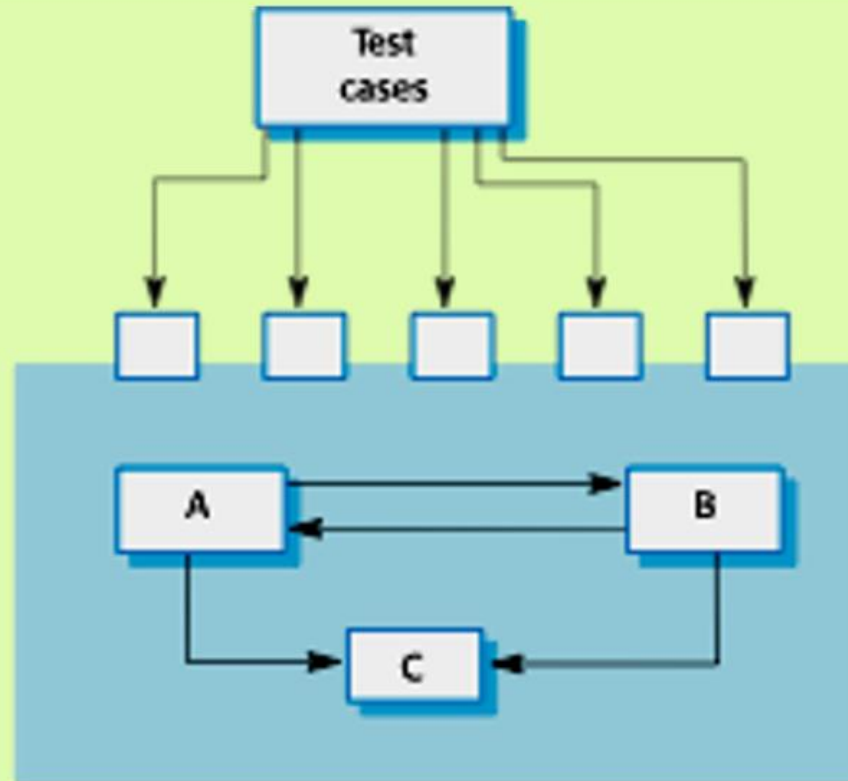



Interface testing (Cont.)

- Objectives are to detect faults due to interface errors or invalid assumptions about interfaces.
- Interface types
 - Parameter interfaces procedure to another.
 - Shared memory Data passed from one method or interfaces
Block of memory is shared between procedures or functions.
 - Procedural interfaces Sub-system encapsulates a set of procedures to be called by other sub-systems.
 - Message passing interfaces Sub-systems request services from other sub-systems



Interface errors

- Interface misuse
 - A calling component calls another component and makes an error in its use of its interface e.g. parameters in the wrong order.
- Interface misunderstanding
 - A calling component embeds assumptions about the behaviour of the called component which are incorrect.
- Timing errors
 - The called and the calling component operate at different speeds and out-of-date information is accessed.



Interface testing guidelines

- Design tests so that parameters to a called procedure are at the extreme ends of their ranges.
- Always test pointer parameters with null pointers.
- Design tests which cause the component to fail.
- Use stress testing in message passing systems.
- In shared memory systems, vary the order in which components are activated.



System testing

- System testing during development involves integrating components to create a version of the system and then testing the integrated system.
- The focus in system testing is testing the interactions between components.
- System testing checks that components are compatible, interact correctly and transfer the right data at the right time across their interfaces.
- System testing tests the emergent behavior of a system.

System and component testing


- During system testing, reusable components that have been separately developed and off-the-shelf systems may be integrated with newly developed components. The complete system is then tested.
- Components developed by different team members or sub-teams may be integrated at this stage. System testing is a collective rather than an individual process.
 - In some companies, system testing may involve a separate testing team with no involvement from designers and programmers.




Use case testing

- The use-cases developed to identify system interactions can be used as a basis for system testing.
- Each use case usually involves several system components so testing the use case forces these interactions to occur.
- The sequence diagrams associated with the use case documents the components and interactions that are being tested.

Collect weather data sequence chart

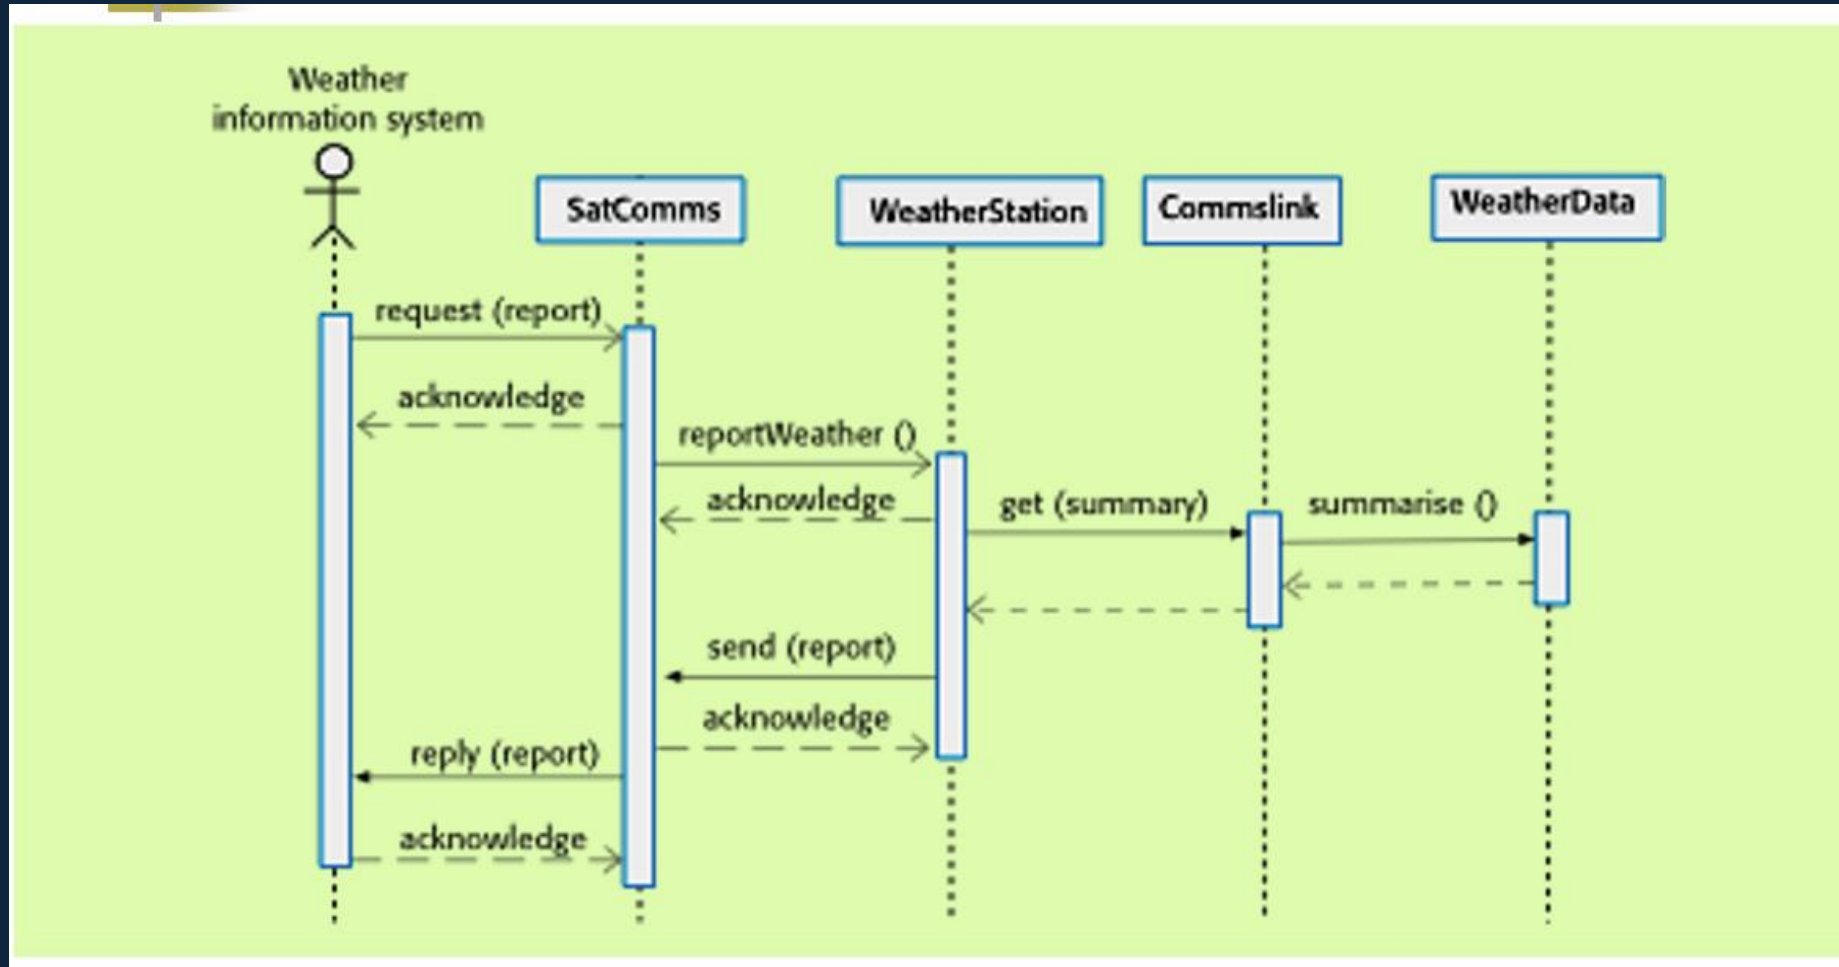

Sequence diagram for Transfer Data

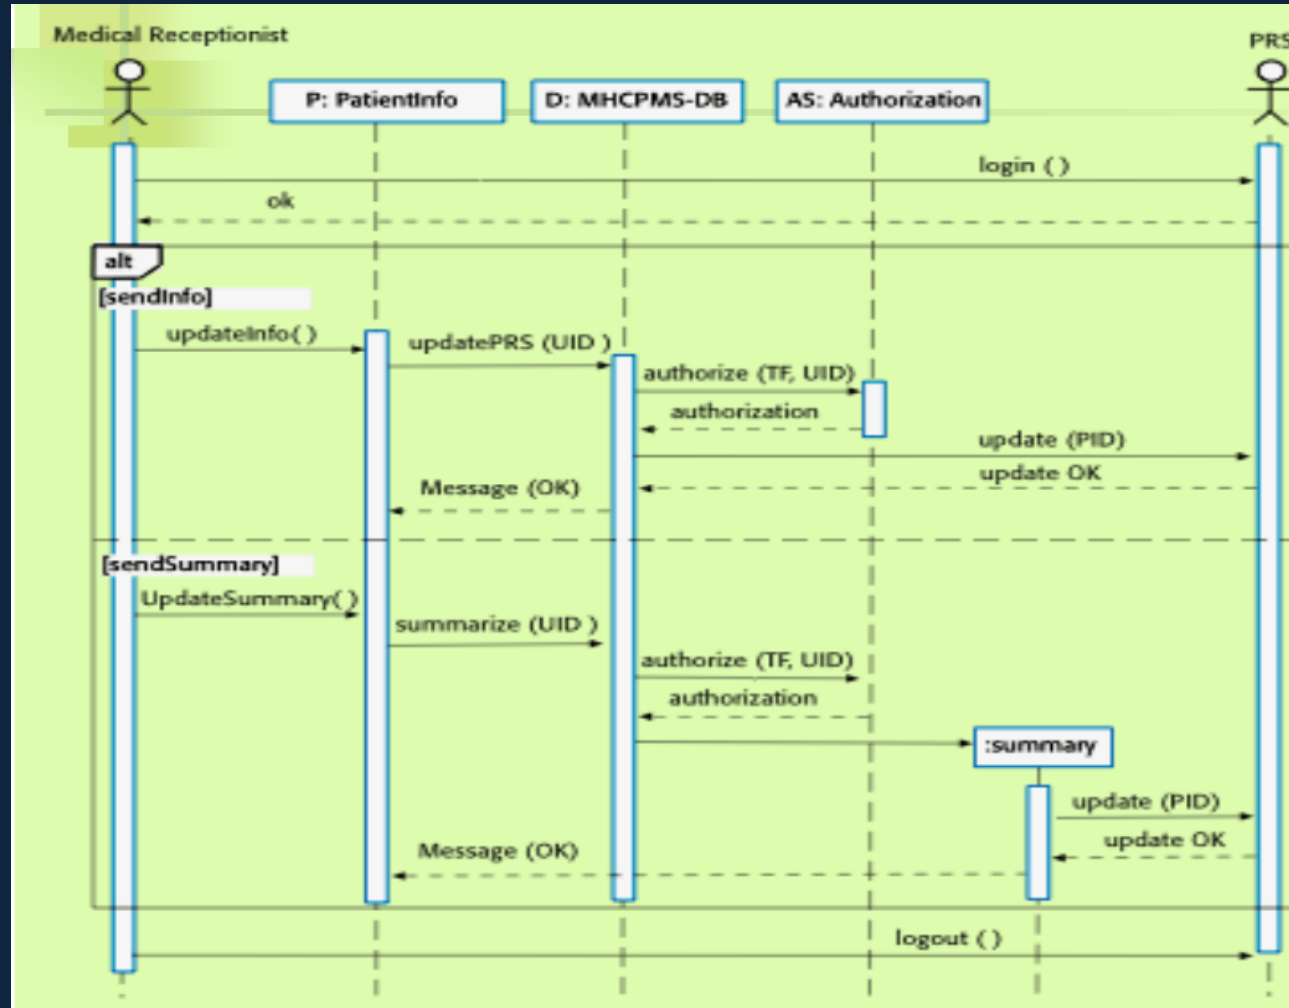

- The receptionist logs on the PRS.
- Two options are available. These allow the direct transfer of updated patient information from the Mentcare database to the PRS and the transfer of summary health data from the Mentcare database to the PRS.
- In each case, the receptionist's permissions are checked using the authorization system.
- Personal information may be transferred directly from the user interface object to the PRS. Alternatively, a summary record may be created from the database, and that record is then transferred.
- On completion of the transfer, PRS issues a status message and the user logs off.

Test cases derived from sequence diagram

- An input of a request for a report should have an associated acknowledgement. A report should ultimately be returned from the request.
 - You should create summarized data that can be used to check that the report is correctly organized.
- An input request for a report to WeatherStation results in a summarized report being generated.
 - Can be tested by creating raw data corresponding to the summary that you have prepared for the test of SatComms and checking that the WeatherStation object correctly produces this summary. This raw data is also used to test the WeatherData object.

Testing policies


- Exhaustive system testing is impossible so testing policies which define the required system test coverage may be developed.
- Examples of testing policies:
 - All system functions that are accessed through menus should be tested.
 - Combinations of functions (e.g. text formatting) that are accessed through the same menu must be tested.
 - Where user input is provided, all functions must be tested with both correct and incorrect input.



Test driven development

- Test-driven development (TDD) is an approach to program development in which you carried out inter-leave testing and code development.
- Tests are written before code and ‘passing’ the tests is the critical driver of development.
- You develop code incrementally, along with a test for that increment. You don’t move on to the next increment until the code that you have developed passes its test.
- TDD was introduced as part of agile methods such as Extreme Programming. However, it can also be used in plan-driven development processes.

Test driven development

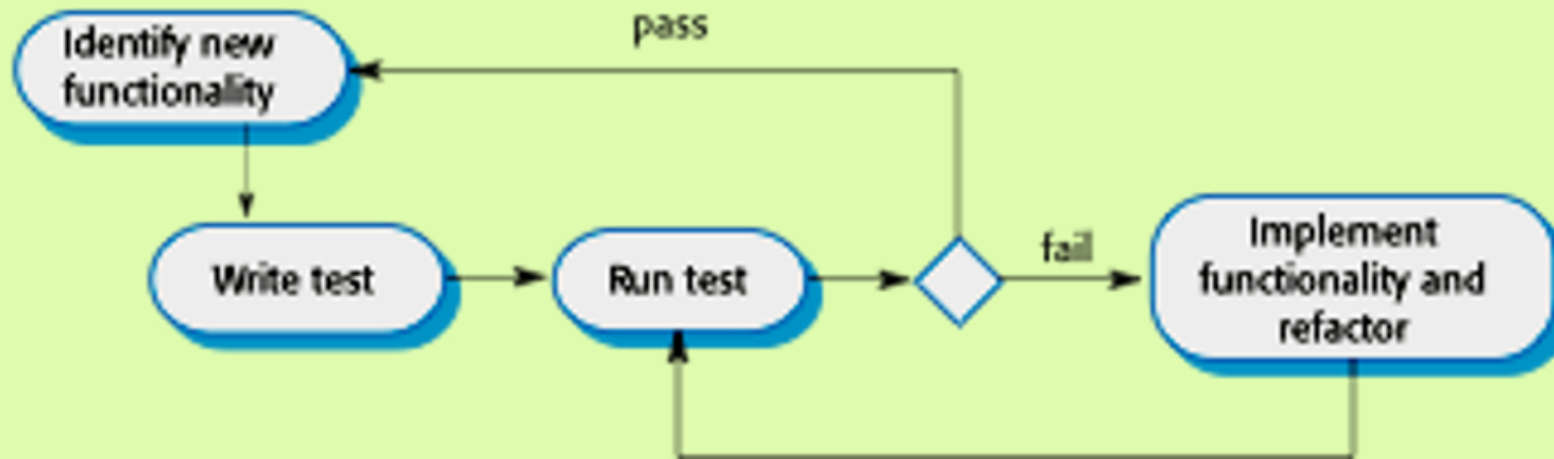



TDD process activities

- Start by identifying the increment of functionality that is required. This should normally be small and implementable in a few lines of code.
- Write a test for this functionality and implement this as an automated test.
- Run the test, along with all other tests that have been implemented. Initially, you have not implemented the functionality so the new test will fail.
- Implement the functionality and re-run the test.
- Once all tests run successfully, you move on to implementing the next chunk of functionality.

Benefits of test driven development

- **Code coverage**
 - Every code segment that you write has at least one associated test so all code written has at least one test.
- **Regression testing**
 - A regression test suite is developed incrementally as a program is developed.
- **Simplified debugging**
 - When a test fails, it should be obvious where the problem lies. The newly written code needs to be checked and modified.
- **System documentation**
 - The tests themselves are a form of documentation that describe what the code should be doing.



Regression testing

- Regression testing is testing the system to check that changes have not ‘broken’ previously working code.
- In a manual testing process, regression testing is expensive but, with automated testing, it is simple and straightforward. All tests are rerun every time a change is made to the program.
- Tests must run ‘successfully’ before the change is committed.



Release testing

- Release testing is the process of testing a particular release of a system that is intended for use outside of the development team.
- The primary goal of the release testing process is to convince the supplier of the system that it is good enough for use.
 - Release testing, therefore, has to show that the system delivers its specified functionality, performance, and dependability, and that it does not fail during normal use.
- Release testing is usually a black-box testing process where tests are only derived from the system specification.

Release testing and system testing

- Release testing is a form of system testing.
- Important differences:
 - A separate team that has not been involved in the system development, should be responsible for release testing.
 - System testing by the development team should focus on discovering bugs in the system (defect testing). The objective of release testing is to check that the system meets its requirements and is good enough for external use (validation testing).

Requirements based testing

- Requirements-based testing involves examining each requirement and developing a test or tests for it.
- MHC-PMS requirements:
 - If a patient is known to be allergic to any particular medication, then prescription of that medication shall result in a warning message being issued to the system user.
 - If a prescriber chooses to ignore an allergy warning, they shall provide a reason why this has been ignored.

Requirements tests

- Set up a patient record with no known allergies. Prescribe medication for allergies that are known to exist. Check that a warning message is not issued by the system.
- Set up a patient record with a known allergy. Prescribe the medication to that the patient is allergic to, and check that the warning is issued by the system.
- Set up a patient record in which allergies to two or more drugs are recorded. Prescribe both of these drugs separately and check that the correct warning for each drug is issued.
- Prescribe two drugs that the patient is allergic to. Check that two warnings are correctly issued.
- Prescribe a drug that issues a warning and overrule that warning. Check that the system requires the user to provide information explaining why the warning was overruled.



Features tested by scenario

- Authentication by logging on to the system.
- Downloading and uploading of specified patient records to a laptop.
- Home visit scheduling.
- Encryption and decryption of patient records on a mobile device.
- Record retrieval and modification.
- Links with the drugs database that maintains side-effect information.
- The system for call prompting.

A usage scenario for the Mentcare

George is a nurse who specializes in mental healthcare. One of his responsibilities is to visit patients at home to check that their treatment is effective and that they are not suffering from medication side effects.

On a day for home visits, George logs into the Mentcare system and uses it to print his schedule of home visits for that day, along with summary information about the patients to be visited. He requests that the records for these patients be downloaded to his laptop. He is prompted for his key phrase to encrypt the records on the laptop.

One of the patients that he visits is Jim, who is being treated with medication for depression. Jim feels that the medication is helping him but believes that it has the side effect of keeping him awake at night. George looks up Jim's record and is prompted for his key phrase to decrypt the record. He checks the drug prescribed and queries its side effects. Sleeplessness is a known side effect, so he notes the problem in Jim's record and suggests that he visits the clinic to have his medication changed. Jim agrees so George enters a prompt to call him when he gets back to the clinic to make an appointment with a physician. George ends the consultation, and the system re-encrypts Jim's record.

After, finishing his consultations, George returns to the clinic and uploads the records of patients visited to the database. The system generates a call list for George of those patients who He has to contact for follow-up information and make clinic appointments.



Performance testing

- Part of release testing may involve testing the emergent properties of a system, such as performance and reliability.
- Tests should reflect the profile of use of the system.
- Performance tests usually involve planning a series of tests where the load is steadily increased until the system performance becomes unacceptable.
- Stress testing is a form of performance testing where the system is deliberately overloaded to test its failure behavior.



User testing


- User or customer testing is a stage in the testing process in which users or customers provide input and advice on system testing.
- User testing is essential, even when comprehensive system and release testing have been carried out.
 - The reason for this is that influences from the user's working environment have a major effect on the reliability, performance, usability and robustness of a system. These cannot be replicated in a testing environment.



Types of user testing

- Alpha testing
 - Users of the software work with the development team to test the software at the developer's site.
- Beta testing
 - A release of the software is made available to users to allow them to experiment and to raise problems that they discover with the system developers.
- Acceptance testing
 - Customers test a system to decide whether or not it is ready to be accepted from the system developers and deployed in the customer environment. Primarily for custom systems.

The acceptance testing process

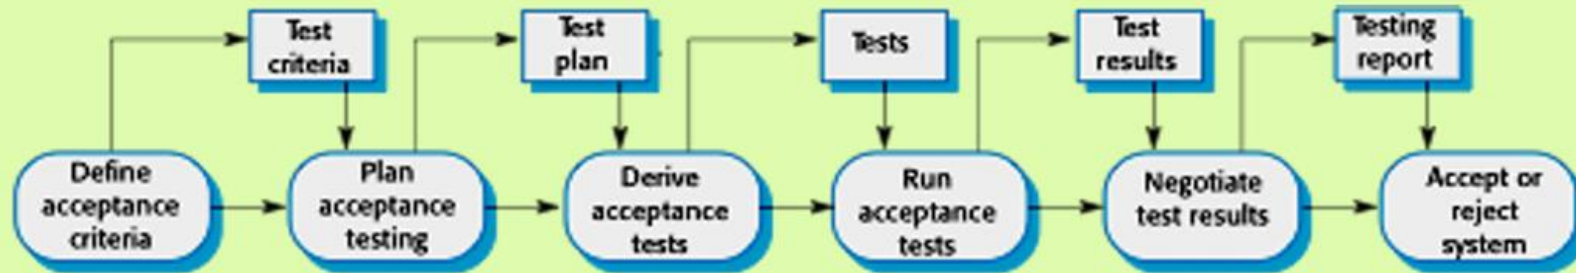



Stages in the acceptance testing process

- Define acceptance criteria
- Plan acceptance testing
- Derive acceptance tests
- Run acceptance tests
- Negotiate test results
- Reject/accept system

Agile methods and acceptance testing

- In agile methods, the user/customer is part of the development team and is responsible for making decisions on the acceptability of the system.
- Tests are defined by the user/customer and are integrated with other tests in that they are run automatically when changes are made.
- There is no separate acceptance testing process.
- Main problem here is whether or not the embedded user is ‘typical’ and can represent the interests of all system stakeholders.



Key points

- Testing can only show the presence of errors in a program. It cannot demonstrate that there are no remaining faults.
- Development testing is the responsibility of the software development team. A separate team should be responsible for testing a system before it is released to customers.
- Development testing includes unit testing, in which you test individual objects and methods component testing in which you test related groups of objects and system testing, in which you test partial or complete systems.



Key points

- When testing software, you should try to ‘break’ the software by using experience and guidelines to choose types of test case that have been effective in discovering defects in other systems.
- Wherever possible, you should write automated tests. The tests are embedded in a program that can be run every time a change is made to a system



Key points

- The principle of equivalence partitioning is, test cases should be designed to cover each partition at least once.
- Equivalence partitioning is an effective approach to testing because it helps account for errors that programmers often make when processing inputs at the edges of partitions.
- System testing checks that components are compatible, interact correctly and transfer the right data at the right time across their interfaces.
- Test-first development is an approach to development where tests are written before the code to be tested.



Key points

- The primary goal of the release testing process is to convince the supplier of the system that it is good enough for use.
- Scenario testing involves inventing a typical usage scenario and using this to derive test cases.
- Acceptance testing is a user testing process where the aim is to decide if the software is good enough to be deployed and used in its operational environment.

A decorative pattern of hexagons in various shades of blue, orange, and white, arranged in a honeycomb-like structure on the left side of the slide.

Thank you

Prof. Dr. Fahim Akhtar Rajput