

Zeek

Network Security Monitor

Maruthi S. Inukonda


Scientific Officer, CCS, IITH

13th March 2026

License

Copyright © 2024-26 - Maruthi S. Inukonda

This work is licensed under a Creative Common Attribution-NonCommercial-ShareAlike 4.0 Unported License. This license is available at <https://creativecommons.org/licenses/by-nc-sa/4.0/>



Are handheld cameras sufficient?



NO
Its a manual
method

Wireshark is a tool for
manual analysis

Are CCTV cameras sufficient?



Semi-automated
method

CCTV + Automation is the key



Fully-automated method

TRAFFIC VIOLATION CASES IN BENGALURU

Year	Contactless cases	Total cases	% of contactless enforcements
2014	28.2 lakh	74.3 lakh	38%
2015	30.6 lakh	76.2 lakh	40.20%
2016	48.8 lakh	91.8 lakh	53.10%
2017	30.2 lakh	1.01 crore	30%
2018	31.7 lakh	83.8 lakh	38%
2019	39.4 lakh	79.8 lakh	49.30%
2020	62.8 lakh	84 lakh	75%
2021	78.1 lakh	93.5 lakh	83.40%
2022	96.2 lakh	1.04 crore	92%
2023	12.4 lakh	12.8 lakh	96%

(till Feb 2023),
Source: Bengaluru traffic police



Will you pay penalty without evidence?

Zeek is a tool for full-automation of Evidence collection, Network Detection and Response.

Agenda

- Introduction
- Installation
- Logs
- Scripting

Introduction

Zeek

- Zeek is an automated Network Security Monitoring (NSM) Tool
- Formerly known as Bro
- Developed at Lawrence Berkely National Laboratory (LBNL), USA
- Published in Unix Security Symposium 1998



USENIX

<https://www.usenix.org> > sec98 > paxson > paxson PDF

Bro: A System for Detecting Network Intruders in Real-Time


by V Paxson · Cited by **4123** — We describe **Bro**, a stand-alone system for detecting network intruders in real-time by passively monitoring a network link over which the intruder's ...

22 pages

- Code open-sourced under BSD License
- Not an active security device like Firewall, Intrusion Prevention System
- Unobtrusively observes network traffic
- Used in products for Evidence-Based Network Detection and Response (NDR), and Threat Hunting, Log Management (see Corelight, Security Onion)

Architecture

- **Network Interface**
 - Tap network link passively, send up a copy of all traffic
- **Libpcap**
 - Kernel filters down high-volume stream via packet capture library
- **Event Engine**
 - Distills filtered stream of packets into high-level events
 - Developed in C++
- **Policy Script Interpreter**
 - Loads scripts written in domain specific policy language (similar to Python)
 - Runs event handlers corresponding to events to take action

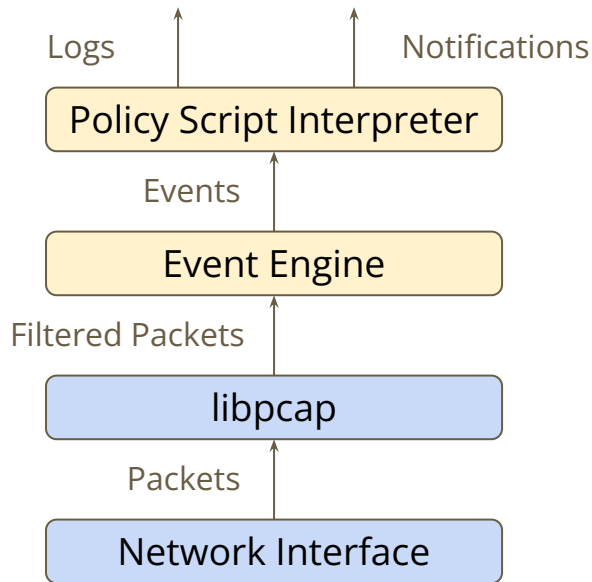

Installation

Setup Apt Repository & Install

- Install Long Term Support (LTS) version
<https://docs.zeek.org/en/lts/install.html>
- Packages are available for major distros of Linux

On Debian/Kali

```
$ echo 'deb http://download.opensuse.org/repositories/security:zeek/Debian_12/ /' |  
sudo tee /etc/apt/sources.list.d/security:zeek.list
```

```
$ curl -fsSL  
https://download.opensuse.org/repositories/security:zeek/Debian_12/Release.key | gpg  
--dearmor | sudo tee /etc/apt/trusted.gpg.d/security_zeek.gpg > /dev/null
```

```
$ sudo apt update  
$ sudo apt install zeek-lts
```

Select appropriate mail
server. If you don't have one,
select "No configuration"

Setup Apt Repository & Install

- Also available for Ubuntu
- You may also build from source.

On Ubuntu

```
$ echo 'deb http://download.opensuse.org/repositories/security:/zeek/xUbuntu_22.04/' | sudo tee /etc/apt/sources.list.d/security:zeek.list
```

```
$ curl -fsSL https://download.opensuse.org/repositories/security:zeek/xUbuntu_22.04/Release.key |  
gpg --dearmor | sudo tee /etc/apt/trusted.gpg.d/security_zeek.gpg > /dev/null
```

```
$ sudo apt update  
$ sudo apt install zeek-lts
```

Select appropriate mail server. If you don't have one, select "No configuration"

Configuration (1/2)

- Zeek runs as root user. Switch to root shell
- Configure root's shell environment and reload it
- Verify the shell environment

```
$ sudo su -
```

```
#
```

```
# vi /root/.bashrc
```

```
.
```

```
.
```

```
.
```

```
export PATH=$PATH:/opt/zeek/bin/
```

```
# exec bash
```

```
# which zeek
```

```
/opt/zeek/bin/zeek
```

```
# which zeekctl
```

```
/opt/zeek/bin/zeekctl
```

```
# which zeek-cut
```

```
/opt/zeek/bin/zeek-cut
```

Configuration (2/2)

- Find your network interface

```
# ip link show
```

```
.  
2: enp0s7: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel state UP mode  
DEFAULT group default qlen 1000  
    link/ether be:ef:fe:ed:be:ef brd ff:ff:ff:ff:ff:ff  
3: wlp0s20f3: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc noqueue state UP mode  
DORMANT group default qlen 1000  
    link/ether de:ad:be:ef:de:ad brd ff:ff:ff:ff:ff:ff
```

- Find your network interface

```
# vi /opt/zeek/etc/node.cfg
```

```
.  
.  
[zeek]  
type=standalone  
host=localhost  
interface=af_packet::wlp0s20f3
```

Deploy Zeek

- Deploy Zeek in the background

```
# zeekctl deploy
checking configurations ...
installing ...
removing old policies in
/opt/zeek/spool/installed-scripts-do-not-touch/site ...
removing old policies in
/opt/zeek/spool/installed-scripts-do-not-touch/auto ...
creating policy directories ...
installing site policies ...
generating standalone-layout.zeek ...
generating local-networks.zeek ...
generating zeekctl-config.zeek ...
generating zeekctl-config.sh ...
stopping ...
stopping zeek ...
starting ...
starting zeek ...
```

Starting/Stopping Zeek

- Start Zeek in the background
- Stop Zeek running in the background

```
# zeekctl start  
starting zeek ...
```

```
# zeekctl stop  
stopping zeek ...
```

Verify Zeek

- Check status of zeek running in the background

```
# zeekctl status
```

```
waiting for lock (owned by PID 24496) ...
```

Name	Type	Host	Status	Pid	Started
zeek	standalone	localhost	running	25670	04 Mar 22:37:35

- Check network statistics

```
# zeekctl netstats
```

```
zeek: 1709573082.768830 recvd=9714926 dropped=0 link=9715276
```

- Check capture statistics

```
# zeekctl capstats
```

Interface	kpps	mbps	(10s average)
localhost/af_packet::wlp0s20f3	86.2	967.1	

Logs

Logs

- Currently generated logs are stored in current directory
- Periodically log files are archived in directory named with <date>

```
# ls /opt/zeek/logs/current
capture_loss.log conn.log dhcp.log
dns.log files.log http.log ntp.log ocsf.log
software.log ssl.log stats.log stderr.log stdout.log
telemetry.log weird.log x509.log
```

```
# ls /opt/zeek/logs
2024-03-04 current
```

Default Log Format

- By default, all logs are stored as space/tab separated values (TSV)
- For eg., conn.log contains flow records

```
# less /opt/zeek/logs/current/conn.log
```

```
•
•
#fields      ts      uid      id.orig_h  id.orig_p  id.resp_h  id.resp_p  proto  service
duration     orig_bytes  resp_bytes  conn_state  local_orig  local_resp
missed_bytes  history     orig_pkts   orig_ip_bytes  resp_pkts   resp_ip_bytes
tunnel_parents
#types      time      string     addr      port      addr      port      enum     string     interval
count       count     string     bool      bool      count     string     count     count     count
count       set[string]
1 1709602202.400788      CPjdaz38Qfyz0sX9c      172.16.0.228      5353      224.0.0.251      5353      udp
dns      2.010773      330      0      S0      T      F      0      D      3      414      0      0-
2 1709602182.244735      CPR4Mc1NN1j4IBDD72      172.16.0.237      34492      142.250.193.170      443
udp      -      0.428834      3546      4986      SF      T      F      0      Dd      5      3686      9      5238
-
•
•
```

Difficult to
automate

Processing Current Logs in TSV format using zeek-cut, cat

- zeek-cut is the tool to pick required columns (only works with logs in TSV format)

Using input redirection

```
# zeek-cut -m -d ts uid id.orig_h id.orig_p id.resp_h id.resp_p proto < conn.log
ts      uid      id.orig_h    id.orig_p    id.resp_h    id.resp_p    proto
2024-03-05T07:00:02+0530    CPjdaz38Qfyz0sX9c    172.16.0.228    5353    224.0.0.251    5353    udp
2024-03-05T06:59:42+0530    CPR4Mc1NN1j4IBDD72    172.16.0.237    34492    142.250.193.170    443    udp
.
```

Using pipe

```
# cat conn.log | zeek-cut -m -d ts id.orig_h id.orig_p id.resp_h id.resp_p proto
ts      uid      id.orig_h    id.orig_p    id.resp_h    id.resp_p    proto
2024-03-05T07:00:02+0530    CPjdaz38Qfyz0sX9c    172.16.0.228    5353    224.0.0.251    5353    udp
2024-03-05T06:59:42+0530    CPR4Mc1NN1j4IBDD72    172.16.0.237    34492    142.250.193.170    443    udp
.
```

Processing Archived Logs in TSV format using zcat, zgrep

- zcat, zgrep work on archived/compressed files without extracting them

Using pipe

Value to be searched

```
# zcat conn.* | grep 172.16.0.228
2024-03-05T07:00:02+0530    CPjdaz38Qfyz0sX9c    172.16.0.228    5353    224.0.0.251    5353    udp
.
```

Value to be searched

```
# zgrep 172.16.0.228 conn.*
2024-03-05T07:00:02+0530    CPjdaz38Qfyz0sX9c    172.16.0.228    5353    224.0.0.251    5353    udp
```

* zcat, zgrep tools are standard linux command. Not zeek specific.

JSON Log Format

- Zeek supports generating logs in JSON to make automation much easier.

```
# vi /opt/zeek/share/zeek/site/local.zeek
```

```
.  
.
.
```

```
redef LogAscii::use_json = T;
```

```
# zeekctl deploy
```

```
# less /opt/zeek/logs/current/conn.log
```

```
.  
.
```

1

```
{ "ts": 1738196198.848019, "uid": "CiYEXT3v8nl15hPwm4", "id_orig_h": "172.16.0.246", "id_orig_p": 43219, "id_resp_h": "172.16.0.1", "id_resp_p": 53, "proto": "udp", "service": "dns", "duration": 0.0063250064849853516, "orig_bytes": 0, "resp_bytes": 83, "conn_state": "SHR", "local_orig": true, "local_resp": true, "missed_bytes": 0, "history": "Cd", "orig_pkts": 0, "orig_ip_bytes": 0, "resp_pkts": 1, "resp_ip_bytes": 111, "ip_proto": 17 }
```

2

```
{ "ts": 1738196142.72783, "uid": "CAzF082EPNFWgN9m82", "id_orig_h": "172.16.0.246", "id_orig_p": 55265, "id_resp_h": "142.250.196.74", "id_resp_p": 443, "proto": "udp", "duration": 7.079740047454834, "orig_bytes": 0, "resp_bytes": 20664, "conn_state": "SHR", "local_orig": true, "local_resp": false, "missed_bytes": 0, "history": "CdC", "orig_pkts": 0, "orig_ip_bytes": 0, "resp_pkts": 59, "resp_ip_bytes": 22316, "ip_proto": 17 }
```



Easier to automate

Processing Logs in JSON format using jq

- jq is the tool to run queries on JSON files

```
# jq -c '{ts, id.orig_h, id.orig_p, id.resp_h, id.resp_p, proto}' conn.log
{"ts":1738207778.759994,"id_orig_h":"172.16.0.246","id_orig_p":45543,"id_resp_h":"172.16.0.1","id_resp_p":53,"proto":"udp"}
{"ts":1738207778.760139,"id_orig_h":"172.16.0.246","id_orig_p":59144,"id_resp_h":"172.16.0.1","id_resp_p":53,"proto":"udp"}
.
```

```
# zcat conn.* | jq -c '{ts, id.orig_h, id.orig_p, id.resp_h, id.resp_p, proto}'
.
```

```
# zcat conn.* | grep 172.16.0.246
{"ts":1738196938.098077,"uid":"CSKSpMXSB1ojDz8Zc","id_orig_h":"172.16.0.246","id_orig_p":123,"id_resp_h":"13.126.27.131","id_resp_p":123,"proto":"udp","service":"ntp","duration":0.03427600860595703,"orig_bytes":0,"resp_bytes":48,"conn_state":"SHR","local_orig":true,"local_resp":false,"missed_bytes":0,"history":"Cd","orig_pkts":0,"orig_ip_bytes":0,"resp_pkts":1,"resp_ip_bytes":76,"ip_proto":17}
```

```
# zcat conn.* | jq -c 'select(.id.orig_h == "172.16.0.246") | {ts, id.orig_h, id.orig_p, id.resp_h, id.resp_p, proto}'
{"ts":1738207778.759994,"id_orig_h":"172.16.0.246","id_orig_p":45543,"id_resp_h":"172.16.0.1","id_resp_p":53,"proto":"udp"}
{"ts":1738207778.760139,"id_orig_h":"172.16.0.246","id_orig_p":59144,"id_resp_h":"172.16.0.1","id_resp_p":53,"proto":"udp"}
"}
```

* jq is a standard linux command. Not zeek specific. Refer jq manual page.

Scripting

Script init and done (1/4)

- Create a directory to place all our scripts
- `zeek_init()` event handler is used for initialization
- It is invoked
 - During “`zeekctl deploy`”
 - During “`zeekctl start`”
 - Beginning of “`zeek -r test.pcap`”
- `zeek_done()` is used for cleanup
- It is invoked
 - During “`zeekctl stop`”
 - Ending of “`zeek -r test.pcap`”

```
# mkdir /opt/zeek/share/zeek/site/myscripts
# cd /opt/zeek/share/zeek/site/myscripts

# vi sample.zeek

event zeek_init() {
    print "Zeek started!";
    # Any other initialization stuff goes here
}

event zeek_done() {
    # Any other cleanup stuff goes here
    print fmt("Zeek stopped!");
}
```

Script init and done (2/4)

- Create a dummy pcap file `# tcpdump -w /tmp/test.pcap`
- Analyze a pcap file `# zeek -C -r /tmp/test.pcap sample.zeek`
Zeek started!
Zeek stopped!

Script init and done (3/4)

- By default no logs are printed during daemon/background mode

- By default the global variable `Log::print_to_log` is set to `Log::REDIRECT_NONE`

- To send all prints to `print.log`, edit our script and assign it with `Log::REDIRECT_ALL`

```
# vi sample.zEEK
```

```
redef Log::print_to_log = Log::REDIRECT_ALL;
```

```
event zEEK_init() {  
    print "Zeek started!";  
    # Any other initialization stuff goes here  
}
```

```
event zEEK_done() {  
    # Any other cleanup stuff goes here  
    print fmt("Zeek stopped!");  
}
```

Script init and done (4/4)

- Add the following line at the **end of the default** site/local.zeeb file

```
# vi /opt/zeek/share/zeek/site/local.zeeb
.  
.  
.  
@load myscripts/sample
```

- Deploy the script
- Check the prints in print.log

```
# zeekctl deploy
```

```
# less /opt/zeek/logs/current/print.log
```

Variables and Constants

- Global variables are accessible across event handlers and scripts
- Local variables are defined and accessible only inside an event handler
- Constants are accessible in their defined scope (global or local) and cannot be modified

```
# vi sample.zEEK
```

```
redef Log::print_to_log = Log::REDIRECT_ALL;
```

```
global gs = "apple";
```

```
const cs = "mango";
```

```
event zeek_init() {
```

```
    print "Zeek started!";
```

```
    local ls = "orange";
```

```
    print fmt("gs:%s cs:%s ls:%s", gs, cs, ls);
```

```
    gs = "muskmelon";
```

```
    ls = "banana";
```

```
    print fmt("gs:%s ls:%s", gs, ls);
```

```
}
```

```
event zeek_done() {
```

```
    print fmt("gs:%s cs:%s", gs, cs);
```

```
    print fmt("Zeek stopped!");
```

```
}
```

Primitive Data Types (1/2)

- String
- Boolean
- Integer (64-bit unsigned)
- Double (64-bit double precision)
- Counter
- Timestamp
- Interval

```
local ls: string = "pomegranate";
```

```
local lb: bool = F;
```

```
local li: int = 4;
```

```
global ld: double = 9.25;
```

```
global gc: count = 0;
```

```
local lt: ts = current_time();
```

```
local linvl: ts = 2.5sec;
```

Primitive Data Types (2/2)

- IP Address
- Subnet
- Port

```
event zeek_init()
{
    .
    .
    .

    local ip : addr = 192.168.1.100;
    local sn : subnet = 192.168.0.0/16;
    local prt : port = 53/udp;
    print(fmt("ip:%s sn:%s port:%d", ip, sn, prt));
}
```

Control Statements (1/2)

- If - else statement

```
local ip: addr = 192.168.1.100;
local sn: subnet = 192.168.0.0/16;
if ( ip/16 == sn )
    print(fmt("ip:%s belongs to sn %s", ip, sn));
```

- for loop
No need to define loop
control variable

```
for (c in "Hello") {
    print fmt("c: %s", c);
}
```

- while loop

```
local i = 0;
while (i <= 5) {
    ++i;
    print "i: ", i;
}
```


Control Statements (2/2)

- switch case statement

```
local p : int = 3
switch (i) {
  case 1:
    print "i is 1";
    break;
  case 2:
    print "i is 2";
    break;
  case 3:
    print "i is 3";
    break;
  default:
    print "i is not 1-3";
    break;
}
```

Composite Data Types (1/3)

- Record types are used to store related information together

```
type MyRecordType: record {  
    c: count;  
    s: string;  
};  
  
event zeek_init()  
{  
    .  
    .  
    .  
    local lr : MyRecordType = record($c = 9, $s =  
"nine");  
    print(fmt("lr$c:%d lr$s:%s", lr$c, lr$s));  
    .  
    .  
}
```

Composite Data Types (2/3)

- Vector

```
local vec = vector("one", "two", "three");
print(fmt("vec: %s %s %s", vec[0], vec[1], vec[2]));
for (v in vec){
    print fmt("v: %s", vec[v]);
}
```

- Set

```
local s: set[port] = { 21/tcp, 23/tcp, 80/tcp,
443/tcp };
for (s in s1){
    print fmt("s: %s", s);
}
if (21/tcp in s1) {
    print("port no exists in set");
}
```


Composite Data Types (3/3)

- Table

```
local t1: table[count] of string = {  
    [11] = "eleven",  
    [5] = "five",  
};  
for (t in t1){  
    print fmt("t: %s", t);  
}  
if (11 in t1) {  
    print("count exists in table");  
}
```

TCP State machine

- `connection_established`: Upon receiving the ACK, both the client and server transition into the **ESTABLISHED** state, signifying a successful connection establishment.
 - Applicable for TCP only
- `connection_finished`: Upon receiving the FIN, both the client and server transition into the **CLOSING** state, signifying a successful connection termination.
 - Applicable for TCP only
- `new_connection`: Upon receiving a packet that makes zeek create a new flow tracking data structure.
 - Applicable for both TCP and UDP

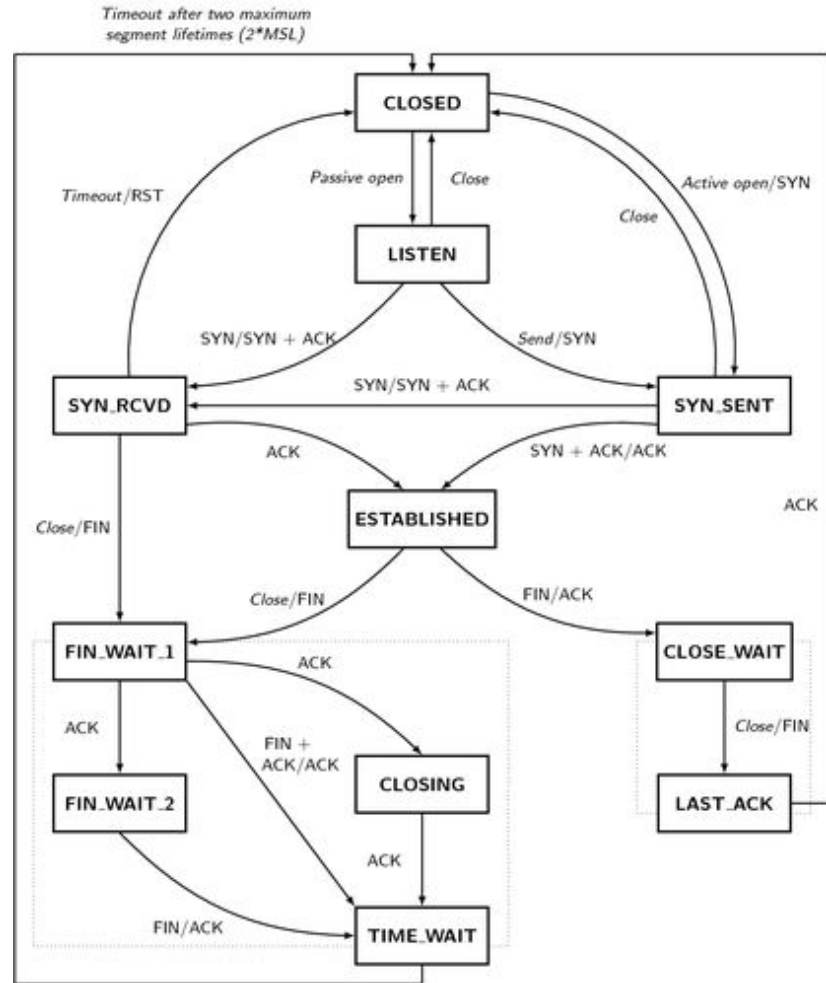

Connection Events

- Add these handlers to the sample.zeeK script

```
# vi sample.zeeK
.
# Applicable for TCP
event connection_established(c: connection)
{
    print fmt("Zeek connection established from %s:%s to %s:%s",
              c$id$orig_h, c$id$orig_p, c$id$resp_h, c$id$resp_p);
}

# Applicable for TCP
event connection_finished(c: connection)
{
    print fmt("Zeek connection finished from %s:%s to %s:%s",
              c$id$orig_h, c$id$orig_p, c$id$resp_h, c$id$resp_p);
}

# Applicable for TCP and UDP
event new_connection(c: connection)
{
    print fmt("Zeek new connection from %s:%s to %s:%s",
              c$id$orig_h, c$id$orig_p, c$id$resp_h, c$id$resp_p);
}
```

Connection Events

- Run the script on test pcap file

```
# zeek -C -r /tmp/test.pcap sample.zeek
```

```
Zeek new connection from 10.10.20.11:34206/tcp to  
192.168.137.179:22/tcp
```

```
Zeek connection established from 10.10.20.11:56474/tcp to  
192.168.137.179:22/tcp
```

```
Zeek connection finished from 10.10.20.11:56474/tcp to  
192.168.137.179:22/tcp
```

Packet Events

- `tcp_packet` : Generated for every TCP packet.
- `udp_request`: Generated for each packet sent by a UDP flow's originator.
- `udp_reply`: Generated for each packet sent by a UDP flow's responder.
- A very low-level and expensive event due to the volume of traffic.
- Should be avoided in background mode.

```
# vi sample.zeek
```

```
:
:
event tcp_packet(c: connection, is_orig: bool, flags: string,
seq: count, ack: count, len: count, payload: string)
{
    print fmt("Zeek new tcp packet from %s:%s to %s:%s",
              c$id$orig_h, c$id$orig_p,
              c$id$resp_h, c$id$resp_p);
}

event udp_request(u: connection)
{
    print fmt("Zeek new udp request from %s:%s to %s:%s",
              u$id$orig_h, u$id$orig_p,
              u$id$resp_h, u$id$resp_p);
}

event udp_reply(u: connection)
{
    print fmt("Zeek new udp reply from %s:%s to %s:%s",
              u$id$orig_h, u$id$orig_p,
              u$id$resp_h, u$id$resp_p);
}
```


Packet Events

- Count the number of TCP/UDP events using zeek
- Count number of TCP/UDP packets using tcpdump utility.

```
# tcpdump -r /tmp/test.pcap udp or tcp | wc -l
reading from file /tmp/test.pcap, link-type EN10MB (Ethernet),
snapshot length 262144
24
```

```
# zeek -C -r /tmp/test.pcap sample.zeek | wc -l
24
```

Application Protocol-level Events

- Eg. Count the number of http errors

```
# vi sample.zeek
```

```
global http_404_count: count = 0;
```

```
.
```

```
event zeek_done() {  
    print fmt("Zeek stopped. Count: %d", http_404_count);  
}
```

- Redeploy zeek

```
# Applicable for http reply
```

```
event http_reply(c: connection, version: string, code: count,  
    reason: string) {  
    if (code == 404) {  
        # Increment the count  
        http_404_count += 1;
```

- Open a non-existent web page

```
        # Print information or perform other actions  
        print fmt("%d HTTP 404 responses detected.",  
            http_404_count);  
    }  
}
```

- Check the print.log

Raw Packet Events

- Eg. Count the number of L2 level packets
- Redeploy zeek
- Perform 802.1x (EAPOL) authentication
- Check the print.log

```
# vi sample.zeek

global raw_pkt_count: count = 0;
.
.
event zeek_done() {
    print fmt("Zeek stopped. Count: %d", raw_pkt_count);
}

event raw_packet(p: raw_pkt_hdr)
{
    raw_pkt_count += 1;
    print fmt("Zeek raw packet from %s to %s type %x",
              p$l2$src, p$l2$dst, p$l2$eth_type);
}
```

References

References

- V. Paxson, "Bro: A system for detecting network intruders in Real-Time," in 7th USENIX Security Symposium (USENIX Security 98), Jan.1998.
- Book of Zeek (LTS : v6.0.3)
<https://docs.zeek.org/en/lts/>
- Zeek Training Materials/Products <https://github.com/zeek/zeek-training>
- Zeek in Action - Youtube Channel - Many playlists
<https://www.youtube.com/@Zeekurity>

Q & A