


Causal Chambers | Actuator chain (scm_4)


40,000 observations | 10 variables | 23 reference edges | 63/63 successful fits

Full-range paths; every successful operating point retained

Directed edges

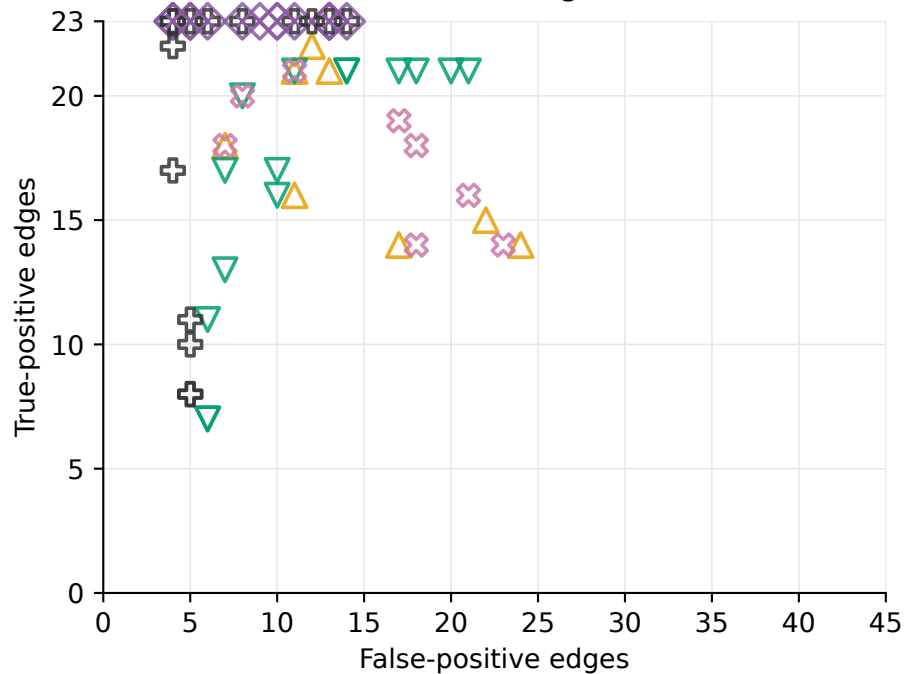

Skeleton edges

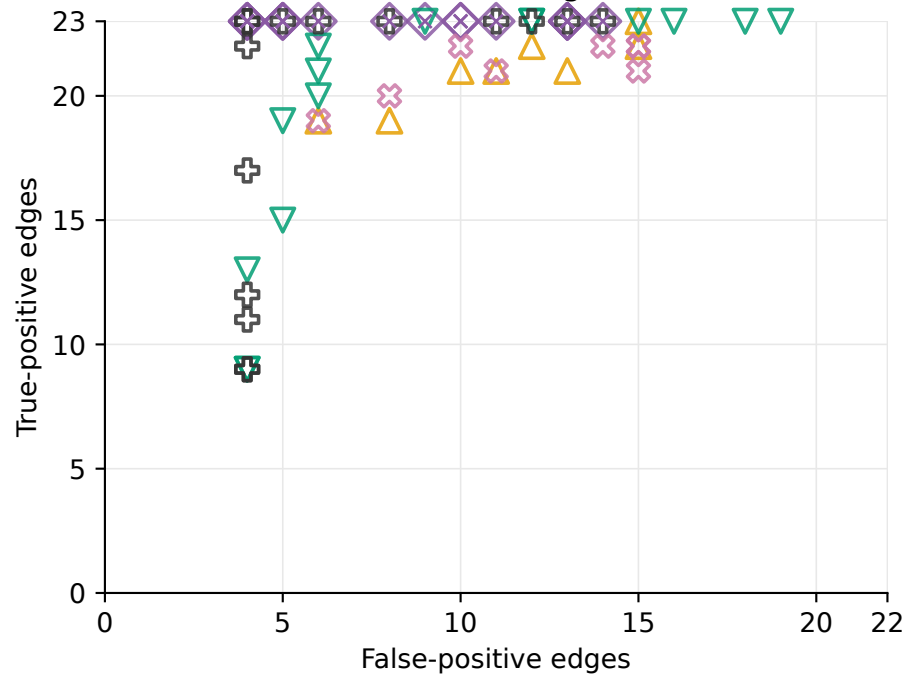

- ◇ PS-MIP: targets withheld
- △ UT-IGSP: targets supplied
- ▽ GnIES: target union supplied

- ⊕ GIES: complete targets
- ⊗ IGSP: complete targets

Intervention targets withheld from PS-MIP; documented target information retained by baselines.


Unconnected settings; overlaps retained. Cross inside a marker = feasible but nonoptimal PS-MIP.

Causal Chambers | Actuator chain (scm_4)


40,000 observations | 10 variables | 23 reference edges | 63/63 successful fits

0-25 FP viewing window; other points remain in full results

Directed edges

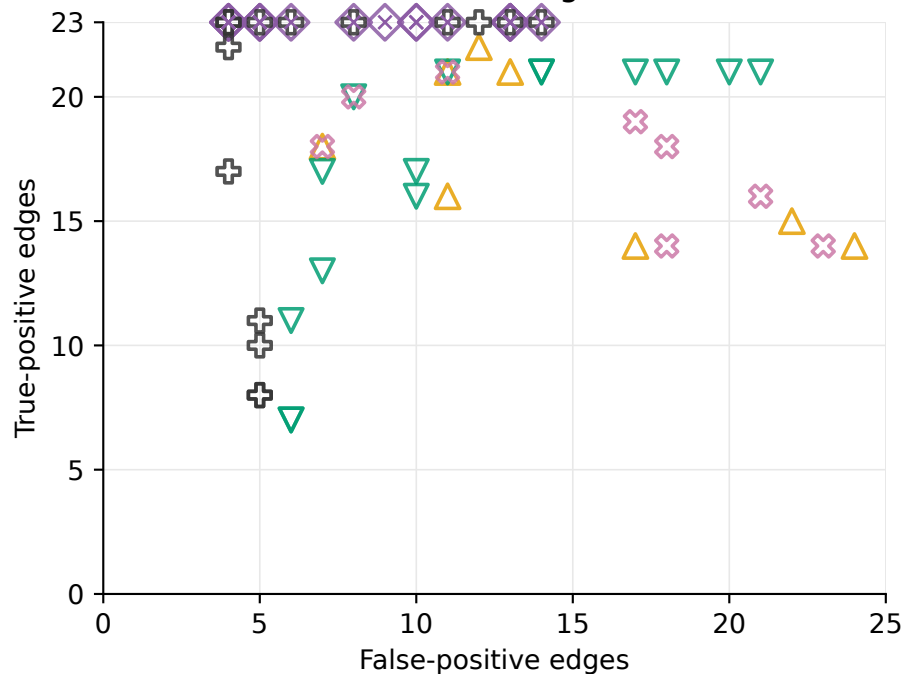

Skeleton edges

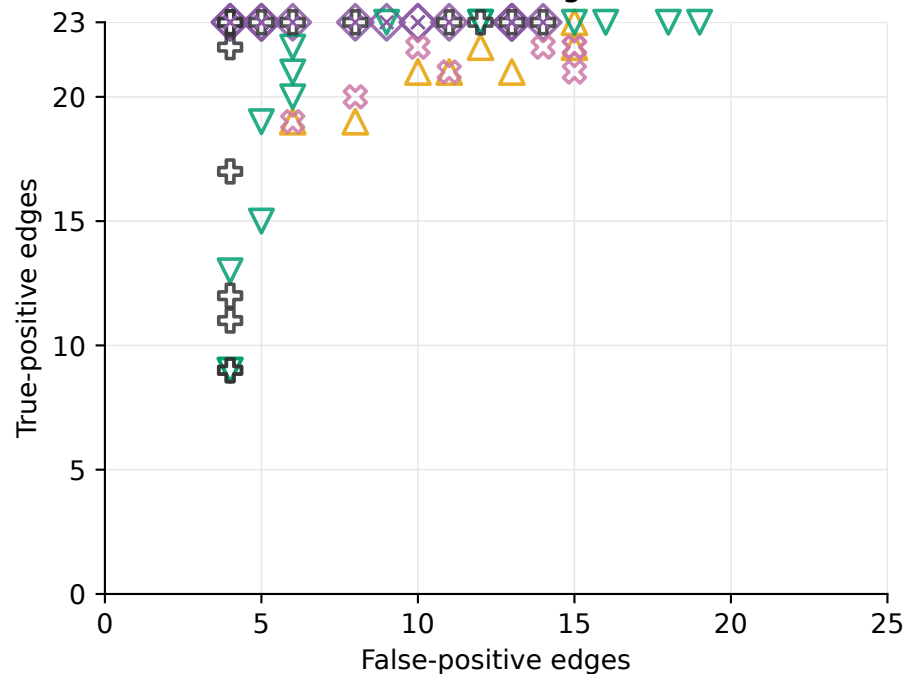

- ◇ PS-MIP: targets withheld
- △ UT-IGSP: targets supplied
- ▽ GnIES: target union supplied

- ⊕ GIES: complete targets
- ⊗ IGSP: complete targets

Intervention targets withheld from PS-MIP; documented target information retained by baselines.


Unconnected settings; overlaps retained. Cross inside a marker = feasible but nonoptimal PS-MIP.

Causal Chambers | Actuator chain (scm_4)


40,000 observations | 10 variables | 23 reference edges | 63/63 successful fits

Full-range normalized paths

Directed edges

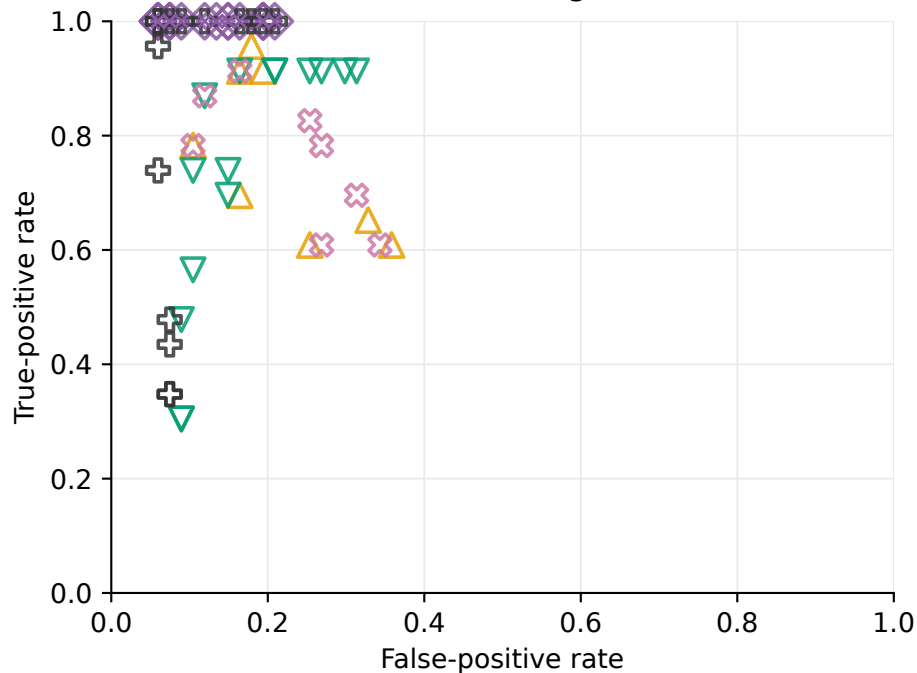

Skeleton edges

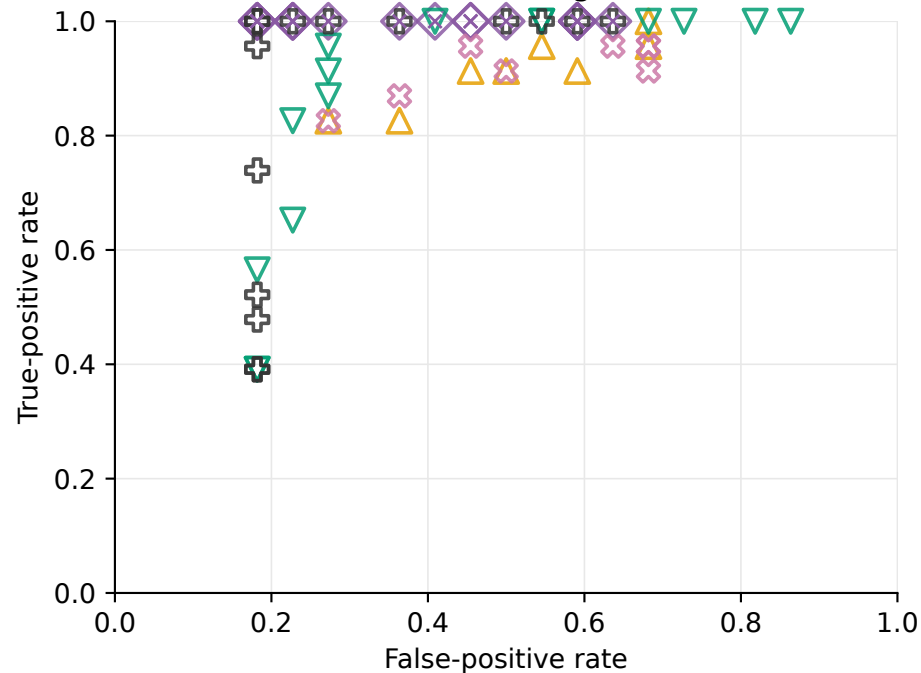

- ◇ PS-MIP: targets withheld
- △ UT-IGSP: targets supplied
- ▽ GnIES: target union supplied

- ⊕ GIES: complete targets
- ⊗ IGSP: complete targets

Intervention targets withheld from PS-MIP; documented target information retained by baselines.

Unconnected settings; overlaps retained. Cross inside a marker = feasible but nonoptimal PS-MIP.