

The Intervention-Coverage Barrier: Why Finite Functional Tests Cannot Certify Neural Replacement Fidelity

Thomas Ryan

Independent Researcher, San Francisco, California, USA

Status: Public preprint; not peer reviewed

Version: 1.0.0 - 29 August 2026

Abstract

Functional tests are indispensable for evaluating neural replacements, brain emulations, and other dynamical substitutes. A failed test can falsify fidelity at a declared interface. The meaning of a successful finite battery is more limited. This paper formalizes an intervention-coverage barrier: on a continuous state-intervention domain, exact agreement on any finite battery is compatible with a continuous piecewise-linear candidate that diverges at an admissible, reachable, untested intervention. The construction is representable by a finite ReLU network and already applies to a one-state recurrent system. It therefore cannot be dismissed as a discontinuous pathology or as an artifact of purely static functions.

The paper separates three claims that are often compressed into the word "validation": finite-battery falsification, distributional validation under an explicit intervention law, and worst-case certification over a declared domain. For a discrepancy function with a sound global Lipschitz constant K , a finite battery B supports the uniform bound

$$\sup_{x \in X} d(x) \leq \max_{b \in B} d(b) + K\rho(B; X),$$

where ρ is the fill distance of the battery in the declared domain. The residual term is minimax tight for the information class. On the unit cube under the max norm, a target error ε requires at least $(K/(2\varepsilon))^m$ evaluations in dimension m in the worst case, exposing an exponential coverage burden unless stronger structure is justified. For recurrent substitutions, one-step bounds transport only on a domain containing both source and candidate reachable trajectories and are amplified by the incremental dynamics.

A frozen synthetic confirmation tested five parameterized recurrent packets. Across 368 trajectories and 3,632 tested state-input pairs, every candidate matched its source exactly on its battery but diverged by 0.12-0.20 at a reachable unseen intervention. Every sound one-step coverage audit rejected a 0.01 uniform certificate. Equal-budget space-filling designs reduced approximate fill distance relative to random batteries in all five frozen replications, but did not erase the claim distinction. These deterministic fixtures validate the implementation, not the theorem by repetition.

The result is a claim-audit framework, not an impossibility theorem for whole-brain emulation. It does not show that any specific replacement fails, that functional fidelity is unattainable, or that consciousness is preserved or lost. It shows what evidence must be added before finite functional success can be called distributional validation or worst-case certification.

Keywords: neural replacement; whole-brain emulation; functional fidelity; interventions; system identification; coverage; verification; falsification; recurrent dynamics

1. Introduction

An engineered neural substitute is usually evaluated by making it do things. Investigators present stimuli, intervene on states or mechanisms, record trajectories, and compare the outputs of the source and candidate. This is the right basic instinct. Anatomy alone does not determine dynamics, ordinary observations can conceal causal differences, and a replacement that fails under a relevant perturbation is not functionally faithful on the tested interface.

The problem begins when success on a battery changes grammatical category on its way into a conclusion. "The candidate passed every test we ran" can become "the candidate is functionally equivalent" without an explicit intervention distribution, a declared domain, a coverage argument, or a verification step. Those sentences are not synonymous. The first is a finite observation. The second can mean at least two stronger mathematical claims: low expected discrepancy under a probability law, or low worst-case discrepancy over all admissible interventions. Each requires evidence absent from a bare list of passes.

This distinction is not a philosophical technicality. Functional testing is being proposed as a practical way to navigate fidelity tradeoffs in whole-brain emulation (Linssen and Koene, 2025). Brain-emulation roadmaps increasingly treat benchmarks, perturbations, and behavioral validation as central engineering instruments. Controlled-perturbation frameworks similarly define generative fidelity using response distributions under novel interventions (Cipresso, 2026). In consciousness-oriented computational functionalism, complete future input-output roles and, more recently, mechanism-enriched intervention profiles are candidate invariants of functional organization (Kanai and Ma, 2026). The more weight a field places on functional tests, the more important it becomes to state exactly what a passed test licenses.

The core result is simple:

A finite intervention battery can falsify a universal fidelity claim, but it cannot certify that claim over a continuous domain without additional structural, probabilistic, or regularity assumptions.

That sentence echoes established ideas from system identification, optimal recovery, global optimization, simulation relations, and formal verification. The mathematical ingredients are not claimed as new. The contribution is to assemble them into an operational audit for neural replacement and brain-emulation fidelity, to make the recurrent and reachable-state seam explicit, and to attach a fail-closed reporting standard that preserves the value of both positive and null results.

The paper makes five bounded contributions.

- 1 It defines a three-level claim ladder: finite-battery falsification, distributional validation, and worst-case certification.
- 2 It gives a constructive finite-battery indistinguishability result for a recurrent system using a continuous piecewise-linear witness.
- 3 It states a tight fill-distance audit under a sound global Lipschitz assumption and a corresponding dimensional lower bound.
- 4 It states the additional candidate-inclusive reachable-domain condition needed to transport local discrepancy through recurrent dynamics.
- 5 It reports exploratory and frozen confirmatory fixtures with exact shams, deliberately wrong controls, reachability controls, non-normal amplification, equivalent-realization controls, and delayed-mismatch controls.

The claim ceiling is equally important. This study does not infer anything about subjective experience, personal identity, survival, moral status, biological replaceability, or substrate independence. It does not establish that a particular whole-brain emulation is inadequate. It supplies a method for keeping the strength of a fidelity claim aligned with the strength of its evidence.

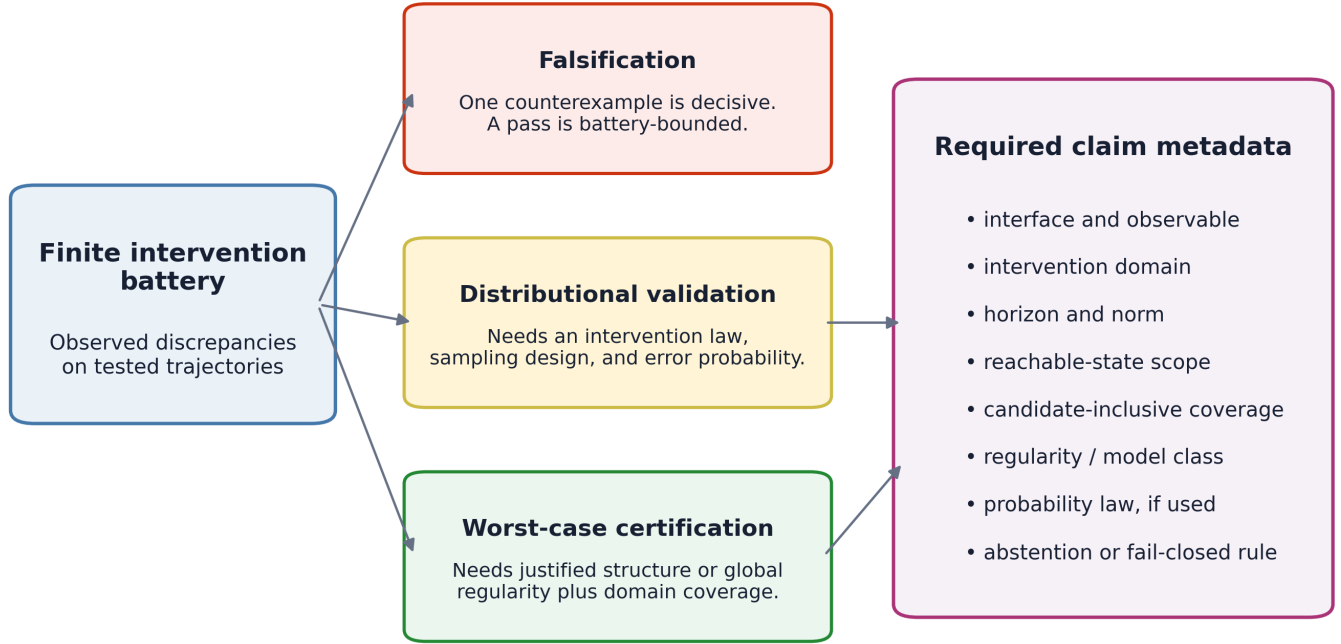


Figure 1. A passed finite battery can support three different kinds of statement only when the required metadata and assumptions are supplied.

2. From test success to the right claim

2.1 Interface-relative fidelity

Let a source system S and candidate system C interact with an intervention sequence through a declared interface. The interface specifies at least:

- which variables may be manipulated;
- which initial states are admissible;
- what output or internal readout is observed;
- the time horizon and sampling convention;
- the discrepancy norm and tolerance; and
- the domain over which the claim is intended to hold.

Without these choices, "functional fidelity" has no unique estimand. A candidate can be exactly faithful at an external behavioral output while differing internally, or exact on ordinary trajectories while differing under internal intervention. Neither is a contradiction. They are different interfaces.

Write χ for the declared space of finite-horizon experimental conditions. An element χ may encode an initial condition, an intervention sequence, a readout choice, and any fixed contextual variables. Let

$$d(\chi) = D(Y_S(\chi), Y_C(\chi)) \geq 0$$

be the discrepancy between the source and candidate trajectories at the declared interface. A tolerance ε defines a local pass when $d(\chi) \leq \varepsilon$. This paper is agnostic about the particular trajectory distance D , provided the choices are declared before the result is interpreted.

2.2 Three non-equivalent conclusions

Finite-battery falsification. For a finite set $B = \{\chi_1, \dots, \chi_N\}$, the empirical statement is

$$\max_{\chi \in B} d(\chi) \leq \varepsilon.$$

A violation is a valid counterexample to a universal claim, assuming the test is correctly implemented and the intervention is in scope. A pass says only that no violation was observed on B .

Distributional validation. Given an explicit intervention law p on X , one may instead seek a statement such as

$$\Pr_{x \sim p}[d(x) > \varepsilon] \leq \alpha$$

or a bound on expected discrepancy. This requires a sampling design, independence or dependence assumptions, treatment of adaptivity, uncertainty quantification, and a clearly delimited target distribution. A held-out battery can support this kind of claim if it was actually sampled for it. It still does not imply a worst-case bound outside high-probability regions or under distribution shift.

Worst-case certification. A uniform claim has the form

$$\sup_{x \in X} d(x) \leq \varepsilon.$$

It requires proof or a sound certificate for every admissible x . Finite evaluations can contribute to the certificate, but only through justified structure: for example, a known finite model class, symbolic reachability, monotonicity, convexity, a sound regularity constant plus coverage, an approximate simulation relation, or another exhaustive argument.

These levels are complementary. Falsification is often cheap and decisive. Distributional validation is appropriate when an intervention law is meaningful. Worst-case certification is appropriate when rare failures are unacceptable or when the claim is stated universally. The error is not choosing one level; it is reporting one while having evidence only for another.

3. Formal results

3.1 Finite-battery indistinguishability

Assume X is a compact metric space containing a finite battery B and at least one untested point x_* . Consider a source interface map $f_S : X \rightarrow \mathbb{R}$. Define the distance from x to the battery by

$$r_B(x) = \min_{b \in B} \text{dist}(x, b).$$

Choose any amplitude $a > 0$ and define

$$\phi(x) = a \frac{r_B(x)}{r_B(x_*)}.$$

Then $\phi(b) = 0$ for every tested point b , while $\phi(x_*) = a$. The candidate

$$f_C(x) = f_S(x) + \phi(x)$$

therefore agrees exactly on B and differs at the admissible untested point.

Proposition 1 (finite-battery indistinguishability). Let X be a compact metric domain and B a finite proper subset of X . For every continuous source interface map and every positive amplitude, there exists a continuous candidate interface map that agrees with the source on B and differs by the chosen amplitude at some point in $X \setminus B$.

Proof. A finite set is closed. Because x_* is outside B , $r_B(x_*) > 0$. Distance to a closed set is continuous and 1-Lipschitz. The construction above is therefore continuous, vanishes on B , and takes value a at x_* . Adding it to the source yields the result. QED.

The construction is not confined to arbitrary continuous black boxes. On a compact rectangular subset of Euclidean space with the max norm, distances to individual battery points can be written using absolute values and maxima; distance to B is their minimum. Finite compositions of affine functions with minimum, maximum, and absolute value are continuous piecewise-linear functions. Such functions admit finite ReLU representations. When the source is finite-ReLU-representable, the constructed candidate is too. A finite battery therefore cannot obtain a universal guarantee merely by restricting both systems to a broad finite-ReLU class.

The one-step construction also applies to recurrent systems. A memoryless interface is a special case of a stateful system, so the universal statement already fails for the larger stateful class. More constructively, Section 5 places a compact piecewise-linear bump in an untested but reachable state-input region of a one-state recurrence. The source and candidate generate identical trajectories on every tested intervention yet differ after a two-step unseen sequence reaches the bump.

An adaptive tester does not escape the result if it terminates after finitely many queries. Once the algorithm stops, its queried set is finite. A candidate can agree on that realized query history and differ elsewhere. Adaptivity can improve where tests are placed; it does not convert a finite point set into distribution-free certainty over an unrestricted continuous class.

3.2 A tight regularity-and-coverage audit

Proposition 1 identifies what a finite battery lacks. A sound regularity assumption can partly fill the gap. Let d itself be globally K -Lipschitz on X :

$$|d(x) - d(z)| \leq K \text{dist}(x, z).$$

Define the fill distance

$$\rho(B; X) = \sup_{x \in X} \min_{b \in B} \text{dist}(x, b).$$

Proposition 2 (fill-distance certificate). If d is globally K -Lipschitz on the declared domain X , then

$$\sup_{x \in X} d(x) \leq \max_{b \in B} d(b) + K\rho(B; X).$$

Proof. For any x , choose a nearest battery point b . Lipschitz continuity gives $d(x) \leq d(b) + K \text{dist}(x, b)$. Bound the first term by the observed maximum and the second by the fill distance, then take the supremum over x . QED.

The residual term cannot be uniformly improved using only the sampled values, K , and the metric domain. When all observed discrepancies are zero, the function

$$d_*(x) = K r_B(x)$$

is nonnegative, K -Lipschitz, zero on B , and reaches $K\rho(B; X)$. Thus the certificate is minimax tight for this information class. A large upper bound does not assert that the candidate fails; it correctly says the available evidence cannot certify that it passes.

The word "sound" matters. Estimating a Lipschitz constant from observed slopes is not generally a sound global bound: the steepest region may be unobserved. A usable K must come from verified model structure, analytically bounded components, interval or symbolic methods, or another argument that covers the declared domain. Likewise, an approximate numerical fill distance can support exploration but is not itself a proof unless its approximation error is bounded.

3.3 Dimensional coverage burden

For N sample points in the unit cube $[0, 1]^m$ under the max norm, covering the cube by N balls of radius r requires

$$N(2r)^m \geq 1.$$

Therefore

$$\rho(B; [0, 1]^m) \geq \frac{1}{2N^{1/m}}.$$

Combining this with Proposition 2 in the favorable case of zero measured discrepancy gives a necessary worst-case evaluation count

$$N \geq \left(\frac{K}{2\varepsilon}\right)^m.$$

At $K = 1$ and $\varepsilon = 0.05$, the lower bound is 10^m : 10 tests in one dimension, 100 in two, 10,000 in four, 100 million in eight, and one trillion in twelve. These are not sample-size prescriptions for a particular neural experiment. They expose the information class being claimed. Real intervention domains may have lower intrinsic dimension, anisotropic sensitivity, compositional structure, symmetries, sparsity, reachable-set restrictions, or verified abstractions. Such structure is precisely what must be demonstrated to avoid the generic burden.

Worst-case coverage scales exponentially without stronger structure

$K = 1$; target uniform error = 0.05 on the unit cube

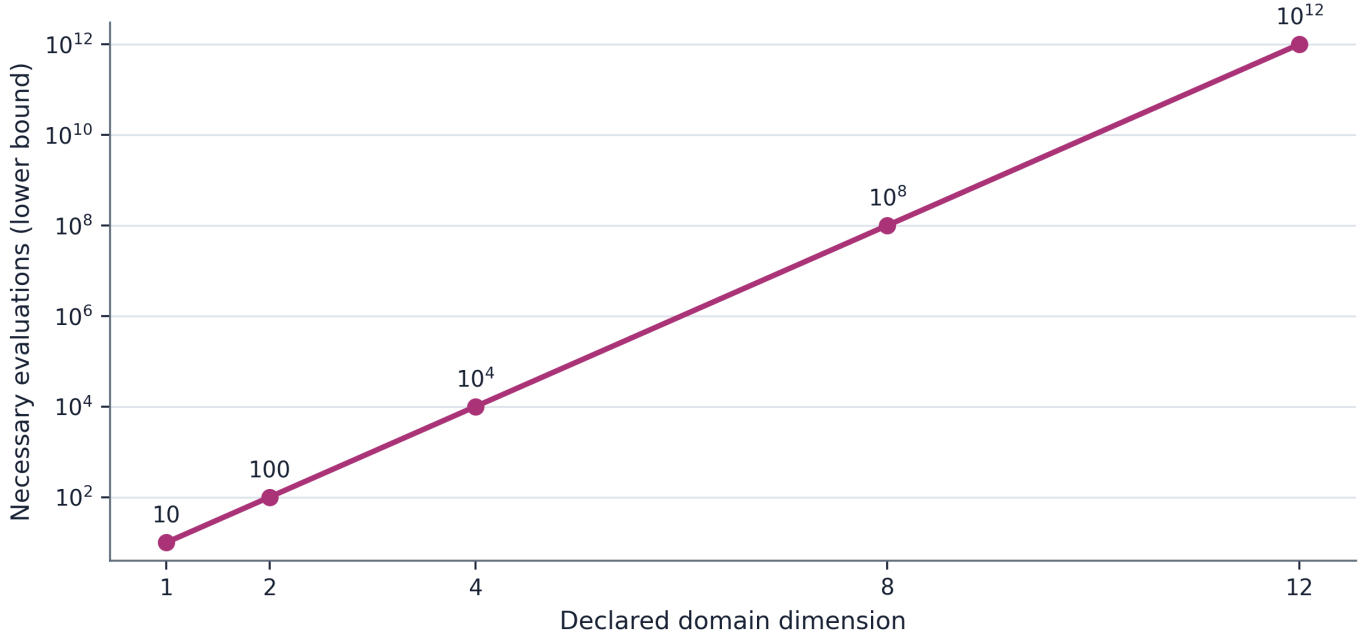


Figure 5. Necessary worst-case evaluations from the unit-cube covering lower bound for $K = 1$ and $\epsilon = 0.05$.

3.4 Recurrent transport is candidate-inclusive

Pointwise one-step similarity does not automatically survive recurrent composition. Let V compare a source state and candidate state. Suppose that throughout a domain R ,

$$\forall (F_S(s, u), F_C(c, u)) \leq LV(s, c) + \delta$$

for every admissible paired state (s, c) and input u . If the initial discrepancy is V_0 , induction gives

$$V_t \leq L^t V_0 + \delta \sum_{j=0}^{t-1} L^j.$$

If the output map adds an M -Lipschitz term and a direct mismatch δ_y , then

$$e_t^{\text{out}} \leq M V_t + \delta_y.$$

This familiar simulation-style bound carries a frequently omitted condition: R must contain both source and candidate reachable trajectories for the interventions in scope. Measuring local mismatch only on source-clamped states does not show that the candidate remains in the measured tube. Once candidate state drifts, later comparisons may be evaluated where no bound was established. Non-normal or unstable dynamics can amplify a small local seam even when eigenvalues or ordinary responses appear benign.

The remedy depends on the model class. It may be an invariant tube, incremental input-to-state stability, contraction, an approximate simulation relation, verified reachability, or explicit testing over candidate-inclusive state pairs. The present result does not elevate any one method. It makes the missing obligation visible.

4. Relation to prior work and the Papers 1-9 lineage

4.1 Established foundations

System identification has long tied what can be inferred to input design, excitation, observability, model class, and noise assumptions (Ljung, 1999). Linear realization theory shows that finite Markov parameters can identify bounded-order minimal linear systems under suitable rank conditions, while distinct state-space realizations related by similarity can have identical input-output behavior. Those positive cases are important: Paper 10 does not claim that finite certification is never possible. It claims that the assumptions making it possible must be carried into the conclusion.

Bisimulation and approximate simulation relations provide structural guarantees for transition systems. Recent work learns candidate bisimulations from finite data but then checks them over the entire state space with satisfiability-modulo-theory solving and counterexample-guided refinement (Abate, Giacobbe, and Schnitzer, 2024). That final verification step is the exact contrast at issue here. Causal abstraction similarly formalizes faithfulness across interventions and mechanism transformations rather than treating observational agreement as sufficient (Geiger et al., 2025).

Neural-network verification asks whether specified input-output properties hold over regions, not merely at sampled points. Exact or complete methods can be expensive; verification is hard for broad ReLU classes, and general verification domains are coNP-hard in recent complexity results (Froese, Grillo, and Skutella, 2025). Probabilistic verification deliberately weakens the claim to a distributional one. These literatures already contain the relevant distinction. The present paper imports it into a fidelity setting where "test battery" and "certificate" are easily conflated.

Global optimization of Lipschitz functions and optimal-recovery theory provide the regularity-and-coverage mathematics. Malherbe and Vayatis (2017), for example, derive minimax behavior for global optimization under Lipschitz assumptions. Proposition 2 is therefore presented as an audit identity and tight witness, not as a new optimization theorem.

4.2 Whole-brain emulation, behavior, and consciousness

Linssen and Koene (2025) argue that standardized functional tests can guide complex cost-fidelity tradeoffs in whole-brain emulation. Their proposal makes the practical need for broad batteries clear. The State of Brain Emulation Report 2025 likewise centers benchmarking while acknowledging incomplete functional coverage. Paper 10 is constructive toward this program: it specifies the metadata needed to prevent a useful benchmark from being assigned a stronger evidential meaning than it has.

Cipresso (2026) treats behavioral measurement as system identification through controlled perturbations, emphasizes perturbation richness and domain-specific reconstructability, and validates on unseen interventions. That framework supports a distributional or domain-specific validation program. The present contribution adds a worst-case audit: a finite held-out set still requires a sampling law for a probabilistic statement or a certificate for a universal one.

Kanai and Ma (2026) distinguish boundary behavior from mechanism-enriched intrinsic causal-computational realization. Their complete future input-output roles quantify over all possible input histories under a fixed interface; their enriched proposal additionally includes internal mechanisms and intervention profiles. Paper 10 does not adjudicate that consciousness theory. It shows why finite observation of a subset of those roles is not the same object as the quantified structure.

Kleiner and Hoel (2021) analyze falsification in consciousness science and the possibility of substitutions that preserve predictions while changing theoretical attribution. Their target is the logic of theory testing. The present target is engineering inference from finite intervention success. Both reinforce the asymmetry between finding a counterexample and certifying a universal claim.

4.3 Papers 1-9

This work is Paper 10 in a public research program on consciousness preservation and functional continuity.

- Paper 1 mapped theories of consciousness to divergent engineering requirements and emphasized that preservation criteria are theory-relative.
- Paper 2 introduced an exploratory Attention Schema Theory transplant assay in a toy agent.
- Paper 3 turned functional continuity into a benchmark with explicit source-candidate comparisons.
- Paper 4 added history dependence, delayed probes, and counterfactual source-state tests.
- Paper 5 added interchange interventions and source-specific causal continuity.

- Paper 6 exposed the scaffold continuity trap in persistent coding agents: unchanged support systems can mimic continuity.
- Paper 7 exposed purpose disclosure as a confound in AI-welfare evaluation.
- Paper 8 developed the Binding Test for causal choice control, with construction audits and exploratory feasibility boundaries.
- Paper 9 tested local neural-dynamics equivalence inside a 45,669-neuron connectome-constrained fly visual model. Ordinary outputs remained robust for locally eligible substitutions, while a narrow causal gain seam did not clear a matched-control confirmation gate.

Paper 9 most directly motivates the present work. Its 24 moving-edge trajectories, block substitutions, activity impulses, solver checks, exact shams, and deliberately wrong controls formed a serious falsification battery. Paper 9 nevertheless stated a bounded conclusion: it did not establish connectome sufficiency, biological interchangeability, consciousness preservation, or a general composition theorem. An attempted Paper 10 follow-up first sought a positive causal-compression or finite intervention-basis theorem. Hostile prior-art and data audits killed both directions: the empirical aggregate failed frozen reconstruction gates, and the theorem candidate collapsed into classical realization, reachability, simulation, verification, and optimal-recovery results.

The surviving question was therefore not "which small battery certifies replacement?" but "what exactly prevents a finite battery from becoming a certificate, and what additional evidence closes the gap?" Paper 10 makes Paper 9's restraint explicit and reusable across the whole lineage.

5. Synthetic methods

5.1 Development sequence and preregistration boundary

Exploratory development used a frozen JSON specification before the main fixture was executed. The exploratory specification hash was

5fecc6bf14b1088f15c593fc8bf245fd3b2f33e0b1d6527c9066489ef94ce2d6.

The exploratory fixture tested construction logic, measurement plumbing, controls, and figure generation. After reviewing those results, a separate confirmatory specification froze five packets, five coverage-design replications, exact and causal thresholds, conjunctive success rules, failure language, and prohibited changes. Its SHA-256 hash was

4dcc507a26d1e67e7ad9bce0b6784ea4bc9319d056d921798ec9495da31a7050.

The runner hash was

0663d496d7104d28ad7bbe9b8a720b02b4e533dce87803f3ca37c52ead5eadfd.

No packet, seed, threshold, search grid, or pooling rule was changed after confirmatory execution. Because the fixtures are deterministic and generated by one implementation, different seeds are transport tests, not independent empirical replications.

5.2 Recurrent source and candidate

Each packet used the scalar source recurrence

$$s_{t+1} = as_t + u_t, \quad s_0 = 0,$$

where a was packet-specific and u_t was bounded. The battery comprised uniformly sampled finite input sequences. Every state-input pair visited by the source battery was retained.

The candidate added a compact max-norm cone bump:

$$c_{t+1} = ac_t + u_t + A \max\left(0, 1 - \frac{\|(c_t, u_t) - z\|_\infty}{r}\right).$$

The center z was selected on a finite grid to be both clear of every tested state-input pair and reachable after a one-input lead-in from zero. The support radius was 90% of that clearance, so the bump was exactly zero throughout every tested trajectory and throughout the lead-in. A two-step unseen intervention then reached the center and produced discrepancy A . The bump is continuous piecewise-linear and finite-ReLU representable.

The declared state range was the invariant bound $[-U/(1 - |a|), U/(1 - |a|)]$; the intervention range was $[-U, U]$. Approximate fill distance was evaluated over their Cartesian grid. The bump Lipschitz constant A/r supplied a sound analytic constant for the constructed one-step discrepancy term, while the gridded fill distance was labeled approximate. The reachable sequence witness separately demonstrated trajectory divergence; the fixture did not treat the one-step bound as a Lipschitz constant for the complete sequence-to-trajectory map.

A finite battery can miss a reachable switching region

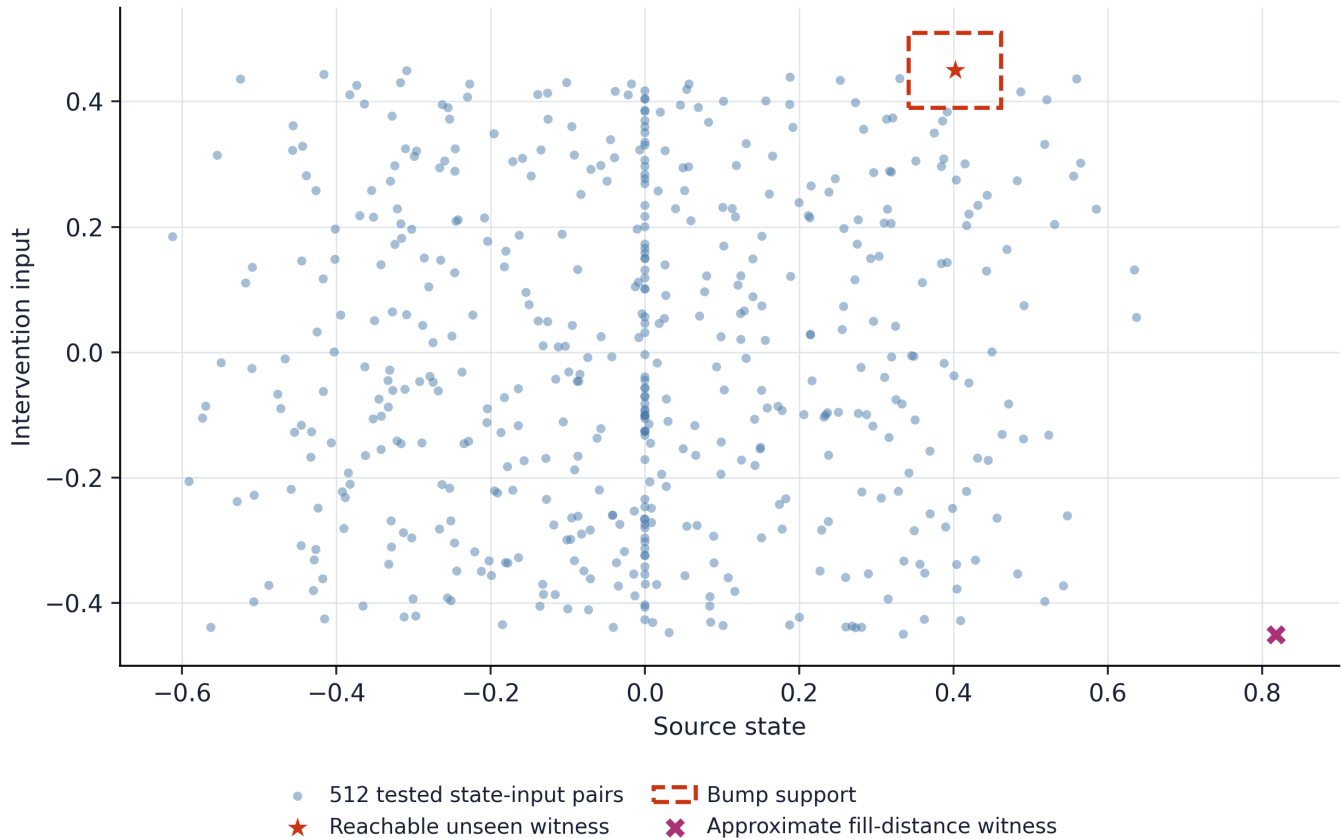


Figure 2. Exploratory state-input battery, reachable unseen bump, and approximate fill-distance witness.

5.3 Frozen outcomes

The primary confirmatory estimand was conjunctive: for each of five independently parameterized packets, could the candidate be exactly indistinguishable on the finite battery, exceed 0.05 discrepancy at a reachable unseen intervention, and be rejected by the coverage audit at a 0.01 uniform threshold? A failure in any packet killed implementation generality; pooled success could not rescue it.

The secondary estimand compared a regular 7 by 7 grid with the median fill distance of 50 equal-budget random batteries on a 101 by 101 evaluation grid. Each of five frozen seeds had to yield a regular-to-random ratio at or below 0.75.

5.4 Controls

The exploratory control suite included:

- exact replacement, which had to produce zero interface error;
- an output-unobservable hidden-state mismatch, which had to remain invisible at the declared interface;
- a mismatch outside the declared reachable experiment, which had to remain invisible;
- a deliberately wrong interface offset, which had to be detected;
- a stable non-normal recurrence, which had to amplify a small local impulse;
- two linearly similar realizations, which had to match their Markov parameters; and

- a finite-horizon delayed mismatch, which had to agree through the declared number of Markov parameters and then diverge.

These controls distinguish a sound measurement path from an overbroad interpretation. In particular, unobservable and unreachable differences are not false negatives when the claim is explicitly interface- and domain-relative.

6. Results

6.1 Exploratory construction passed all frozen gates

The exploratory battery contained 64 trajectories and 512 tested state-input pairs. The candidate's maximum discrepancy over the battery was exactly 0. The reachable unseen intervention produced maximum output divergence 0.20. The approximate fill distance over the declared state-input domain was 0.270465. With the analytic bump regularity, the corresponding coverage upper bound was 0.902961, far above the 0.01 uniform-equivalence threshold. The audit therefore failed closed despite perfect empirical success.

At equal budget 64 in two dimensions, an 8 by 8 regular grid had approximate fill distance 0.071429. The median across 100 frozen random batteries was 0.198001. The ratio was 0.360749, below the frozen maximum 0.75. Space-filling design substantially improved the worst uncovered region but did not establish a universal certificate at the selected tolerance.

All shams behaved as declared. Exact replacement, output-unobservable hidden mismatch, and unreachable mismatch produced zero interface error. The wrong-interface control produced 0.10 error. The stable non-normal recurrence amplified the local impulse by 16.384 times. Similar linear realizations differed in their first 16 Markov parameters by at most 8.33×10^{-17} . The delayed sham matched eight Markov parameters and first differed at index eight. Five deterministic software tests passed.

6.2 Every frozen confirmatory packet reproduced the barrier

The five packets varied seed, trajectory count, horizon, recurrence coefficient, input bound, bump amplitude, and search-grid resolution. Together they contained 368 tested trajectories and 3,632 tested state-input pairs. Every tested discrepancy was exactly zero. Reachable unseen discrepancies were 0.12, 0.15, 0.18, 0.20, and 0.14 for packets C01-C05, respectively. All exceeded the frozen 0.05 threshold.

Approximate fill distances were 0.127340, 0.209941, 0.223666, 0.271177, and 0.127564. The corresponding one-step regularity-and-coverage upper bounds were 0.181099, 0.620551, 1.024686, 2.039261, and 0.375507. Every bound exceeded the 0.01 equivalence threshold, so every certificate correctly abstained. The primary conjunctive gate passed without amendments.

Tested battery discrepancy: 0.000 in C01-C05

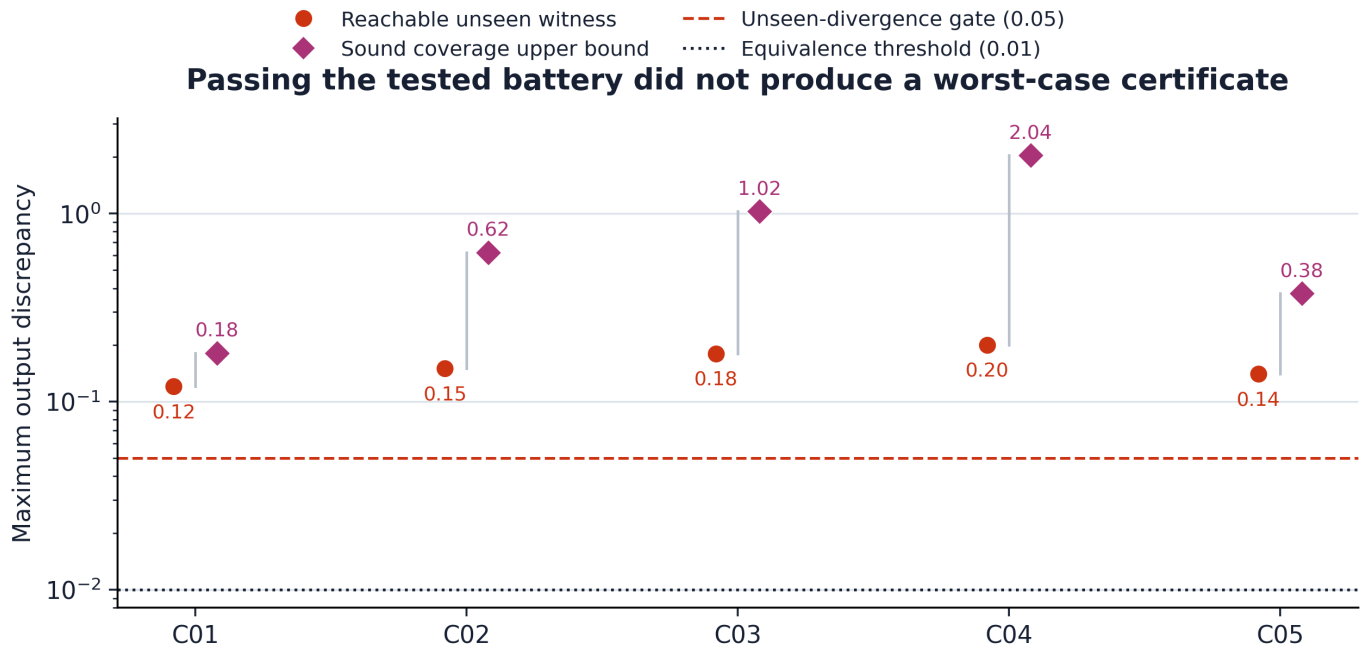


Figure 4. Confirmatory tested discrepancies, reachable unseen witnesses, and coverage bounds. A zero tested discrepancy does not turn a large upper bound into a pass.

6.3 Coverage design helped in every frozen replication

For budget 49 in two dimensions, the regular grid's approximate fill distance was 0.083333 in all five replications. Median random-battery distances ranged from 0.208402 to 0.217750. Regular-to-random ratios ranged from 0.382702 to 0.399869, passing the 0.75 threshold in all five seeds. The secondary conjunctive gate passed.

This result supports a design recommendation, not a universal ranking of designs. Regular grids are poorly suited to high ambient dimension, constrained reachable sets, anisotropic metrics, or costly interventions. The correct general principle is to optimize coverage or discriminatory power with respect to the declared domain and metric, then report what remains uncovered.

Space-filling design reduces, but does not eliminate, unseen uncertainty

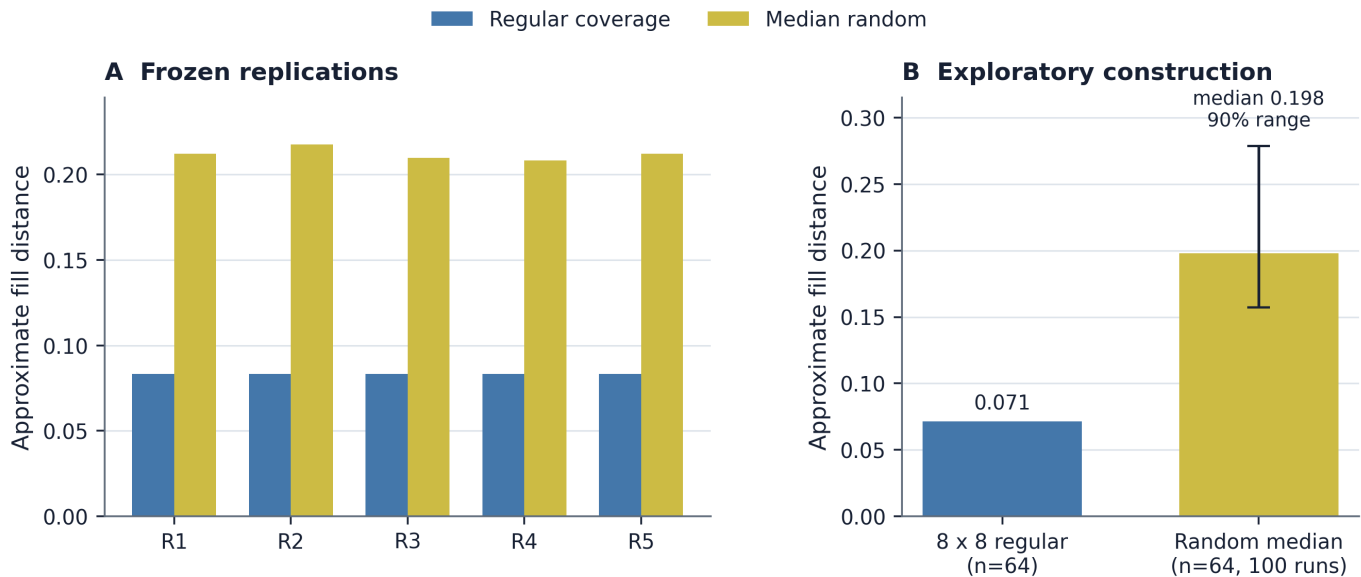


Figure 3. Equal-budget space-filling batteries reduced approximate fill distance relative to random placement in the exploratory fixture and all frozen replications.

7. A reporting standard for functional fidelity

A fidelity result should identify its rung on the claim ladder and include the metadata that makes the rung meaningful.

7.1 Minimum record for every battery

Every report should declare:

- 1 source and candidate artifact identities;
- 2 manipulated variables and allowed intervention policies;
- 3 initial-state and reachable-state domain;
- 4 readout interface and whether internal coordinates are compared;
- 5 horizon, timing, solver, and stopping convention;
- 6 discrepancy function, normalization, tolerance, and aggregation rule;
- 7 battery-generation process, adaptivity, and exclusions;
- 8 exact shams, positive controls, and deliberately wrong controls;
- 9 candidate-inclusive drift or reachability checks; and
- 10 the sentence that remains valid if every test passes.

7.2 Additional record for a distributional claim

Distributional validation additionally requires the target intervention law, the relationship between test sampling and that law, the probability statement being estimated, uncertainty and dependence treatment, multiplicity rules, and a domain-shift boundary. "Held out" is a data-management property, not by itself a probability model.

7.3 Additional record for a worst-case certificate

Worst-case certification additionally requires a sound structural argument. If regularity and coverage are used, the report must give the metric, a globally valid K , a sound bound on fill distance, and the resulting upper bound without replacing it by the sampled maximum. If symbolic or formal verification is used, the specification, solver completeness conditions, numerical assumptions, and unresolved regions must be reported. An inconclusive certificate is not a failed candidate; it is a failed claim at that strength.

7.4 Fail-closed language

When a battery passes but the certificate bound exceeds tolerance, the valid conclusion is:

No discrepancy above the threshold was observed on the declared battery; the available assumptions and coverage do not certify uniform fidelity over the declared domain.

This is a publishable result. It identifies what was tested, what survived, and which next measurement would reduce uncertainty. It avoids both false reassurance and the opposite error of treating inability to certify as evidence of failure.

8. Discussion

8.1 What is established

The analytic construction establishes that finite pointwise intervention success is insufficient for a universal fidelity claim over a continuous domain when the candidate class can express localized continuous piecewise-linear differences. The fill-distance result establishes a tight worst-case audit under a sound global Lipschitz bound. The recurrent transport inequality establishes the need to control candidate as well as source reachability when local errors are composed through time.

The deterministic fixtures establish that the construction and audit survive variation in recurrence coefficient, intervention bound, trajectory count, horizon, search grid, and bump size. The controls establish that the implementation detects visible mismatches, respects interface-relative equivalence, reproduces finite-horizon ambiguity, and exposes dynamic amplification. They do not provide independent empirical confirmation of a biological phenomenon.

8.2 What is not established

The paper does not establish that whole-brain emulation is impossible, that functional testing is futile, or that a tested emulation is unfaithful. It does not show that a biologically plausible candidate can hide an arbitrary cone bump. Candidate classes with verified structure may rule out the witness. Finite tests may identify a bounded-order linear system, validate low average error under a target distribution, or work jointly with a sound verifier.

The paper also does not establish any criterion of consciousness. Functional, causal, and dynamical equivalence are theory-relevant engineering properties; whether they are sufficient for consciousness or personal survival is a separate conditional question. Nothing here measures phenomenal experience.

8.3 Why the negative result has positive engineering value

The barrier turns a vague demand for "more tests" into three concrete choices. First, weaken the conclusion to the finite battery actually run. Second, declare an intervention distribution and validate statistically under it. Third, justify enough structure to certify the domain. Each is scientifically respectable. Each produces useful null results.

Coverage design also gives a rational next-test policy. If the discrepancy is believed smooth in a defensible metric, select interventions that reduce fill distance or the corresponding posterior/verification uncertainty. If mechanisms imply anisotropy, use that geometry. If reachability is constrained, cover the reachable set rather than an ambient cube. If a candidate leaves the certified tube, abstain and refine. A benchmark can therefore be both aggressive in falsification and honest about certification.

8.4 Implications for neural replacement programs

A neural replacement test should resist four shortcuts.

First, ordinary behavior cannot stand in for the chosen internal causal interface. Second, source-clamped local equivalence cannot stand in for candidate-inclusive recurrent equivalence. Third, a long but finite battery cannot stand in for a distribution-free universal. Fourth, artifact hashes, test counts, repeated seeds, and AI agreement cannot stand in for

independent evidence.

The constructive workflow is staged:

- 1 use broad finite batteries to search efficiently for failures;
- 2 separate exploratory tuning from frozen confirmation;
- 3 hold out interventions according to an explicit target law when making distributional claims;
- 4 audit coverage in a declared metric;
- 5 prove or verify structural transport where a worst-case claim is needed; and
- 6 state an abstention boundary before looking at confirmatory outcomes.

This workflow does not guarantee success. It guarantees that failure, null, and positive outcomes retain interpretable publication value.

9. Limitations and decisive next experiments

The synthetic domain is deliberately minimal. It shows the logical seam cleanly but does not estimate how severe the seam is in a particular biological model. The bump is adversarial by construction. Real candidate families may be much smoother, lower-dimensional, or more constrained; conversely, real neural systems may contain discontinuities, metastable transitions, plasticity, hidden variables, and long horizons that make certification harder.

The fill distances in the fixtures are numerical grid approximations. They are adequate for deterministic implementation tests because the analytic construction supplies the theorem, but a deployed certificate would require rigorous covering bounds. The recurrence is deterministic and scalar. Stochastic systems require distances between trajectory laws and a separation between aleatoric variation, model error, and rare-event guarantees.

Three next experiments would be decisive.

Verified small-circuit challenge. Choose a bounded neural circuit model whose transition and readout maps admit exact or interval verification. Compare three outputs from the same finite battery: sampled maximum, distributional holdout estimate, and verified supremum. The result would measure how often ordinary reporting changes the decision.

Candidate-inclusive tube test in Paper 9's model class. Construct a reduced recurrent block in which local substitution error can be bounded on both source and candidate reachable tubes. Test whether the transport bound predicts ordinary and perturbational divergence across horizon. A failed bound with observed preservation would diagnose conservatism; an escaped tube would localize the missing measurement.

Coverage-aware benchmark competition. At fixed intervention cost, compare random, regular, discrepancy-seeking, model-disagreement, and reachability-aware designs on hidden candidate families. Freeze candidates and the evaluation domain before design selection. The primary outcome should be worst hidden discrepancy found per unit cost, with a separate soundness score for any claimed certificate.

Kill criteria should remain explicit. If an exact prior source is found that already states and operationalizes the complete three-level audit for stateful neural replacement, the novelty claim should be narrowed to replication or withdrawn. If the proposed metric cannot be justified as relevant to the interface, coverage calculations should not be treated as fidelity evidence. If a regularity constant is estimated only from observed slopes, the worst-case certificate should be killed. If confirmatory interventions are exposed during candidate tuning, the confirmatory label should be removed.

10. Conclusion

Functional tests are strongest when their asymmetry is respected. A single well-implemented counterexample can refute fidelity at a declared interface. Any finite collection of successes remains a finite collection unless a probability law or a sound structural certificate connects it to the untested domain.

For neural replacement and brain emulation, the practical rule is concise:

Report the battery as falsification evidence, report a sampling law for distributional evidence, and report a sound coverage or verification argument for a worst-case certificate.

This rule raises the bar without making null results disposable. A candidate may pass every test and still leave the certificate unresolved. That is not scientific failure. It is the exact boundary the evidence supports.

11. Data, code, ethics, and authorship statements

Data and code availability. The manuscript, frozen specifications, deterministic source code, unit tests, result JSONs, figures, tables, and checksums are assembled in the local Paper 10 package. External release has not been authorized. No private human or animal data are used.

Preregistration. The exploratory and confirmatory specifications are preserved separately. The confirmatory specification was hashed before its runner was executed. The package records prohibited post-execution changes and the conjunctive success rule. This local freeze is an audit artifact, not third-party preregistration.

Ethics. This is an in-silico methods and theory study. It involved no human participants or living animals. Its main ethical risk is overclaiming from functional evidence to consciousness, identity, or survival. The claim ceiling in the abstract and Discussion is binding.

Author contributions. Thomas Ryan is the sole human author and accountable operator.

AI assistance disclosure. AI systems assisted with literature triage, adversarial prior-art review, protocol design, code drafting, deterministic execution, figure generation, manuscript drafting, and package checks under Thomas Ryan's direction. AI systems are not authors, are not independent validators, and bear no accountability. All claims, analyses, code, citations, and release decisions require human review.

Competing interests. The author declares no competing interests.

References

- Abate, A., Giacobbe, M., and Schnitzer, Y. (2024). Bisimulation Learning. arXiv:2405.15723. <https://doi.org/10.48550/arXiv.2405.15723>
- Cipresso, P. (2026). Measuring human behavior through controlled perturbations: a framework for reconstructing behavioral systems. *Frontiers in Psychology*, 17, 1833113. <https://doi.org/10.3389/fpsyg.2026.1833113>
- Eleftheriadis, C., Kekatos, N., Katsaros, P., and Tripakis, S. (2022). On neural network equivalence checking using SMT solvers. In *FORMATS 2022*, 237-257. https://doi.org/10.1007/978-3-031-15839-1_14
- Froese, V., Grillo, M., and Skutella, M. (2025). Complexity of injectivity and verification of ReLU neural networks. *Proceedings of Thirty Eighth Conference on Learning Theory*, PMLR 291, 2188-2189. <https://proceedings.mlr.press/v291/froese25a.html>
- Geiger, A., Ibeling, D., Zur, A., Chaudhary, M., Chauhan, S., Huang, J., Arora, A., Wu, Z., Goodman, N., Potts, C., and Icard, T. (2025). Causal abstraction: a theoretical foundation for mechanistic interpretability. *Journal of Machine Learning Research*, 26(83), 1-64. <https://www.jmlr.org/papers/v26/23-0058.html>
- Kanai, R., and Ma, S. (2026). Intrinsic computational functionalism and simulated consciousness. arXiv:2606.15348. <https://doi.org/10.48550/arXiv.2606.15348>
- Kleiner, J., and Hoel, E. (2021). Falsification and consciousness. *Neuroscience of Consciousness*, 2021(1), niab001. <https://doi.org/10.1093/nc/niab001>
- Linssen, C., and Koene, R. (2025). Functional tests guide complex fidelity tradeoffs in whole-brain emulation. *Journal of Ethics and Emerging Technologies*, 35(1), 1-14. <https://doi.org/10.55613/jeet.v35i1.152>
- Ljung, L. (1999). *System Identification: Theory for the User*, second edition. Prentice Hall.
- Malherbe, C., and Vayatis, N. (2017). Global optimization of Lipschitz functions. *Proceedings of the 34th International Conference on Machine Learning*, PMLR 70, 2314-2323. <https://proceedings.mlr.press/v70/malherbe17a.html>
- Otsuka, J., and Saigo, H. (2022). On the equivalence of causal models: a category-theoretic approach. *Proceedings of the First Conference on Causal Learning and Reasoning*, PMLR 177. <https://proceedings.mlr.press/v177/otsuka22a.html>
- Pilipovsky, J., Sivaramakrishnan, A., Oishi, M., and Tsiotras, P. (2023). Probabilistic verification of ReLU neural networks. *Proceedings of the 5th Annual Learning for Dynamics and Control Conference*, PMLR 211. <https://proceedings.mlr.press/v211/pilipovsky23a.html>
- Ryan, T. (2026a). What must be preserved? Mapping theories of consciousness to engineering requirements for mind preservation. Zenodo. <https://doi.org/10.5281/zenodo.19374628>
- Ryan, T. (2026b). An exploratory transplant assay for Attention Schema Theory in a toy neural agent. Zenodo. <https://doi.org/10.5281/zenodo.19738204>
- Ryan, T. (2026c). The Preservation Benchmark: testing functional continuity across substrate transfer. Zenodo. <https://doi.org/10.5281/zenodo.20480505>
- Ryan, T. (2026d). History-dependent functional continuity under delayed and counterfactual source-state probes. Zenodo. <https://doi.org/10.5281/zenodo.20705654>
- Ryan, T. (2026e). Causal preservation under substrate transfer: interchange intervention tests for source-specific functional continuity. Zenodo. <https://doi.org/10.5281/zenodo.20852042>
- Ryan, T. (2026f). The Scaffold Continuity Trap: a blinded scaffold-lesion test in persistent coding agents. Zenodo. <https://doi.org/10.5281/zenodo.21342748>
- Ryan, T. (2026g). The Purpose-Disclosure Trap in AI-welfare evaluation. Zenodo. <https://doi.org/10.5281/zenodo.21782895>

-
- Ryan, T. (2026h). The Binding Test: construction audit, synthetic planning, and an exploratory feasibility case study of causal choice-control evaluation for AI systems. Zenodo. <https://doi.org/10.5281/zenodo.22020047>
- Ryan, T. (2026i). Stress-testing local neural-dynamics equivalence in a connectome-constrained visual system. Zenodo. <https://doi.org/10.5281/zenodo.22070302>
- Samari, B., Zaker, M., and Lavaei, A. (2025). Abstraction-based control of unknown continuous-space models with just two trajectories. *Proceedings of the 7th Annual Learning for Dynamics and Control Conference*, PMLR 283, 1167-1179. <https://proceedings.mlr.press/v283/samari25a.html>
- Zanichelli, N., Schons, M., Freeman, I., Shiu, P. K., and Arkhipov, A. (2026). *State of Brain Emulation Report 2025*, version 1. Zenodo. <https://doi.org/10.5281/zenodo.18377594>

Supplement to The Intervention-Coverage Barrier

Author: Thomas Ryan

Status: Public supplement; not peer reviewed

Version: 1.0.0 - 29 August 2026

S1. Scope

This supplement records the complete theorem assumptions, constructive fixtures, frozen analysis boundary, prior-art stress test, Paper 9 postmortem, research-program selection, controls, and reproducibility map. It is part of the Paper 10 audit package. The main manuscript controls the scientific claim.

The exact claim ceiling is:

Finite successful functional tests do not by themselves certify uniform causal fidelity over a continuous intervention domain. A distributional statement needs an explicit intervention law and uncertainty design. A worst-case statement needs justified structure or sound regularity plus coverage.

The work does not show that a specific neural replacement is inadequate, that whole-brain emulation is impossible, or that consciousness, identity, survival, biological replaceability, or substrate independence is preserved or lost.

S2. Definitions

Let (X, dist) be the declared metric space of experimental conditions. A condition can encode initial state, finite intervention sequence, readout selection, environmental context, and horizon. The source and candidate induce interface trajectories $Y_S(x)$ and $Y_C(x)$. A declared nonnegative trajectory discrepancy D gives

$$d(x) = D(Y_S(x), Y_C(x)).$$

For a finite nonempty battery B :

Observed maximum:

$$d_B = \max_{b \in B} d(b).$$

Fill distance:

$$\rho(B; X) = \sup_{x \in X} \min_{b \in B} \text{dist}(x, b).$$

Finite-battery pass at tolerance ε :

$$d_B \leq \varepsilon.$$

Distributional violation rate under law P :

$$P[d(x) > \varepsilon].$$

Uniform pass:

$$\sup_{x \in X} d(x) \leq \varepsilon.$$

These are distinct estimands. No choice of terminology changes their logical relation.

S3. Full proofs

S3.1 Finite-set construction

Theorem S1. Let X be a compact metric space, B a finite proper subset of X , and x_* any point outside B . For every continuous source map $f_S : X \rightarrow \mathbb{R}^p$, nonzero vector $v \in \mathbb{R}^p$, and positive amplitude a , there exists a continuous candidate f_C such that

$$f_C(b) = f_S(b) \quad (b \in B), \quad \|f_C(x_*) - f_S(x_*)\| = a,$$

under the norm used to normalize v .

Proof. Define

$$r_B(x) = \min_{b \in B} \text{dist}(x, b).$$

Each map $x \mapsto \text{dist}(x, b)$ is 1-Lipschitz, and the pointwise minimum of finitely many 1-Lipschitz functions is 1-Lipschitz. Thus r_B is continuous. Since B is finite, it is closed. Since x_* is outside B , $r_B(x_*) > 0$. Normalize v so $\|v\| = 1$ and define

$$\phi(x) = a \frac{r_B(x)}{r_B(x_*)} v.$$

For $b \in B$, $r_B(b) = 0$, hence $\phi(b) = 0$. At x_* , $\|\phi(x_*)\| = a$. Taking $f_C = f_S + \phi$ proves the claim. QED.

Corollary S1.1. Any algorithm that terminates after finitely many point queries cannot certify uniform equality over an unrestricted continuous class from query results alone.

Reason. Condition on the finite realized query set B . Theorem S1 supplies two continuous candidates consistent with all returned values but different elsewhere. Randomization or adaptivity changes the distribution of B , not its finiteness after termination.

S3.2 Piecewise-linear and ReLU realization

Let X be a compact rectangle in $\mathbb{R}^m$ with max-norm distance. For a fixed b ,

$$\text{dist}_\infty(x, b) = \max_i |x_i - b_i|.$$

Absolute value satisfies $|z| = \text{ReLU}(z) + \text{ReLU}(-z)$. Maximum and minimum satisfy

$$\max(a, b) = \text{ReLU}(a - b) + b,$$

$$\min(a, b) = a - \text{ReLU}(a - b).$$

Finite nesting therefore represents

$$\min_{b \in B} \max_i |x_i - b_i|$$

with a finite ReLU network. Scaling and adding the result to a ReLU-representable source preserves finite ReLU representability. This is an existence statement; it does not claim the representation is size-optimal or biologically plausible.

The compact cone used in the fixtures is

$$q_z(x) = A \text{ReLU}\left(1 - \frac{\|x - z\|_\infty}{r}\right).$$

It is zero outside the max-norm ball of radius r , equals A at z , and has global Lipschitz constant A/r under the max norm.

S3.3 Tight fill-distance bound

Theorem S2. Let d be K -Lipschitz on X . Then

$$\sup_X d \leq d_B + K\rho(B; X).$$

Proof. For arbitrary x and any positive η , select $b \in B$ satisfying

$$\text{dist}(x, b) \leq \min_{z \in B} \text{dist}(x, z) + \eta.$$

Then

$$\begin{aligned} d(x) &\leq d(b) + K \text{dist}(x, b) \\ &\leq d_B + K \min_{z \in B} \text{dist}(x, z) + K\eta \\ &\leq d_B + K\rho(B; X) + K\eta. \end{aligned}$$

Let η decrease to zero, then take the supremum over x . QED.

Theorem S3 (tightness at zero observations). For any nonempty B , define

$$d_*(x) = Kr_B(x).$$

This function is K -Lipschitz, vanishes on B , and satisfies

$$\sup_x d_* = K\rho(B; X).$$

Proof. Distance to a set is 1-Lipschitz by the triangle inequality. Scaling supplies K -Lipschitz continuity. The other statements follow from the definitions of r and ρ . QED.

For nonzero compatible observations, standard Lipschitz upper envelopes can give sharper point-specific bounds. The zero-observation witness is enough to prove that the residual term cannot be deleted from a general audit.

S3.4 Unit-cube lower bound

Theorem S4. For N points in $[0, 1]^m$ under the max norm,

$$\rho \geq \frac{1}{2N^{1/m}}.$$

Proof. If N closed max-norm balls of radius r cover the unit cube, their intersections with the cube have total volume at most $N(2r)^m$. Coverage requires that total to be at least one. Thus $N(2r)^m \geq 1$. Every covering radius, including the optimal radius, satisfies the stated inequality. QED.

If all tested discrepancies are zero and only a sound K -Lipschitz assumption is available, a certificate $K\rho \leq \varepsilon$ therefore requires

$$N \geq \left(\frac{K}{2\varepsilon}\right)^m.$$

Boundary clipping only decreases ball volume, so the inequality remains valid.

S3.5 Recurrent error transport

Let source and candidate states be S_t and C_t . Let V be a nonnegative comparison function. Assume, for all paired states and inputs in a declared domain R ,

$$V(F_S(s, u), F_C(c, u)) \leq LV(s, c) + \delta.$$

Theorem S5. If every paired state-input point reached through time T lies in R , then

$$V_t \leq L^t V_0 + \delta \sum_{j=0}^{t-1} L^j$$

for $t \leq T$.

Proof. The case $t=0$ is immediate. Assume the result for t . Apply the one-step inequality:

$$\begin{aligned} V_{t+1} &\leq LV_t + \delta \\ &\leq L^{t+1}V_0 + \delta \sum_{j=1}^t L^j + \delta \\ &= L^{t+1}V_0 + \delta \sum_{j=0}^t L^j. \end{aligned}$$

Induction proves the result. QED.

For $L \neq 1$, the sum is $(L^t - 1)/(L - 1)$; for $L = 1$, it is t . If the output discrepancy satisfies

$$D_Y(H_S(s), H_C(c)) \leq MV(s, c) + \delta_Y,$$

then substitute the state bound. If the candidate leaves R , the proof stops at the exit time. A source-only trajectory tube is insufficient unless it is proved also to contain the candidate.

S4. Constructive recurrent fixture

For each packet, the source is

$$s_{t+1} = as_t + u_t, \quad s_0 = 0.$$

The battery contains finite sequences sampled in $[-U, U]^T$. Over every battery sequence and time t , source state-input pairs are collected in

$$P_B = \{(s_t, u_t)\}.$$

A grid search chooses a center $z = (s_*, u_*)$ that maximizes the minimum of:

- its distance to every pair in P_B ; and
- its distance from the lead-in path, so that input s_* reaches state s_* from zero without activating the bump.

The radius is 0.9 times this clearance. The candidate is

$$c_{t+1} = ac_t + u_t + q_z(c_t, u_t).$$

Every battery rollout remains identical because q is zero at every visited pair. The unseen sequence begins with $u_0 = s_*$, then uses $u_1 = u_*$. The lead-in transition remains unchanged; the next transition activates the bump at its center and adds A . Thus the witness is dynamically reachable, not merely a point in an ambient state-input rectangle.

S5. Exploratory and confirmatory separation

S5.1 Exploratory freeze

The exploratory specification fixed:

- source recurrence and intervention bounds;
- 64 trajectories of horizon 8;
- a 0.20 bump;
- exact and causal tolerances;
- search-grid density;
- equal-budget coverage comparison;
- sham behavior; and
- gate conjunction.

Specification SHA-256:

5fecc6bf14b1088f15c593fc8bf245fd3b2f33e0b1d6527c9066489ef94ce2d6

S5.2 Confirmatory freeze

The confirmatory specification was written after exploratory interpretation and before running `run_confirmatory.py`. It fixed five packets and forbade:

- packet deletion;
- seed replacement;
- threshold relaxation;
- search-grid expansion to rescue a failed witness; and
- pooled success in place of the conjunctive rule.

Specification SHA-256:

4dcc507a26d1e67e7ad9bce0b6784ea4bc9319d056d921798ec9495da31a7050

Runner SHA-256:

0663d496d7104d28ad7bbe9b8a720b02b4e533dce87803f3ca37c52ead5eadfd

The local hashes establish artifact identity only. They are not external timestamping and are not independent evidence.

S6. Complete confirmatory packet results

Packet	Trajectories	Tested pairs	Battery max	Unseen max	Approx. fill	Coverage upper bound	Result
C01	32	192	0	0.12	0.127340	0.181099	pass
C02	64	512	0	0.15	0.209941	0.620551	pass
C03	96	960	0	0.18	0.223666	1.024686	pass
C04	128	1,536	0	0.20	0.271177	2.039261	pass
C05	48	432	0	0.14	0.127564	0.375507	pass

The primary rule required every packet to have tested discrepancy at most 10^{-12} , unseen discrepancy at least 0.05, and a coverage upper bound above the 0.01 equivalence threshold. All five passed.

S7. Coverage-design replications

Seed	Budget	Regular fill	Median random fill	Ratio	Threshold	Result
1732	49	0.083333	0.212136	0.392830	0.75	pass
2236	49	0.083333	0.217750	0.382702	0.75	pass
2645	49	0.083333	0.209800	0.397205	0.75	pass
3162	49	0.083333	0.208402	0.399869	0.75	pass
3741	49	0.083333	0.212208	0.392696	0.75	pass

Each random median used 50 batteries. All fill distances were evaluated on the same 101 by 101 grid. These are fixed deterministic computations and share code; they are not five independent scientific experiments.

S8. Controls and failure semantics

Control	Expected	Observed	Interpretation
exact replacement	zero interface error	0	execution path can reproduce identity
hidden unobservable mismatch	zero declared-interface error	0	interface scope is respected
unreachable mismatch	zero on declared experiment	0	reachability scope is respected
wrong interface offset	detected mismatch	0.10	measurement path has positive sensitivity
stable non-normal recurrence	transient amplification	16.384x	local seams can amplify dynamically
linearly similar realizations	equal Markov sequence	max error 8.33×10^{-17}	internal coordinates need not match
delayed linear mismatch	finite prefix match, later failure	first difference at index 8	finite horizon cannot infer all horizons

A failed coverage certificate means "insufficient evidence for the uniform claim," not "candidate known to fail." A found reachable witness means the constructed candidate actually fails at that intervention. The distinction is retained in every table and result JSON.

S9. Hostile prior-art audit

S9.1 Research streams checked

Stream	Prior result or practice	Collision with a stronger Paper 10 claim	Surviving contribution
linear realization	finite Markov parameters can identify bounded-order minimal systems	kills a blanket claim that finite tests can never certify	assumptions must be stated; delayed sham shows horizon dependence
bisimulation/simulation	structural relations certify transition behavior	kills novelty of generic recurrence-transport theorems	candidate-inclusive domain obligation translated to neural replacement
symbolic reachability	explores or overapproximates entire state domains	kills novelty of using exhaustive verification after learning	contrast between sampled testing and verification
neural-network verification	certifies regional properties; broad cases are hard	kills novelty of generic "verify the network" proposal	claim ladder and fail-closed fidelity reporting
probabilistic verification	certifies under an explicit probability measure	kills novelty of distinguishing average and worst-case in general	forces intervention law into fidelity claims
Lipschitz optimization/optimal recovery	covering and minimax rates under regularity	kills novelty of the fill-distance inequality itself	operational audit and tight witness for functional-fidelity reports
WBE functional testing	proposes comprehensive standardized batteries	prior art for test-centered fidelity	identifies what a passed battery does and does not certify
controlled behavioral perturbation	held-out interventions, identifiability, domain bounds	prior art for perturbation richness and domain-relative reconstruction	explicit worst-case coverage/certificate rung
computational functionalism	complete future roles and intervention profiles	prior art for quantified functional organization	separates complete structure from finite evidence about it
consciousness falsification	substitution and prediction logic	adjacent prior art for falsification asymmetries	engineering-specific finite coverage barrier

S9.2 Priority statement

No exact primary source was found in the targeted 2024-2026 scan that operationalized the complete three-level audit - finite-battery falsification, intervention-law validation, and worst-case certification - for stateful neural replacement or whole-brain-emulation fidelity. This is a bounded search result, not proof of priority. The paper therefore claims a domain-specific synthesis and reporting framework, not invention of the underlying mathematics.

S9.3 Rediscovery kill rule

If a prior source is found that contains the same three-level framework, recurrent candidate-inclusive condition, and operational fail-closed standard in this application, the novelty claim must be narrowed to independent replication or withdrawn before release.

S10. Paper 9 postmortem

Paper 9 established a validated software path for substituting cell-type blocks inside a public connectome-constrained fly visual model. In two global checkpoints, all 45 locally eligible ladder cells preserved ordinary block responses and unchanged-decoder outputs within frozen 1% margins. Perturbation effects exposed a small Mi1 timescale gain deviation across two checkpoints and two integration steps. Effect-vector directions remained approximately collinear. A matched-local-error shunt control failed its eligibility/matching gate before confirmatory holdout exposure, so the mechanism-family interpretation was not confirmed.

Paper 9 explicitly did not establish:

- connectome sufficiency;
- biological neuron replaceability;
- a general local-to-global composition theorem;
- a family-specific causal mechanism effect;
- consciousness preservation;
- personal identity or survival; or

- substrate independence.

The attempted Paper 10 empirical extension recovered all 110 public recordings and the historical 156-coordinate loader shape, but only 154 neuron identifiers were common. On the frozen test split, reconstructed historical predictions reached aligned masked Pearson correlation 0.530543, NRMSE 1.056644, and mask coverage 0.840530. Train-test and connectome score deviations exceeded the frozen gates. The causal-compression direction was therefore killed before a new biological claim was made.

This failure shaped Paper 10 in two ways. First, it demonstrated that local hashes, tests, and recovered shapes do not rescue a failed scientific reconstruction. Second, it reinforced the difference between passing an available test set and possessing a certificate about the unobserved intervention domain.

S11. Competing Paper 10 programs and decisions

Six programs were considered. Scores were ordinal, not measurements, and were used only to force explicit tradeoffs.

Program	Novelty	Importance	Tractability	Meas. validity	Causal leverage	Repro.	Decision
Causal Compression Frontier in public worm dynamics	4	5	3	3	5	4	killed by frozen reconstruction gates
Matched-error causal seam in Paper 9 FlyVis model	3	4	3	4	4	4	no-go without eligible comparator
Finite Intervention-Basis theorem	2	5	4	5	5	5	killed by realization/verification prior art
Intervention-Coverage Barrier audit	4	5	5	5	4	5	selected with bounded novelty
Verification-aware reduced neural circuit benchmark	4	4	2	5	5	4	high-value follow-up; not needed for central theorem
Coverage-aware adaptive perturbation challenge	4	4	3	4	4	5	follow-up; requires hidden candidate suite

The selected direction cleared the bar only after its claim was narrowed from a new positive basis theorem to a domain-specific audit framework grounded in credited mathematics. The alternative would have been a no-go, not novelty inflation.

S12. Exact evidence ledger conventions

The project ledger labels every entry as one of:

- **Fact:** directly supported by an artifact, primary source, or executed result;
- **Inference:** a reasoned conclusion from facts with assumptions stated;
- **Speculation:** a plausible but untested possibility;
- **Proposal:** a future action, protocol, or design.

Hashes establish identity. Passing unit tests establishes behavior on the tested software paths. Multiple seeded packets establish deterministic transport across parameterizations. AI agreement establishes none of these independently.

S13. Reproduction map

From the Paper 10 package root:

```
python3 -m unittest discover -s work/g0d_intervention_coverage -p 'test_*.py' -v
python3 work/g0d_intervention_coverage/intervention_coverage.py
python3 work/g0d_intervention_coverage/run_confirmatory.py
MPLBACKEND=Agg MPLCONFIGDIR=/tmp/paper10-mpl python3 paper10/build_artifacts.py
python3 paper10/verify_package.py
```

Re-running result generators overwrites deterministic result JSONs. The manifest and checksum verifier are the release audit. Confirmatory status depends on the preserved pre-execution specification and repository history; a rerun cannot create independent preregistration.

S14. References unique to the supplement

- Abate, A., Giacobbe, M., and Schnitzer, Y. (2024). Bisimulation Learning. <https://doi.org/10.48550/arXiv.2405.15723>
- Cipresso, P. (2026). Measuring human behavior through controlled perturbations: a framework for reconstructing behavioral systems. <https://doi.org/10.3389/fpsyg.2026.1833113>
- Froese, V., Grillo, M., and Skutella, M. (2025). Complexity of injectivity and verification of ReLU neural networks. <https://proceedings.mlr.press/v291/froese25a.html>
- Geiger, A., et al. (2025). Causal abstraction: a theoretical foundation for mechanistic interpretability. <https://www.jmlr.org/papers/v26/23-0058.html>
- Kanai, R., and Ma, S. (2026). Intrinsic computational functionalism and simulated consciousness. <https://doi.org/10.48550/arXiv.2606.15348>
- Linssen, C., and Koene, R. (2025). Functional tests guide complex fidelity tradeoffs in whole-brain emulation. <https://doi.org/10.55613/jeet.v35i1.152>
- Malherbe, C., and Vayatis, N. (2017). Global optimization of Lipschitz functions. <https://proceedings.mlr.press/v70/malherbe17a.html>