


➤ interaction with hadoop file system commands

Step 1: "hadoop fs" command -

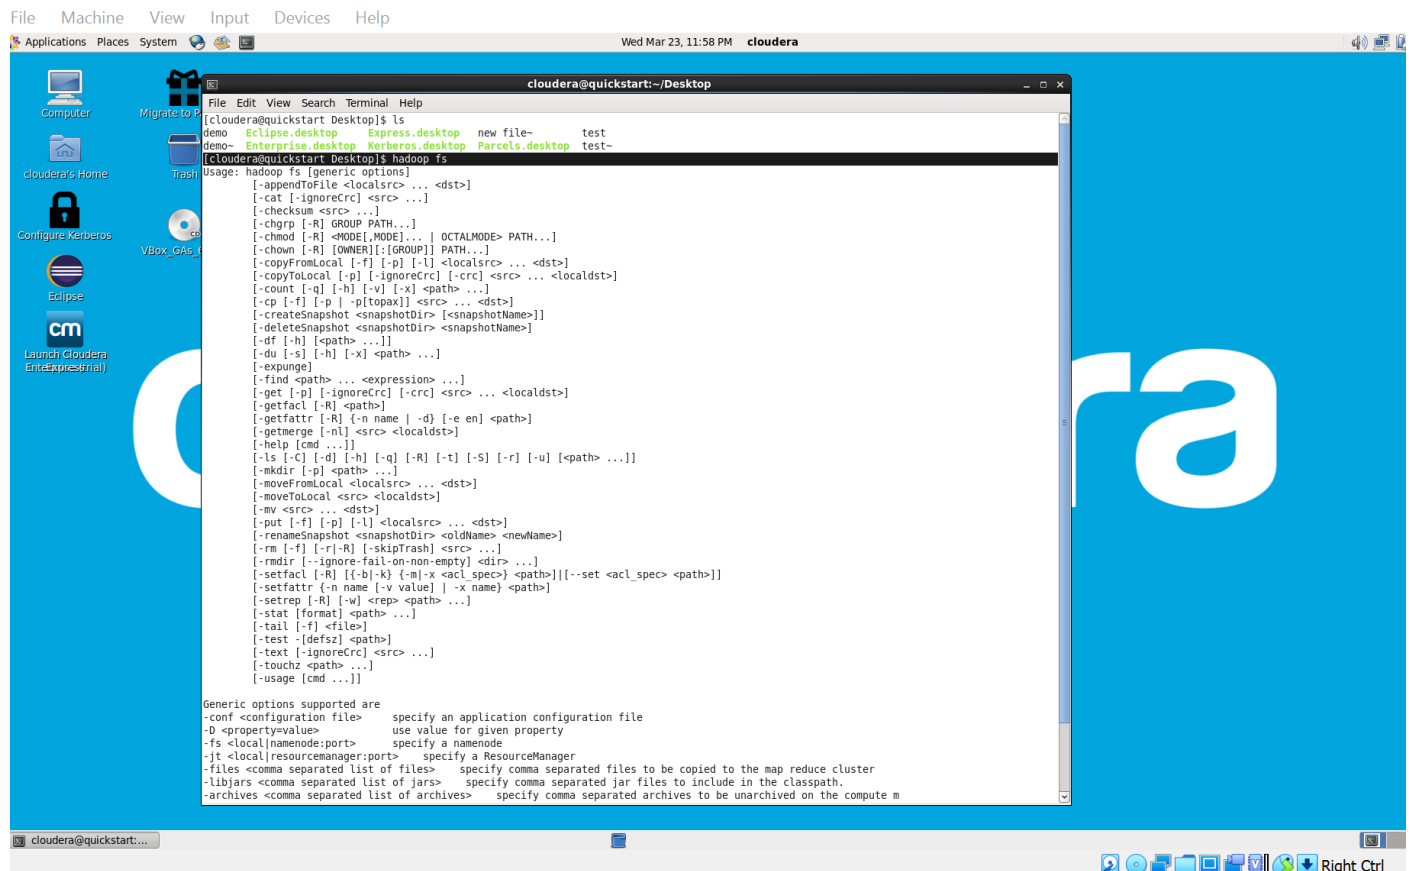


The screenshot shows a Linux desktop with a blue background and a large white 'C' logo. A terminal window titled 'cloudera@quickstart: ~/Desktop' is open, displaying the help text for the 'hadoop fs' command. The terminal output lists various subcommands and their usage, including 'ls', 'cat', 'cp', 'mv', 'rm', 'mkdir', etc. The desktop environment includes icons for 'Computer', 'Migrate to P...', 'cloudera's Home', 'Trash', 'Configure Kerberos', 'VBox_GAs_6.1.32', 'Eclipse', and 'Launch Cloudera Enterprise Trial'.

```
cloudera@quickstart Desktop]$ ls
demo  Eclipse.desktop  Express.desktop  new file-      test
demo- Enterprise.desktop  Kerberos.desktop  Parcels.desktop  test-

cloudera@quickstart Desktop]$ hadoop fs
Usage: hadoop fs [generic options]
[-appendToFile <localsrc> ... <dst>]
[-cat [-ignorecrc] <src> ...]
[-checksum <src> ...]
[-chgrp [-R] GROUP PATH...]
[-chmod [-R] <MODE>[<MODE>... | OCTALMODE] PATH...]
[-chown [-R] [OWNER][[:<GROUP>] PATH...]
[-copyFromLocal [-f] [-p] [-l] <localsrc> ... <dst>]
[-copyToLocal [-p] [-ignorecrc] [-crc] <src> ... <localdst>]
[-count [-q] [-h] [-v] [-x] <path> ...]
[-cp [-f] [-p] [-p[topax]] <src> ... <dst>]
[-createSnapshot <snapshotDir> [-snapshotName]]
[-deleteSnapshot <snapshotDir> <snapshotName>]
[-df [-h] <path> ...]
[-du [-s] [-h] [-x] <path> ...]
[-expunge]
[-find <path> ... <expression> ...]
[-get [-p] [-ignorecrc] [-crc] <src> ... <localdst>]
[-getfacl [-R] <path>]
[-getfattr [-R] [-n name] [-d] [-e en] <path>]
[-getmerge [-n] <src> <localdst>]
[-help [cmd ...]]
[-ls [-C] [-d] [-h] [-q] [-R] [-t] [-S] [-r] [-u] <path> ...]
[-mkdir [-p] <path> ...]
[-moveFromLocal <localsrc> ... <dst>]
[-moveToLocal <src> <localdst>]
[-mv <src> ... <dst>]
[-put [-f] [-p] [-l] <localsrc> ... <dst>]
[-renameSnapshot <snapshotDir> <oldName> <newName>]
[-rm [-f] [-r] [-R] [-skipTrash] <src> ...]
[-rmrmdir [-ignore-fail-on-non-empty] <dir> ...]
[-setfacl [-R] [{-b|-k} {-m|-x <acl_spec>} <path>][[-set <acl_spec> <path>]]
[-setfattr [-n name [-v value]] [-x name] <path>]
[-setrep [-R] [-w] <rep> <path> ...]
[-stat [format] <path> ...]
[-tail [-f] <file>]
[-test [-defsz] <path>]
[-text [-ignorecrc] <src> ...]
[-touchz <path> ...]
[-usage [cmd ...]]

Generic options supported are
-conf <configuration file>      specify an application configuration file
-D <property=value>             use value for given property
-fs <local|namenode:port>       specify a namenode
-jt <local|resourcemanager:port> specify a ResourceManager
-files <comma separated list of files> specify comma separated files to be copied to the map reduce cluster
-libjars <comma separated list of jars> specify comma separated jar files to include in the classpath.
-archives <comma separated list of archives> specify comma separated archives to be unarchived on the compute m
```

Step 2: Some basic commands -

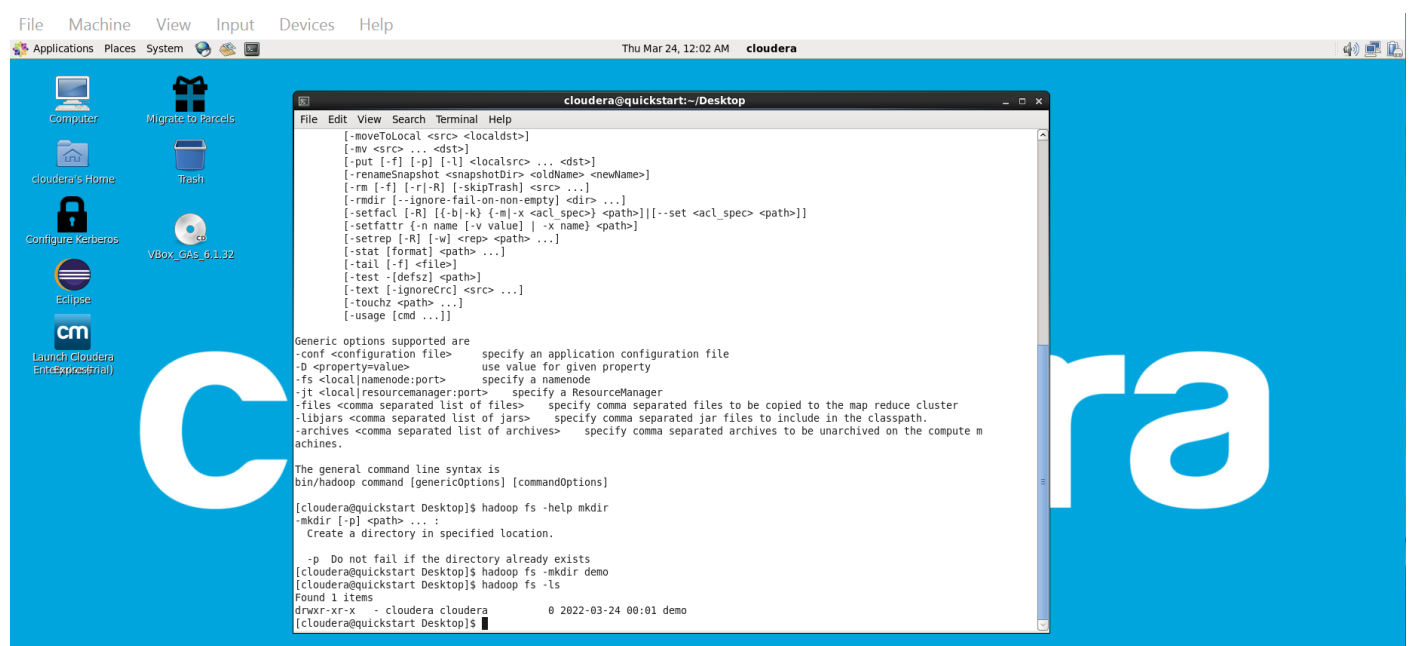

The screenshot shows the same Linux desktop environment as before. The terminal window now displays the output of the 'hadoop fs' command being used to create a directory. The terminal output shows the command 'mkdir [-p] <path> ...' and its usage. The desktop environment remains the same, with the blue background and 'C' logo.

```
cloudera@quickstart:~/Desktop
File Edit View Search Terminal Help
[-moveToLocal <src> <localdst>]
[-mv <src> ... <dst>]
[-put [-f] [-p] [-l] <localsrc> ... <dst>]
[-renameSnapshot <snapshotDir> <oldName> <newName>]
[-rm [-f] [-r] [-R] [-skipTrash] <src> ...]
[-rmrmdir [-ignore-fail-on-non-empty] <dir> ...]
[-setfacl [-R] [{-b|-k} {-m|-x <acl_spec>} <path>][[-set <acl_spec> <path>]]
[-setfattr [-n name [-v value]] [-x name] <path>]
[-setrep [-R] [-w] <rep> <path> ...]
[-stat [format] <path> ...]
[-tail [-f] <file>]
[-test [-defsz] <path>]
[-text [-ignorecrc] <src> ...]
[-touchz <path> ...]
[-usage [cmd ...]]



Generic options supported are
-conf <configuration file>      specify an application configuration file
-D <property=value>             use value for given property
-fs <local|namenode:port>       specify a namenode
-jt <local|resourcemanager:port> specify a ResourceManager
-files <comma separated list of files> specify comma separated files to be copied to the map reduce cluster
-libjars <comma separated list of jars> specify comma separated jar files to include in the classpath.
-archives <comma separated list of archives> specify comma separated archives to be unarchived on the compute m
achines.

The general command line syntax is
bin/hadoop command [genericOptions] [commandOptions]


cloudera@quickstart Desktop]$ hadoop fs -help mkdir
mkdir [-p] <path> ...
Create a directory in specified location.

-p Do not fail if the directory already exists
cloudera@quickstart Desktop]$ hadoop fs -mkdir demo
cloudera@quickstart Desktop]$ hadoop fs -ls
Found 1 items
drwxr-xr-x - cloudera cloudera 0 2022-03-24 00:01 demo
cloudera@quickstart Desktop]$
```


Step 3: First create a text file on Cloudera desktop as shown below in the screenshots.

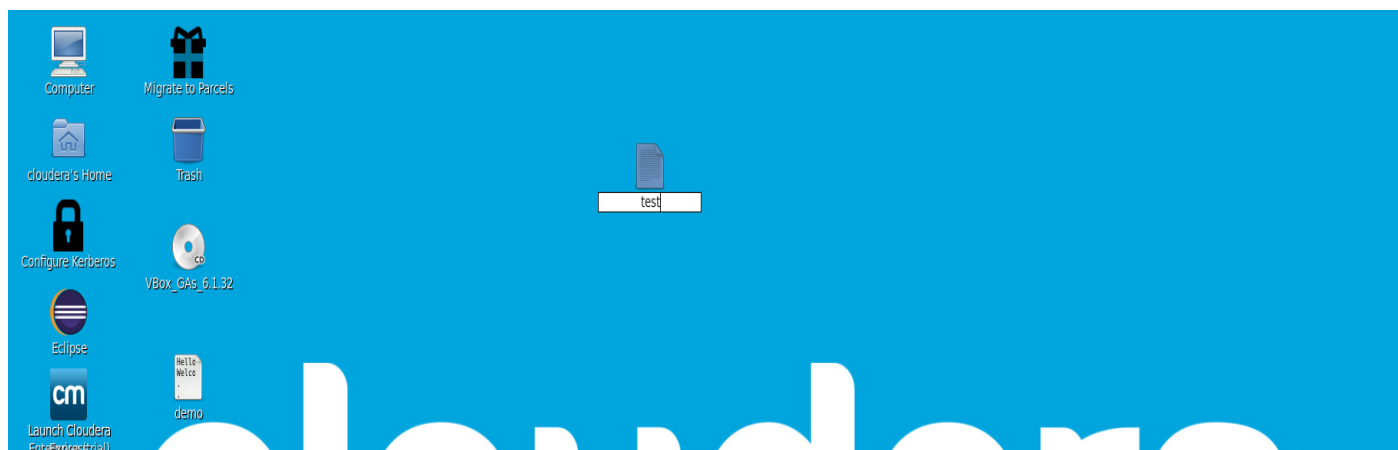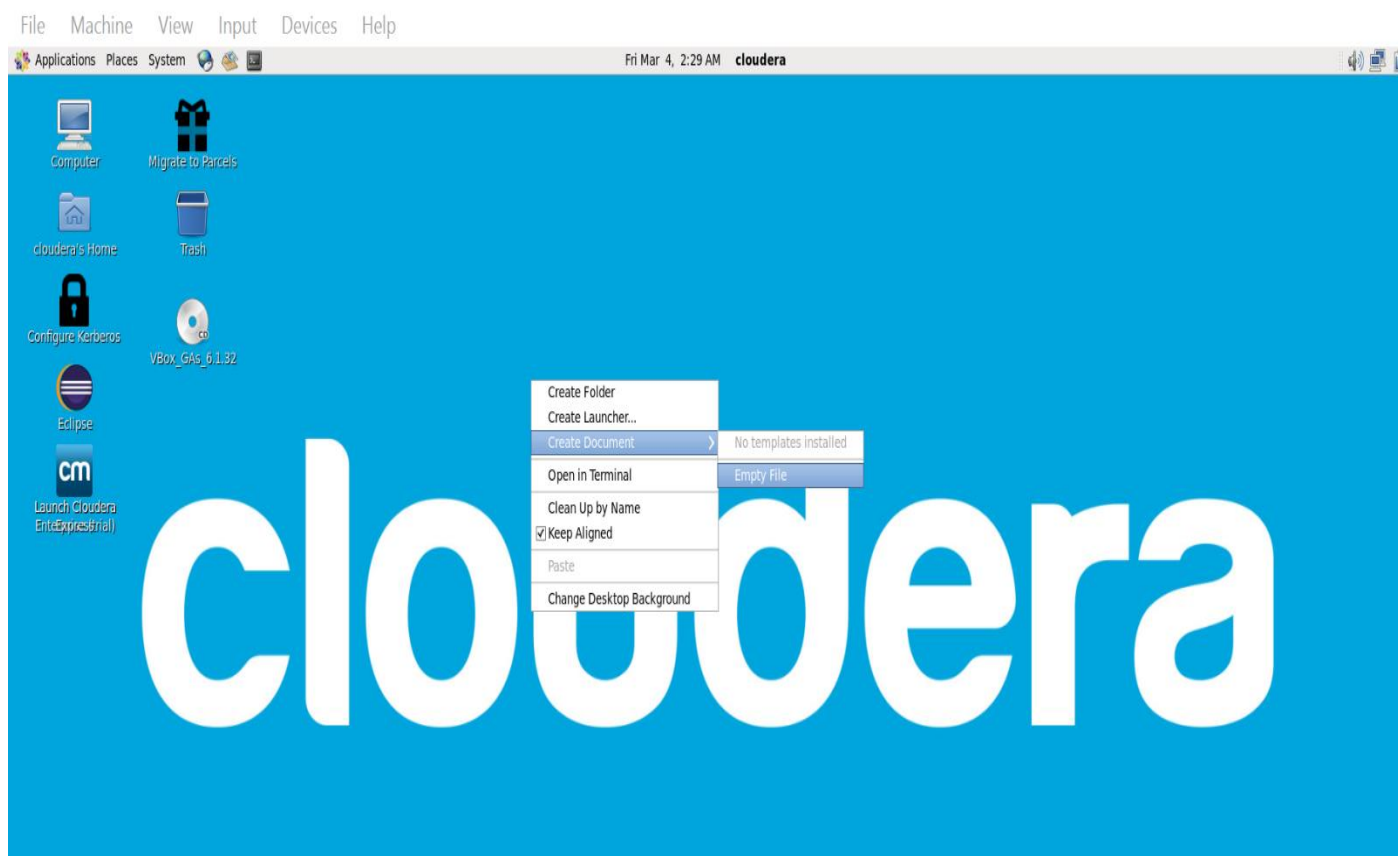


Step 4: Write something inside the text file and save it, by clicking on save button.

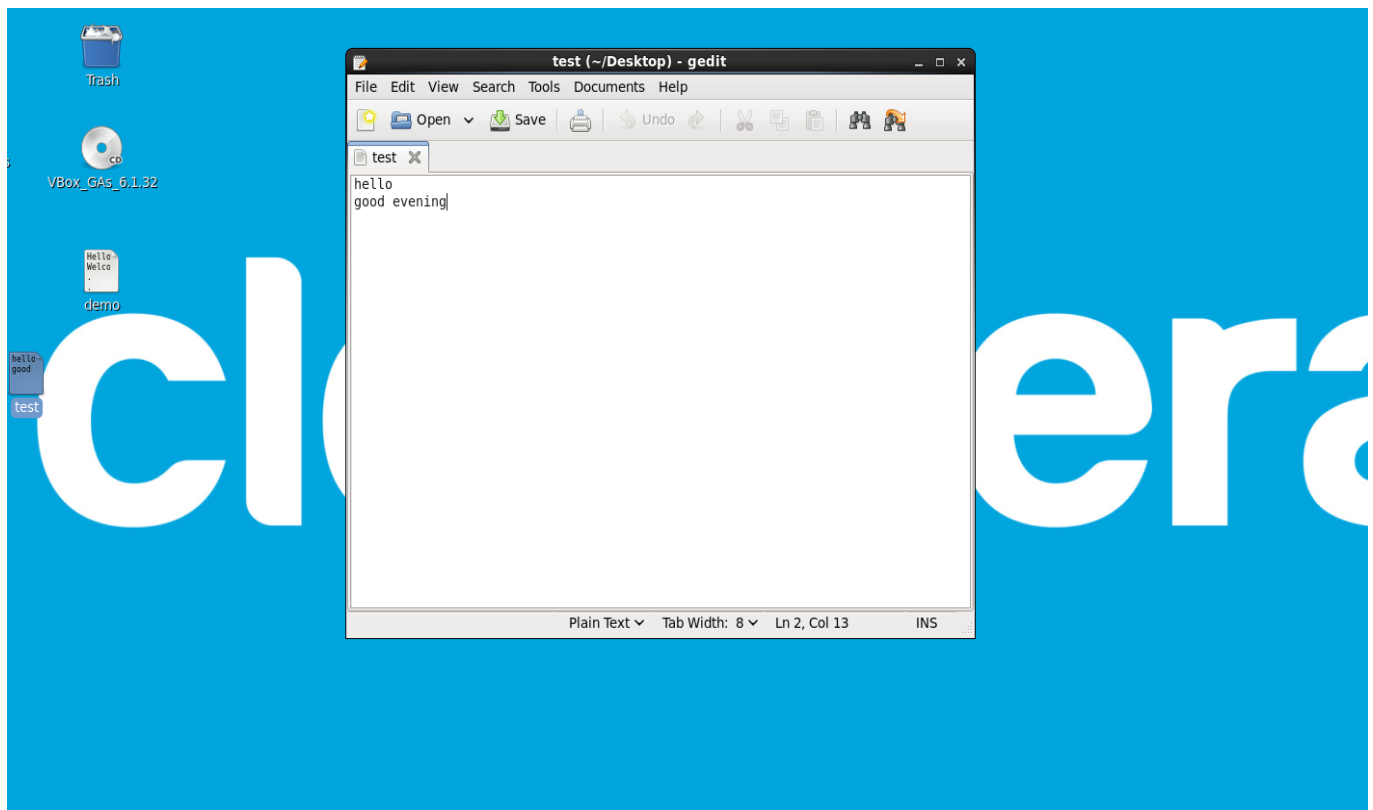


Step 5: Now open the the terminal by clicking right mouse button and select open in terminal.

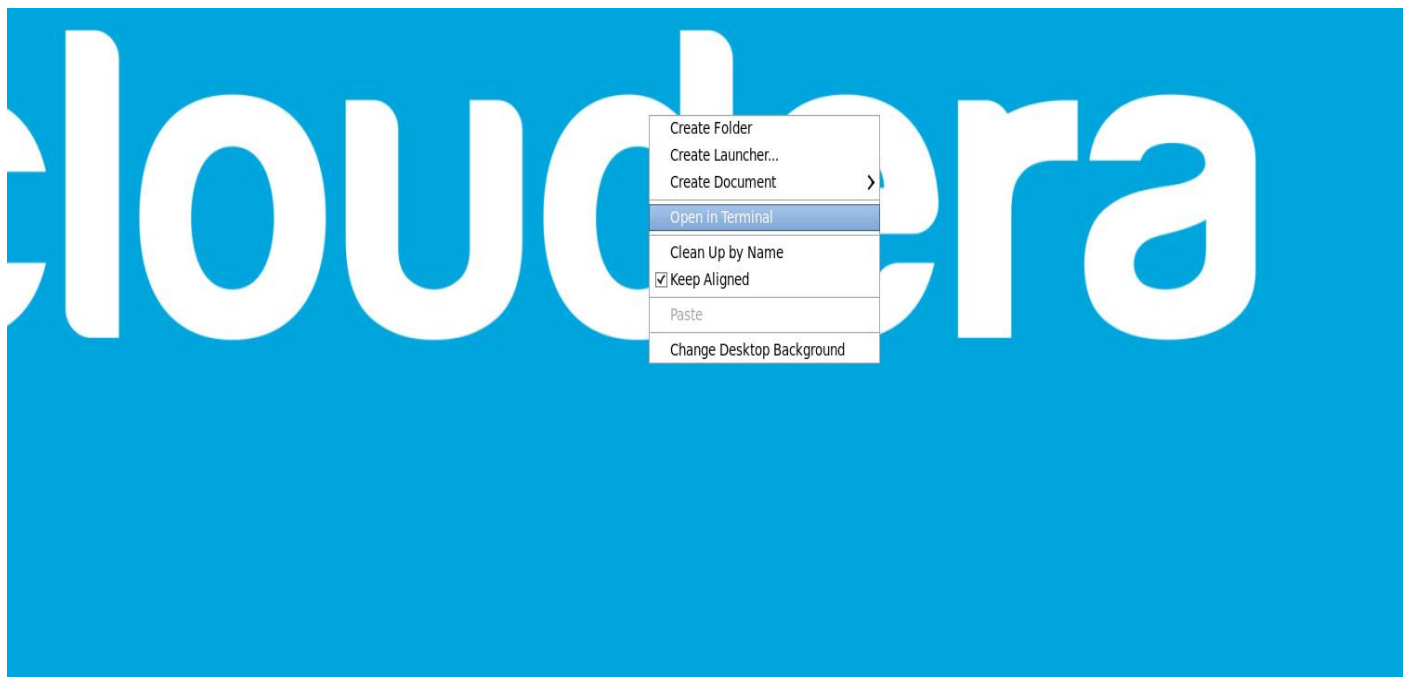


Step 6: copy a file from cloudera desktop (or other place) to hadoop fs

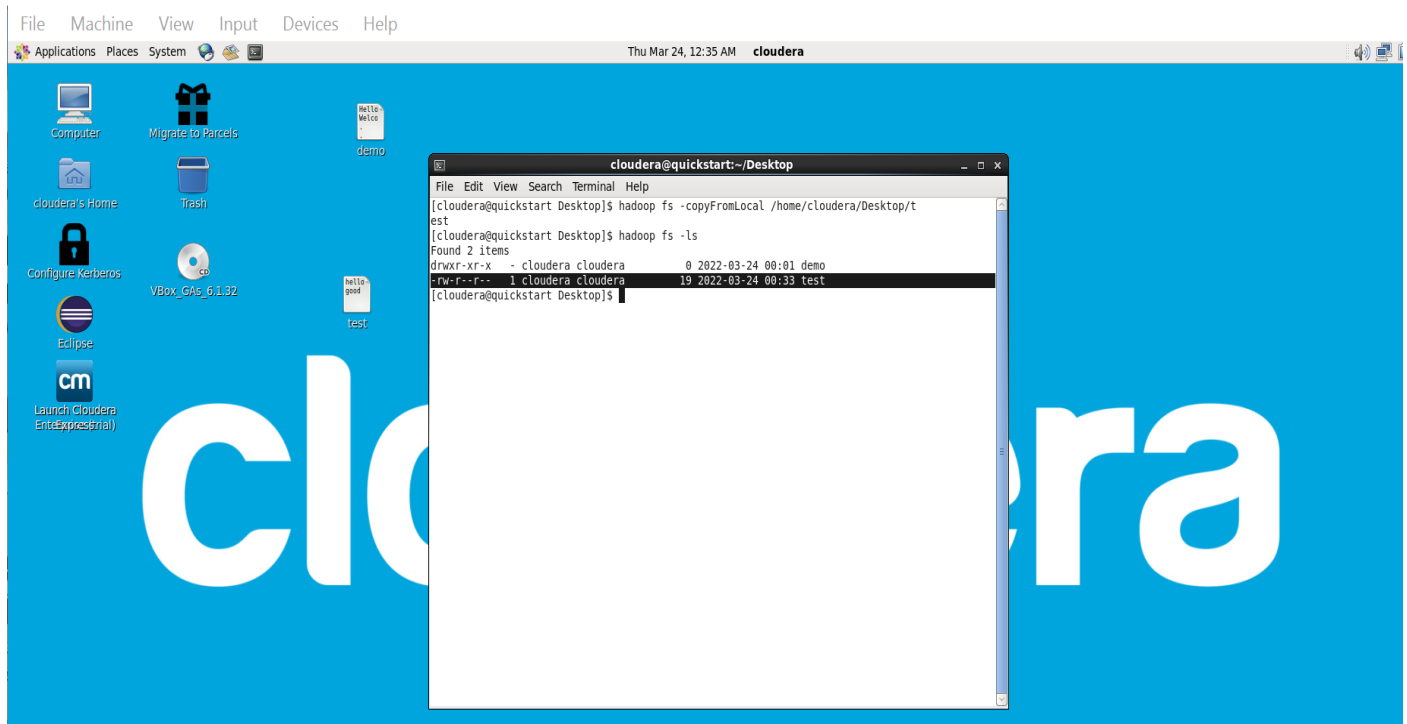


Step 7: copy a file/folder from hadoop fs to cloudera home/any location

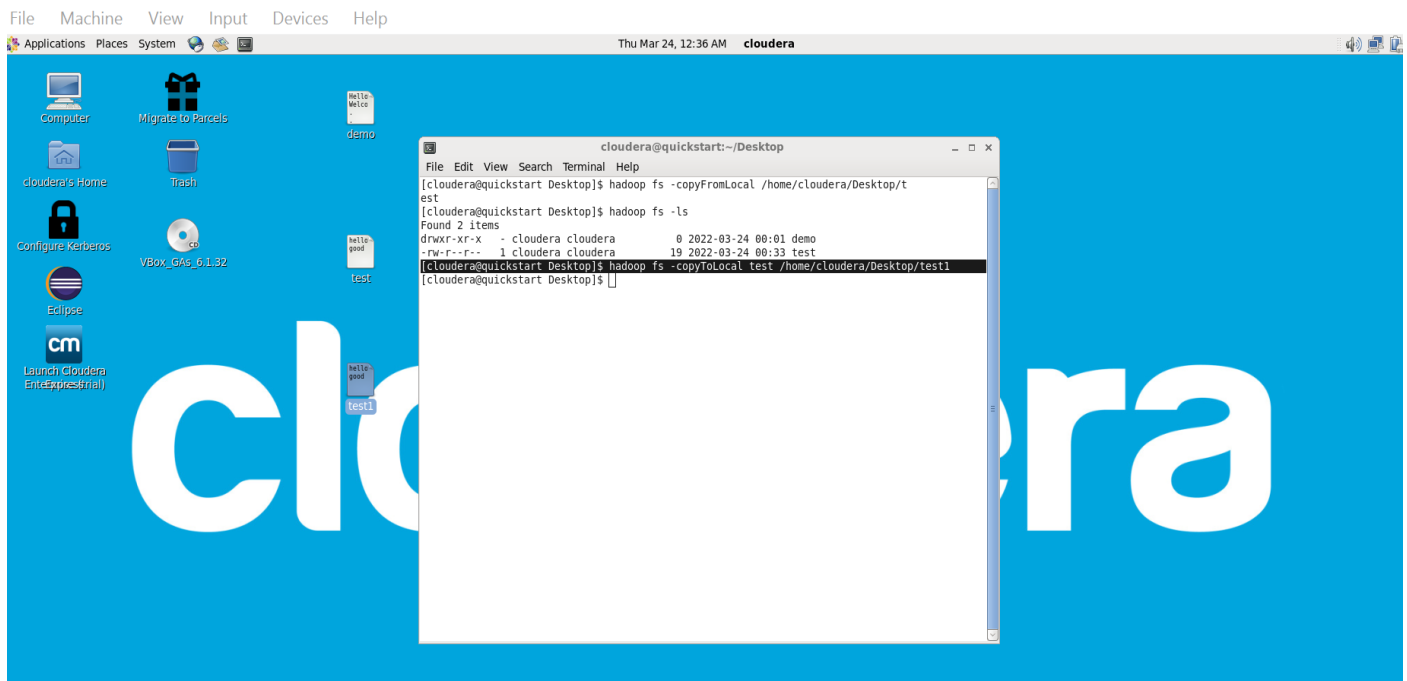


Step 8:

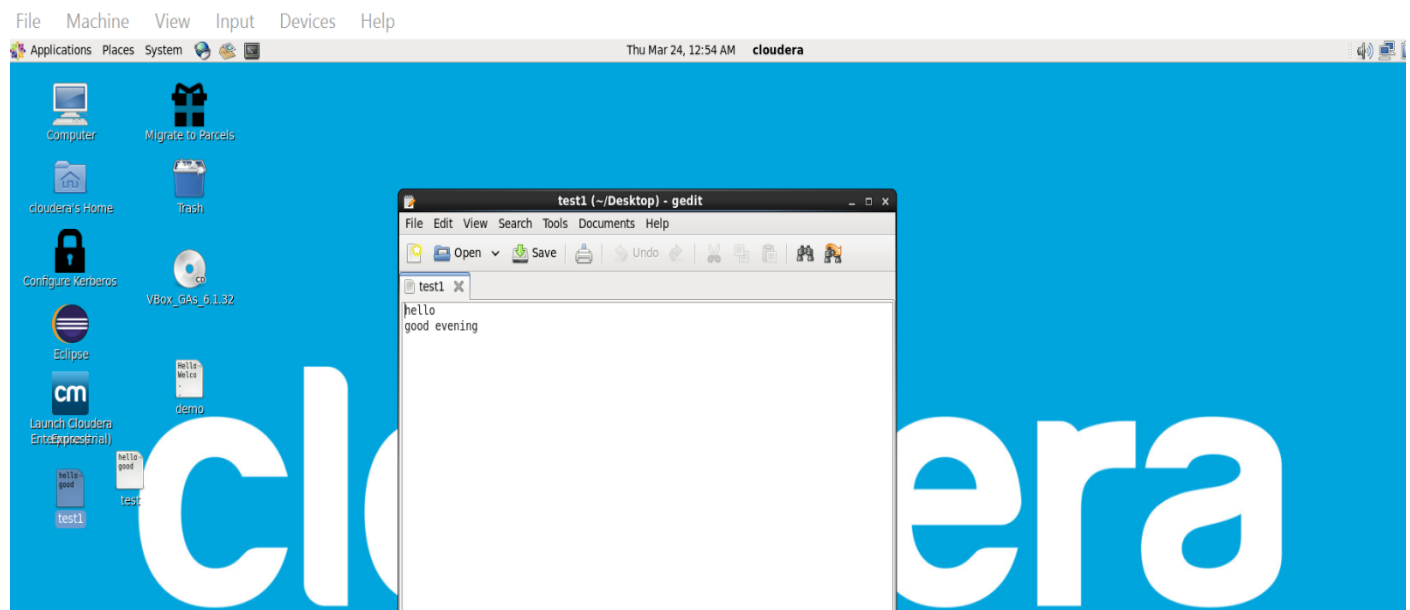

Step 9: one jar file executed for mapreduce task for wordcount from a file . the mapreduce example was there in `usr/lib/hadoop-mapreduce-examples.jar`

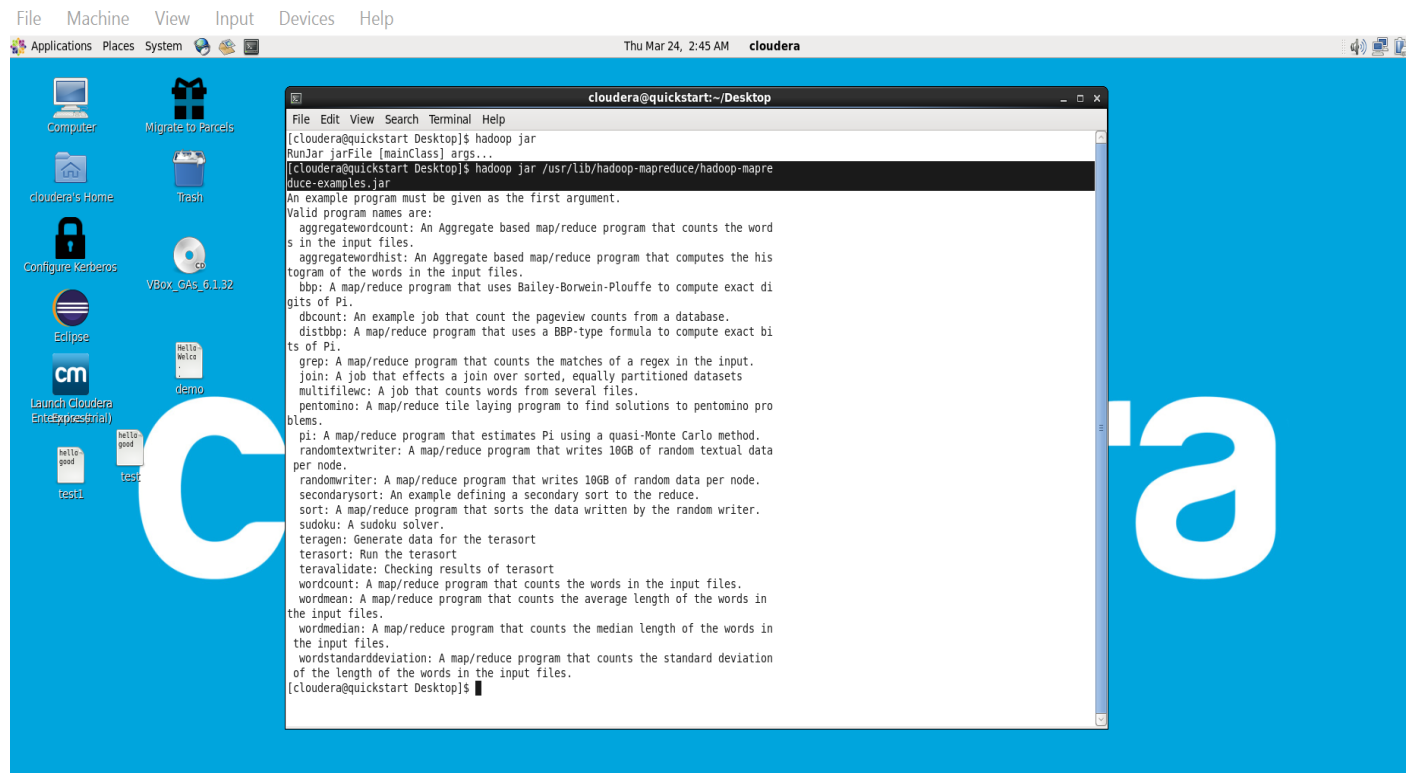

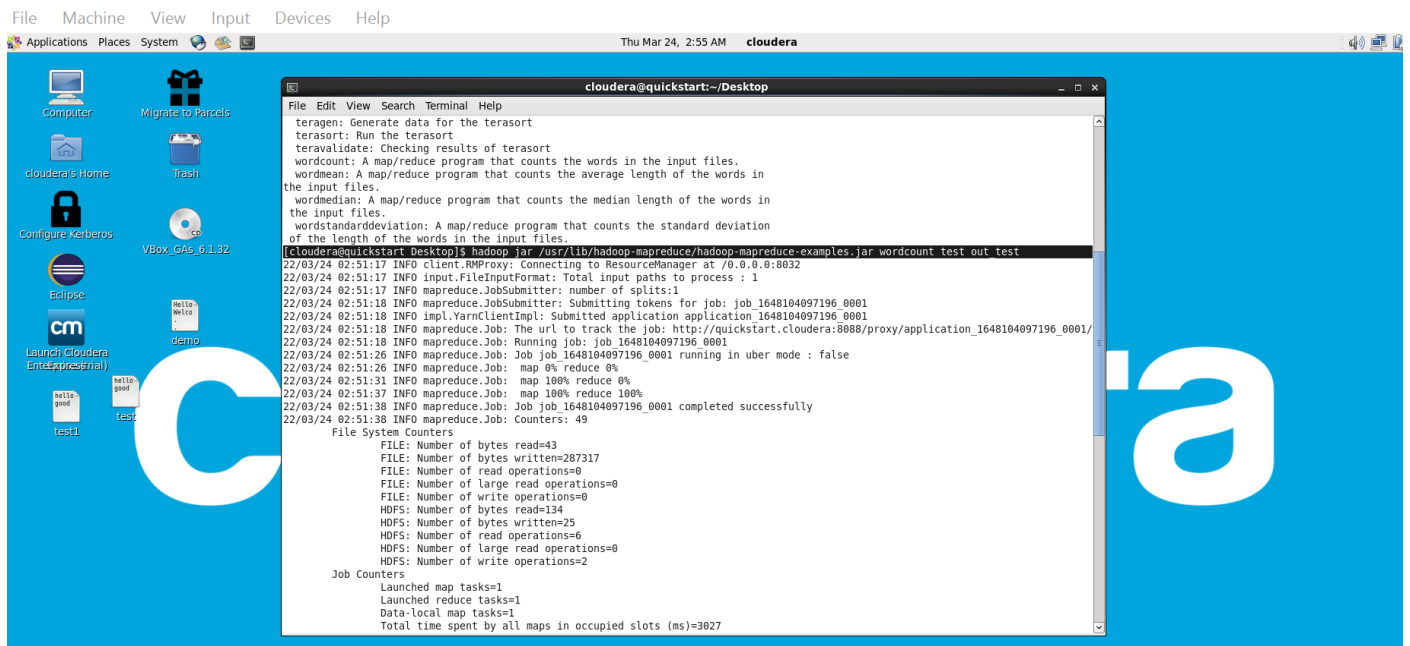

- interaction with hadoop file system commands

hadoop fs -

2. copy a file from cloudera desktop (or other place) to hadoop fs

3. copy a file/folder from hadoop fs to cloudera home/any location

4. checked how to run jar

5. one jar file executed for mapreduce task for wordcount from a file . the mapreduce example was there in usr/lib/hadoop-mapreduce-examples.jar