

Course Code: CAP 615	Course Instructor: Mr. Kumar Vishal	
Course Title: Java Programming	Roll Number: RD2110B61	
Name: Atul Kumar	Registration Number: 12102801	
Set Assign: 01	Page Number: 01	Total Pages: 19

Question 1: Write a program to create a following GUI application using database connectivity.

Answer: -

CODE

```
import javax.swing.*;
import java.util.*;
import java.awt.*;
import java.awt.event.*;
import java.sql.*;

class ScoreCard extends JFrame implements ActionListener{
    JTextField stdId;
    JTextField stdScore;
    JTextField stdDesc;
    JPanel panel1;
    JPanel panel2;
    JLabel title;
    JLabel stdIdLbl;
    JLabel stdScoreLbl;
    JLabel StdDescLbl;
```

```

JLabel courseIdlbs;

JComboBox courseId;

JButton cancelBtn;

JButton addBtn;

JButton connetBtn;

Connection con = null;

JTable jt;

String courses[] = {"Java","JavaScript","C++"};

String data[][]={ {"101","Java","78", "GOOD"},
                  {"102","JavaScript","98","OUTSTANDING"},
                  {"103","HTML","85","EXCELLENT"}};

String column[]={"SID","COURSE","SCORE",
"DESCRIPTION"};

    public ScoreCard(){
        panel1 = new JPanel();
        panel1.setBounds(0,0,700,50);
        panel1.setBackground(Color.ORANGE);
        add(panel1);
        title = new JLabel("Add Score");
        title.setBounds(0,20,200,50);
        title.setFont(new Font("Arial", Font.BOLD, 20));
        panel1.add(title);

```

```
stdIdLbl = new JLabel("Student Id : ");
stdIdLbl.setBounds(50, 70, 120, 30);
add(stdIdLbl);

stdId = new JTextField();
stdId.setBounds(180, 70, 120, 30);
add(stdId);

stdIdLbl = new JLabel("Course Id : ");
stdIdLbl.setBounds(50, 120, 120, 30);
add(stdIdLbl);

courseId = new JComboBox(courses);
courseId.setBounds(180, 120, 120, 30);
add(courseId);

stdIdLbl = new JLabel("Score : ");
stdIdLbl.setBounds(50, 170, 120, 30);
add(stdIdLbl);

stdId = new JTextField();
stdId.setBounds(180, 170, 120, 30);
add(stdId);

stdIdLbl = new JLabel("Description : ");
stdIdLbl.setBounds(50, 220, 120, 30);
add(stdIdLbl);

stdId = new JTextField();
```

```
stdId.setBounds(180, 220, 120, 30);  
add(stdId);  
cancelBtn = new JButton("Cancel");  
cancelBtn.setBounds(200, 300, 80, 30);  
add(cancelBtn);  
addBtn = new JButton("Add");  
addBtn.setBounds(80, 300, 80, 30);  
add(addBtn);  
panel2 = new JPanel();  
panel2.setBounds(330,70,330,350);  
panel2.setBackground(Color.GRAY);  
add(panel2);  
jt = new JTable(data, column);  
jt.setBounds(0,0,200,300);  
JScrollPane sp=new JScrollPane(jt);  
panel2.add(sp);  
panel2.setLayout(new GridLayout());  
connetBtn = new JButton("Connet Database");  
connetBtn.setBounds(100, 350, 150, 30);  
add(connetBtn);  
connetBtn.addActionListener(this);  
setBounds(100, 100, 700, 500);
```

```

        getContentPane().setBackground(Color.ORANGE);
        setResizable(false);
        setLayout(null);
        setVisible(true);
    }

    public void actionPerformed(ActionEvent e){
        databaseConnect();
    }

    public void databaseConnect(){
        try{
            String url =
"jdbc:mysql://127.0.0.1:3306/dabase";
            String userName = "root";
            String password = "root123";
            con =
DriverManager.getConnection(url,userName, password);
            if(con!=null){
                System.out.println("Database
Connected");
            }
        }catch(Exception ex){
            System.out.println("Error");
        }
    }

```

```

    }
}

class MainClass{

    public static void main(String[] args){

        ScoreCard ss = new ScoreCard();

    }

}

```

OUTPUT

Add Score

Student Id : 104

Course Id : C++

Score : 65

Description : OK

Add Cancel

Connet Database

SID	COURSE	SCORE	DESCRIPTI...
101	Java	78	GOOD
102	JavaScript	98	OUTSTANDI...
103	HTML	85	EXCELLENT

Question 2: Write a program to create a following GUI application using Swing components.

Answer: -

CODE


```
import javax.swing.*;
import java.awt.*;

class AddImage extends JFrame {
    public static void main(String[] args) {
        JLabel title=new JLabel("My Profile");
        title.setFont(new Font("Arial", Font.BOLD, 30));
        title.setSize(350,50);
        title.setLocation(200,20);
        JPanel p=new JPanel();
        p.setBounds(350,125,200,150);
        JFrame frame = new JFrame();
        frame.setTitle("My Profile Page");
        frame.setLayout(null);

        frame.setDefaultCloseOperation(JFrame.EXIT_ON_CLOSE);
        frame.setSize(600,600);
        Container c = frame.getContentPane();
        JLabel label1 = new JLabel();
```

```
label1.setIcon(new ImageIcon("user.png"));
label1.setBounds(75,125,300,30);
JLabel label2 = new JLabel();
label2.setIcon(new ImageIcon("gmailicon.jpg"));
label2.setBounds(60,400,300,30);
JLabel label3 = new JLabel();
label3.setIcon(new ImageIcon("fbicon.jpg"));
label3.setBounds(120,400,300,30);
JLabel label4 = new JLabel();
label4.setIcon(new ImageIcon("instaicon.jpg"));
label4.setBounds(180,400,300,30);
JLabel label5 = new JLabel();
label5.setIcon(new ImageIcon("linkedinicon.png"));
label5.setBounds(240,400,300,30);
c.add(label1); c.add(label2); c.add(label3);
c.add(label4);
c.add(label5); c.add(title); c.add(p);
frame.setVisible(true);
}
}
```

OUTPUT

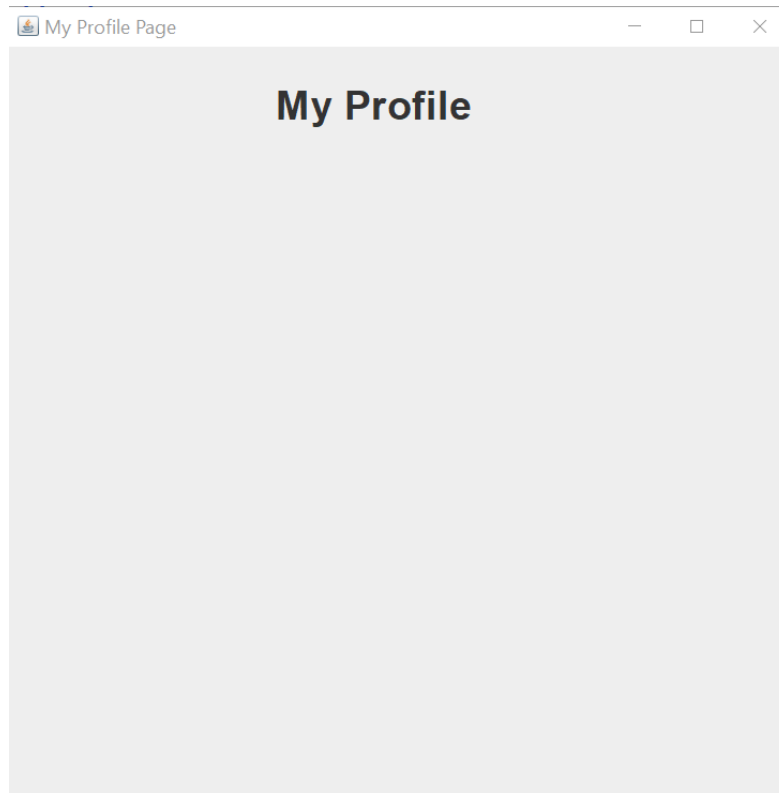

Question 3: Write a program to create a GUI App: Employee Registration page in which you have to take input like: Employee name, Password, date of birth, Gender, Contact No. Address.

Answer: -

CODE

```
import javax.swing.*;  
import java.awt.*;  
import java.awt.event.*;
```

```
class MyFrame extends JFrame implements ActionListener {  
    private Container c;  
    private JLabel title;  
    private JLabel name;  
    private JTextField tname;  
    private JLabel mno;  
    private JTextField tmno;  
    private JLabel gender;  
    private JRadioButton male;  
    private JRadioButton female;  
    private ButtonGroup gengp;  
    private JLabel dob;  
    private JComboBox date;  
    private JComboBox month;  
    private JComboBox year;  
    private JLabel add;  
    private JTextArea tadd;  
    private JCheckBox term;  
    private JButton sub;  
    private JButton reset;  
    private JTextArea tout;  
    private JLabel res;  
    private JTextArea resadd;  
    private String dates[]  
}
```

```
= { "1", "2", "3", "4", "5",  
    "6", "7", "8", "9", "10",  
    "11", "12", "13", "14", "15",  
    "16", "17", "18", "19", "20",  
    "21", "22", "23", "24", "25",  
    "26", "27", "28", "29", "30",  
    "31" };
```

```
private String months[]
```

```
= { "Jan", "feb", "Mar", "Apr",  
    "May", "Jun", "July", "Aug",  
    "Sep", "Oct", "Nov", "Dec" };
```

```
private String years[]
```

```
= { "1995", "1996", "1997", "1998",  
    "1999", "2000", "2001", "2002",  
    "2003", "2004", "2005", "2006",  
    "2007", "2008", "2009", "2010",  
    "2011", "2012", "2013", "2014",  
    "2015", "2016", "2017", "2018",  
    "2019" };
```

```
public EmpReg()
```

```
{
```

```
    setTitle("Registration Form");
```

```
    setBounds(300, 90, 900, 600);
```

```
    setDefaultCloseOperation(EXIT_ON_CLOSE);
```

```
setResizable(false);  
c = getContentPane();  
c.setLayout(null);  
title = new JLabel("Registration Form");  
title.setFont(new Font("Arial", Font.PLAIN, 30));  
title.setSize(300, 30);  
title.setLocation(300, 30);  
c.add(title);  
name = new JLabel("Name");  
name.setFont(new Font("Arial", Font.PLAIN, 20));  
name.setSize(100, 20);  
name.setLocation(100, 100);  
c.add(name);  
tname = new JTextField();  
tname.setFont(new Font("Arial", Font.PLAIN, 15));  
tname.setSize(190, 20);  
tname.setLocation(200, 100);  
c.add(tname);  
mno = new JLabel("Mobile");  
mno.setFont(new Font("Arial", Font.PLAIN, 20));  
mno.setSize(100, 20);  
mno.setLocation(100, 150);  
c.add(mno);  
tmno = new JTextField();
```

```
tmno.setFont(new Font("Arial", Font.PLAIN, 15));
tmno.setSize(150, 20);
tmno.setLocation(200, 150);
c.add(tmno);

gender = new JLabel("Gender");
gender.setFont(new Font("Arial", Font.PLAIN, 20));
gender.setSize(100, 20);
gender.setLocation(100, 200);
c.add(gender);

male = new JRadioButton("Male");
male.setFont(new Font("Arial", Font.PLAIN, 15));
male.setSelected(true);
male.setSize(75, 20);
male.setLocation(200, 200);
c.add(male);

female = new JRadioButton("Female");
female.setFont(new Font("Arial", Font.PLAIN, 15));
female.setSelected(false);
female.setSize(80, 20);
female.setLocation(275, 200);
c.add(female);

gengp = new ButtonGroup();
gengp.add(male);
gengp.add(female);
```

```
dob = new JLabel("DOB");  
dob.setFont(new Font("Arial", Font.PLAIN, 20));  
dob.setSize(100, 20);  
dob.setLocation(100, 250);  
c.add(dob);  
  
date = new JComboBox(dates);  
date.setFont(new Font("Arial", Font.PLAIN, 15));  
date.setSize(50, 20);  
date.setLocation(200, 250);  
c.add(date);  
  
month = new JComboBox(months);  
month.setFont(new Font("Arial", Font.PLAIN, 15));  
month.setSize(60, 20);  
month.setLocation(250, 250);  
c.add(month);  
  
year = new JComboBox(years);  
year.setFont(new Font("Arial", Font.PLAIN, 15));  
year.setSize(60, 20);  
year.setLocation(320, 250);  
c.add(year);  
  
add = new JLabel("Address");  
add.setFont(new Font("Arial", Font.PLAIN, 20));  
add.setSize(100, 20);  
add.setLocation(100, 300);
```

```
c.add(add);
tadd = new JTextArea();
tadd.setFont(new Font("Arial", Font.PLAIN, 15));
tadd.setSize(200, 75);
tadd.setLocation(200, 300);
tadd.setLineWrap(true);
c.add(tadd);
term = new JCheckBox("Accept Terms And Conditions.");
term.setFont(new Font("Arial", Font.PLAIN, 15));
term.setSize(250, 20);
term.setLocation(150, 400);
c.add(term);
sub = new JButton("Submit");
sub.setFont(new Font("Arial", Font.PLAIN, 15));
sub.setSize(100, 20);
sub.setLocation(150, 450);
sub.addActionListener(this);
c.add(sub);
reset = new JButton("Reset");
reset.setFont(new Font("Arial", Font.PLAIN, 15));
reset.setSize(100, 20);
reset.setLocation(270, 450);
reset.addActionListener(this);
c.add(reset);
```

```

    tout = new JTextArea();
    tout.setFont(new Font("Arial", Font.PLAIN, 15));
    tout.setSize(300, 400);
    tout.setLocation(500, 100);
    tout.setLineWrap(true);
    tout.setEditable(false);
    c.add(tout);
    res = new JLabel("");
    res.setFont(new Font("Arial", Font.PLAIN, 20));
    res.setSize(500, 25);
    res.setLocation(100, 500);
    c.add(res);
    resadd = new JTextArea();
    resadd.setFont(new Font("Arial", Font.PLAIN, 15));
    resadd.setSize(200, 75);
    resadd.setLocation(580, 175);
    resadd.setLineWrap(true);
    c.add(resadd);
    setVisible(true);
}

public void actionPerformed(ActionEvent e)
{
    if (e.getSource() == sub) {
        if (term.isSelected()) {

```

```

String data1;
String data
    = "Name : "
    + tname.getText() + "\n"
    + "Mobile : "
    + tmno.getText() + "\n";
if (male.isSelected())
    data1 = "Gender : Male"
        + "\n";
else
    data1 = "Gender : Female"
        + "\n";
String data2
    = "DOB : "
    + (String)date.getSelectedItem()
    + "/" + (String)month.getSelectedItem()
    + "/" + (String)year.getSelectedItem()
    + "\n";

String data3 = "Address : " + tadd.getText();
tout.setText(data + data1 + data2 + data3);
tout.setEditable(false);
res.setText("Registration Successfully..");
}

```

```

        else {
            tout.setText("");
            resadd.setText("");
            res.setText("Please accept the"
                        + " terms & conditions..");
        }
    }

    else if (e.getSource() == reset) {
        String def = "";
        tname.setText(def);
        tadd.setText(def);
        tmno.setText(def);
        res.setText(def);
        tout.setText(def);
        term.setSelected(false);
        date.setSelectedIndex(0);
        month.setSelectedIndex(0);
        year.setSelectedIndex(0);
        resadd.setText(def);
    }
}

}

class EmpReg {


```

```

public static void main(String[] args) throws Exception
{
    EmpReg r = new EmpReg();
}
}

```

OUTPUT

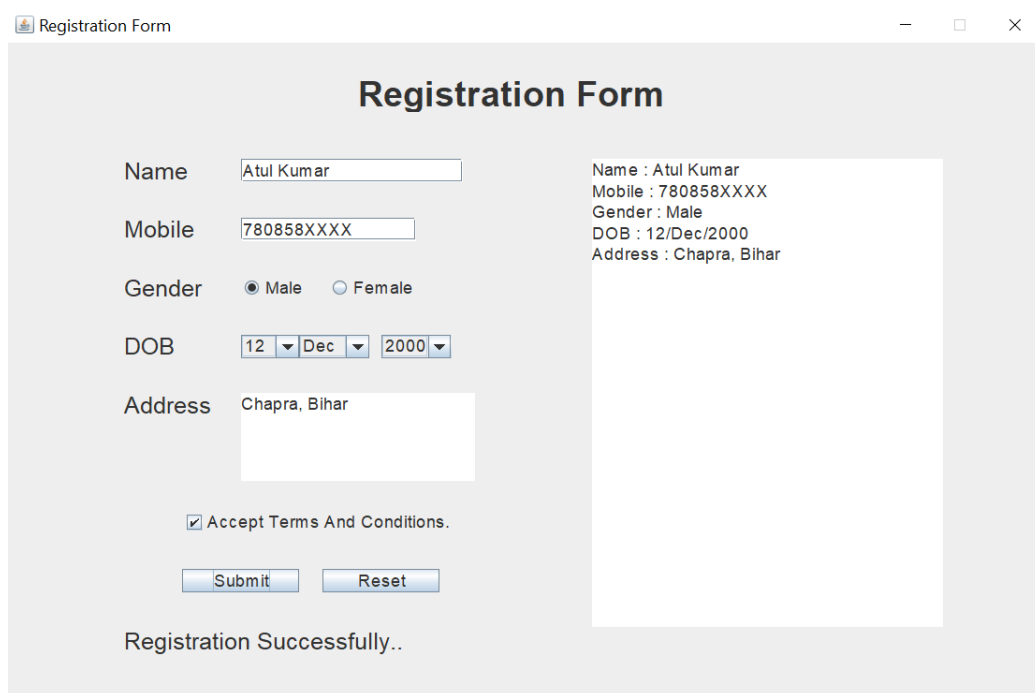

Registration Form

Name:

Mobile:

Gender: ☒ Male ☐ Female

DOB:

Address:

☒ Accept Terms And Conditions.

Registration Successfully..

Summary:
 Name : Atul Kumar
 Mobile : 780858XXXX
 Gender : Male
 DOB : 12/Dec/2000
 Address : Chapra, Bihar

