
## TUGAS LAB PWL 3-1



## MUHAMMAD AUDYA FADHLURROHMAN 202310041

## PARIWISATA DAN INFORMATIKA TEKNOLOGI INFORMASI INSTITUT BISNIS DAN INFORMATIKA KESATUAN

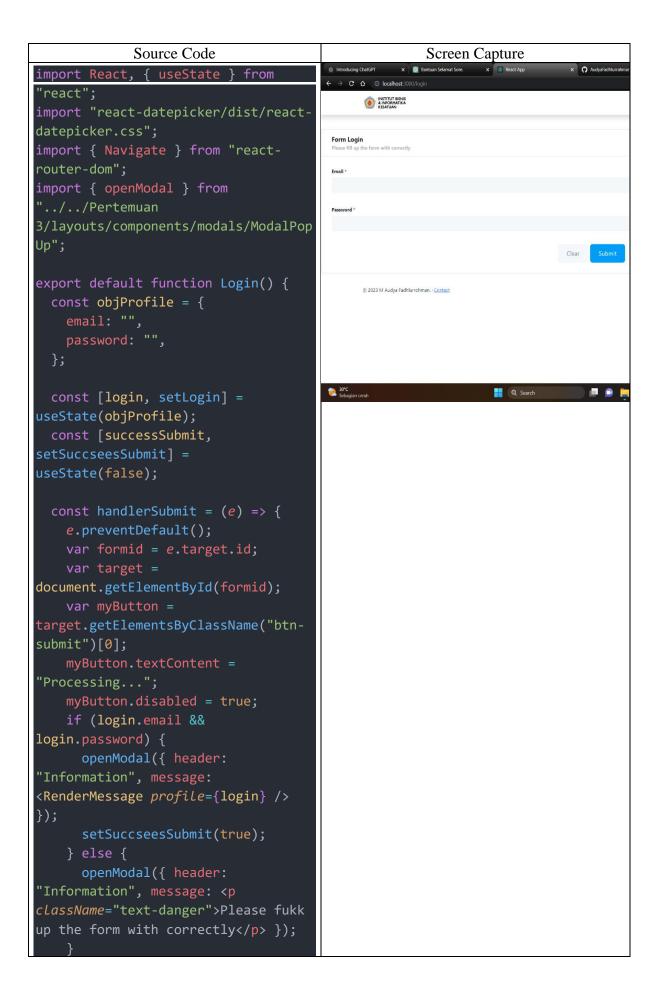

```
myButton.textContent = "Submit";
    myButton.disabled = false;
  };
  return successSubmit ? (
    <Navigate to="/home"
replace={true} />
    <div className="card">
      <div className="card-header">
        <h3 <pre>className="card-title"
align-items-start flex-column">
          <span className="card-</pre>
label fw-bolder text-dark">Form
Login</span>
          <span className="text-</pre>
gray-400 mt-1 fw-bold fs-6">Please
fill up the form with
correctly</span>
        </h3>
      </div>
      <div className="card-body">
        <form className="form-</pre>
profile" method="post" onSubmit={(e)
=> handlerSubmit(e)} id="form-
profile">
          <div className="fv-row mb-</pre>
10 fv-plugins-icon-container">
            <label
className="required form-label fs-6
fw-bolder text-dark">Email</label>
            <input type="email"</pre>
name="email" required
className="form-control form-
control-lg form-control-solid"
defaultValue={login.email}
onChange={(e) => setLogin({
...login, email: e.target.value })}
          </div>
          <div className="fv-row mb-</pre>
10 fv-plugins-icon-container">
            <label
className="required form-label fs-6
fw-bolder text-
dark">Password</label>
```

```
<input type="password"</pre>
name="password" required
className="form-control form-
control-lg form-control-solid"
pattern="^[0-9]*$"
defaultValue={login.password}
onChange={(e) => setLogin({
...login, password: e.target.value
})} />
         </div>
         <div className="text-</pre>
center">
           <button type="button"</pre>
className="btn btn-lg btn-light">
             Clear
           </button>
           <button type="submit"</pre>
className="btn btn-lg btn-primary
mx-2 btn-submit">
             Submit
           </button>
         </div>
      </div>
    </div>
  );
const RenderMessage = ({ profile })
=> {
   <div className="Login">
     dark">Email: {profile.npm}
      Fullname: {profile.fname}
{profile.mname} {profile.lname}{" "}
     </div>
AppRoute.js
import React from "react";
```

import { Route, Routes, Navigate }

from "react-router-dom";

```
import Layouts from
"../layouts/Layouts";
import Home from
"../modules/components/Homes/Home";
import Explore from
"../modules/components/Explore/Explo
re";
import Messages from
"../modules/components/Messages/Mess
ages";
import Feeds from
"../modules/components/Explore/widge
ts/Feeds";
import Reels from
"../modules/components/Explore/widge
ts/Reels";
import FYP from
"../modules/components/Explore/widge
ts/FYP";
import Profiles from
"../modules/components/Profiles/Prof
iles";
import Login from "../../Latihan-3-
1/Widget/Login";
import NotFound from "../../Latihan-
3-1/NotFound";
const routes = [
      <Layouts>
        <Home />
      </Layouts>
    ),
  },
    path: "/home",
      <Layouts>
        <Home />
      </Layouts>
    path: "/explore",
      <Layouts>
```

```
<Explore />
      </Layouts>
      { path: "feeds", element:
<Feeds /> },
<Reels /> },
     { path: "fyp", element: <FYP</pre>
   path: "/messages",
     <Layouts>
        <Messages />
     </Layouts>
    path: "/login",
     <Layouts>
       <Login />
     </Layouts>
     <Layouts>
       <NotFound />
      </Layouts>
  },
];
export default function AppRoute() {
  return (
    <Routes>
      {routes.map(({ path, element,
children }) => (
       <Route key={path}</pre>
path={path} element={element}>
```

## NotFound Pages

