(a) BHV: at most two legs

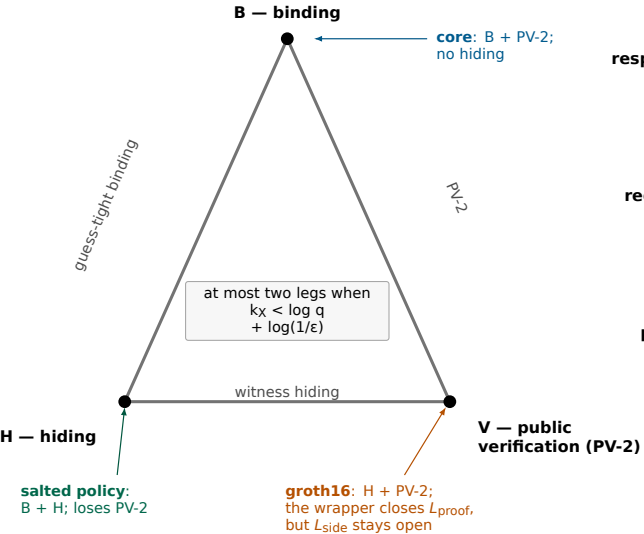

(b) Leakage profile: three inputs, three channels

	L_{pub} public values	L_{proof} proof artefact	L_{side} side information
response *T*	core: **bounded** *b*, *C* public g16: **bounded** same; $q \cdot 2^{-k}$	core: **open** trace, opened values g16: **closed** ⊥ (wrapper)	core: **open** prompt, model g16: **open** re-execution
request *n*	core: **bounded** *n* public; $f = 0$ g16: **bounded** $f > 0$ closes replay	core: **closed** *n* bound in *b* g16: **closed** same	core: **open** no freshness g16: **open** replay without *n*
policy π	core: **bounded** policy_hash public g16: **bounded** salted commit; PV-2 lost	core: **open** spec_canonical, witness g16: **closed** ⊥ (wrapper)	core: **open** candidate corpus g16: **open** dictionary

core = STARK, hiding none; **g16** = wrapper-level hiding, not post-quantum.
No proof tier closes L_{side}; a zero probe is not a zero-knowledge proof.

closed in this channel | bounded / conditional | open