


2. Create multiple gcloud configurations with different configurations such as different email id's or different projects etc. and list the commands to switch between two accounts

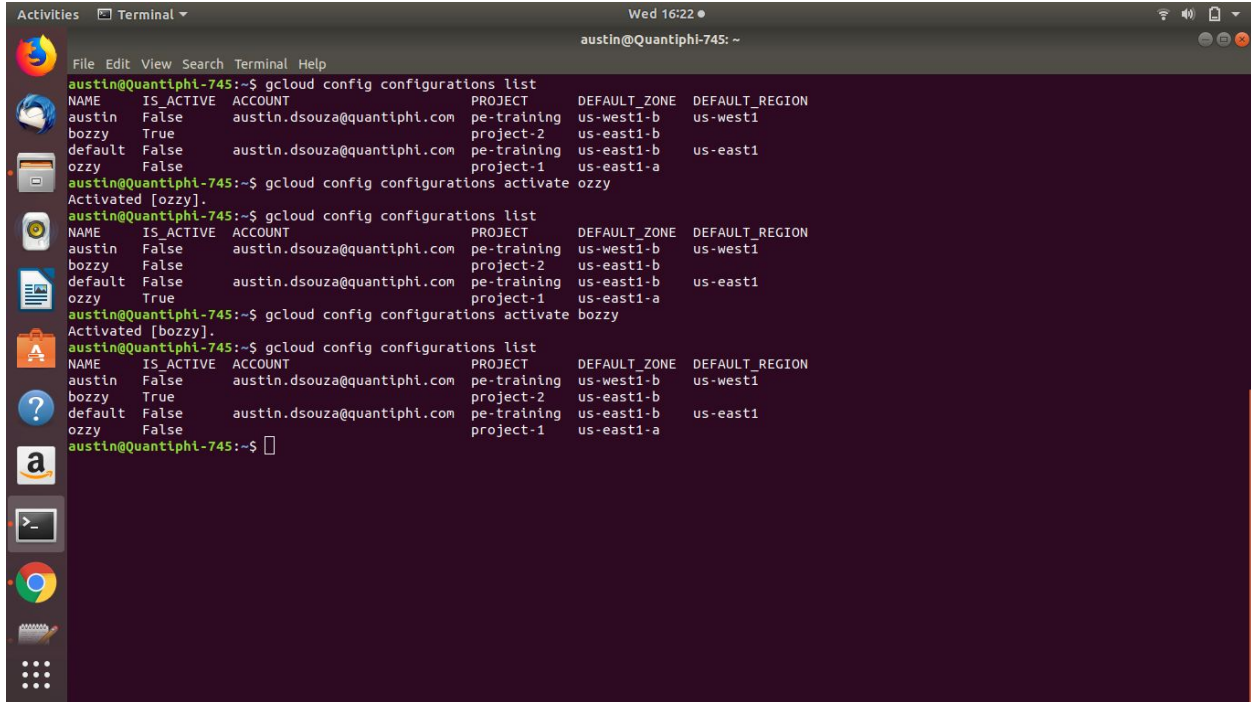

The image shows a terminal window titled "austin@Quantiphi-745: ~" with a menu bar (File, Edit, View, Search, Terminal, Help) and a sidebar with application icons. The terminal displays the following commands and output:

```
austin@Quantiphi-745:~$ gcloud config configurations list
```

NAME	IS_ACTIVE	ACCOUNT	PROJECT	DEFAULT_ZONE	DEFAULT_REGION
austin	False	austin.dsouza@quantiphi.com	pe-training	us-west1-b	us-west1
bozzy	True		project-2	us-east1-b	
default	False	austin.dsouza@quantiphi.com	pe-training	us-east1-b	us-east1
ozzy	False		project-1	us-east1-a	

```
austin@Quantiphi-745:~$ gcloud config configurations activate ozzy
```

Activated [ozzy].

```
austin@Quantiphi-745:~$ gcloud config configurations list
```

NAME	IS_ACTIVE	ACCOUNT	PROJECT	DEFAULT_ZONE	DEFAULT_REGION
austin	False	austin.dsouza@quantiphi.com	pe-training	us-west1-b	us-west1
bozzy	False		project-2	us-east1-b	
default	False	austin.dsouza@quantiphi.com	pe-training	us-east1-b	us-east1
ozzy	True		project-1	us-east1-a	

```
austin@Quantiphi-745:~$ gcloud config configurations activate bozzy
```

Activated [bozzy].

```
austin@Quantiphi-745:~$ gcloud config configurations list
```

NAME	IS_ACTIVE	ACCOUNT	PROJECT	DEFAULT_ZONE	DEFAULT_REGION
austin	False	austin.dsouza@quantiphi.com	pe-training	us-west1-b	us-west1
bozzy	True		project-2	us-east1-b	
default	False	austin.dsouza@quantiphi.com	pe-training	us-east1-b	us-east1
ozzy	False		project-1	us-east1-a	

```
austin@Quantiphi-745:~$
```