


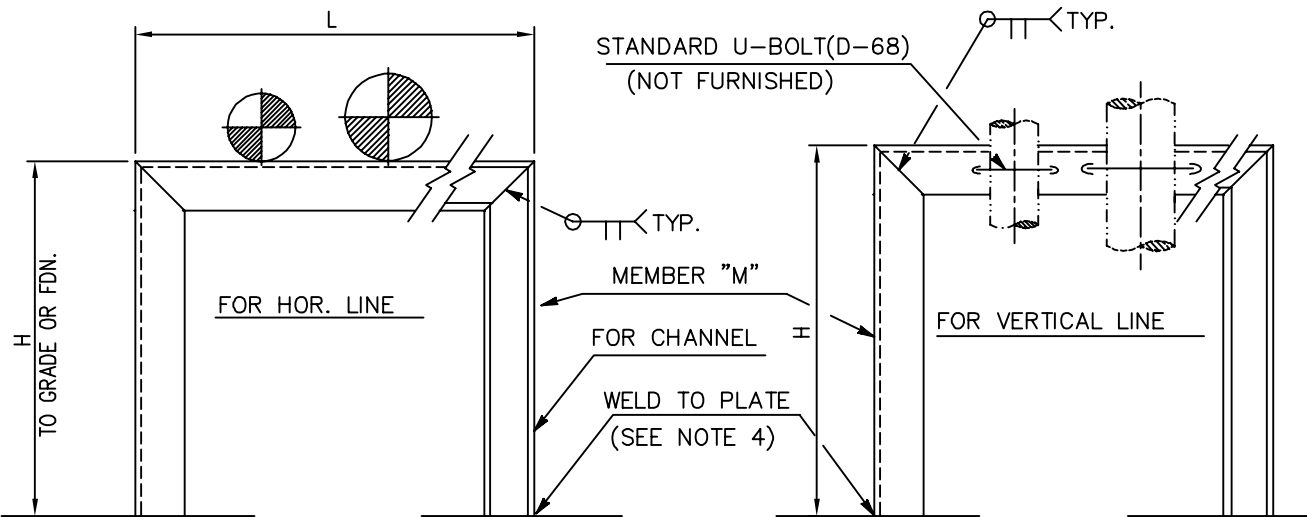

ELEV.

MEMBER "M"	L (MAX.)	H (MAX.)
L50X50X6	1000	500
L75X75X9	1000	1500
C125X65X6	1500	1500
C150X75X9	1500	2000

NOTES:

1. DESIGNATION NUMBER DENOTES AS FOLLOWS:
28-L50-1005L

DENOTE THE LOWER COMPONENT TYPE SEE M-42

DENOTE DIMENSION "H" (IN 100mm)

DENOTE DIMENSION "L" (IN 100mm)

DENOTE MEMBER "M"

DENOTE TYPE NO.
2. DIMENSION "H" & "L" SHALL BE CUT TO SUIT IN FIELD .
3. IF THE FOUNDATION IS NOT USED IN THIS DETAIL, DIMENSION "H" SHALL BE COUNTED FROM THE ELEVATION OF THE LOWEST POINT OF PAVING.
4. THIS TYPE SHALL BE USED WITH M-42 TO DETERMINE THE LOWER COMPONENT TYPE. IN THIS DETAIL, USE TYPE-L & T ONLY.



中鼎工程股份有限公司
CTCI CORPORATION

DETAIL OF PIPE SUPPORT
TYPE-28

ENGINEERING STANDARD

D7TS-701-E

BY		CHK.	
DATE		APPR.	

D-31

REV.
1