

Práctica 03 Manejo de repositorios remotos

- Crear un repositorio en tu cuenta personal de GitHub
 - Nombrarlo como **prac03-web integral**
 - Agregar una breve descripción
 - Definir accesibilidad pública

A repository contains all project files, including the revision history. Already have a project repository elsewhere?
[Import a repository.](#)

Owner * / Repository name *

⚠ Your new repository will be created as prac03-web-integral.

Great repository names are short and memorable. Need inspiration? How about didactic-carnival?

Description (optional)

☒ Public
Anyone on the internet can see this repository. You choose who can commit.

☐ Private
You choose who can see and commit to this repository.

Initialize this repository with:

☐ Add a README file
This is where you can write a long description for your project. [Learn more about READMEs.](#)

Add .gitignore

Choose which files not to track from a list of templates. [Learn more about ignoring files.](#)






Choose a license

A license tells others what they can and can't do with your code. [Learn more about licenses.](#)

📌 You are creating a public repository in your personal account.

[Create repository](#)

- Ubicar la carpeta de la aplicación login creada en la unidad 1
 - Inicializa la carpeta en dado caso que no lo esté con **git** o **git Flow**

Nombre	Fecha de modificación
 .angular	12/05/2023 05:15 p. m.
 .git	12/05/2023 05:10 p. m.
 .vscode	12/05/2023 05:09 p. m.
 node_modules	12/05/2023 05:22 p. m.
 ...	12/05/2023 05:00 p. m.

.cmd.exe

```
0.19043.1526]
dos los derechos reservados.

C:\Documents\Unidad 1 Web\classrom

d 1 Web\classrom> git init
```

- Crear o modificar el archivo .gitignore de tal manera que no se suba la carpeta node-modules y todos los archivos *.exe.

```

30
31 # Miscellaneous
32 /.angular/cache
33 .sass-cache/
34 /connect.lock
35 /coverage
36 /libpeerconnection.log
37 testem.log
38 /typings
39
40 # System files
41 .DS_Store
42 Thumbs.db
43
44 *.exe

```

- Agregar todos los archivos de la aplicación al Staging Area

```

C:\Users\DELL\Documents\Unidad 1 Web\classroom> git add .
warning: in the working copy of 'angular.json', LF will be replaced by CRLF the next time Git touches it
warning: in the working copy of 'package-lock.json', LF will be replaced by CRLF the next time Git touches it
warning: in the working copy of 'package.json', LF will be replaced by CRLF the next time Git touches it
warning: in the working copy of 'src/app/app-routing.module.ts', LF will be replaced by CRLF the next time Git touches it
warning: in the working copy of 'src/app/app.component.html', LF will be replaced by CRLF the next time Git touches it
warning: in the working copy of 'src/app/app.module.ts', LF will be replaced by CRLF the next time Git touches it
warning: in the working copy of 'src/index.html', LF will be replaced by CRLF the next time Git touches it
warning: in the working copy of 'src/styles.scss', LF will be replaced by CRLF the next time Git touches it
warning: in the working copy of 'src/app/material.module.ts', LF will be replaced by CRLF the next time Git touches it
warning: in the working copy of 'src/app/pages/auth/login/login-routing.module.ts', LF will be replaced by CRLF the next time Git touches it
warning: in the working copy of 'src/app/pages/auth/login/login.component.html', LF will be replaced by CRLF the next time Git touches it
warning: in the working copy of 'src/app/pages/auth/login/login.component.spec.ts', LF will be replaced by CRLF the next time Git touches it
warning: in the working copy of 'src/app/pages/auth/login/login.component.ts', LF will be replaced by CRLF the next time Git touches it
warning: in the working copy of 'src/app/pages/auth/login/login.module.ts', LF will be replaced by CRLF the next time Git touches it
warning: in the working copy of 'src/app/pages/home/home-routing.module.ts', LF will be replaced by CRLF the next time Git touches it
warning: in the working copy of 'src/app/pages/home/home.component.html', LF will be replaced by CRLF the next time Git touches it
warning: in the working copy of 'src/app/pages/home/home.component.spec.ts', LF will be replaced by CRLF the next time Git touches it
warning: in the working copy of 'src/app/pages/home/home.component.ts', LF will be replaced by CRLF the next time Git touches it
warning: in the working copy of 'src/app/pages/home/home.module.ts', LF will be replaced by CRLF the next time Git touches it
warning: in the working copy of 'src/app/shared/components/footer/footer.component.html', LF will be replaced by CRLF the next time Git touches it
warning: in the working copy of 'src/app/shared/components/footer/footer.component.ts', LF will be replaced by CRLF the next time Git touches it
warning: in the working copy of 'src/app/shared/components/header/header.component.html', LF will be replaced by CRLF the next time Git touches it
warning: in the working copy of 'src/app/shared/components/header/header.component.ts', LF will be replaced by CRLF the next time Git touches it
C:\Users\DELL\Documents\Unidad 1 Web\classroom>

```

- Compromete los cambios.

```
C:\Users\DELL\Documents\Unidad 1 Web\classrom>git commit -m "login de usuario"
[master a70e54d] login de usuario
28 files changed, 1343 insertions(+), 487 deletions(-)
create mode 100644 src/app/material.module.ts
create mode 100644 src/app/pages/auth/login/login-routing.module.ts
create mode 100644 src/app/pages/auth/login/login.component.html
create mode 100644 src/app/pages/auth/login/login.component.scss
create mode 100644 src/app/pages/auth/login/login.component.spec.ts
create mode 100644 src/app/pages/auth/login/login.component.ts
create mode 100644 src/app/pages/auth/login/login.module.ts
create mode 100644 src/app/pages/home/home-routing.module.ts
create mode 100644 src/app/pages/home/home.component.html
create mode 100644 src/app/pages/home/home.component.scss
create mode 100644 src/app/pages/home/home.component.spec.ts
create mode 100644 src/app/pages/home/home.component.ts
create mode 100644 src/app/pages/home/home.module.ts
create mode 100644 src/app/shared/components/footer/footer.component.html
create mode 100644 src/app/shared/components/footer/footer.component.scss
create mode 100644 src/app/shared/components/footer/footer.component.ts
create mode 100644 src/app/shared/components/header/header.component.html
create mode 100644 src/app/shared/components/header/header.component.scss
create mode 100644 src/app/shared/components/header/header.component.ts
create mode 100644 src/app/shared/components/utils/base-form.ts
C:\Users\DELL\Documents\Unidad 1 Web\classrom>
```

- Realiza el merge o fusión de la rama develop a la rama main

```
C:\Users\DELL\Documents\Unidad 1 Web\classrom>git checkout main
Switched to branch 'main'
C:\Users\DELL\Documents\Unidad 1 Web\classrom>git merge develop
Already up to date.
```

- Crear un enlace o URL hacia el repositorio remoto GitHub recién creado.

```
C:\Users\DELL\Documents\Unidad 1 Web\classrom>git remote add origin https://github.com/Bucky2/prac03-web-integral.git
C:\Users\DELL\Documents\Unidad 1 Web\classrom>
```

- Enviar los cambios a rama main del repositorio remoto

```
C:\Users\DELL\Documents\Unidad 1 Web\classrom>git push -u origin main
Enumerating objects: 68, done.
Counting objects: 100% (68/68), done.
Delta compression using up to 8 threads
Compressing objects: 100% (63/63), done.
Writing objects: 100% (68/68), 129.20 KiB | 6.15 MiB/s, done.
Total 68 (delta 15), reused 0 (delta 0), pack-reused 0
remote: Resolving deltas: 100% (15/15), done.
To https://github.com/Bucky2/prac03-web-integral.git
 * [new branch]      main -> main
branch 'main' set up to track 'origin/main'.
```


- Verificar qué se hayan dado

```
C:\Users\DELL\Documents\Unidad 1 Web\classrom>Git status
On branch main
Your branch is up to date with 'origin/main'.


nothing to commit, working tree clean
```

Bucky2 login de usuario		a70e54d · 13 minutes ago	🕒 2 commits
📁 .vscode	initial commit	3 weeks ago	
📁 src	login de usuario	13 minutes ago	
📄 .editorconfig	initial commit	3 weeks ago	
📄 .gitignore	initial commit	3 weeks ago	
📄 README.md	initial commit	3 weeks ago	
📄 angular.json	login de usuario	13 minutes ago	
📄 package-lock.json	login de usuario	13 minutes ago	
📄 package.json	login de usuario	13 minutes ago	
📄 tsconfig.app.json	initial commit	3 weeks ago	
📄 tsconfig.json	initial commit	3 weeks ago	
📄 tsconfig.spec.json	initial commit	3 weeks ago	

- Ingresar a la página StackBlitz
 - Registrar con cuenta personal de GitHub

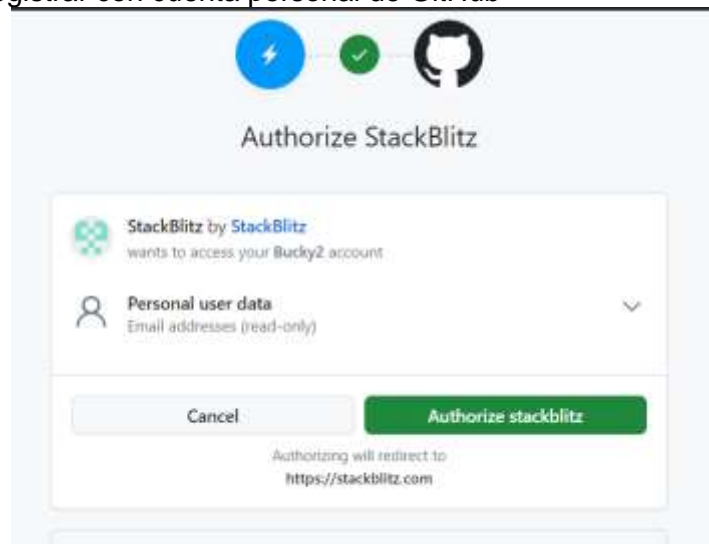


- Crear un nuevo proyecto Angular

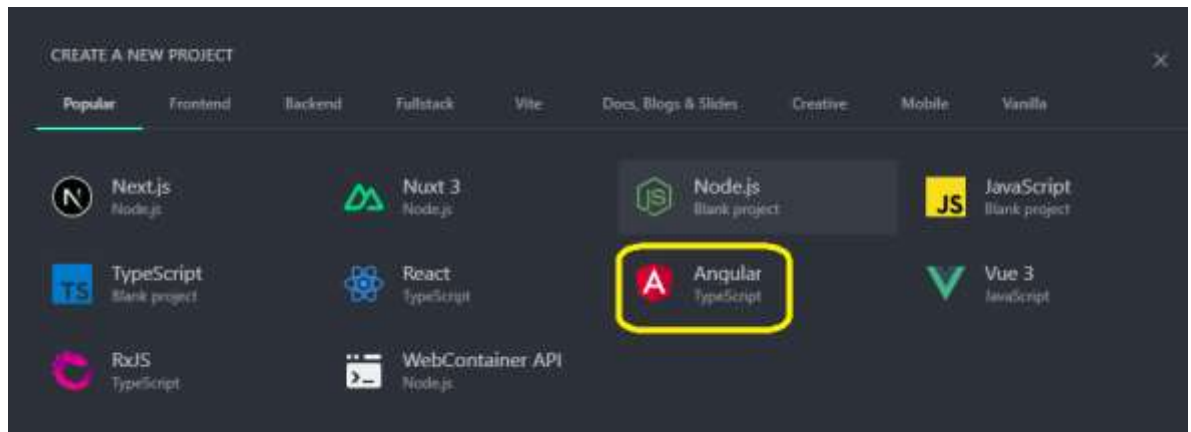


- Conectar con el repositorio de github

+

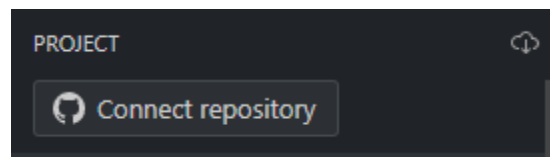

- Conectarlo con repositorio existente de la aplicación login

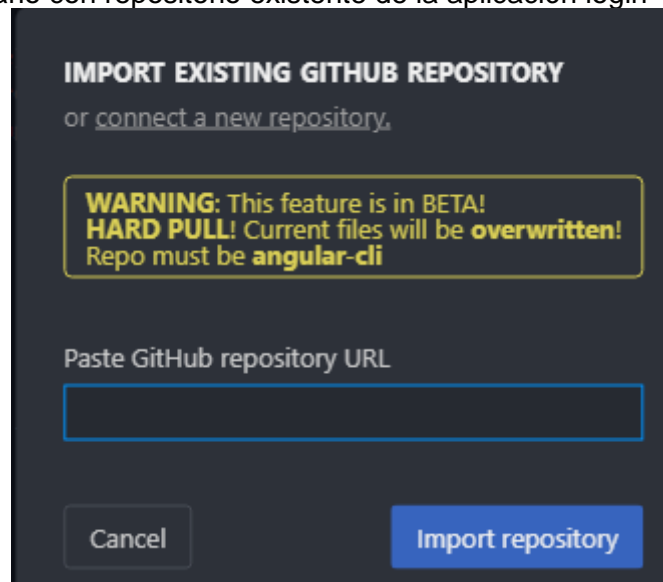

- Modificar el archivo main.ts

```
import 'zone.js'
import { platformBrowserDynamic } from '@angular/platform-browser-dynamic';

import { AppModule } from './app/app.module';

platformBrowserDynamic().bootstrapModule(AppModule)
  .catch(err => console.error(err));
```

(alias) class AppModule
import AppModule

<https://stackblitz.com/edit/stackblitz-starters-wvaam8?file=src%2Fapp%2Fpages%2Fauth%2Flogin%2Flogin.component.html>

Notas:

Cada comando tecleado en la consola y su salida deberá ser capturado

Una vez terminado el ejercicio crea un archivo en formato **PDF** y enviarlo a la repositorio [Git](#)

Nombrar el archivo: **[unidad2practica3-\[apellidos\]-\[nombre\].pdf](#)**