

81_Working_with_Signal

March 22, 2020

```
[1]: from asammdf import Signal
import numpy as np
```

```
[2]: import IPython.display as display
import matplotlib.pyplot as plt
import matplotlib as mpl
import numpy as np
import pandas as pd
import seaborn as sns
%matplotlib inline
```

1 Create 3 Signal objects with different time stamps

```
[3]: # uint8 with 100ms time raster
timestamps = np.array([0.1 * t for t in range(5)], dtype=np.float32)
s_uint8 = Signal(
    samples=np.array([t for t in range(5)], dtype=np.uint8),
    timestamps=timestamps,
    name="Uint8_Signal",
    unit="u1",
)

# int32 with 50ms time raster
timestamps = np.array([0.05 * t for t in range(10)], dtype=np.float32)
s_int32 = Signal(
    samples=np.array(list(range(-500, 500, 100)), dtype=np.int32),
    timestamps=timestamps,
    name="Int32_Signal",
    unit="i4",
)

# float64 with 300ms time raster
timestamps = np.array([0.3 * t for t in range(3)], dtype=np.float32)
s_float64 = Signal(
    samples=np.array(list(range(2000, -1000, -1000)), dtype=np.int32),
    timestamps=timestamps,
```

```

        name="Float64_Signal",
        unit="f8",
    )

```

2 Map signals

```

[4]: xs = np.linspace(-1, 1, 50)
     ys = np.linspace(-1, 1, 50)
     X, Y = np.meshgrid(xs, ys)

```

```

[5]: vals = np.linspace(0, 180.0 / np.pi, 100)
     phi = np.ones((len(vals), 50, 50), dtype=np.float64)

```

```

[6]: for i, val in enumerate(vals):
     phi[i] *= val
     R = 1 - np.sqrt(X ** 2 + Y ** 2)
     samples = np.cos(2 * np.pi * X + phi) * R

     timestamps = np.arange(0, 2, 0.02)

     s_map = Signal(
         samples=samples, timestamps=timestamps, name="Variable Map Signal",
         ↪unit="dB"
     )

```

```


[7]: s_map.plot()

```

```

WARNING:root:Signal plotting requires pyqtgraph or matplotlib
/projects/Jupyter_MDF_Analysis/asammdf/asammdf/signal.py:262:
MatplotlibDeprecationWarning: Adding an axes using the same arguments as a
previous axes currently reuses the earlier instance.  In a future version, a new
instance will always be created and returned.  Meanwhile, this warning can be
suppressed, and the future behavior ensured, by passing a unique label to each
axes instance.
    ax = fig.add_subplot(111, projection="3d")


```

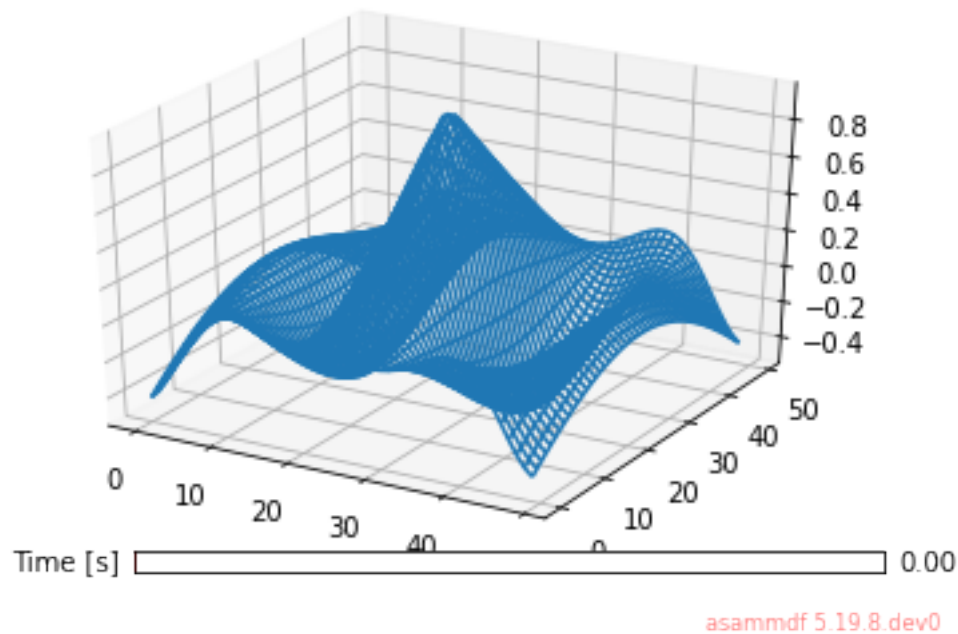

Set plot settings for a larger plot.

```
[8]: mpl.rc_file_defaults()
sns.set(
    rc={
        "figure.figsize": (11.69, 8.27), # A4 paper size.
        "figure.facecolor": "w",
        "figure.edgecolor": "k",
        "axes.labelsize": 18,
        "axes.titlesize": 18,
    }
)
s_map.plot()
```

WARNING:root:Signal plotting requires pyqtgraph or matplotlib
/projects/Jupyter_MDF_Analysis/asammdf/asammdf/signal.py:262:
MatplotlibDeprecationWarning: Adding an axes using the same arguments as a
previous axes currently reuses the earlier instance. In a future version, a new
instance will always be created and returned. Meanwhile, this warning can be
suppressed, and the future behavior ensured, by passing a unique label to each
axes instance.
ax = fig.add_subplot(111, projection="3d")

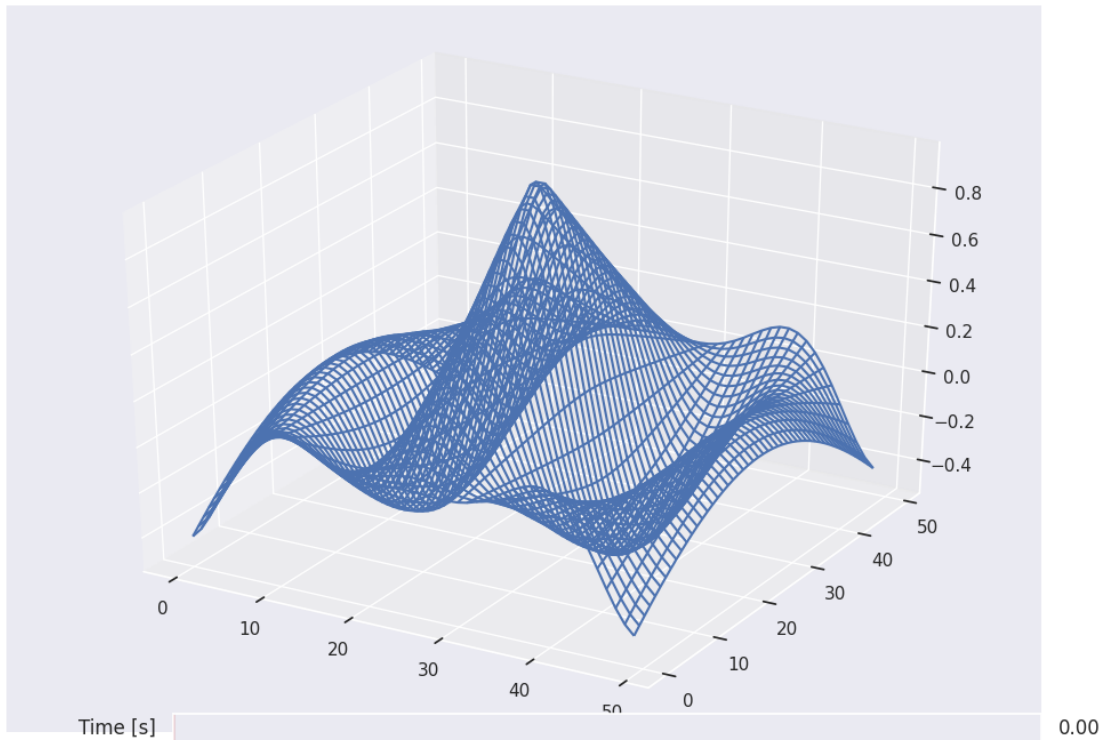

asammdf 5.19.8.dev0

```
[9]: prod = s_float64 * s_uint8
prod.name = "Uint8_Signal * Float64_Signal"
prod.unit = "*"
prod.plot()

pow2 = s_uint8 ** 2
pow2.name = "Uint8_Signal ^ 2"
pow2.unit = "u1^2"
pow2.plot()


allsum = s_uint8 + s_int32 + s_float64
allsum.name = "Uint8_Signal + Int32_Signal + Float64_Signal"
allsum.unit = "+"
allsum.plot()

# inplace operations
pow2 *= -1
pow2.name = "- Uint8_Signal ^ 2"
pow2.plot()


# cut signal
```

```
s_int32.plot()  
cut_signal = s_int32.cut(start=0.2, stop=0.35)  
cut_signal.plot()
```


WARNING:root:Signal plotting requires pyqtgraph or matplotlib

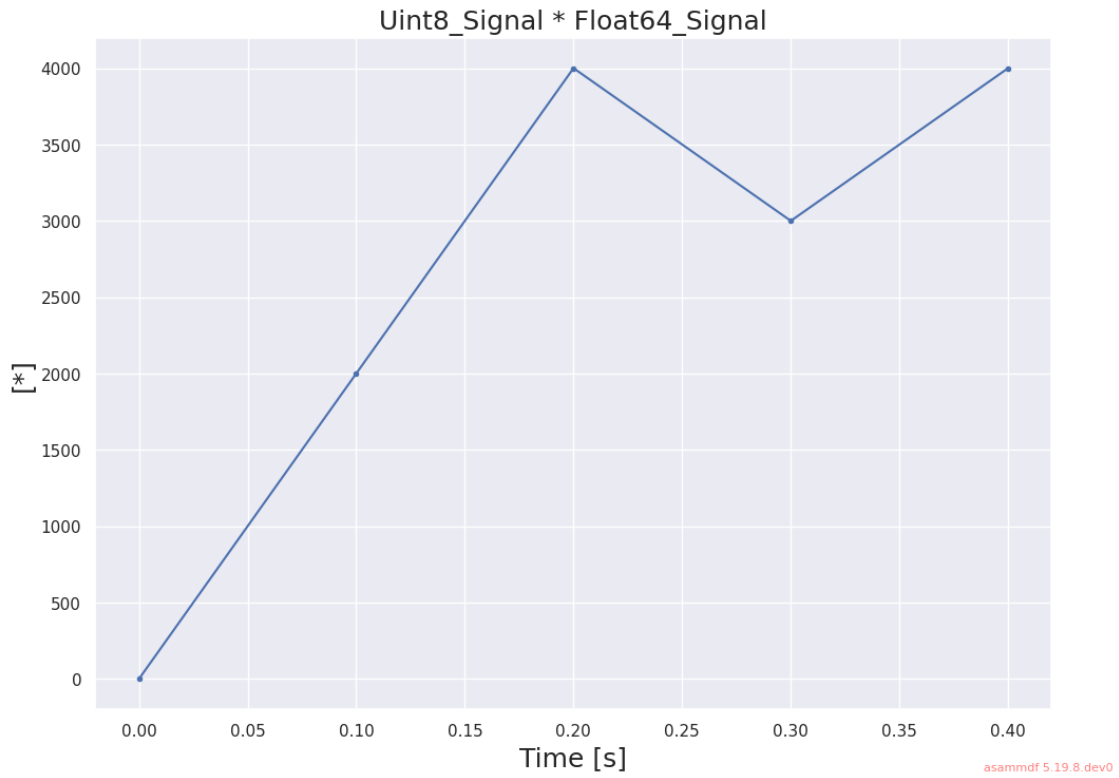


WARNING:root:Signal plotting requires pyqtgraph or matplotlib

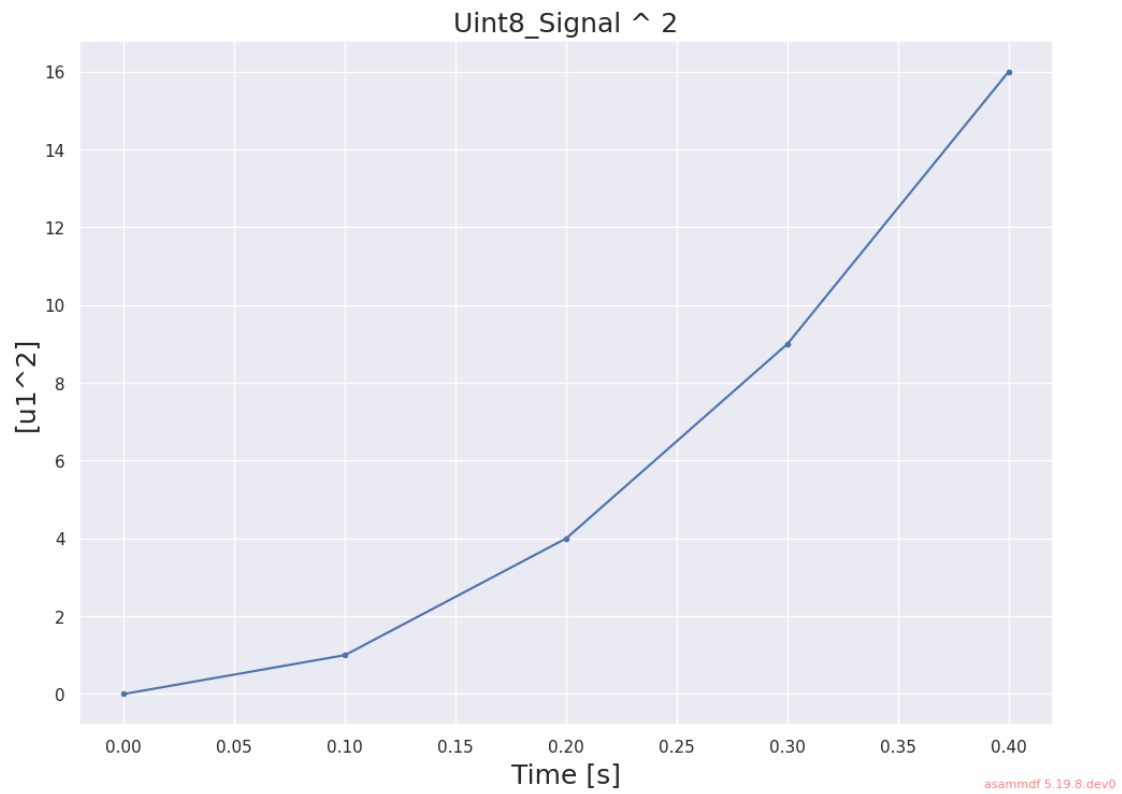


WARNING:root:Signal plotting requires pyqtgraph or matplotlib

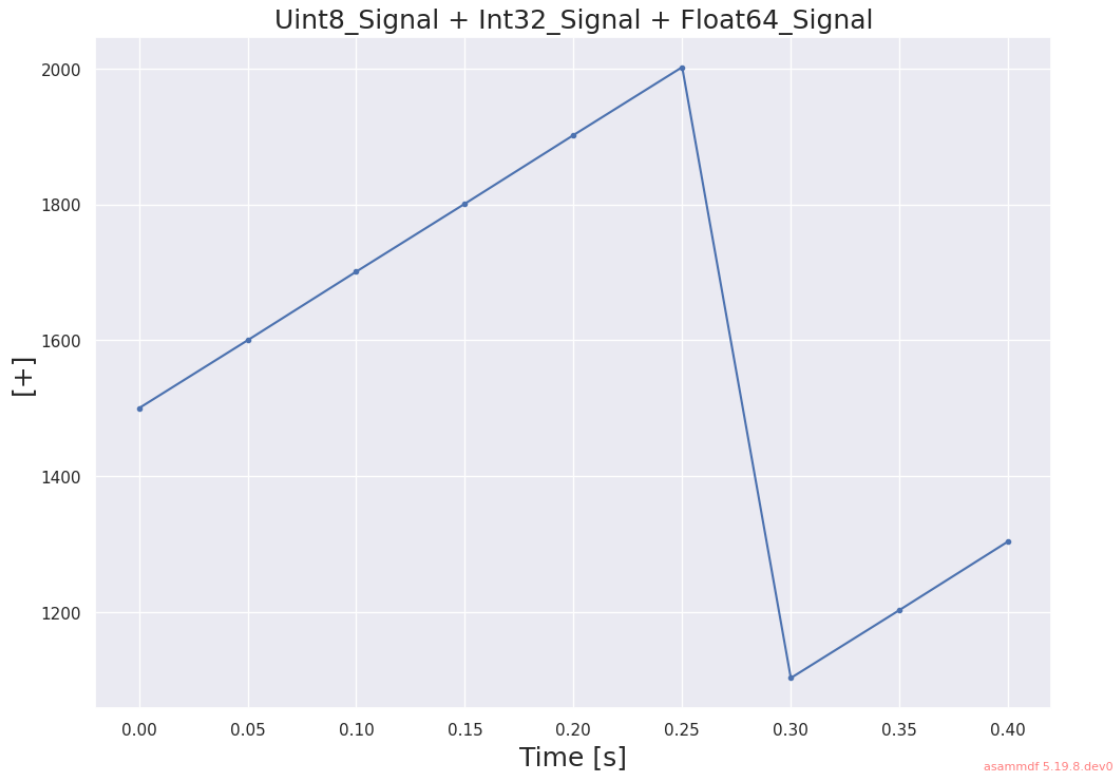


WARNING:root:Signal plotting requires pyqtgraph or matplotlib

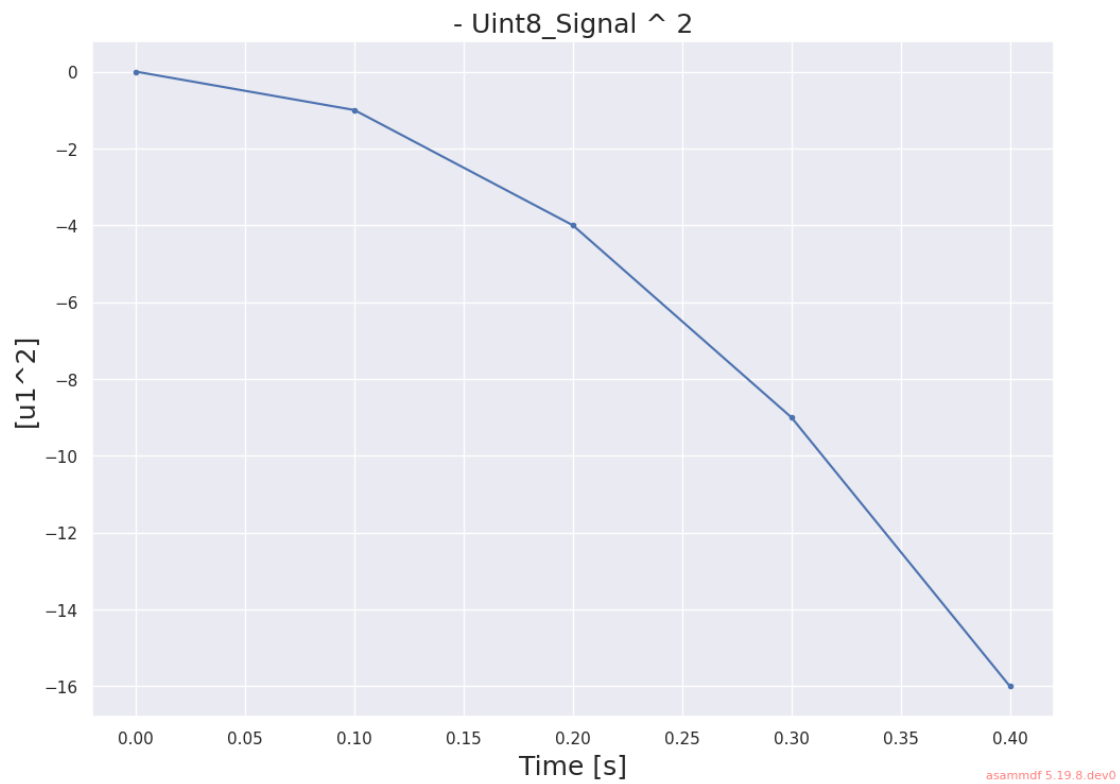

WARNING:root:Signal plotting requires pyqtgraph or matplotlib

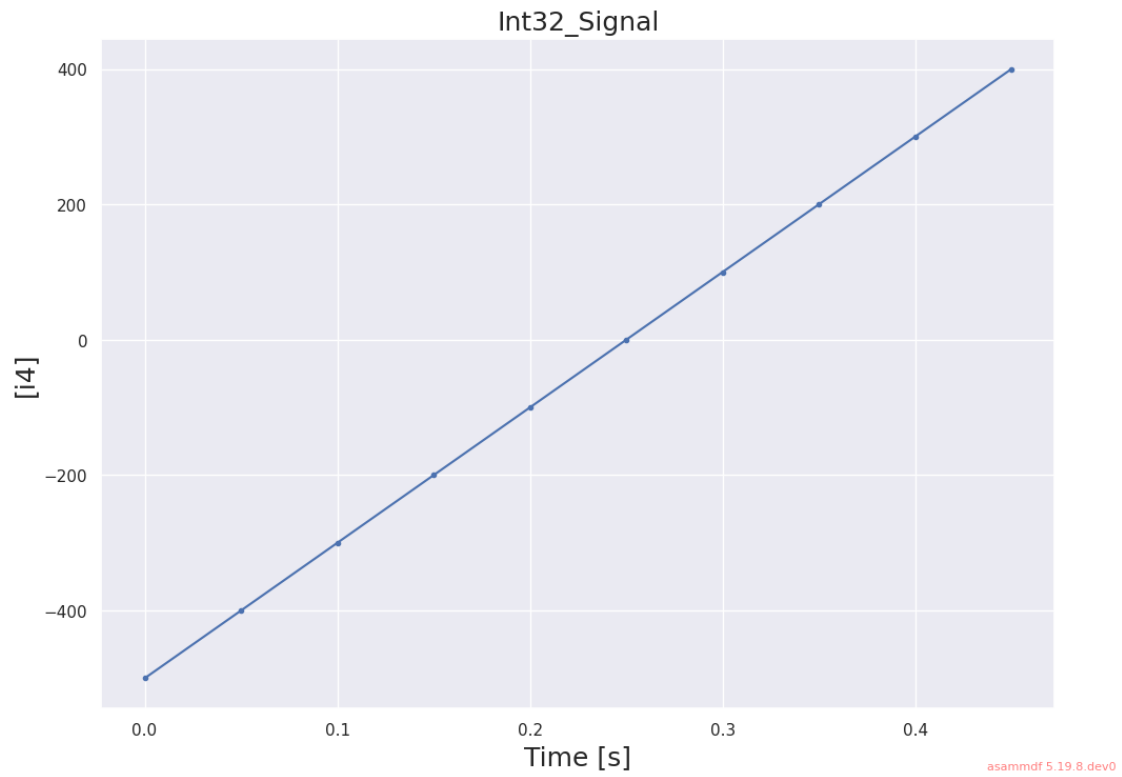


WARNING:root:Signal plotting requires pyqtgraph or matplotlib

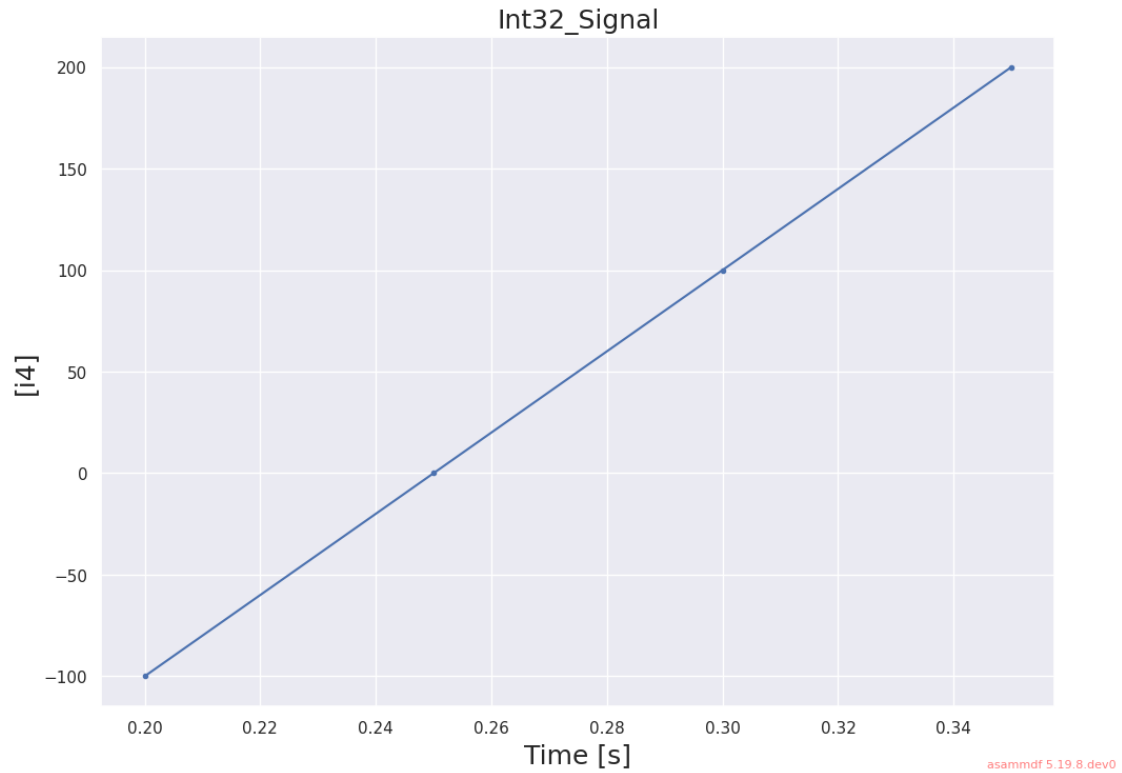


```
[10]: prod = s_float64 * s_uint8
      prod.name = "Uint8_Signal * Float64_Signal"
      prod.unit = "*"
      prod.plot()
```

WARNING:root:Signal plotting requires pyqtgraph or matplotlib

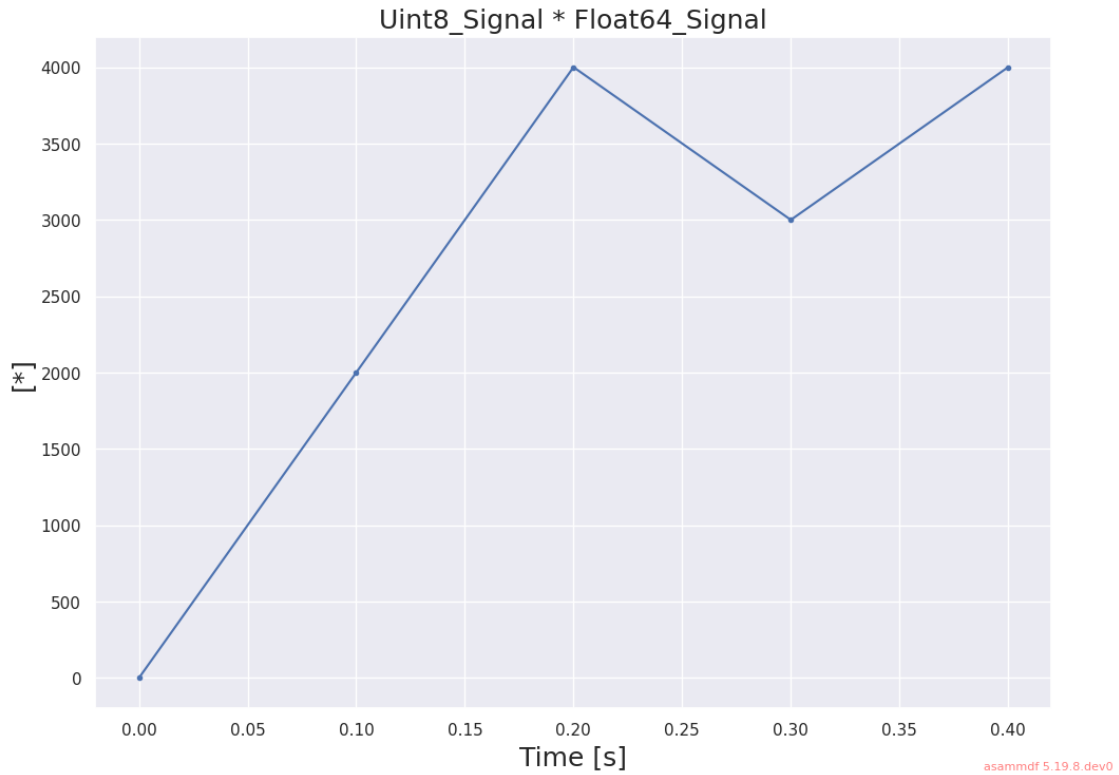


```
[11]: pow2 = s_uint8 ** 2
      pow2.name = "Uint8_Signal ^ 2"
      pow2.unit = "u1^2"
      pow2.plot()
```

WARNING:root:Signal plotting requires pyqtgraph or matplotlib

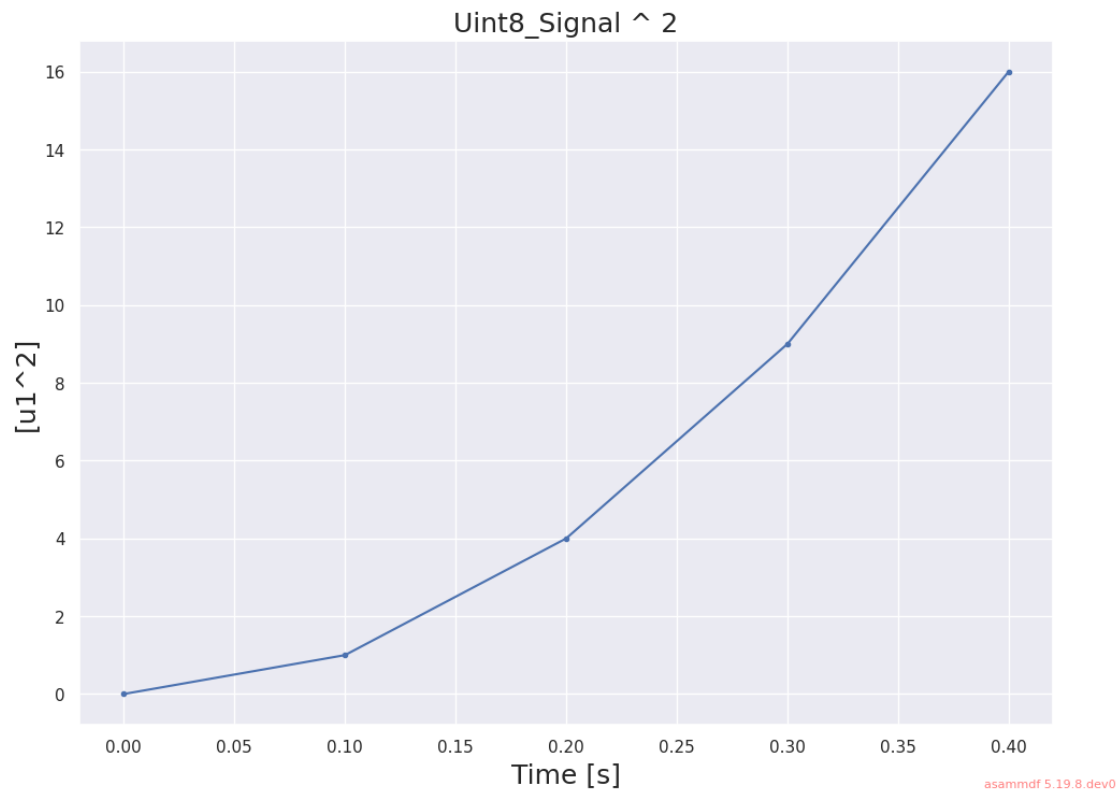

```
[12]: allsum = s_uint8 + s_int32 + s_float64
      allsum.name = "Uint8_Signal + Int32_Signal + Float64_Signal"
      allsum.unit = "+"
      allsum.plot()
```


WARNING:root:Signal plotting requires pyqtgraph or matplotlib

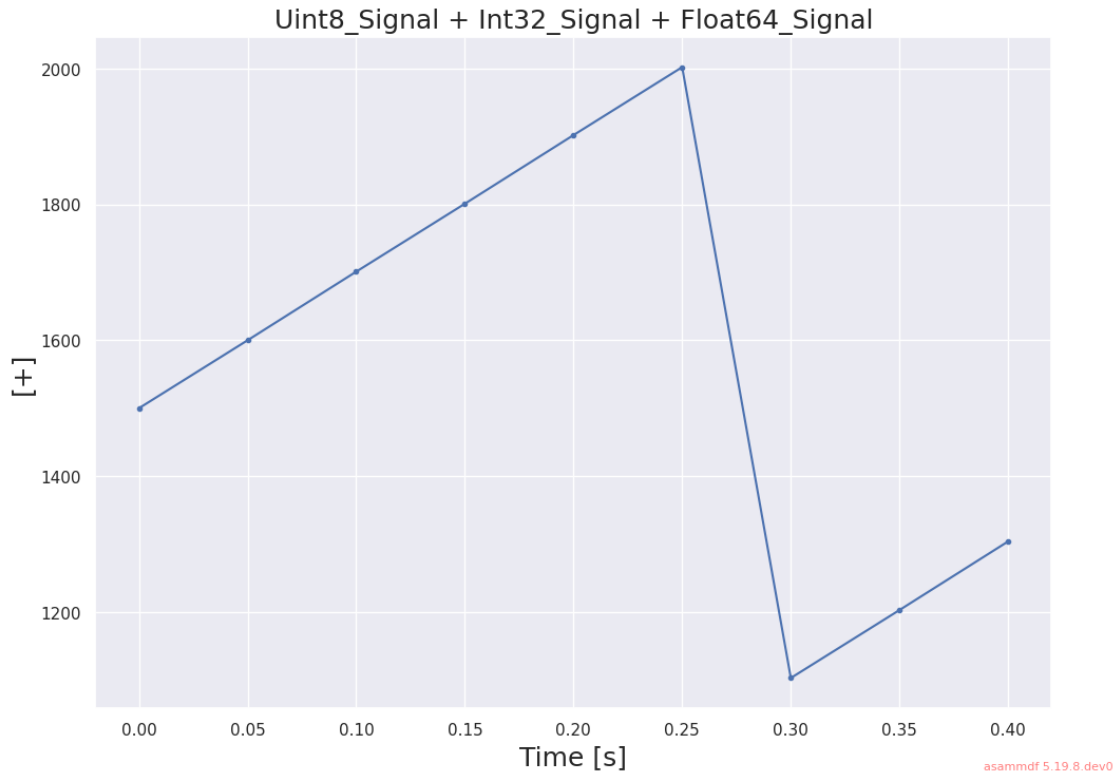

3 Inplace operations

```
[13]: pow2 *= -1  
      pow2.name = "- Uint8_Signal ^ 2"  
      pow2.plot()
```


WARNING:root:Signal plotting requires pyqtgraph or matplotlib

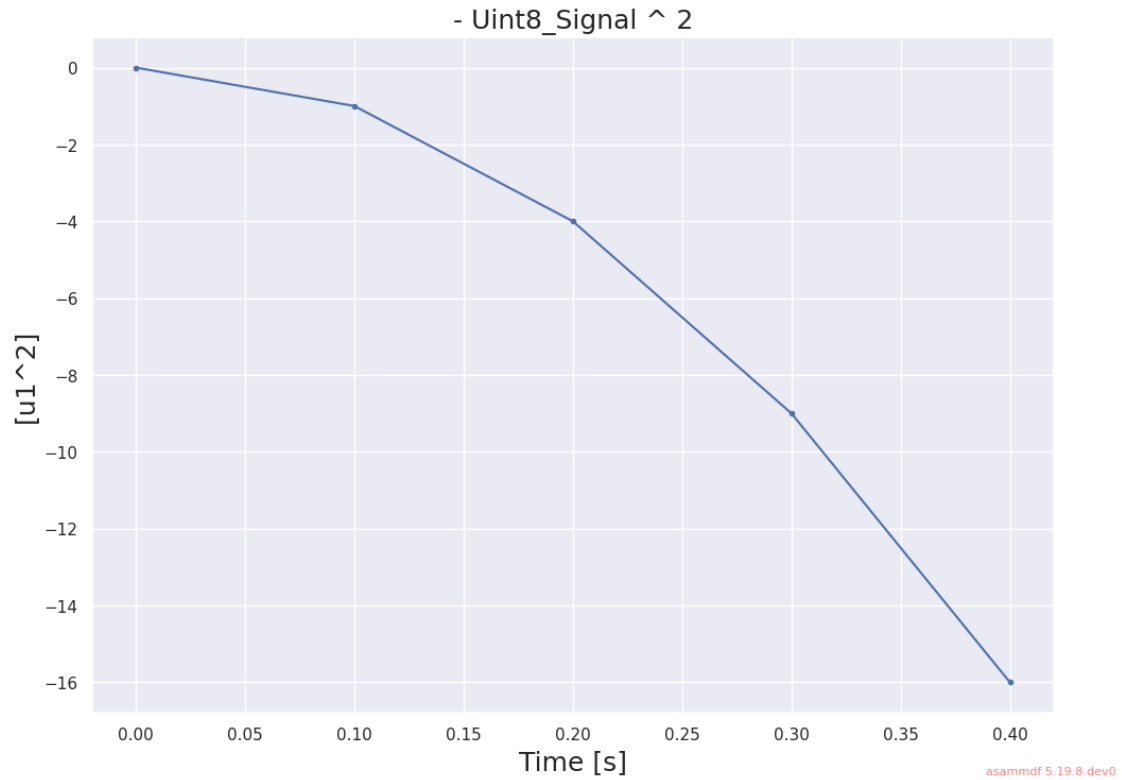

4 Cut Signal

```
[14]: s_int32.plot()  
      cut_signal = s_int32.cut(start=0.2, stop=0.35)  
      cut_signal.plot()
```

WARNING:root:Signal plotting requires pyqtgraph or matplotlib

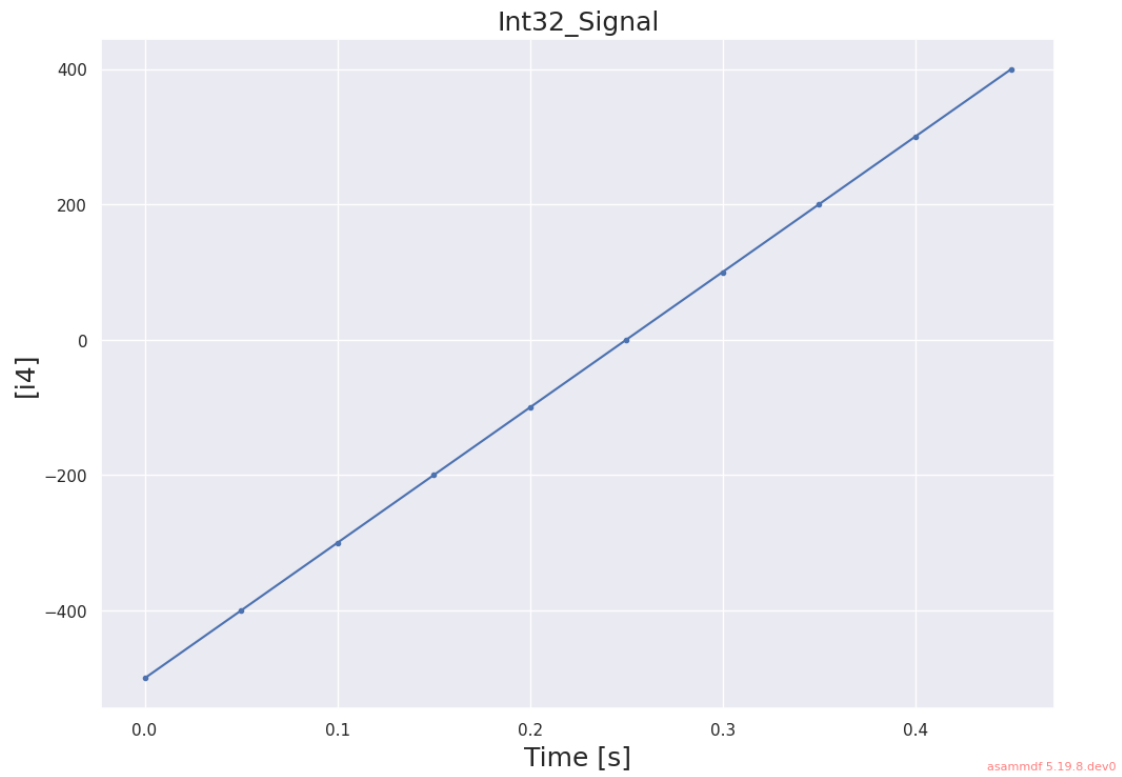

WARNING:root:Signal plotting requires pyqtgraph or matplotlib

