

Ardamire Defense Layer

Beyond execution. Built for defense.

An internal defense layer for Auxtho's AI-assisted document workflows and their backend.

We started with controlled execution and retry paths. We then added records of repeated signals, targeted containment and checks on the evidence itself.

THE SYSTEM

Records signals, strengthens checks, enforces holds and prepares evidence for investigation.

THE PERSON

Reviews the exception and authorizes consequential defensive changes.

Remember the pattern. Control the next action.

Related anomaly signals accumulated within the same operator and workflow context. The next action faced stronger controls.

01 Keep related signals together

Different authentication warnings were tracked together within that context.

02 Apply the next control

Unsafe state changes required additional verification. Held sessions were denied access.


03 Contain the affected object

Artifact and export mismatches led to targeted holds, rather than a blanket hold on unrelated work.

Source: preserved service and route tests; dated April implementation records.

Verify the evidence. Review the change.

Eight invalid replay results were excluded from accepted replay evidence. The results and reasons remained available for investigation.

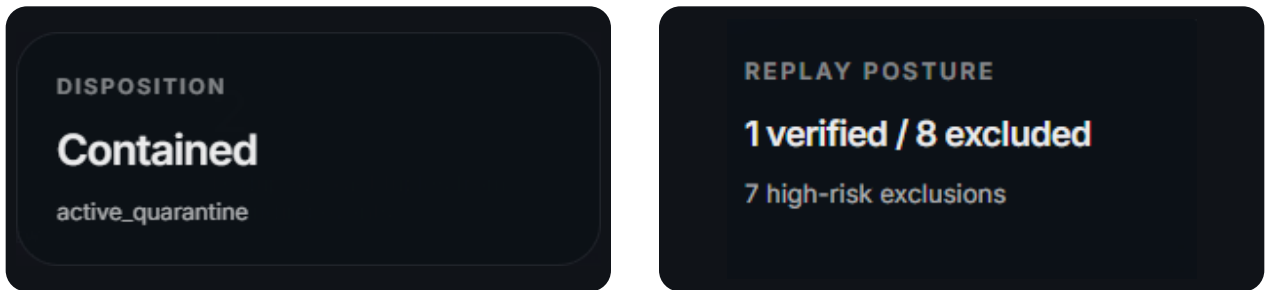

Actual excerpts from two April local tests. Replay counts are not attack counts.

A SEPARATE REVIEWER

A disabled rule proposal needed a request and a separate review to resume shadow evaluation, without changing production rules. Its evidence pack was exported.

A containment state did not, by itself, close the incident.

The action stopped. The record stayed readable.

An unknown operator or wrong token issuer was rejected. Replay attempts without a required prior step, or after a recorded failure, were rejected. Incident detail stayed available.

10

Identity / state checks

Unauthorized identity and invalid progression checks.

18

Method / schema checks

Request-method and malformed-body checks.

1,420

Requests in extended soak

Normal reads and invalid requests under sustained pressure.

Each separate recorded suite: 0 expectation failures.

Test counts include normal requests. They are not counts of attacks prevented.