

GENERAL**Operational Hours**

ATS Hours: 0400-1400‡ except FRI, other times O/R

AD ADMIN Hours: 0330-1030‡

Airport Information

RFF: CAT 3, CAT 6 AVBL during SKED flights, for non-SKED flights with prior permission.

PCN: RWY 07/25: 28/F/B/X/U

Customs: Not AVBL

Operation**Traffic Note**

| PPR for SKED and non-SKED flights at least 48HR before EOBT.

Warnings

SHR VOR/DME unusable:

At 10NM:

- R360-R310 below 6500ft AMSL
- R310-R245 below 9000ft AMSL
- R220-R090 below 7500ft AMSL
- R050-R042 below 7700ft AMSL
- R042-R360 below 8000ft AMSL

At 25NM:

- R310-R295 below 14500ft AMSL
- R295-R245 below 14000ft AMSL
- R220-R170 below 8000ft AMSL
- R170-R090 below 10000ft AMSL
- R050-R042 below 7700ft AMSL
- R042-R310 below 14000ft AMSL

Strolling animals exist on the movement area.

ARRIVAL**Arrival Procedure****VFR Traffic Pattern**

- For heavy ACFT 5700ft.
- For other ACFT 5200ft.

DEPARTURE**Take-off Minima**

RWY		07/25	
A, B, C	ft - m/km	0 - 400V	HJ only
		0 - 800V	HN
		Not applicable	-

Departure Procedure

Start-up: Clearance should be REQ 5-10min prior to start-up.

Effective 21-JUN-2018

14-JUN-2018

RUD-OIMJ

Iran Shahroud

AFC (CAT B only)


AFC

Shahroud Iran

AFC (CAT B only)

AFC

2-10

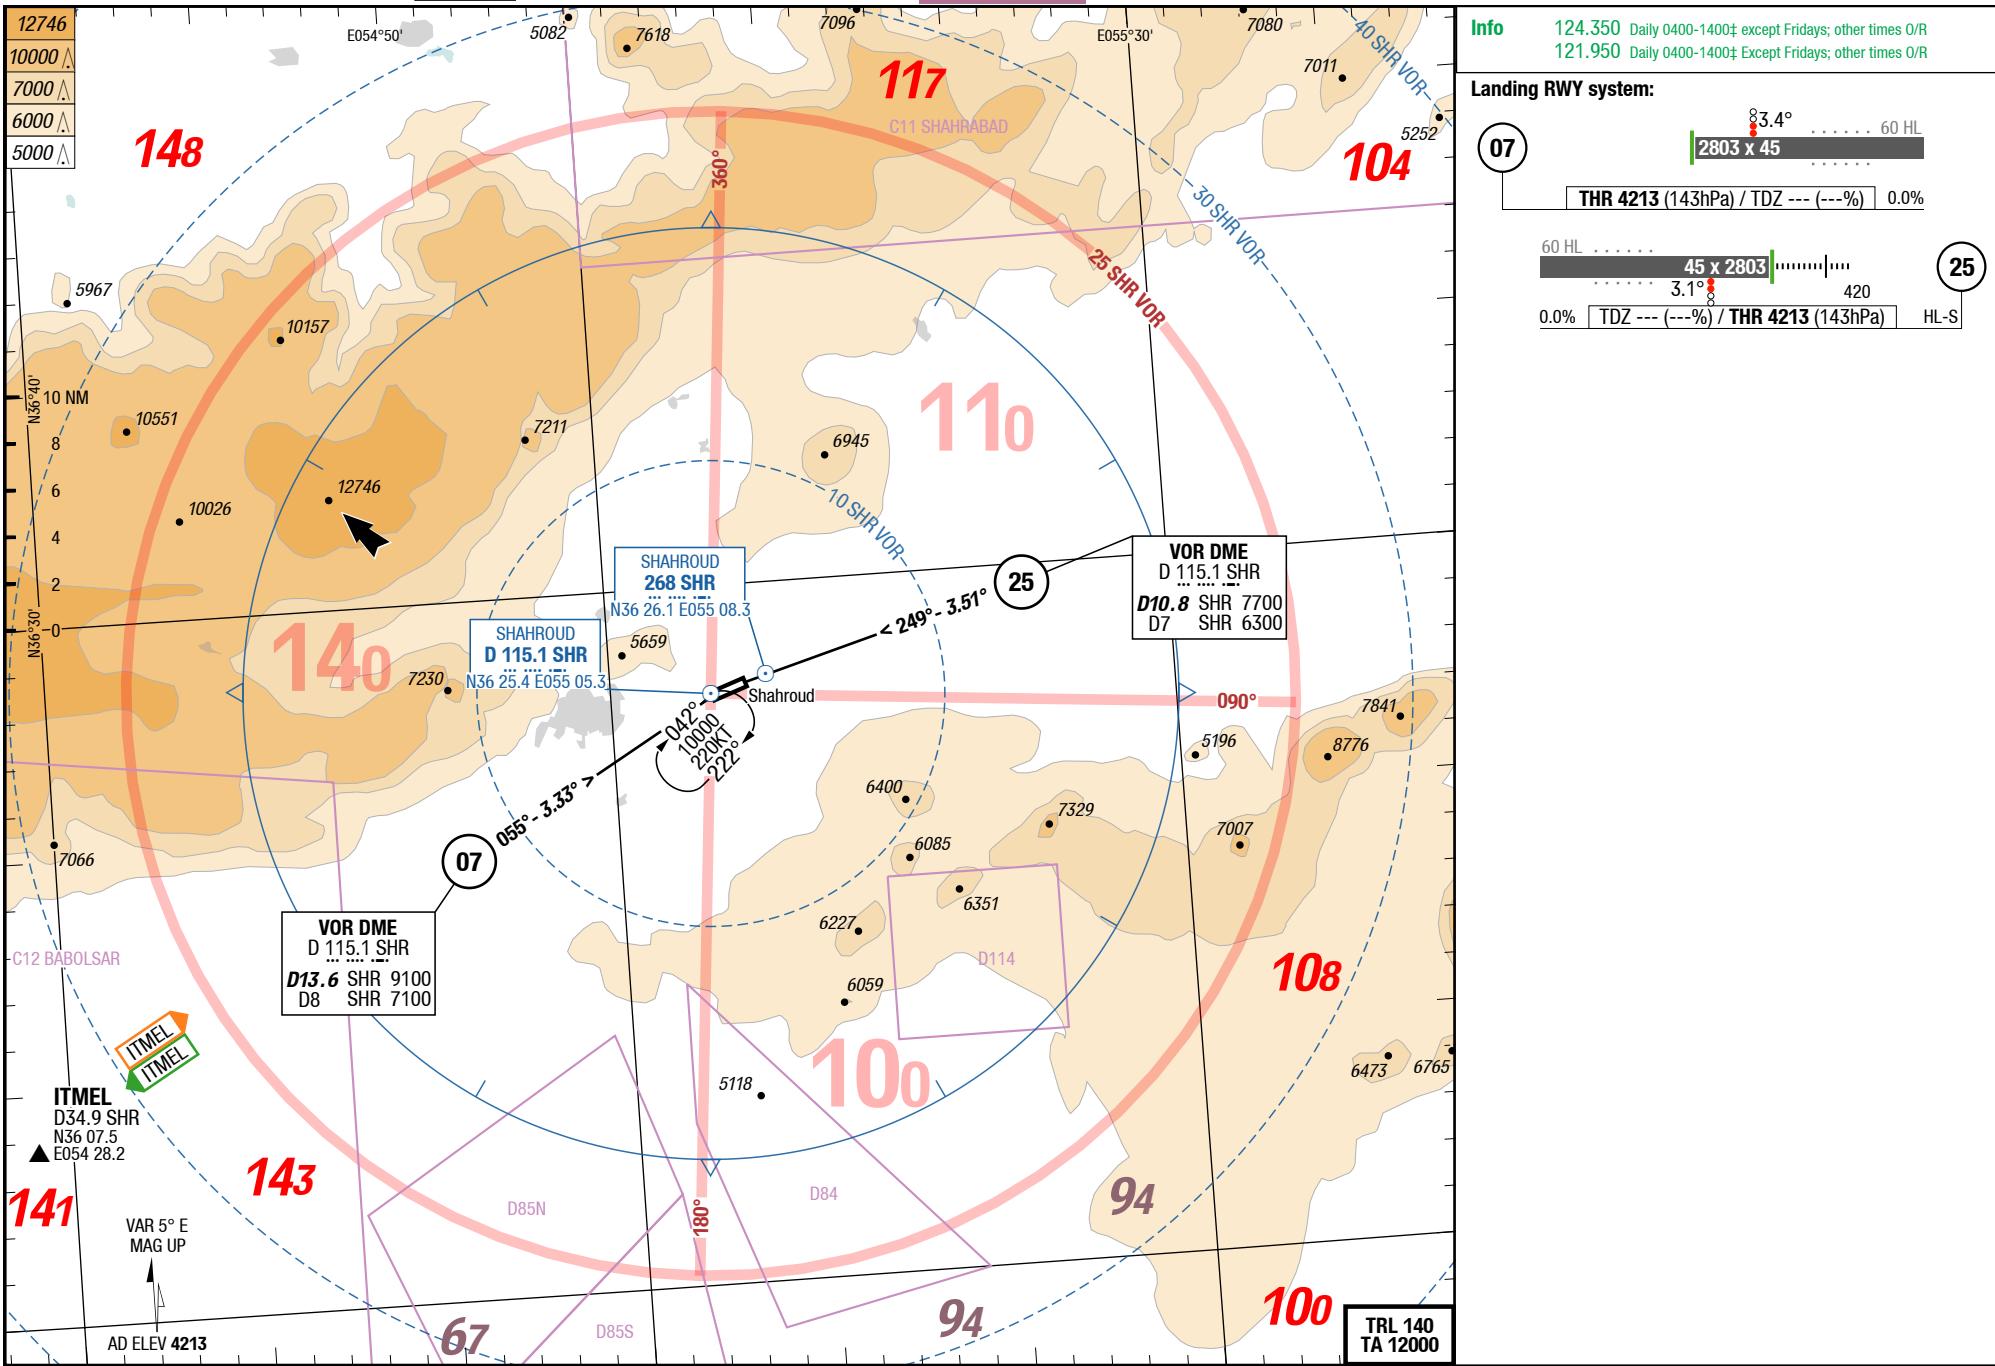

Changes: PROC, WPT

Effective 21-JUN-2018

14-JUN-2018

RUD-OIMJ


Iran Shahroud

AFC (CAT B only)

Shahroud Iran

AFC (CAT B only)

2-20

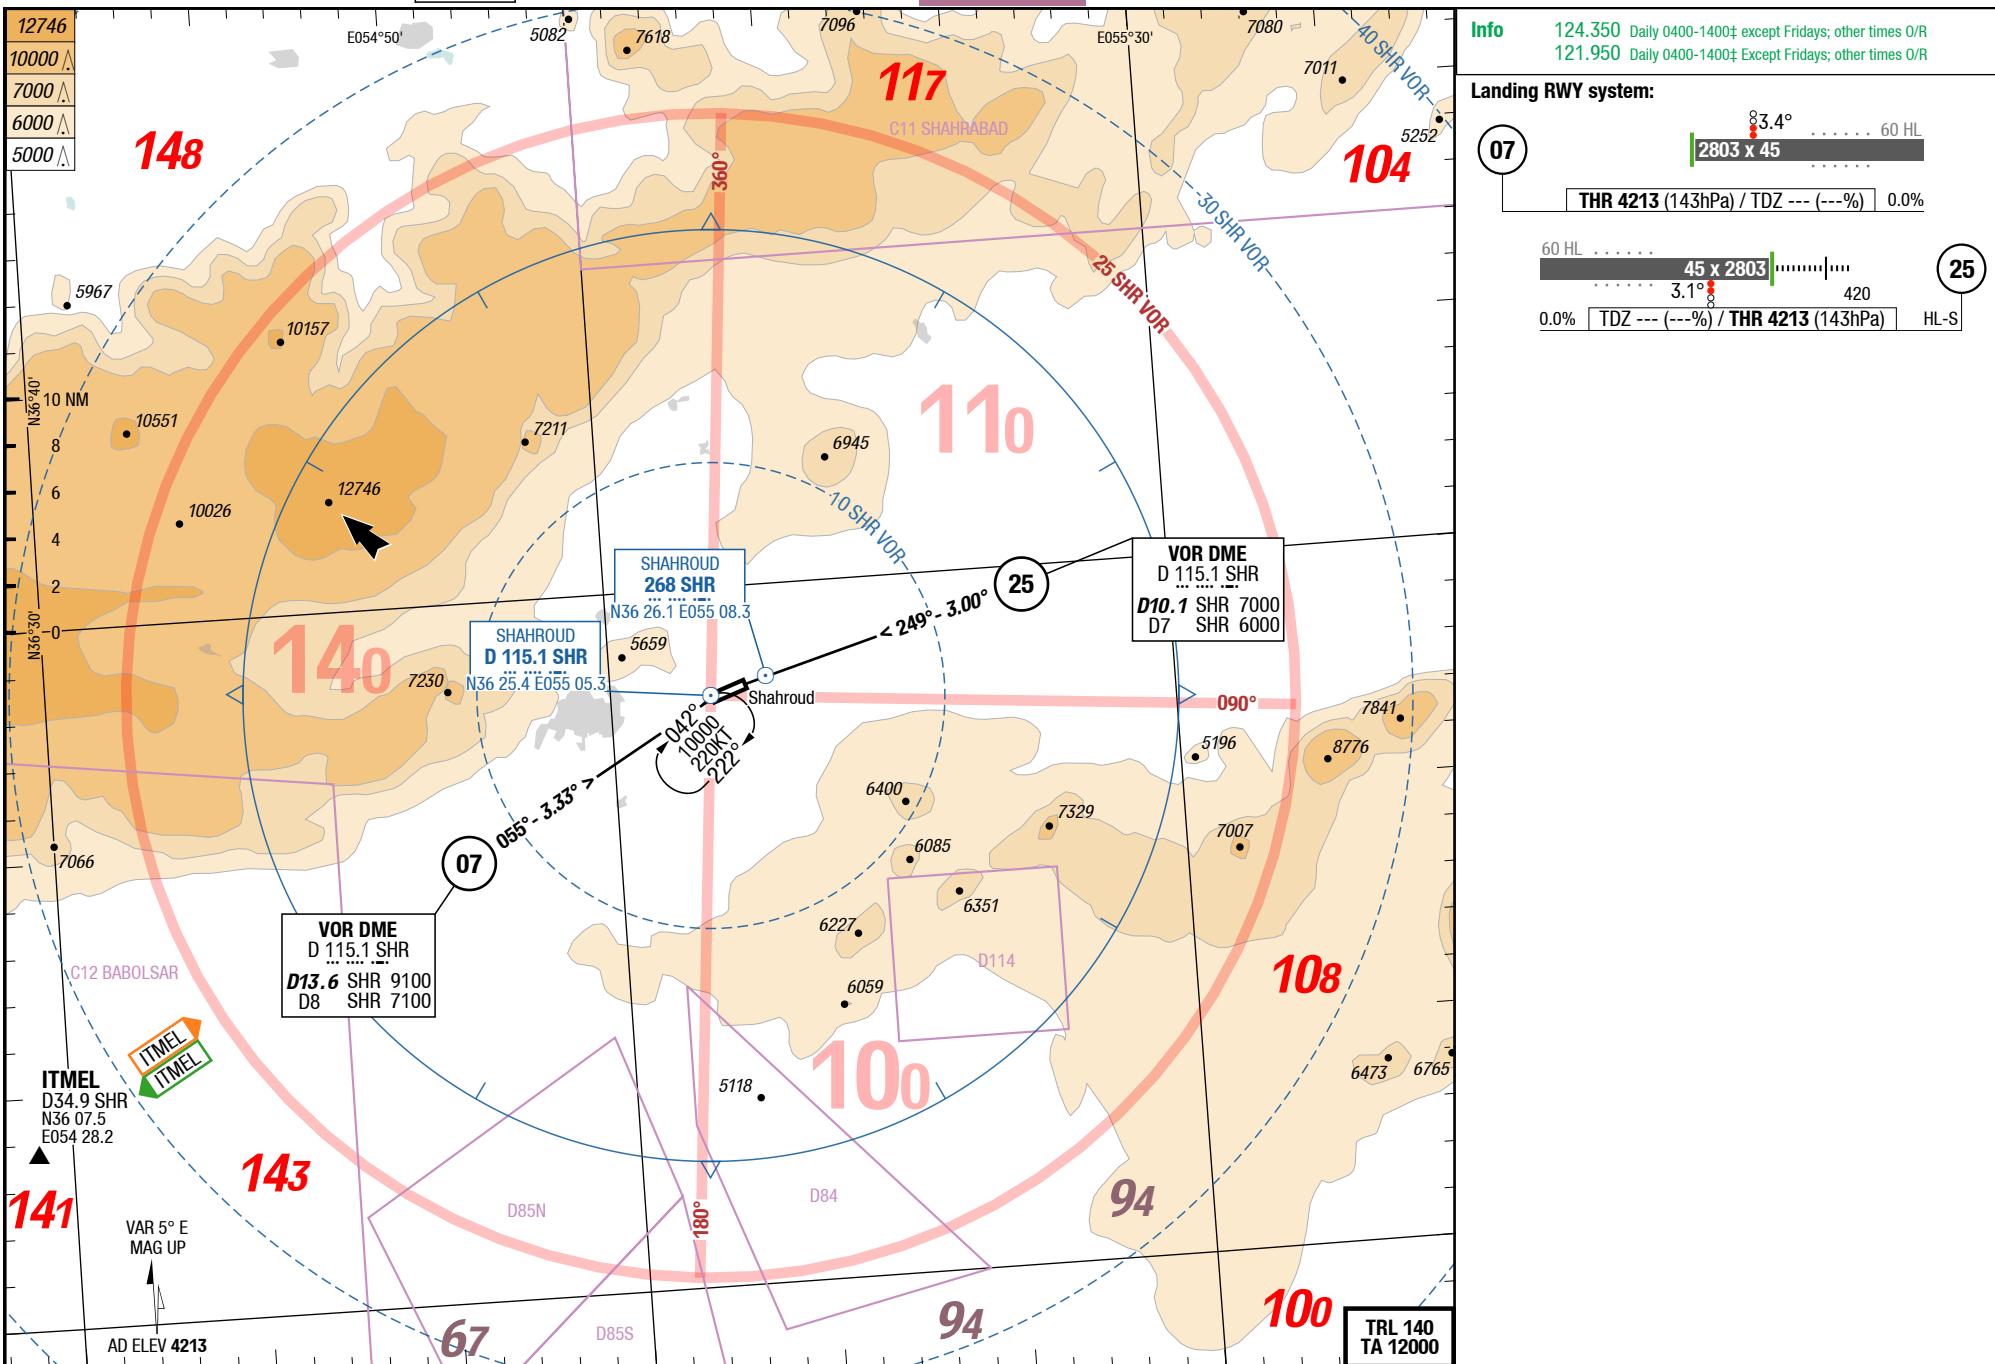

Changes: PROC, WPT

Effective 09-NOV-2017

02-NOV-2017

RUD-OIMJ

Iran Shahroud

AGC
NIL
AGC

Shahroud Iran

AGC
NIL
AGC

3-30

E055°06'

E055°07'

Info 124.350 Daily 0400-1400‡ except Fridays; other times
O/R
121.950 Daily 0400-1400‡ except Fridays; other times
O/R

N36°26'

SHAHROUD
D 115.1 SHR

TERMINAL

APRON

ARP
N 36 25.5
E 055 06.3

2803 X 45

07
065°
4213

VAR 5° E
MAG UP

AD ELEV 4213

215

135

25
245°
4213

RWY	TORA	ASDA	TODA
07	2803	2938	2938
25	2803	3018	3018



Effective 21-JUN-2018

14-JUN-2018

RUD-OIMJ


Iran Shahroud

NIL
SIDs

Shahroud Iran

NIL
SIDs

4-10

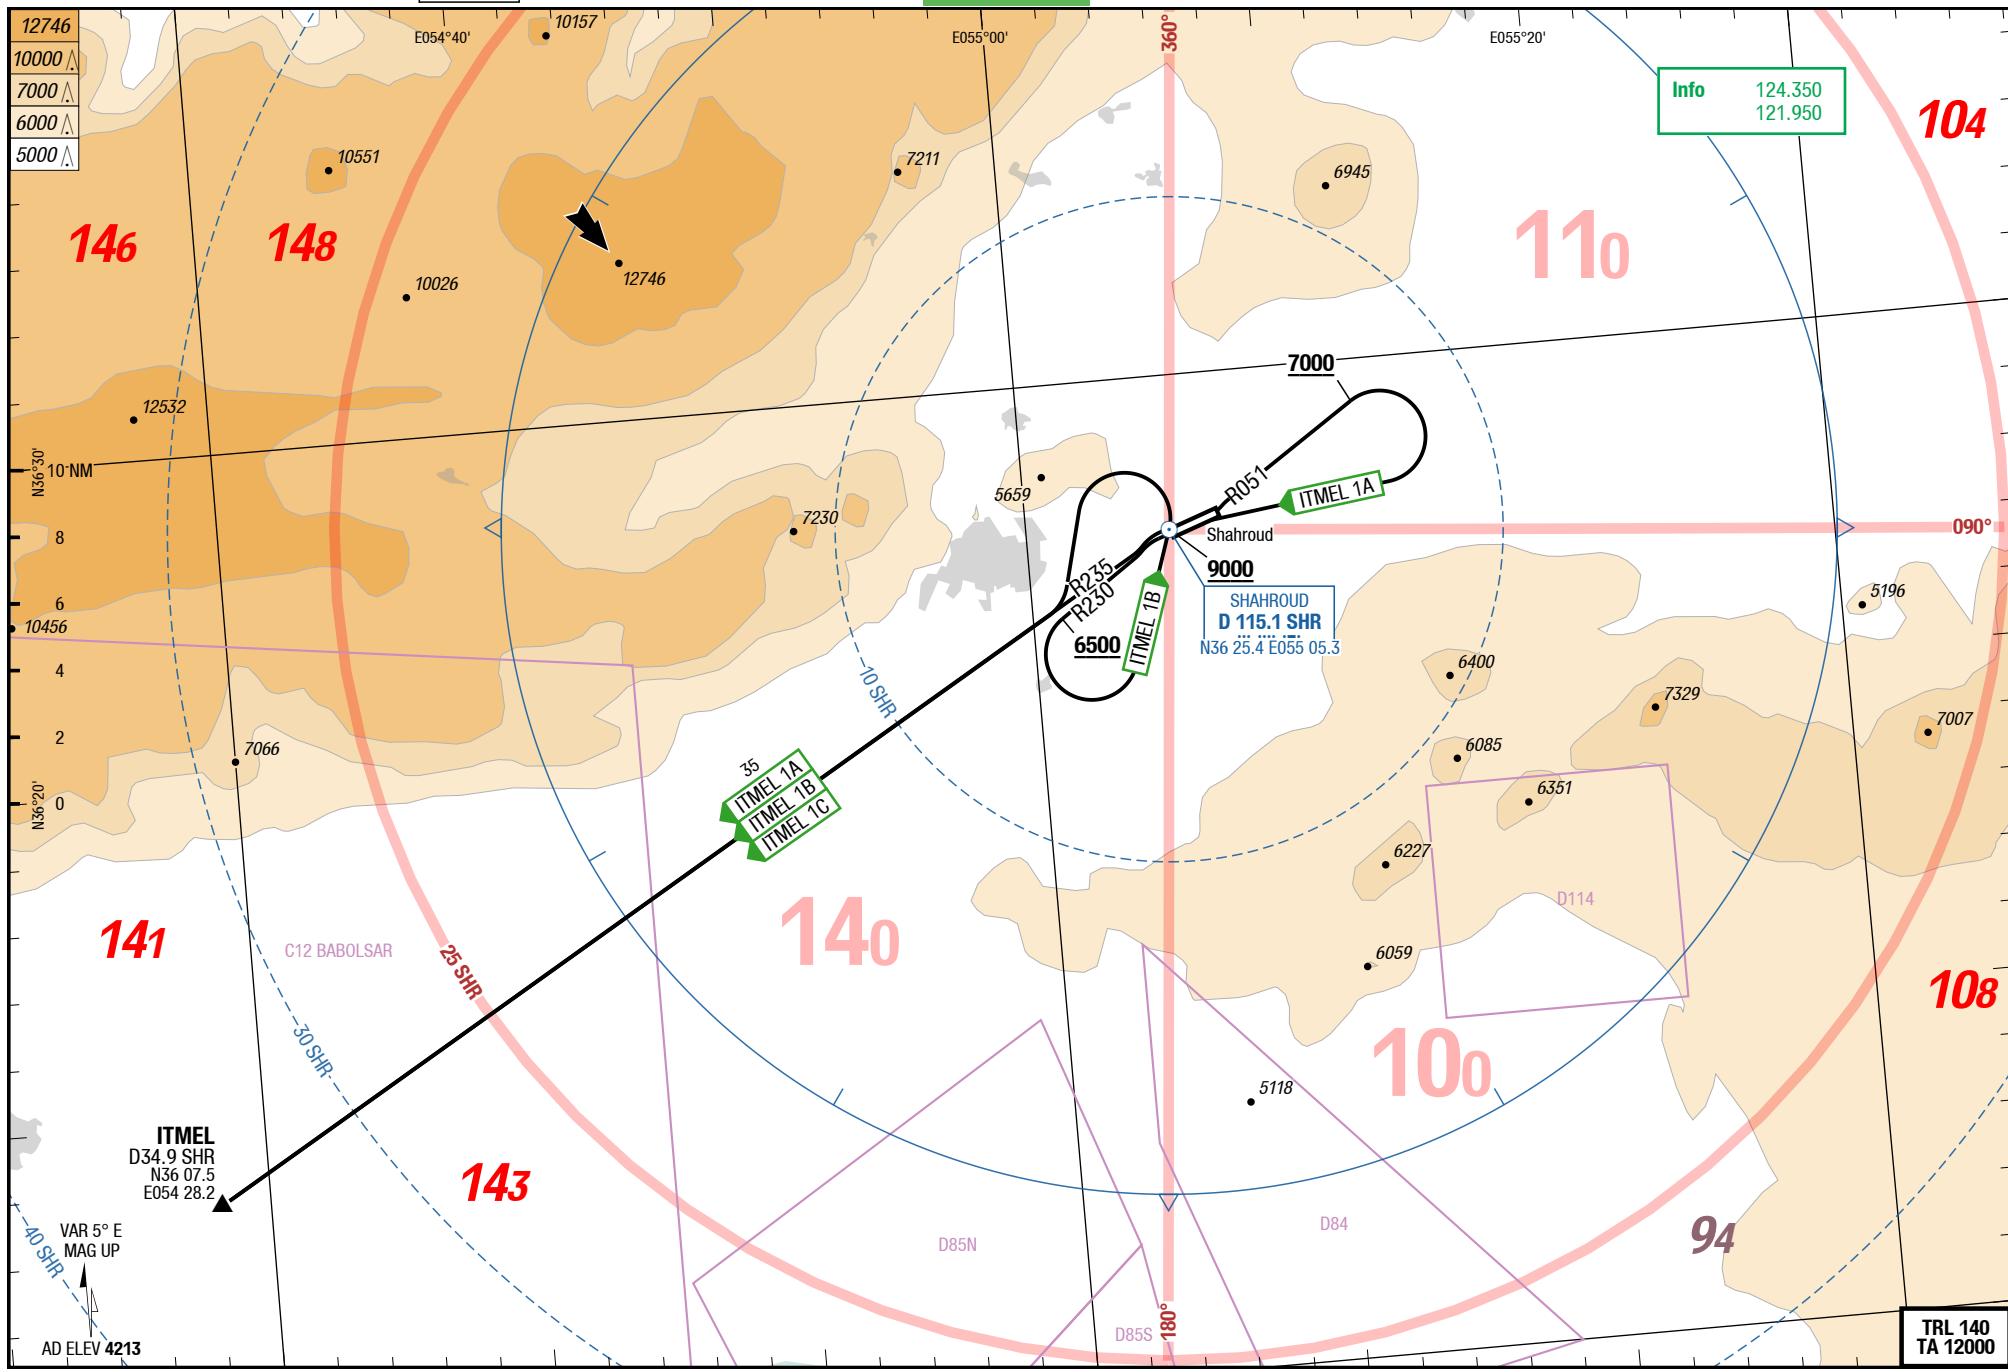

Changes: new

ITMEL 1A / ITMEL 1B / ITMEL 1C

RWYs 07 (065°) / 25 (245°)

	GS	120	150	180	210	240	270
7.4%	ft/MIN	900	1200	1400	1600	1800	2100

DESIGNATOR	ROUTING	ALTITUDES
	Runway 07	
ITMEL 1A 124.350 121.950	LT intercept R051 SHR to MNM 7000 - RT direct SHR - R235 SHR to ITMEL	SHR MNM 9000
	Runway 25	
ITMEL 1B 124.350 121.950	LT intercept R230 SHR to MNM 6500 - LT direct SHR - R235 SHR to ITMEL	SHR MNM 9000
ITMEL 1C 7.4% 124.350 121.950	LT intercept R235 SHR to ITMEL	

Effective 21-JUN-2018

14-JUN-2018

RUD-OIMJ

Iran Shahroud

NIL


STAR
STARs

Shahroud Iran

NIL

STARs

6-10

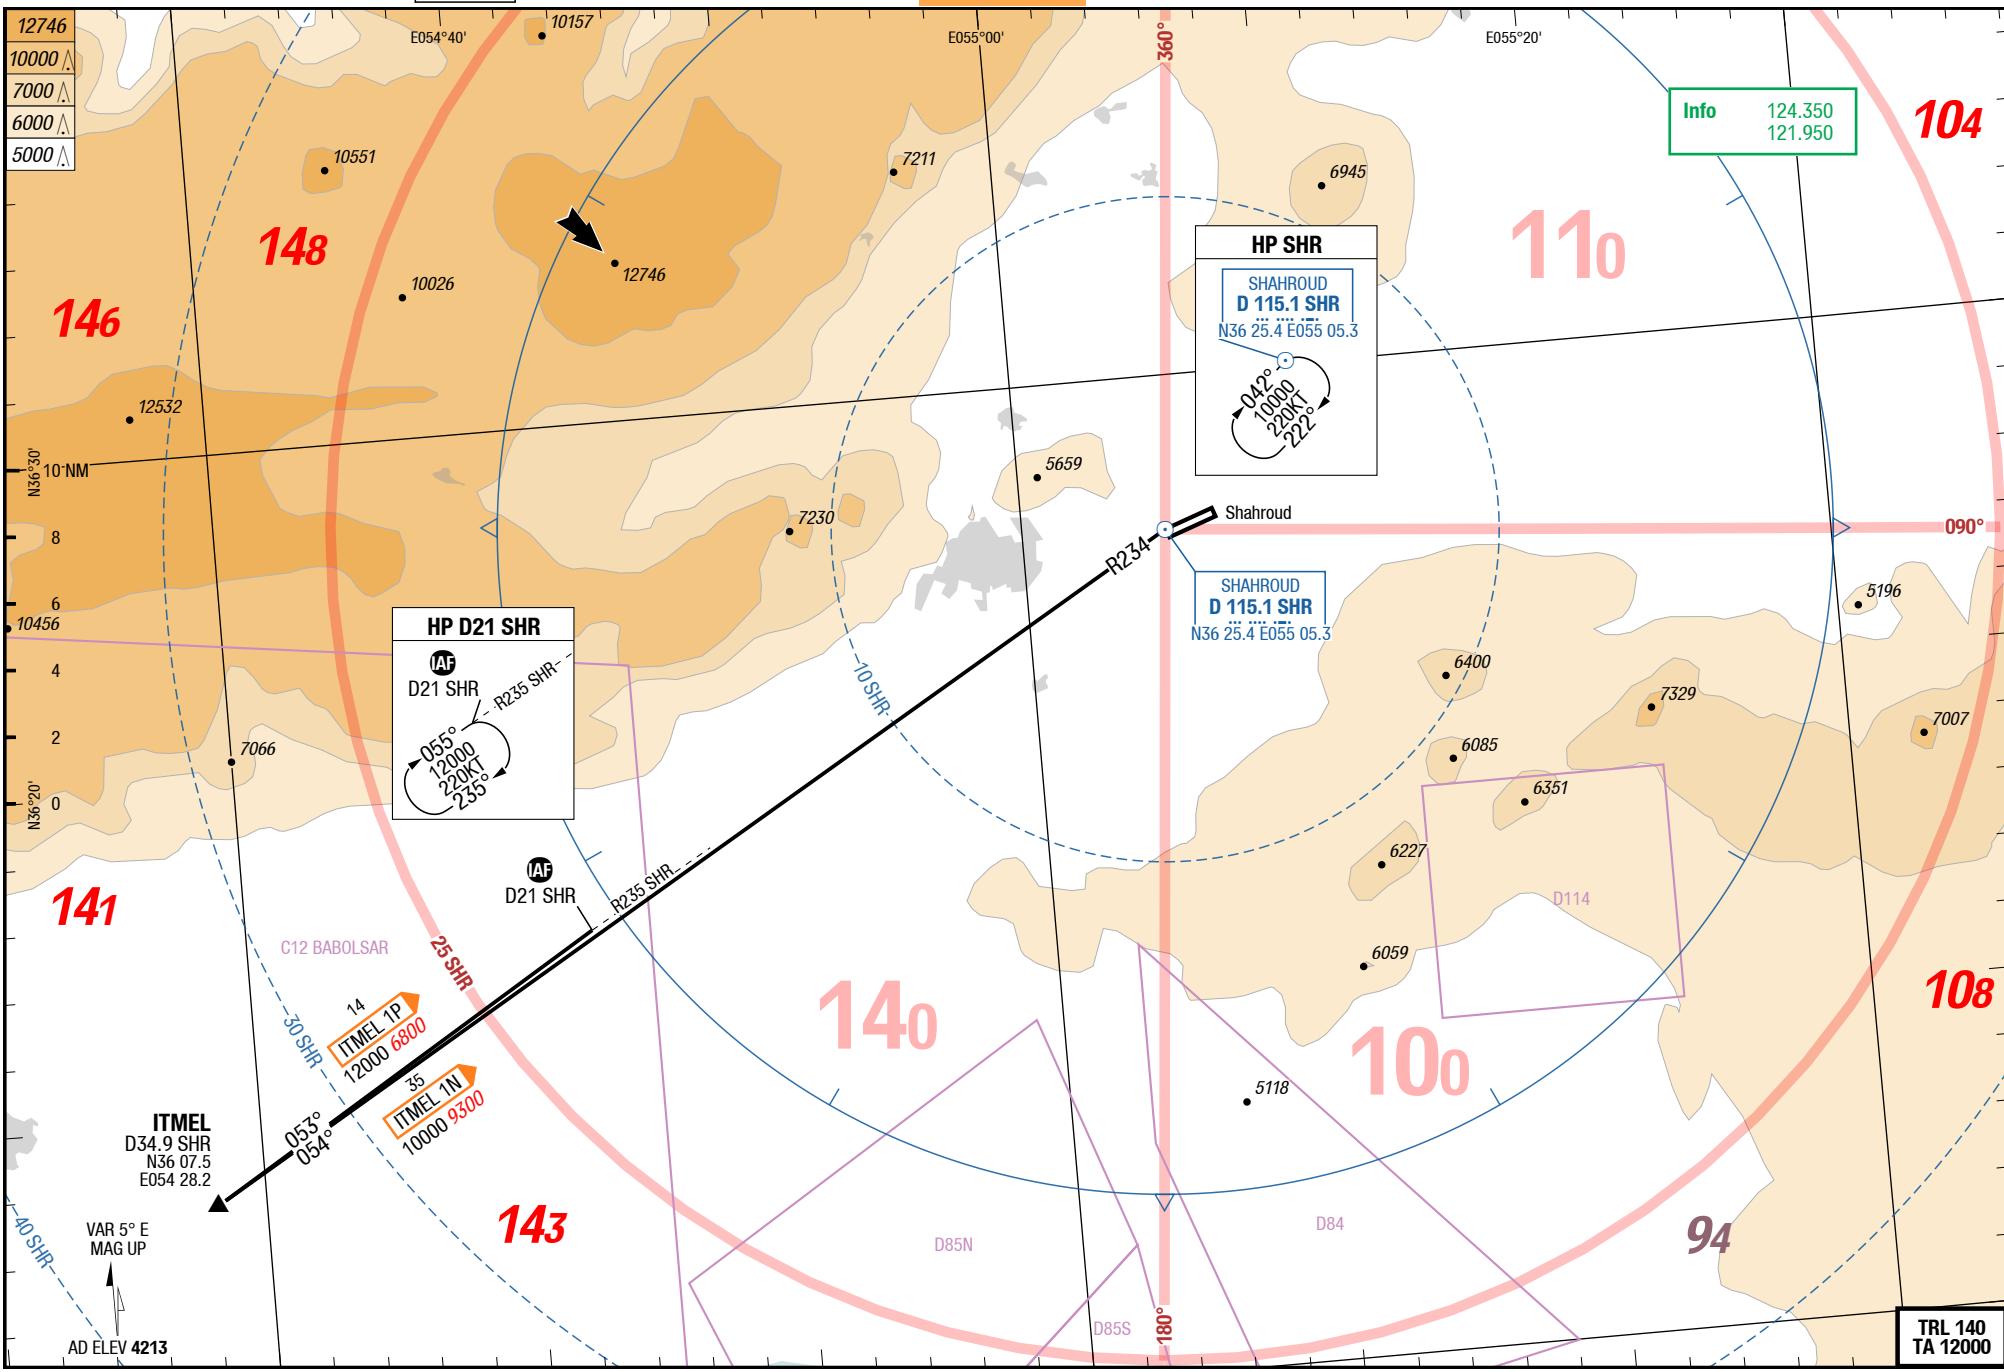


Changes: new

04-NOV-2010

N/A-OIMJ

7-10

NDB 25

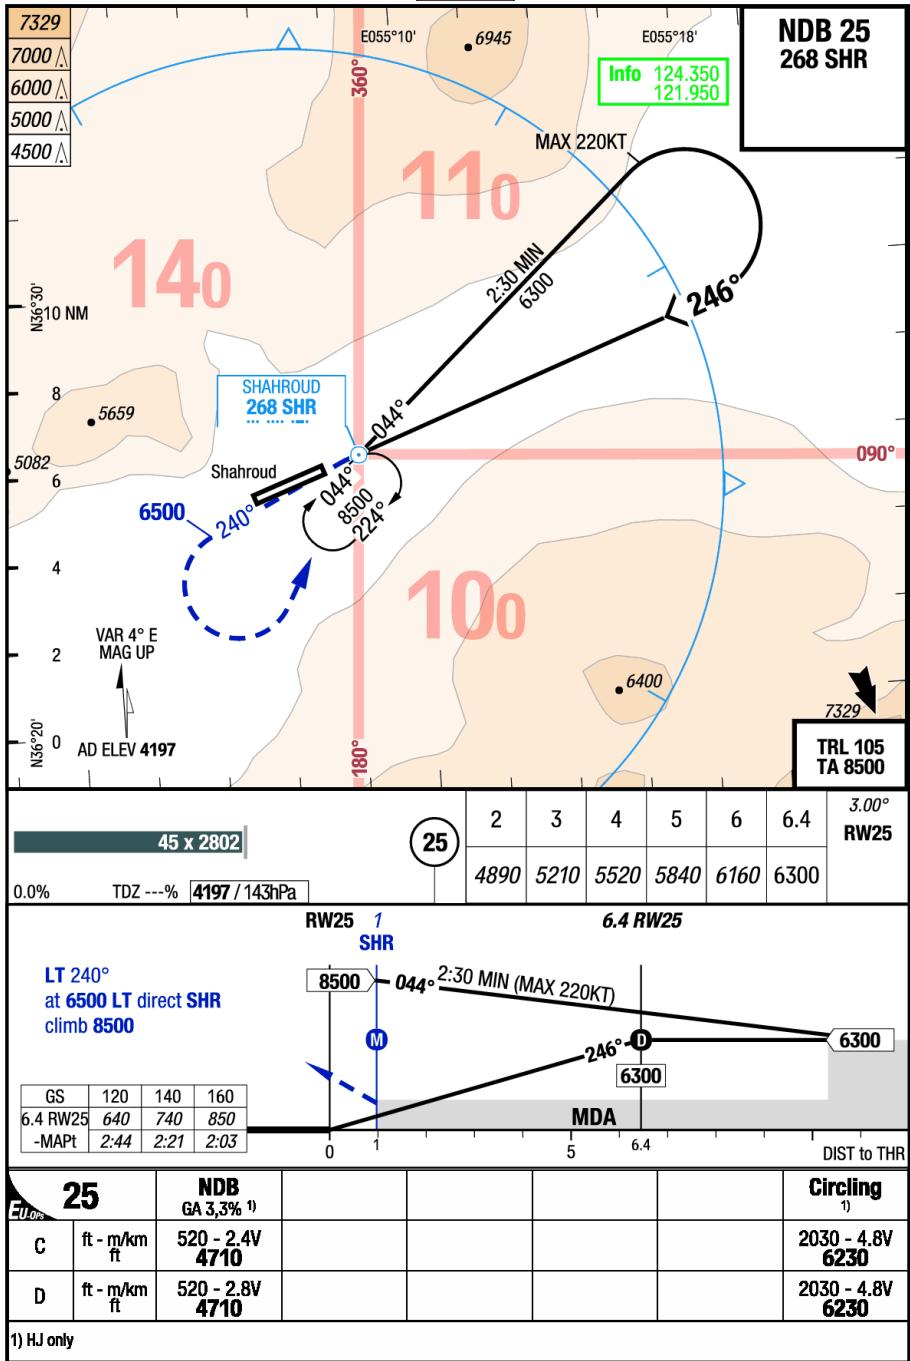

Changes: MIN



04-NOV-2010

Iran Shahroud

NA-01MJ

7-20

NDB Letdown

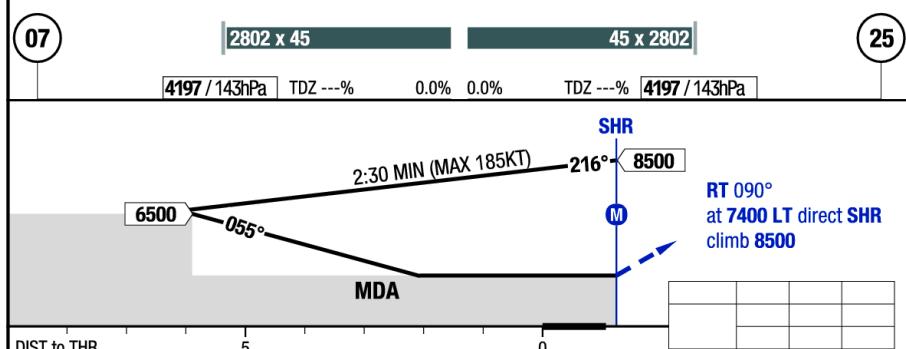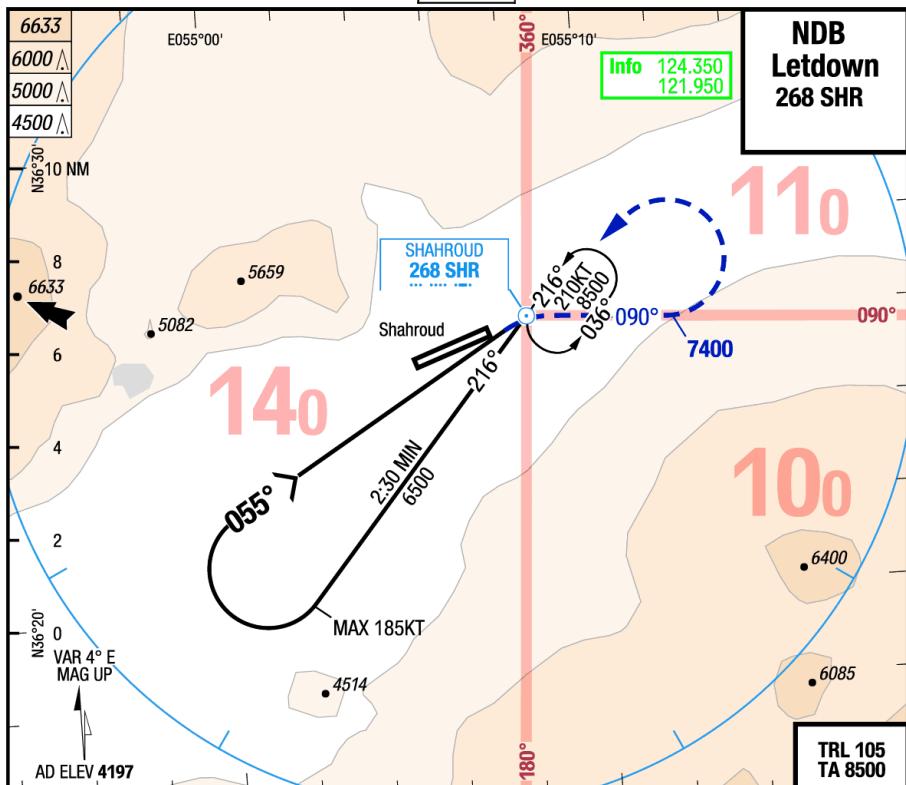

All RWYs		Letdown NDB 1)					Circling 1) 2)
C	ft - m/km ft	Use circling minima					2040 - 4.8V 6230
D	ft - m/km ft	Use circling minima					Not published

1) HJ only
2) BTN BRG 290° - 240° clockwise only

Changes: MIN