


Assignment No. 5:


Problem Statement: Create a public Bucket in AWS. Upload a file and give the necessary permission to check whether file the URL is working.

The steps are as follows: -


1. Access the **AWS console**, search for **S3**, and select the top option from the search results.

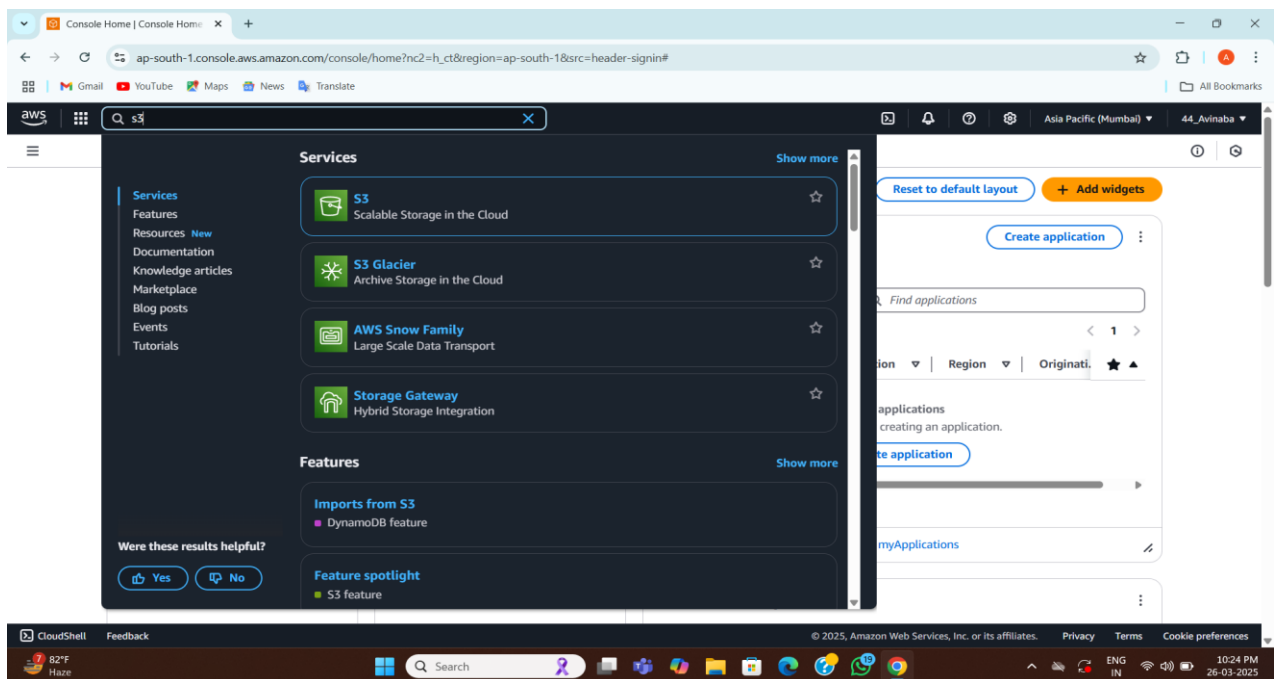

2. Click on 'Create bucket'.

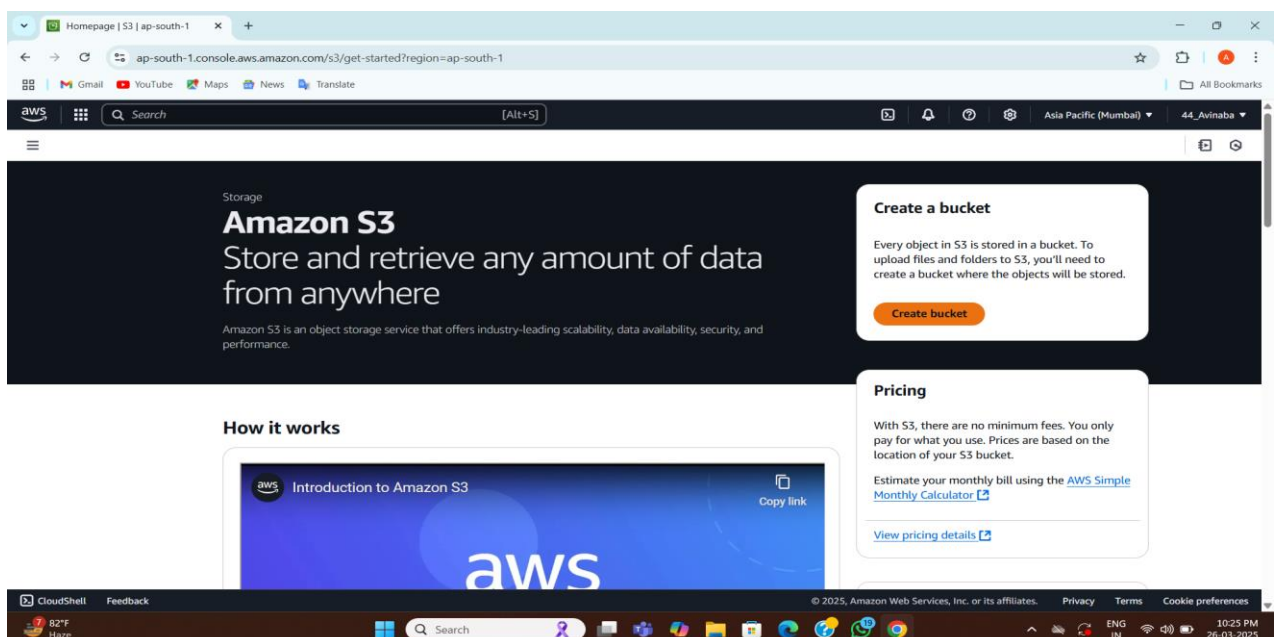

- Subsequent window appears. From the drop-down menu, select '**Asia Pacific (Mumbai) ap-south-1**' as the AWS Region. Next, specify a bucket name, such as 'avinaba'.

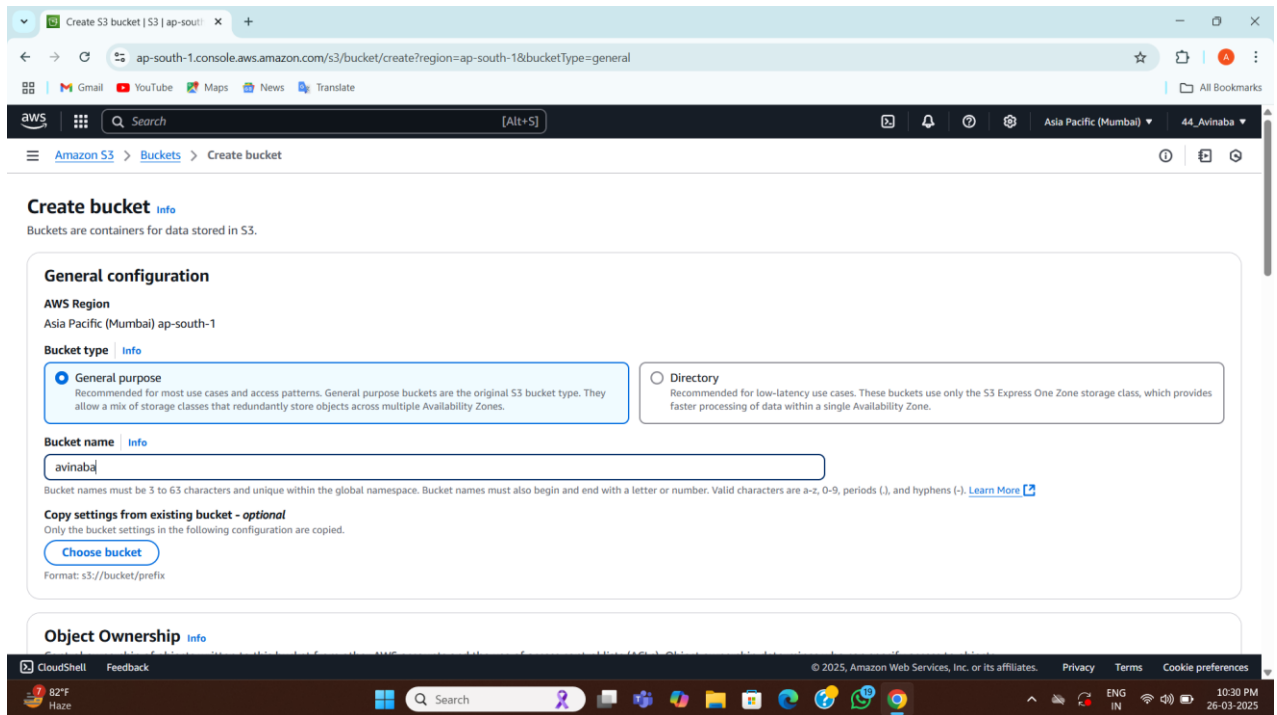

Create bucket | S3 | ap-south-1

ap-south-1.console.aws.amazon.com/s3/bucket/create?region=ap-south-1&bucketType=general

Amazon S3 > Buckets > Create bucket

Create bucket Info

Buckets are containers for data stored in S3.

General configuration

AWS Region
Asia Pacific (Mumbai) ap-south-1

Bucket type Info

☒ **General purpose**
Recommended for most use cases and access patterns. General purpose buckets are the original S3 bucket type. They allow a mix of storage classes that redundantly store objects across multiple Availability Zones.

☐ **Directory**
Recommended for low-latency use cases. These buckets use only the S3 Express One Zone storage class, which provides faster processing of data within a single Availability Zone.

Bucket name Info
avinaba

Bucket names must be 3 to 63 characters and unique within the global namespace. Bucket names must also begin and end with a letter or number. Valid characters are a-z, 0-9, periods (.), and hyphens (-). [Learn More](#)


Copy settings from existing bucket - optional
Only the bucket settings in the following configuration are copied.

[Choose bucket](#)

Format: s3://bucket/prefix

Object Ownership Info

- By default, the Object Ownership is set to '**ACLs disabled**' in this window. Select '**ACLs enabled**' since we are creating a **public bucket**.

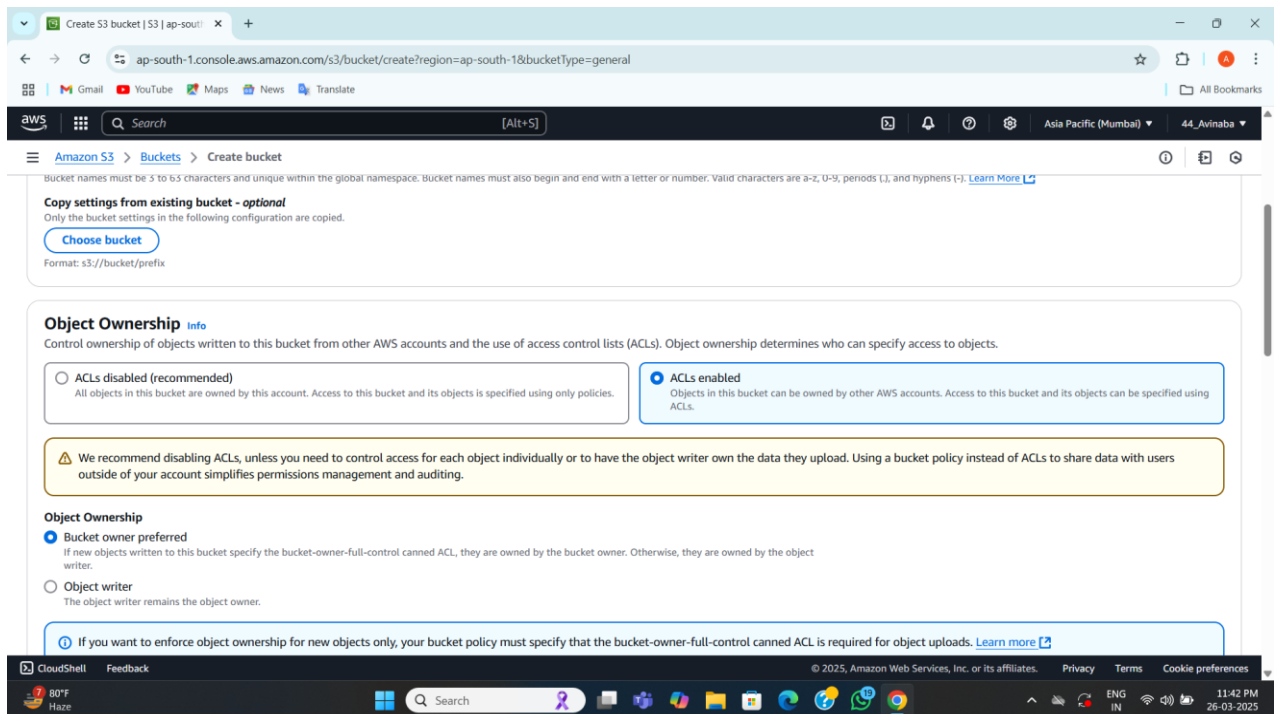

Create bucket | S3 | ap-south-1

ap-south-1.console.aws.amazon.com/s3/bucket/create?region=ap-south-1&bucketType=general

Amazon S3 > Buckets > Create bucket

Bucket names must be 3 to 63 characters and unique within the global namespace. Bucket names must also begin and end with a letter or number. Valid characters are a-z, 0-9, periods (.), and hyphens (-). [Learn More](#)

Copy settings from existing bucket - optional
Only the bucket settings in the following configuration are copied.

[Choose bucket](#)

Format: s3://bucket/prefix

Object Ownership Info

Control ownership of objects written to this bucket from other AWS accounts and the use of access control lists (ACLs). Object ownership determines who can specify access to objects.

☐ **ACLs disabled (recommended)**
All objects in this bucket are owned by this account. Access to this bucket and its objects is specified using only policies.

☒ **ACLs enabled**
Objects in this bucket can be owned by other AWS accounts. Access to this bucket and its objects can be specified using ACLs.

We recommend disabling ACLs, unless you need to control access for each object individually or to have the object writer own the data they upload. Using a bucket policy instead of ACLs to share data with users outside of your account simplifies permissions management and auditing.


Object Ownership

☒ **Bucket owner preferred**
If new objects written to this bucket specify the bucket-owner-full-control canned ACL, they are owned by the bucket owner. Otherwise, they are owned by the object writer.


☐ **Object writer**
The object writer remains the object owner.

If you want to enforce object ownership for new objects only, your bucket policy must specify that the bucket-owner-full-control canned ACL is required for object uploads. [Learn more](#)

- Now, uncheck the box for '**block all public access**'. At the bottom of the window, check the box confirming that the current setting changes may result in a **public bucket**.

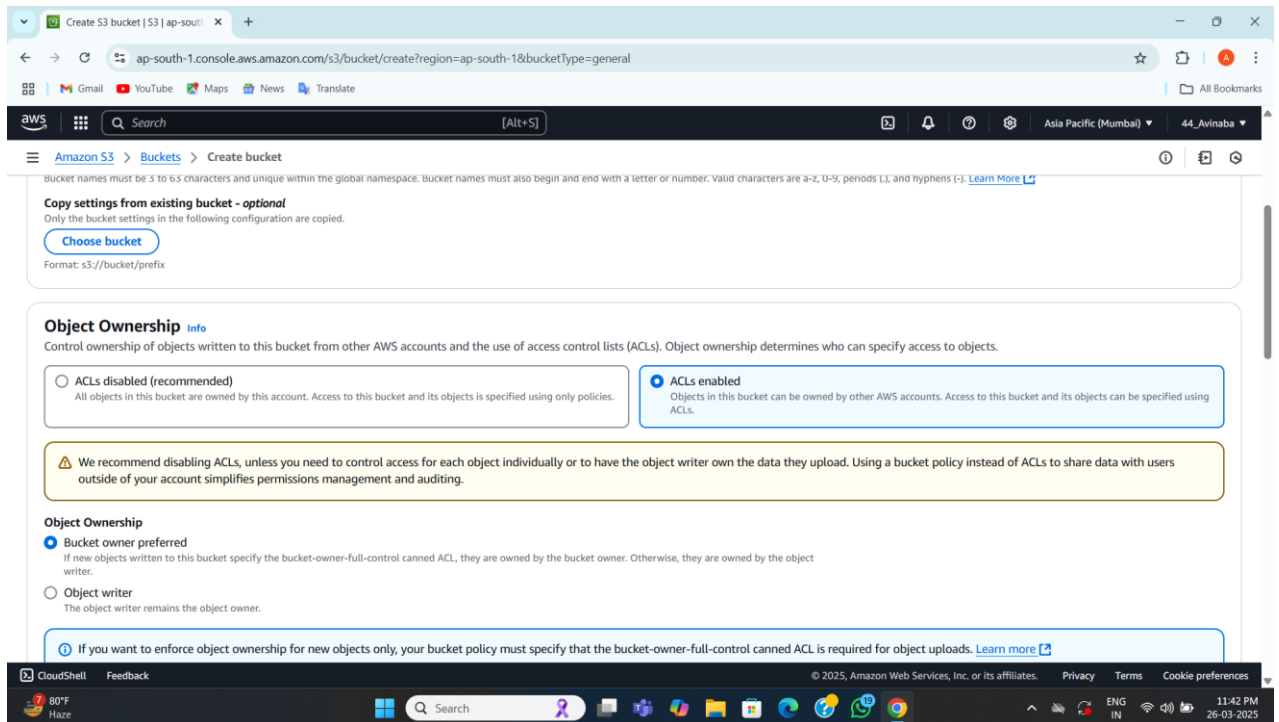

- Scroll down without any further modifications and proceed to click on '**Create Bucket**'.

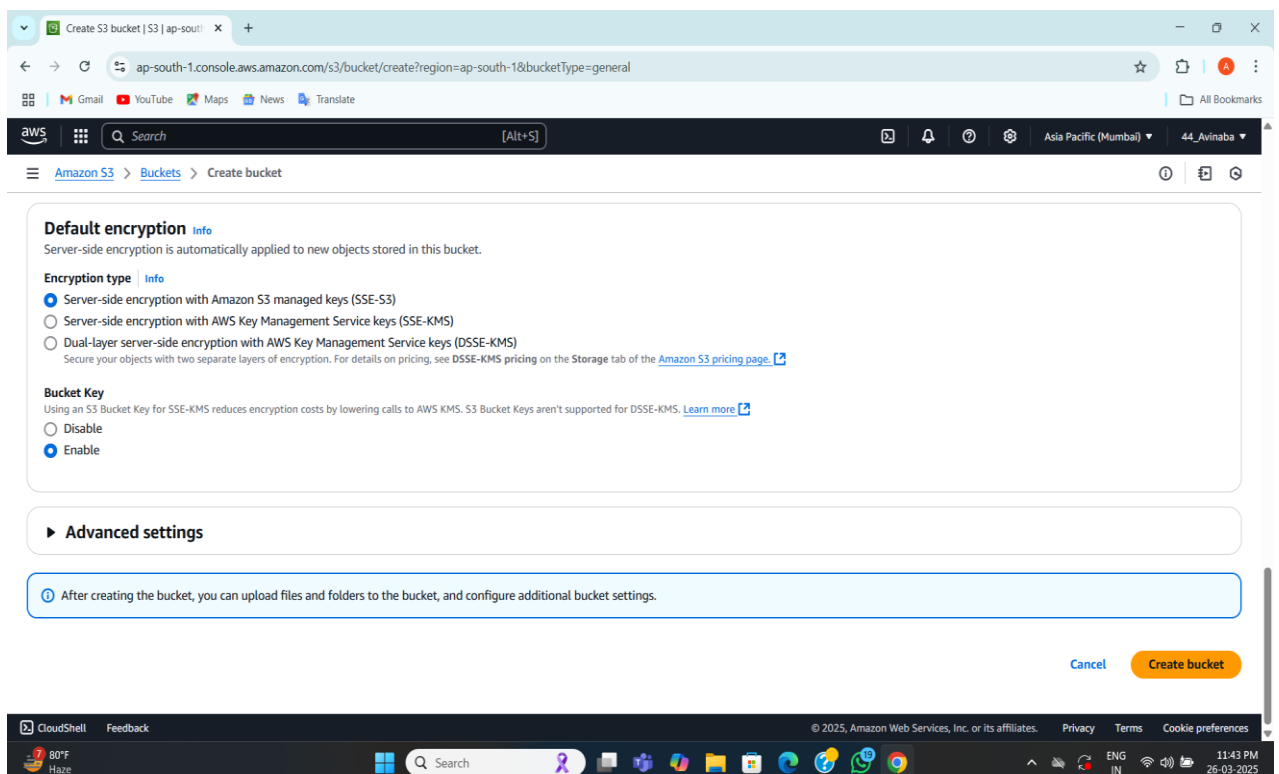

7. It's evident that the bucket has been successfully created.

ap-south-1.console.aws.amazon.com/s3/buckets?region=ap-south-1&bucketType=general

Successfully created bucket "avinaba"
To upload files and folders, or to configure additional bucket settings, choose [View details](#).

Account snapshot - updated every 24 hours All AWS Regions [View Storage Lens dashboard](#)

Storage lens provides visibility into storage usage and activity trends. Metrics don't include directory buckets. [Learn more](#)

General purpose buckets | Directory buckets

General purpose buckets (1) All AWS Regions

Buckets are containers for data stored in S3.

Find buckets by name

Name	AWS Region	IAM Access Analyzer	Creation date
avinaba	Asia Pacific (Mumbai) ap-south-1	View analyzer for ap-south-1	March 26, 2025, 23:43:24 (UTC+05:30)

Buttons: Copy ARN, Empty, Delete, Create bucket

8. Now click on the bucket name. Choose the '**Upload**' option, which will lead to the opening of the subsequent window. From there, click on '**Add files**' and proceed to upload your desired file(s) into the selected bucket.

Upload objects - S3 bucket avinaba

ap-south-1.console.aws.amazon.com/s3/upload/avinaba?region=ap-south-1&bucketType=general

Amazon S3 > Buckets > avinaba > Upload

Upload info

Add the files and folders you want to upload to S3. To upload a file larger than 160GB, use the AWS CLI, AWS SDKs or Amazon S3 REST API. [Learn more](#)

Drag and drop files and folders you want to upload here, or choose [Add files](#) or [Add folder](#).

Files and folders (0)

All files and folders in this table will be uploaded.

Find by name

Name	Folder	Type	Size
No files or folders You have not chosen any files or folders to upload.			


Buttons: Remove, Add files, Add folder

Destination info


Destination
[s3://avinaba](#)

Destination details


9. Scroll down and proceed to click on '**Upload**'. The notification confirms that the file has been successfully uploaded.

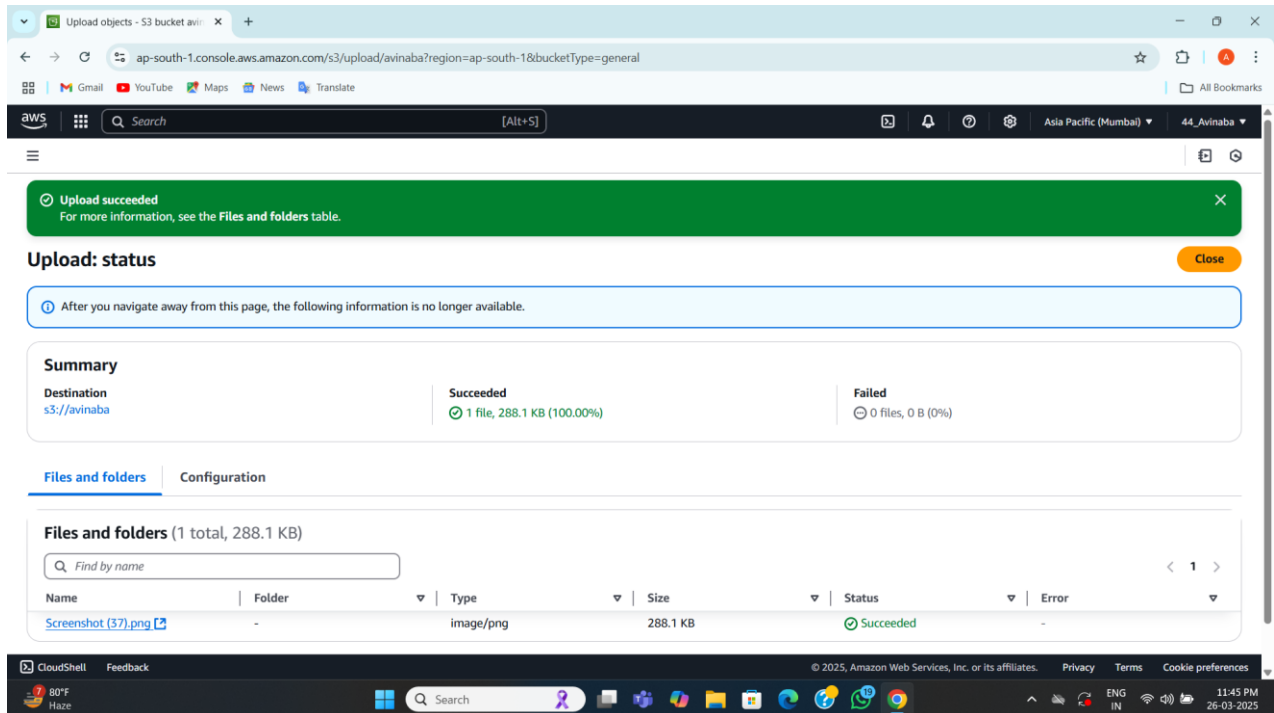


10. Now, click on one of the uploaded file, then '**Copy URL**'.

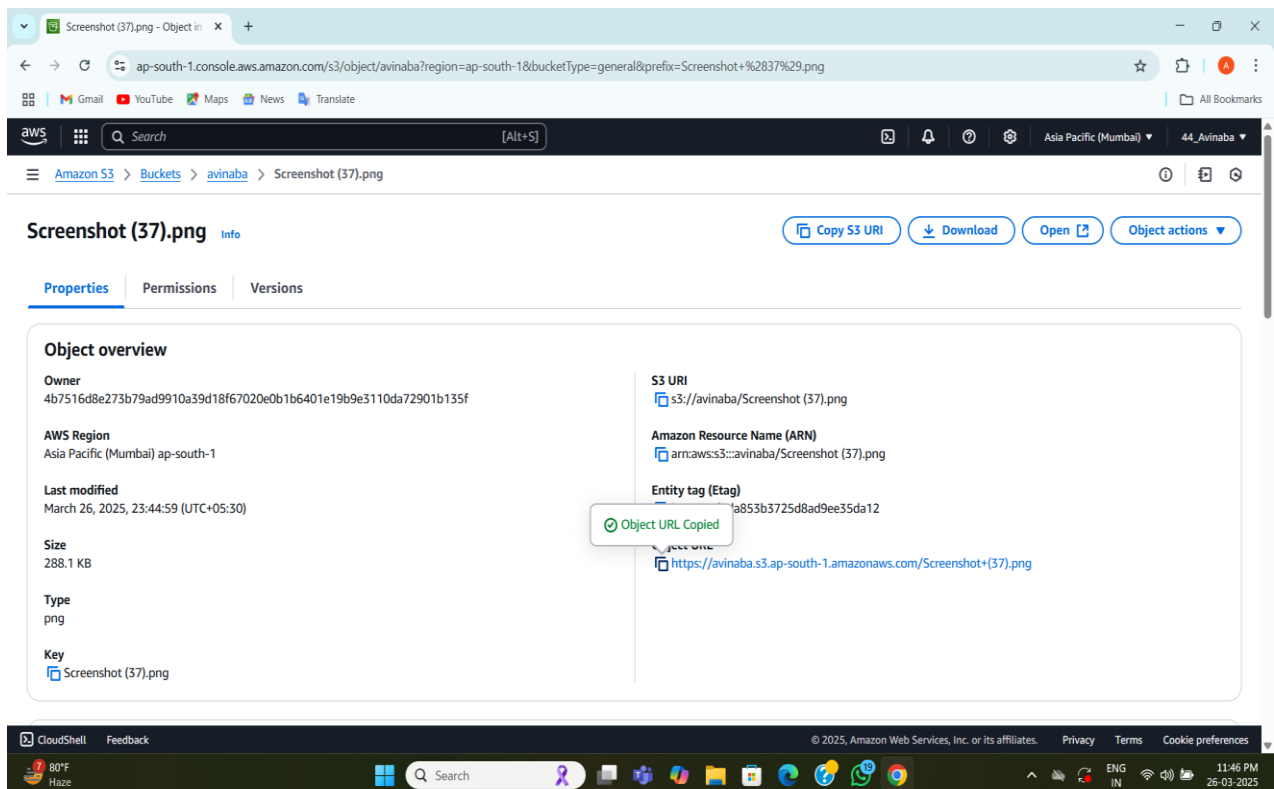


11. Navigate on a new window and paste this URL. An error appears indicating that access to the contents is restricted.

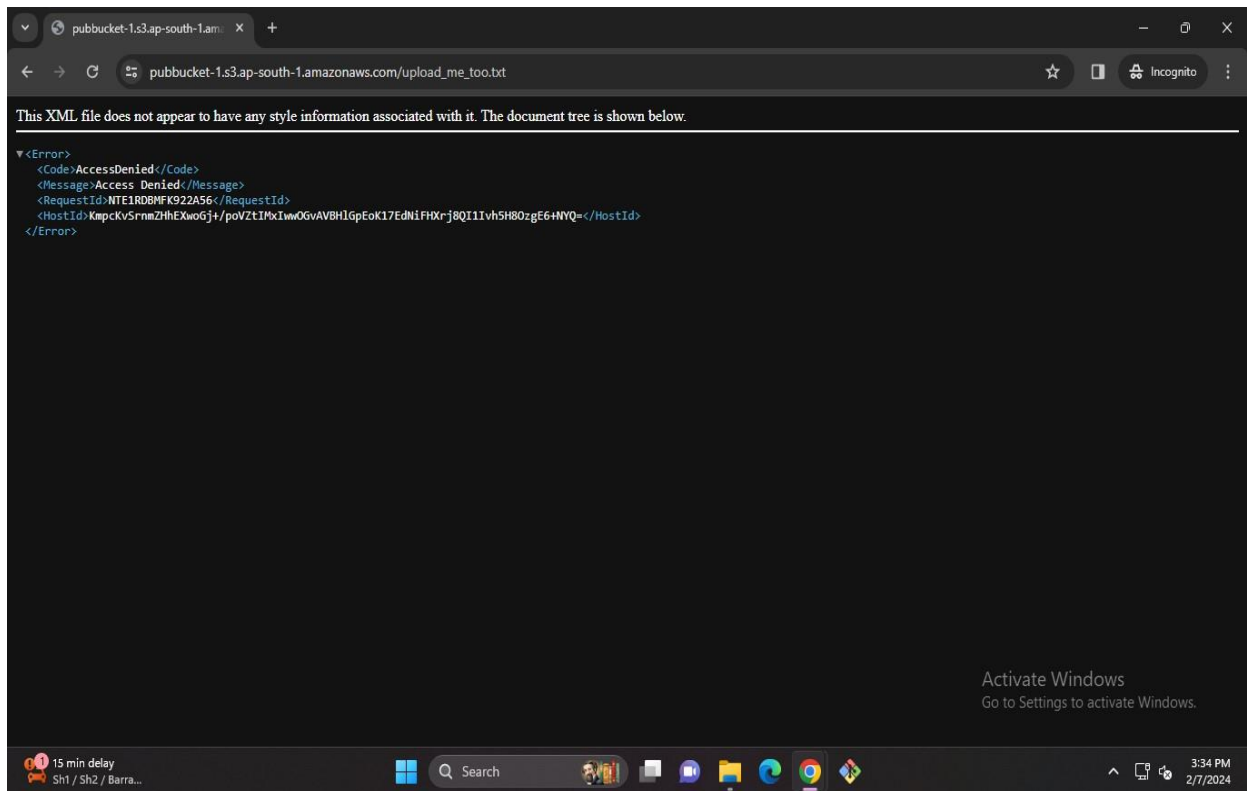

12. Now, for the same file go to permissions.

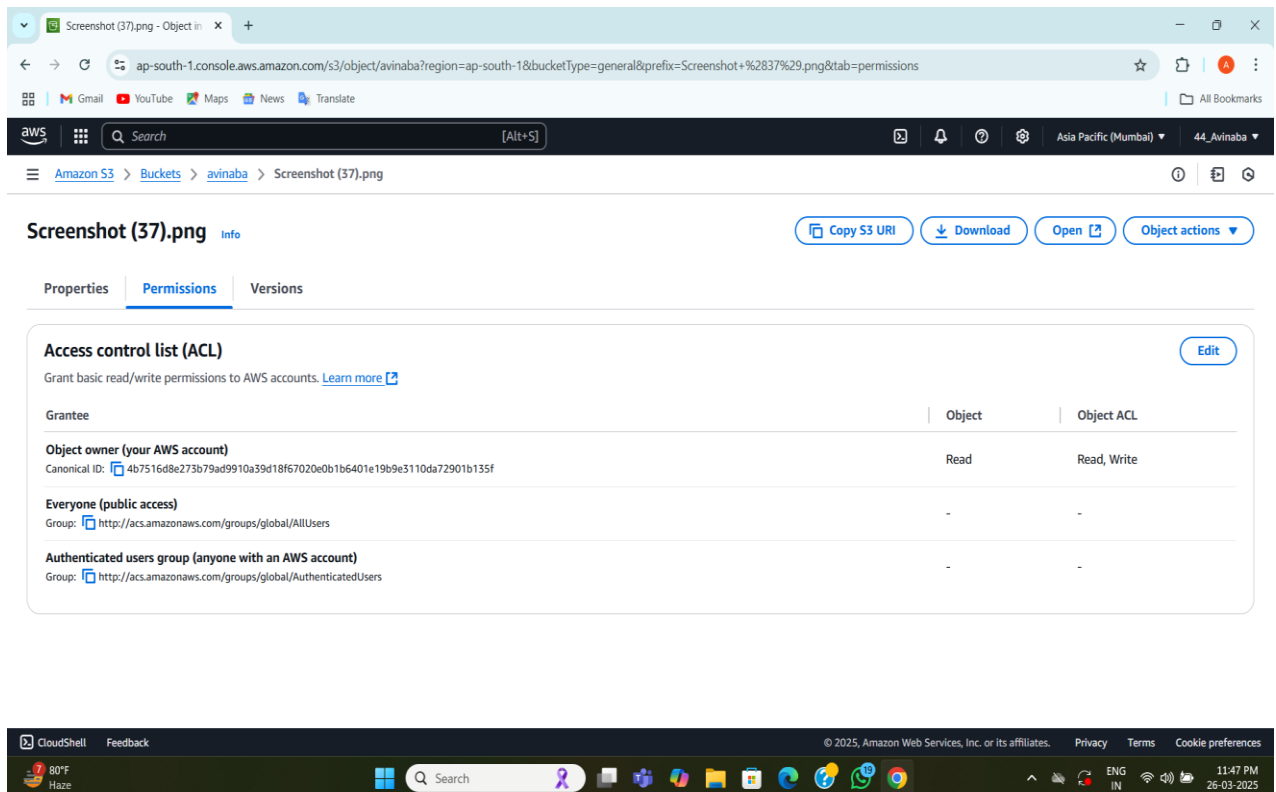

13. Edit the permissions as follows:

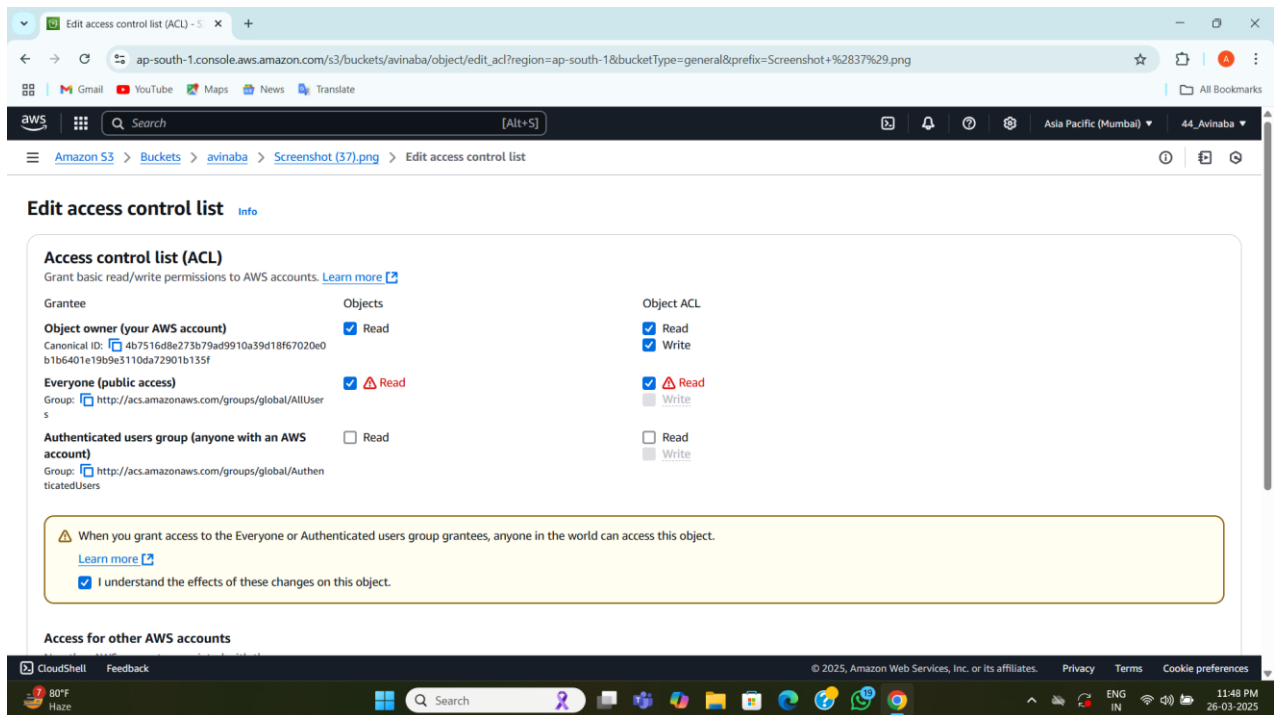

14. Save the changes made above and once-again copy the URL and search it on a new window only to see it open this time.

