

12. Header Linked List


–Free Header

Program:

```
#include <cstdlib>
void freeHeader() {
    if (head != nullptr) {
        free(head);
        head = nullptr;
    }
}
...
case 10:
    cout << "Exiting program. Goodbye!" << endl;
    destroyList();
    freeHeader(); // Free the actual header node
    exit(0);
```


Program Analysis

We know after destroyList() function, we get:

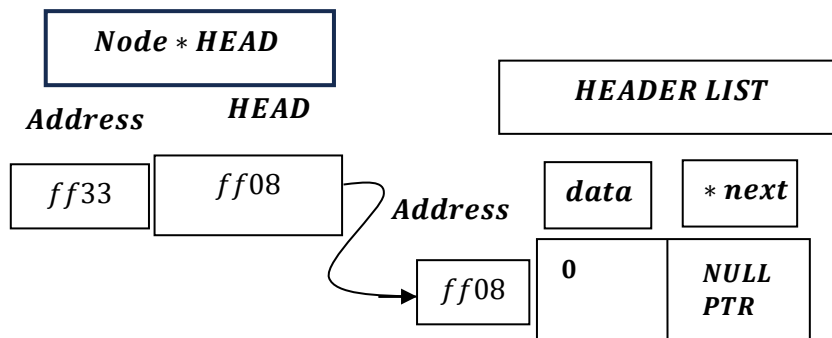


When head $\neq$ NULLPTR :

free (head : ff08);

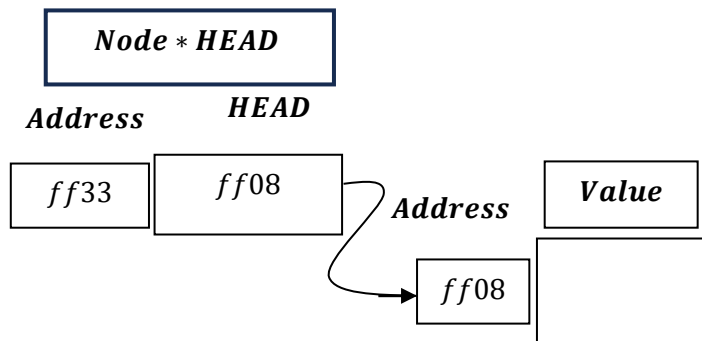

head = nullptr;

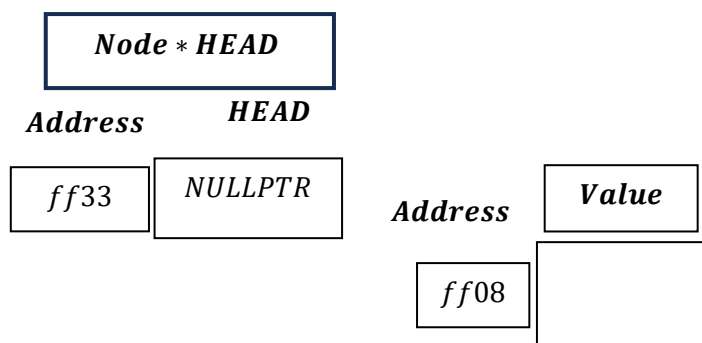

And exit(0) of cstdlib header , exits from program successfully.

And now , we are left with:

