

```
In [1]: import numpy as np
import pandas as pd
import seaborn as sns
import matplotlib.pyplot as plt
from sklearn import preprocessing, svm
from sklearn.model_selection import train_test_split
from sklearn.linear_model import LinearRegression
```

```
In [4]: df=pd.read_csv(r"C:\Users\DELL\Downloads\bottle.csv")  
df
```

C:\Users\DELL\AppData\Local\Temp\ipykernel\_26556\2958872377.py:1: DtypeWarning: Columns (47,73) have mixed types. Specify dtype option on import or set low\_memory=False.  
df=pd.read\_csv(r"C:\Users\DELL\Downloads\bottle.csv")

Out[4]:

st_Cnt	Btl_Cnt	Sta_ID	Depth_ID	Depthm	T_degC	Salnty	O2ml_L	STheta	O2Sat	...	R_PHAEO	R_PRE	R_SAMP	DIC1	DIC2
1	1	054.0 056.0	19- 4903CR- HY-060- 0930- 05400560- 0000A-3	0	10.500	33.4400	NaN	25.64900	NaN	...	NaN	0	NaN	NaN	NaN
1	2	054.0 056.0	19- 4903CR- HY-060- 0930- 05400560- 0008A-3	8	10.460	33.4400	NaN	25.65600	NaN	...	NaN	8	NaN	NaN	NaN
1	3	054.0 056.0	19- 4903CR- HY-060- 0930- 05400560- 0010A-7	10	10.460	33.4370	NaN	25.65400	NaN	...	NaN	10	NaN	NaN	NaN
1	4	054.0 056.0	19- 4903CR- HY-060- 0930- 05400560- 0019A-3	19	10.450	33.4200	NaN	25.64300	NaN	...	NaN	19	NaN	NaN	NaN
1	5	054.0 056.0	19- 4903CR- HY-060- 0930- 05400560- 0020A-7	20	10.450	33.4210	NaN	25.64300	NaN	...	NaN	20	NaN	NaN	NaN
...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...
34404	864859	093.4 026.4	20- 1611SR- MX-310- 2239- 09340264- 0000A-7	0	18.744	33.4083	5.805	23.87055	108.74	...	0.18	0	NaN	NaN	NaN

st_Cnt	Btl_Cnt	Sta_ID	Depth_ID	Depthm	T_degC	Salnty	O2ml_L	STheta	O2Sat	...	R_PHAEO	R_PRES	R_SAMP	DIC1	DIC2
34404	864860	093.4 026.4	20- 1611SR- MX-310- 2239- 09340264- 0002A-3	2	18.744	33.4083	5.805	23.87072	108.74	...	0.18	2	4.0	NaN	NaN
34404	864861	093.4 026.4	20- 1611SR- MX-310- 2239- 09340264- 0005A-3	5	18.692	33.4150	5.796	23.88911	108.46	...	0.18	5	3.0	NaN	NaN
34404	864862	093.4 026.4	20- 1611SR- MX-310- 2239- 09340264- 0010A-3	10	18.161	33.4062	5.816	24.01426	107.74	...	0.31	10	2.0	NaN	NaN
34404	864863	093.4 026.4	20- 1611SR- MX-310- 2239- 09340264- 0015A-3	15	17.533	33.3880	5.774	24.15297	105.66	...	0.61	15	1.0	NaN	NaN

rs × 74 columns


```
In [5]: df=df[['Salnty','T_degC']]  
df.columns=['sal','Temp']  
df.head(10)
```

Out[5]:

	sal	Temp
0	33.440	10.50
1	33.440	10.46
2	33.437	10.46
3	33.420	10.45
4	33.421	10.45
5	33.431	10.45
6	33.440	10.45
7	33.424	10.24
8	33.420	10.06
9	33.494	9.86

```
In [6]: sns.lmplot(x="sal",y="Temp",data=df,order=2,ci=None)
```

```
Out[6]: <seaborn.axisgrid.FacetGrid at 0x2321f736b50>
```

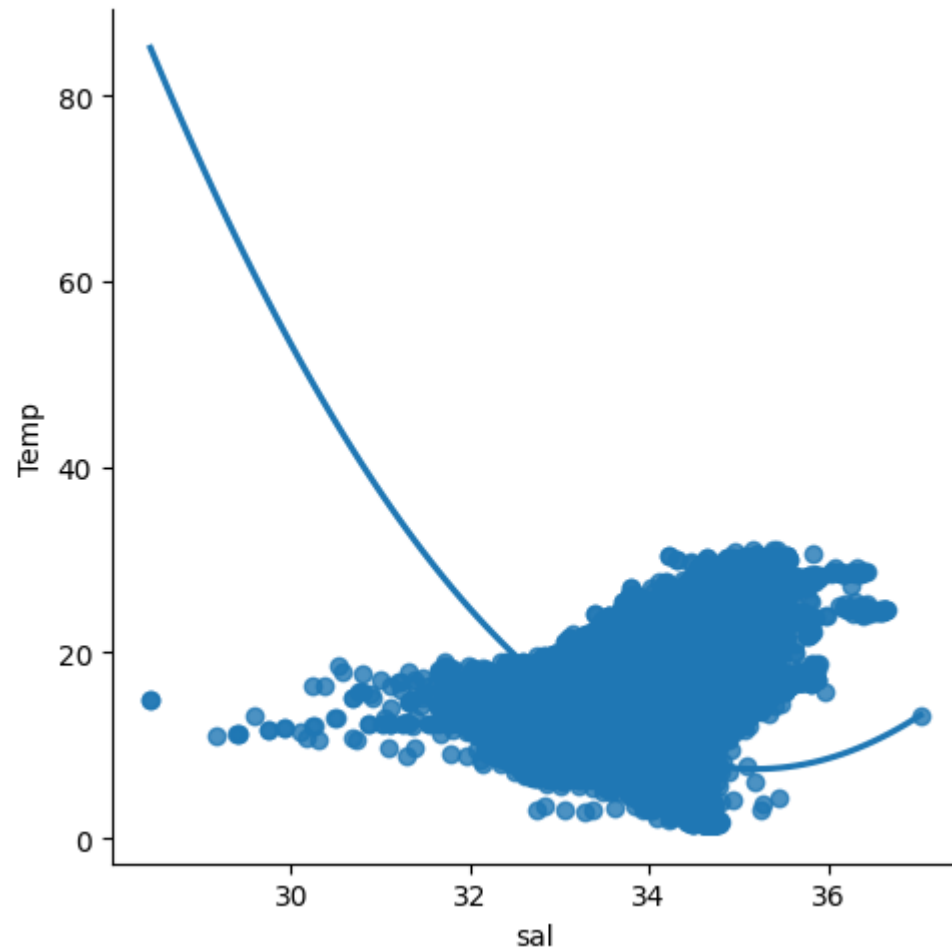

In [7]: df.describe()

Out[7]:

	sal	Temp
count	817509.000000	853900.000000
mean	33.840350	10.799677
std	0.461843	4.243825
min	28.431000	1.440000
25%	33.488000	7.680000
50%	33.863000	10.060000
75%	34.196900	13.880000
max	37.034000	31.140000

In [8]: df.info()

```
<class 'pandas.core.frame.DataFrame'>
RangeIndex: 864863 entries, 0 to 864862
Data columns (total 2 columns):
#   Column  Non-Null Count  Dtype  
---  -
0    sal      817509 non-null   float64
1   Temp     853900 non-null   float64
dtypes: float64(2)
memory usage: 13.2 MB
```

```
In [9]: df.fillna(method='ffill',inplace=True)
```

C:\Users\DELL\AppData\Local\Temp\ipykernel\_26556\4116506308.py:1: SettingWithCopyWarning:  
A value is trying to be set on a copy of a slice from a DataFrame

See the caveats in the documentation: [https://pandas.pydata.org/pandas-docs/stable/user\\_guide/indexing.html#returning-a-view-versus-a-copy](https://pandas.pydata.org/pandas-docs/stable/user_guide/indexing.html#returning-a-view-versus-a-copy) ([https://pandas.pydata.org/pandas-docs/stable/user\\_guide/indexing.html#returning-a-view-versus-a-copy](https://pandas.pydata.org/pandas-docs/stable/user_guide/indexing.html#returning-a-view-versus-a-copy))  
df.fillna(method='ffill',inplace=True)

```
In [10]: x=np.array(df['sal']).reshape(-1,1)  
y=np.array(df['Temp']).reshape(-1,1)  
df.dropna(inplace=True)
```

C:\Users\DELL\AppData\Local\Temp\ipykernel\_26556\4114665048.py:3: SettingWithCopyWarning:  
A value is trying to be set on a copy of a slice from a DataFrame


See the caveats in the documentation: [https://pandas.pydata.org/pandas-docs/stable/user\\_guide/indexing.html#returning-a-view-versus-a-copy](https://pandas.pydata.org/pandas-docs/stable/user_guide/indexing.html#returning-a-view-versus-a-copy) ([https://pandas.pydata.org/pandas-docs/stable/user\\_guide/indexing.html#returning-a-view-versus-a-copy](https://pandas.pydata.org/pandas-docs/stable/user_guide/indexing.html#returning-a-view-versus-a-copy))  
df.dropna(inplace=True)

```
In [11]: x_train,x_test,y_train,y_test=train_test_split(x,y,test_size=0.5)  
regr=LinearRegression()  
regr.fit(x_train,y_train)  
print(regr.score(x_test,y_test))
```

0.20467354335157417




```
In [12]: y_pred=regr.predict(x_test)
plt.scatter(x_test,y_test,color='b')
plt.plot(x_test,y_pred,color='k')
plt.show()
```

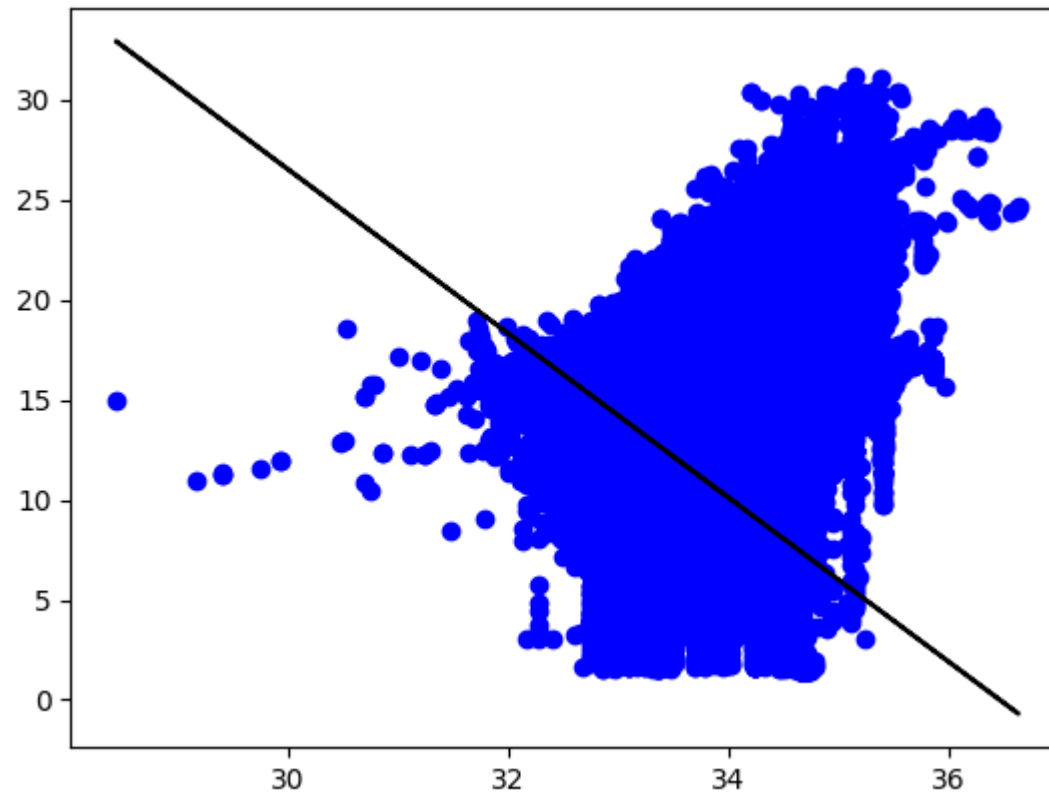

```
In [13]: df500=df[:][:500]  
sns.lmplot(x="sal",y="Temp",data=df500,order=1)
```

```
Out[13]: <seaborn.axisgrid.FacetGrid at 0x2322af98e90>
```

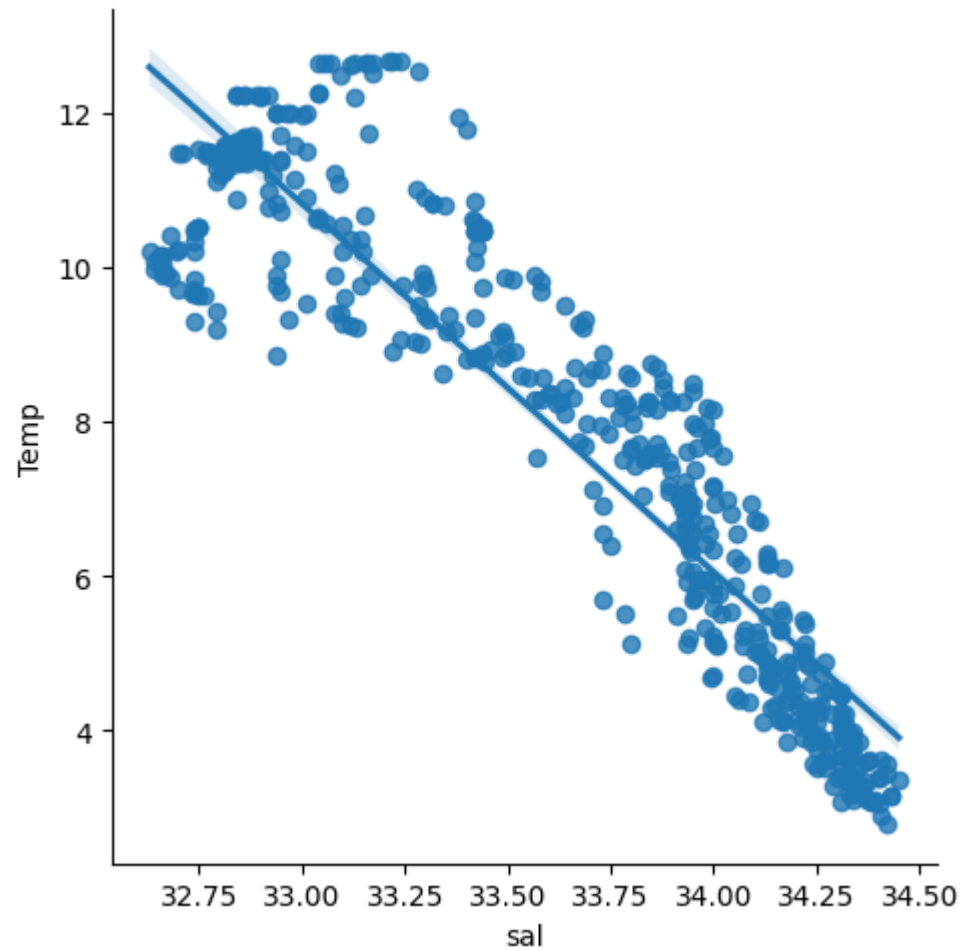


```
In [14]: df500.fillna(method='ffill',inplace=True)
x=np.array(df['sal']).reshape(-1,1)
y=np.array(df['Temp']).reshape(-1,1)
df.dropna(inplace=True)
x_train,x_test,y_train,y_test=train_test_split(x,y,test_size=0.25)
regr=LinearRegression()
regr.fit(x_train,y_train)
print("Regression:",regr.score(x_test,y_test))
y_pred=regr.predict(x_test)
plt.scatter(x_test,y_test,color='b')
plt.plot(x_test,y_pred,color='k')
plt.show()
```

C:\Users\DELL\AppData\Local\Temp\ipykernel\_26556\2104038790.py:4: SettingWithCopyWarning:  
A value is trying to be set on a copy of a slice from a DataFrame

See the caveats in the documentation: [https://pandas.pydata.org/pandas-docs/stable/user\\_guide/indexing.html#returning-a-view-versus-a-copy](https://pandas.pydata.org/pandas-docs/stable/user_guide/indexing.html#returning-a-view-versus-a-copy) ([https://pandas.pydata.org/pandas-docs/stable/user\\_guide/indexing.html#returning-a-view-versus-a-copy](https://pandas.pydata.org/pandas-docs/stable/user_guide/indexing.html#returning-a-view-versus-a-copy))  
df.dropna(inplace=True)

Regression: 0.2054661899559559

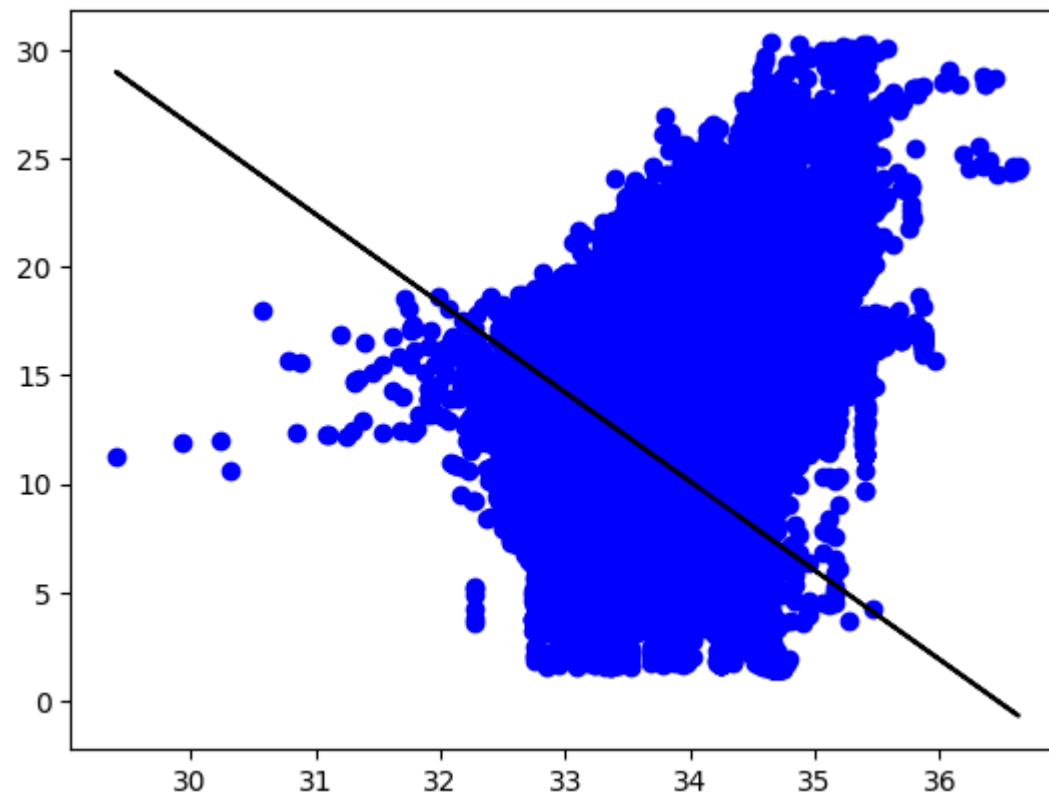

```
In [15]: from sklearn.linear_model import LinearRegression
from sklearn.metrics import r2_score
model=LinearRegression()
model.fit(x_train,y_train)
y_pred=model.predict(x_test)
r2=r2_score(y_test,y_pred)
print("R2_score:",r2)
```

R2\_score: 0.2054661899559559

In [ ]:

