Cucumber Report

| Start : Feb 15, 2:51:30.717 PM	End : Feb 15, 2:51:32.732 PM	Duration : 2.015 s
Features	Scenarios	Steps
PASSED - 0 FAILED - 1 SKIPPED - 0	PASSED - 0 FAILED - 1 SKIPPED - 0	PASSED - 2 FAILED - 1 SKIPPED - 0

Features: 1 — 0 %

Scenarios: 1 — 0 %

Steps: 3 — 66 %

Feature		Scenario				Step			
Name	**Duration**	**T**	**P**	**F**	**S**	**T**	**P**	**F**	**S**
Validating Ecommerce_API's	*2.015 s*	*1*	*0*	*1*	*0*	*3*	*2*	*1*	*0*

Tag	Scenario				Feature			
Name	T	P	F	S	T	P	F	S
@LoginForEcommerceXml	1	0	1	0	1	0	1	0
@XmlBinding	1	0	1	0	1	0	1	0
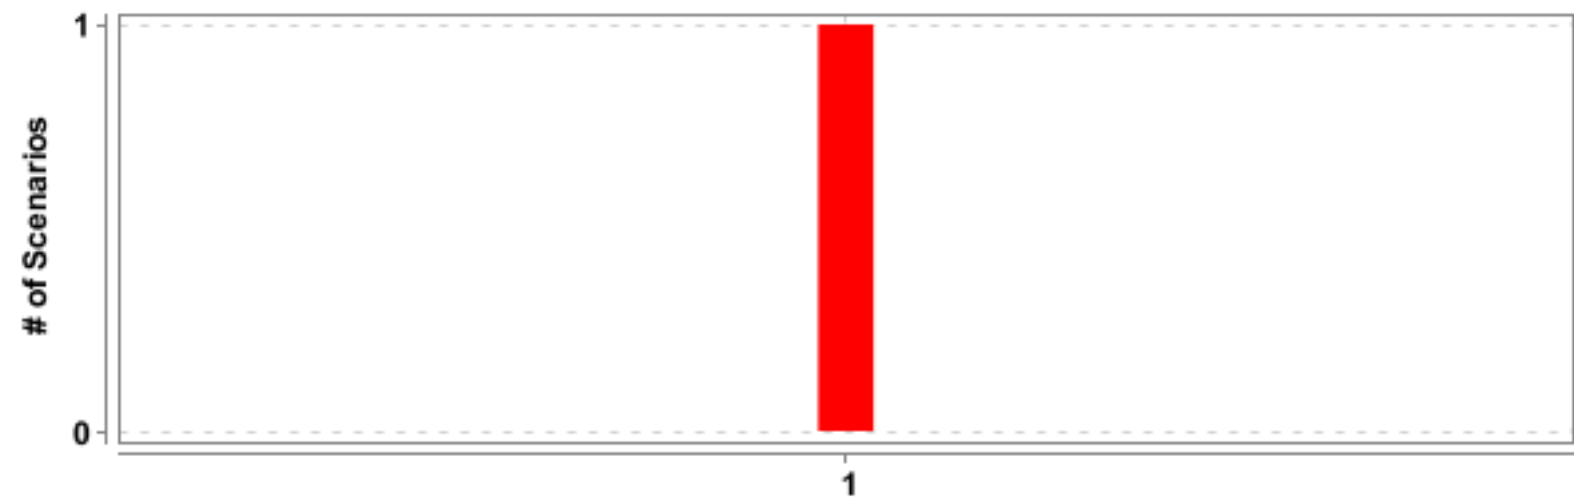
#	Feature Name	T	P	F	S	Duration
1	Validating Ecommerce_API's	1	0	1	0	2.015 s
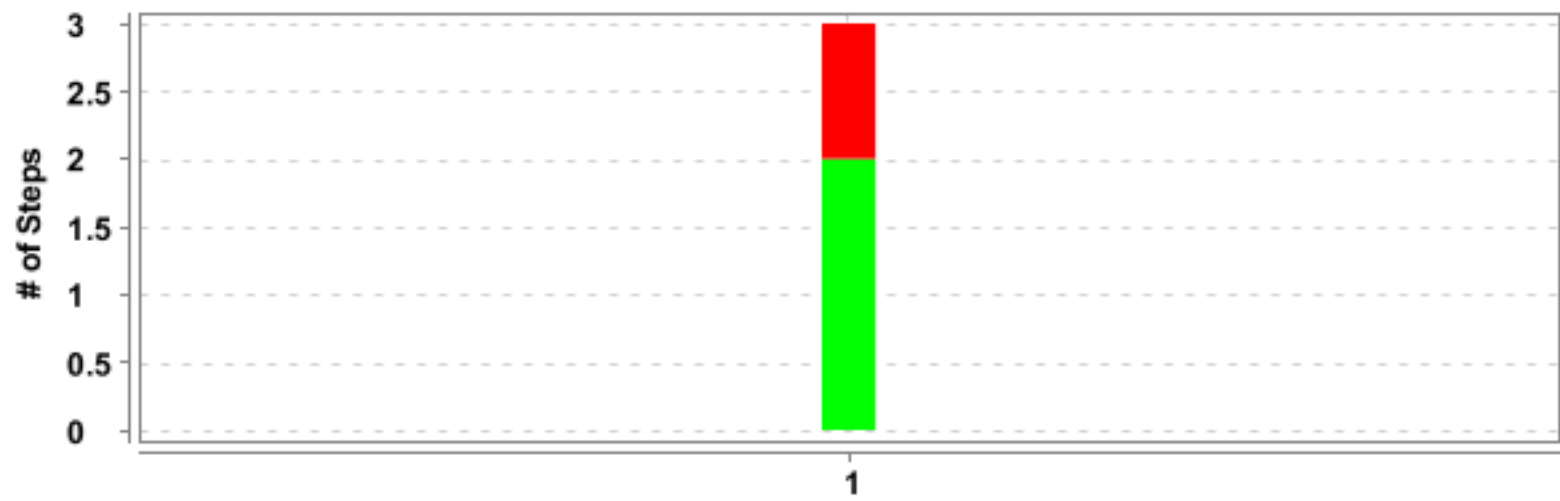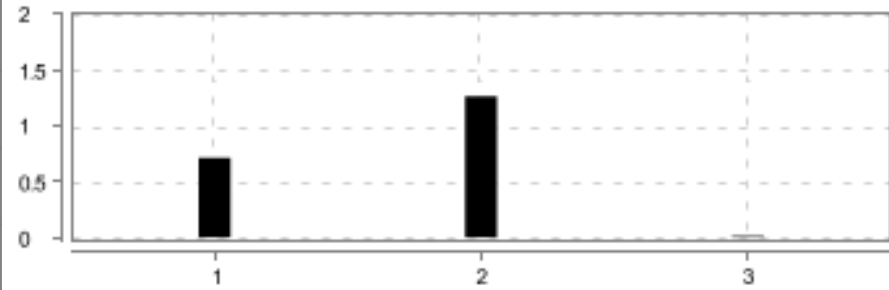
#	Feature Name	Scenario Name	T	P	F	S	Duration
1	Validating Ecommerce_API's	Login validation for ecommerce site	3	2	1	0	2.006 s

Validating Ecommerce_API's

FAILED	DURATION - 2.015 s	Scenarios		Steps	
		Total - 1		Total - 3	
/ 2:51:30.717 PM // 2:51:32.732 PM /		Pass - 0	1	Pass - 2	3
		Fail - 1		Fail - 1	
		Skip - 0		Skip - 0	

Login validation for ecommerce site

FAILED	DURATION - 2.006 s		Steps	
/ 2:51:30.726 PM // 2:51:32.732 PM /			Total - 3	
			Pass - 2	3
Validating Ecommerce_API's			Fail - 1	
@LoginForEcommerceXml @XmlBinding			Skip - 0	

#	Step / Hook Details	Status	Duration
1	Given Body payload with the credentials "srimannaidu7849@gmail.com" and "Sriman@7849"	PASSED	0.714 s
2	When user calls the required resource "Login_API" with "POST" method	PASSED	1.264 s
3	Then the API call will be success with status code 200	FAILED	0.013 s

	javax.xml.bind.UnmarshalException - with linked exception: [org.xml.sax.SAXParseException; lineNumber: 1; columnNumber: 1; Content is not allowed in prolog.]
	    at javax.xml.bind.helpers.AbstractUnmarshallerImpl.createUnmarshalException(AbstractUnmarshallerImpl.java:335)
	    at com.sun.xml.internal.bind.v2.runtime.unmarshaller.UnmarshallerImpl.createUnmarshalException(UnmarshallerImpl.java:563)
	    at com.sun.xml.internal.bind.v2.runtime.unmarshaller.UnmarshallerImpl.unmarshal0(UnmarshallerImpl.java:249)
	    at com.sun.xml.internal.bind.v2.runtime.unmarshaller.UnmarshallerImpl.unmarshal(UnmarshallerImpl.java:214)
	    at javax.xml.bind.helpers.AbstractUnmarshallerImpl.unmarshal(AbstractUnmarshallerImpl.java:157)
	    at javax.xml.bind.helpers.AbstractUnmarshallerImpl.unmarshal(AbstractUnmarshallerImpl.java:214)
	    at API_Resources.util.unmarshal(util.java:95)
	    at stepdefinations.MyStepdefsXml.theAPICallWillBeSuccessWithStatusCode(MyStepdefsXml.java:58)
	    at ?.the API call will be success with status code 200(file:///C:/Users/SK66921/Documents/Git/BddWithEform/src/test/resources/ApiFeatures/EndToEndEcommerceXML.feature:8)
	Caused by: org.xml.sax.SAXParseException; lineNumber: 1; columnNumber: 1; Content is not allowed in prolog.
	    at com.sun.org.apache.xerces.internal.util.ErrorHandlerWrapper.createSAXParseException(ErrorHandlerWrapper.java:203)
	    at com.sun.org.apache.xerces.internal.util.ErrorHandlerWrapper.fatalError(ErrorHandlerWrapper.java:177)		

#	Step / Hook Details	Status	Duration
	at com.sun.org.apache.xerces.internal.impl.XMLErrorReporter.reportError(XMLErrorReporter.java:400)		
	at com.sun.org.apache.xerces.internal.impl.XMLErrorReporter.reportError(XMLErrorReporter.java:327)		
	at com.sun.org.apache.xerces.internal.impl.XMLScanner.reportFatalError(XMLScanner.java:1438)		
	at com.sun.org.apache.xerces.internal.impl.XMLDocumentScannerImpl$PrologDriver.next(XMLDocumentScannerImpl.java:999)		
	at com.sun.org.apache.xerces.internal.impl.XMLDocumentScannerImpl.next(XMLDocumentScannerImpl.java:606)		
	at com.sun.org.apache.xerces.internal.impl.XMLNSDocumentScannerImpl.next(XMLNSDocumentScannerImpl.java:118)		
	at com.sun.org.apache.xerces.internal.impl.XMLDocumentFragmentScannerImpl.scanDocument(XMLDocumentFragmentScannerImpl.java:510)		
	at com.sun.org.apache.xerces.internal.parsers.XML11Configuration.parse(XML11Configuration.java:848)		
	at com.sun.org.apache.xerces.internal.parsers.XML11Configuration.parse(XML11Configuration.java:777)		
	at com.sun.org.apache.xerces.internal.parsers.XMLParser.parse(XMLParser.java:141)		
	at com.sun.org.apache.xerces.internal.parsers.AbstractSAXParser.parse(AbstractSAXParser.java:1213)		
	at com.sun.org.apache.xerces.internal.jaxp.SAXParserImpl$JAXPSAXParser.parse(SAXParserImpl.java:643)		
	at com.sun.xml.internal.bind.v2.runtime.unmarshaller.UnmarshallerImpl.unmarshal0(UnmarshallerImpl.java:243)		
	at com.sun.xml.internal.bind.v2.runtime.unmarshaller.UnmarshallerImpl.unmarshal(UnmarshallerImpl.java:214)		
	at javax.xml.bind.helpers.AbstractUnmarshallerImpl.unmarshal(AbstractUnmarshallerImpl.java:157)		
	at javax.xml.bind.helpers.AbstractUnmarshallerImpl.unmarshal(AbstractUnmarshallerImpl.java:214)		
	at API_Resources.util.unmarshal(util.java:95)		
	at stepdefinations.MyStepdefsXml.theAPICallWillBeSuccessWithStatusCode(MyStepdefsXml.java:58)		
	at sun.reflect.NativeMethodAccessorImpl.invoke0(Native Method)		
	at sun.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:62)		
	at sun.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43)		
	at java.lang.reflect.Method.invoke(Method.java:498)		
	at io.cucumber.java.Invoker.doInvoke(Invoker.java:66)		
	at io.cucumber.java.Invoker.invoke(Invoker.java:24)		
	at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47)		
	at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29)		
	at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66)		
	at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63)		
	at io.cucumber.core.runner.ExecutionMode$1.execute(ExecutionMode.java:10)		
	at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85)		
	at io.cucumber.core.runner.TestStep.run(TestStep.java:57)		
	at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51)		
	at io.cucumber.core.runner.TestCase.run(TestCase.java:84)		
	at io.cucumber.core.runner.Runner.runPickle(Runner.java:75)		
	at io.cucumber.testng.TestNGCucumberRunner.lambda$runScenario$1(TestNGCucumberRunner.java:132)		
	at io.cucumber.core.runtime.CucumberExecutionContext.lambda$runTestCase$5(CucumberExecutionContext.java:129)		
	at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23)		
	at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129)		
	at io.cucumber.testng.TestNGCucumberRunner.runScenario(TestNGCucumberRunner.java:129)		
	at io.cucumber.testng.AbstractTestNGCucumberTests.runScenario(AbstractTestNGCucumberTests.java:35)		

#	Step / Hook Details	Status	Duration
	at sun.reflect.NativeMethodAccessorImpl.invoke0(Native Method)		
	at sun.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:62)		
	at sun.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43)		
	at java.lang.reflect.Method.invoke(Method.java:498)		
	at org.testng.internal.MethodInvocationHelper.invokeMethod(MethodInvocationHelper.java:124)		
	at org.testng.internal.Invoker.invokeMethod(Invoker.java:583)		
	at org.testng.internal.Invoker.invokeTestMethod(Invoker.java:719)		
	at org.testng.internal.Invoker.invokeTestMethods(Invoker.java:989)		
	at org.testng.internal.TestMethodWorker.invokeTestMethods(TestMethodWorker.java:125)		
	at org.testng.internal.TestMethodWorker.run(TestMethodWorker.java:109)		
	at org.testng.TestRunner.privateRun(TestRunner.java:648)		
	at org.testng.TestRunner.run(TestRunner.java:505)		
	at org.testng.SuiteRunner.runTest(SuiteRunner.java:455)		
	at org.testng.SuiteRunner.runSequentially(SuiteRunner.java:450)		
	at org.testng.SuiteRunner.privateRun(SuiteRunner.java:415)		
	at org.testng.SuiteRunner.run(SuiteRunner.java:364)		
	at org.testng.SuiteRunnerWorker.runSuite(SuiteRunnerWorker.java:52)		
	at org.testng.SuiteRunnerWorker.run(SuiteRunnerWorker.java:84)		
	at org.testng.TestNG.runSuitesSequentially(TestNG.java:1208)		
	at org.testng.TestNG.runSuitesLocally(TestNG.java:1137)		
	at org.testng.TestNG.runSuites(TestNG.java:1049)		
	at org.testng.TestNG.run(TestNG.java:1017)		
	at com.intellij.rt.testng.IDEARemoteTestNG.run(IDEARemoteTestNG.java:66)		
	at com.intellij.rt.testng.RemoteTestNGStarter.main(RemoteTestNGStarter.java:109)		
	* Not displayable characters are replaced by '?'.		