MorphEvalHeb: proposed figures for review

Figures marked REAL DATA are computed from files in the repo. Figures marked PLACEHOLDER DATA use synthetic scores only to show the design; the script charts/make_charts.py –scores scores.csv redraws them from real per-summary metric scores. Each figure is shown at its true print size: 7.7 cm = one ACL column, 9.9 cm ≈ 0.62 of the page width.

A. Page-1 teaser

SCORES MISSING

Placement: page 1, right column (single column)

DRAFT — scores and verdicts are placeholders

Source article (excerpt)

שר הביטחון אביגדור ליברמן, שאמר במהלך ישיבת ישראל ביתנו בכנסת
בי החוק **לא יקודם**…

Defense Minister Avigdor Liberman said the law ***will not be advanced****…*

GPT-3.5-turbo summary

שר הביטחון אביגדור ליברמן הביע תמיכה **בהקדמת** החוק.

Defense Minister Avigdor Liberman expressed support ***for advancing*** *the law.*

Same root (ק.ד.מ), opposite meaning: the negated passive verb becomes a nominalized "advancing".


Metric	Score	Verdict
ROUGE-1	?	?
BERTScore (NeoDictaBERT)	?	?
SummaC-ZS (mDeBERTa)	?	?
GPT-4o-mini judge	?	?
MorphEvalHeb	?	?

Draft caption. A real GPT-3.5-turbo summary error: the source says the law will not be advanced, the summary says Liberman supports advancing it, with the same root (q.d.m). Surface and NLI metrics score the summary as faithful, while MorphEvalHeb flags it.
To finish: run the five metrics on this exact pair and fill the cells. Keep the figure only if the scores support the message; otherwise choose another example from Figure 1.

B. Error families in the benchmark

REAL DATA

Placement: Dataset section or appendix (single column)

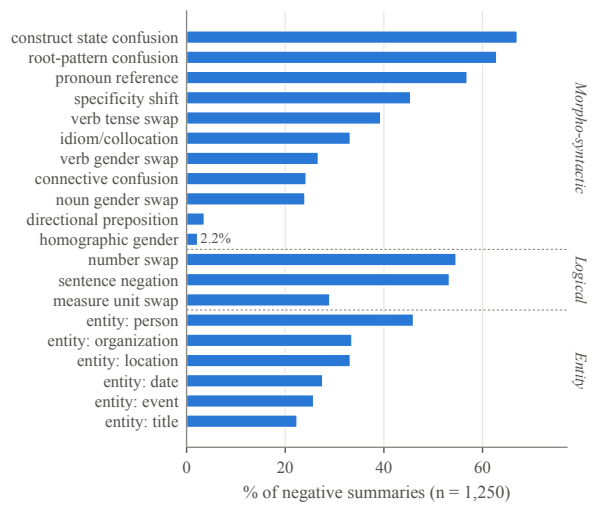


Draft caption. Share of negative summaries containing each error family, grouped by taxonomy group ($n = 1{,}250$ negatives with recorded families).
Finding: only 20 families occur in the benchmark, not the 24 the text claims, and two are nearly absent (directional preposition 3.6%, homographic gender 2.2%). A further 1,058 negatives have no recorded families.

C. Error families per negative summary

REAL DATA

Placement: Dataset section (single column)

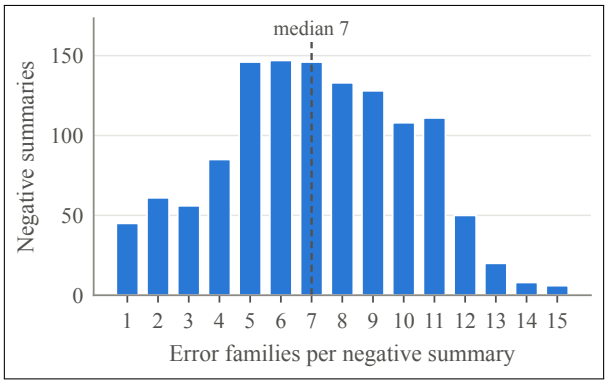


Draft caption. Number of distinct error families injected into each negative summary (median 7).
Finding: negatives are heavily corrupted (90% corruption rate). Reviewers may say they are too easy to detect; the per-family results (D) and real-summary evaluation should address this.

D. Per-family detection

PLACEHOLDER DATA

Placement: Results (single column). The key evidence for the "morphology matters" claim

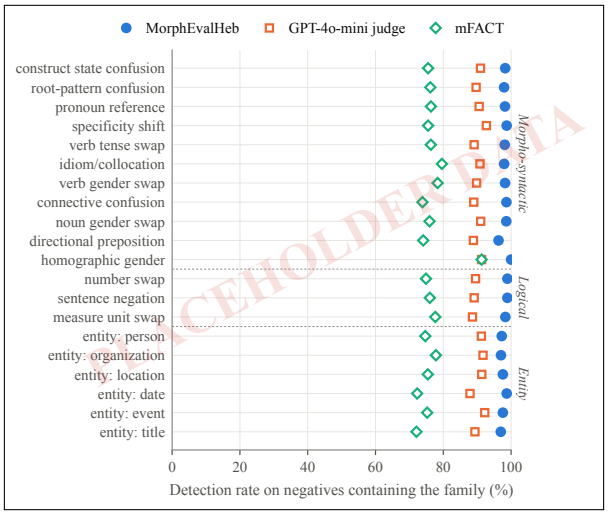


Draft caption. Detection rate per error family on test negatives, at each metric's balanced-accuracy threshold tuned on dev. Filled marker = MorphEvalHeb.
Needs: per-summary scores for MorphEvalHeb and the two strongest baselines, with split and error_types columns. With multi-family negatives, a summary counts toward every family it contains; single-family negatives would give a cleaner per-family estimate.

E. Errors detected in real LLM summaries

REAL DATA

Placement: Introduction or taxonomy section (motivation)

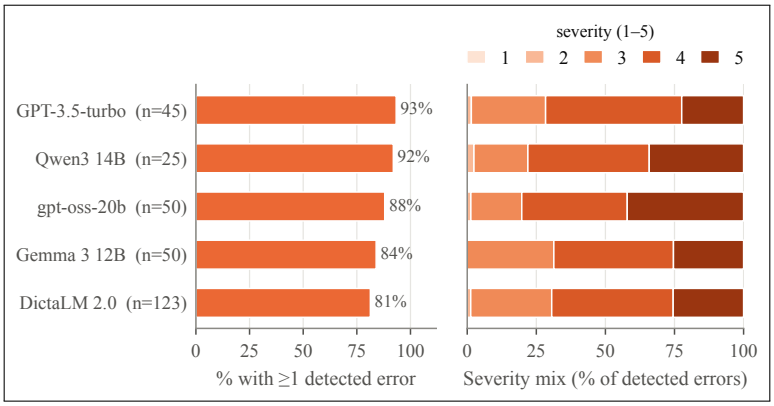


Draft caption. Share of real Hebrew summaries in which an LLM error-finder (Gemini) detected at least one factual error, and the severity mix of those errors, per summarizer. n = summaries examined, pooled over detection runs.
Caveat: errors were found by Gemini and are not human-verified, so the caption must say "detected". Two DictaLM runs overlap (rows 15–30 and 15–35), so those summaries count twice.

F. Score distributions

PLACEHOLDER DATA

Placement: Appendix (or Analysis if space allows)

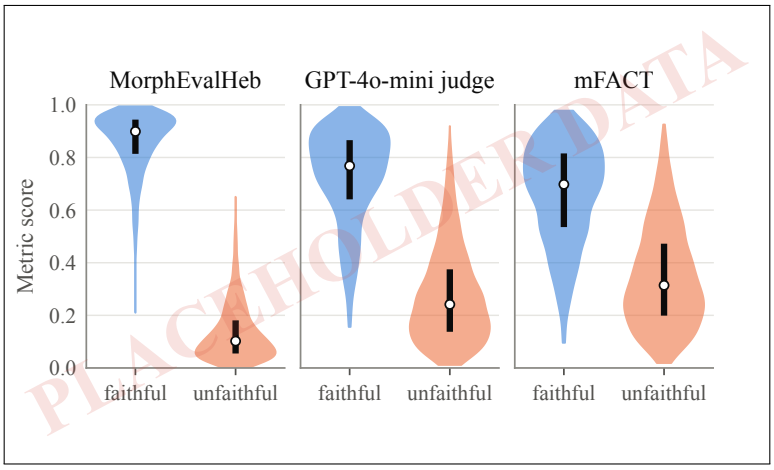


Draft caption. Distribution of metric scores for faithful and unfaithful test summaries. Bars show the interquartile range; white dots, the median. Less overlap means better separation, which is what AUC measures.
Needs: the same per-summary scores as D.

G. Robustness to meaning-preserving rewrites

PLACEHOLDER DATA

Placement: Analysis (single column). Answers the "Stress Testing" critique (ACL 2026)

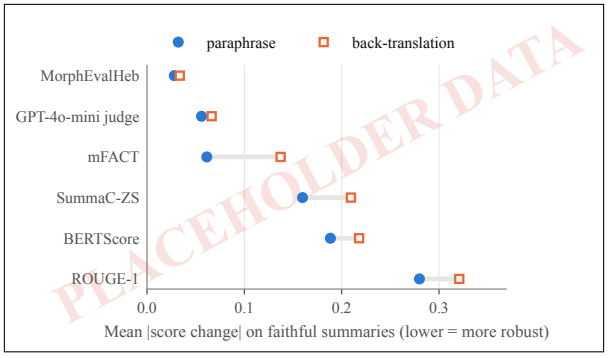

Draft caption. Mean absolute score change when a faithful summary is paraphrased or back-translated. A faithful rewrite should not change the score, so lower is better.
Needs: each metric's score on the 215 paraphrased and 215 back-translated positives and on their original summaries (original_hypothesis). The script does not compute this yet.

H. Multi-label confusions

PLACEHOLDER DATA

Placement: Appendix (single column)



Draft caption. For each true error family (rows), the percentage of its instances in which the multi-label detector also predicts another family (columns) that is not present.
Needs: multi-label detector predictions on the test set. The script does not compute this yet.