

Exemple rulare proiecte

1. Varianta sequentiala

```
C:\Users\Mircea\source\repos  X + v
110
I 11100000
S 111000010
A 111000011
x 1110001000
q 11100010010
| 111000100110
V 1110001001110
~ 1110001001111000
$ 1110001001111001
% 1110001001111010000
+ 1110001001111010001
° 1110001001111010010
% 1110001001111010011
# 111000100111101010
J 111000100111101011
Q 1110001001111011
8 11100010011111
! 1110001010
R 1110001011
' 11100011
, 1110010
b 1110011
r 11101
h 11110
u 111110


111111
Timp executie: 62674 ms
Press any key to continue . . . |
```

2. Varianta MPI

```
Microsoft Visual Studio Debu X + v
File name: test1
Timp executie: 1547.33 ms

C:\Users\Mircea\source\repos\APD_proiect_paralel\x64\Debug\APD_proiect_paralel.exe (process 21648) exited with code 0 (0x0).
To automatically close the console when debugging stops, enable Tools->Options->Debugging->Automatically close the console when debugging stops.
Press any key to close this window . . . |
```

3. Varianta CUDA

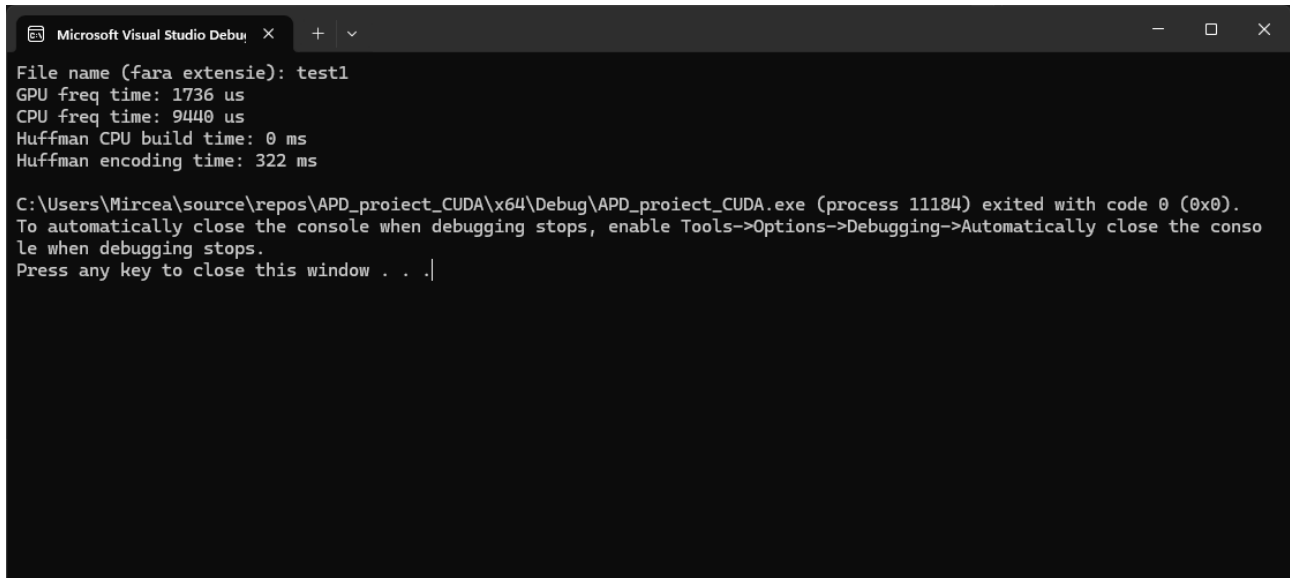

```
Microsoft Visual Studio Debug Console
File name (fara extensie): test1
GPU freq time: 1736 us
CPU freq time: 9440 us
Huffman CPU build time: 0 ms
Huffman encoding time: 322 ms

C:\Users\Mircea\source\repos\APD_proiect_CUDA\x64\Debug\APD_proiect_CUDA.exe (process 11184) exited with code 0 (0x0).
To automatically close the console when debugging stops, enable Tools->Options->Debugging->Automatically close the console when debugging stops.
Press any key to close this window . . .|
```