

Learn C++

Programming Language

**Unique Tech Computer and
Science Academy**

Created by:
Muhammad Ejaz
Mcs (Computer Science)
Network Administrator
+92-334-6504246

Created by:
Awais ul Hassan
BScs (Computer Science)
Android Developer
+92-306-6395565

Table Content

Sr#	Topic	Page#
1	C++ Introduction	4
2	Overview	6
3	Environments Setup	8
4	Basic Syntax	9
5	Comments	14
6	Data Types	15
7	Variables Types	18
8	Variable Scope	22
9	Constant / Literals	24
10	Modifier Types	29
11	Storage Classes	30
12	Loop Types	33
13	Decision Making	36
14	Function	37
15	Numbers	42
16	Arrays	46
17	String	49
18	Pointers	53
19	Reference	56
20	Date and Time	57
21	Basic Input/Output	61
22	Data Structure	64



23	Class and Object	70
24	Inheritance	73
25	Overloading (Operator/Function)	77
26	Polymorphism	82
27	Data Abstraction	85
28	Data Encapsulation	88
29	Interface	90
30	Interview Questions Answers	93



1. C++ Introduction

C++ is a middle-level programming language developed by Bjarne Stroustrup starting in 1979 at Bell Labs. **C++** runs on a variety of platforms, such as Windows, Mac OS, and the various versions of UNIX. This **C++** tutorial adopts a simple and practical approach to describe the concepts of **C++** for beginners to advanced software engineers.

Why to Learn C++

C++ is a MUST for students and working professionals to become a great Software Engineer. I will list down some of the key advantages of learning C++:

- C++ is very close to hardware, so you get a chance to work at a low level which gives you lot of control in terms of memory management, better performance and finally a robust software development.
- **C++ programming** gives you a clear understanding about Object Oriented Programming. You will understand low level implementation of polymorphism when you will implement virtual tables and virtual table pointers, or dynamic type identification.
- C++ is one of every green programming language and loved by millions of software developers. If you are a great C++ programmer then you will never sit without work and more importantly you will get highly paid for your work.
- C++ is the most widely used programming languages in application and system programming. So, you can choose your area of interest of software development.
- C++ really teaches you the difference between compiler, linker and loader, different data types, storage classes, variable types their scopes etc.

There are 1000s of good reasons to learn C++ Programming. But one thing for sure, to learn any programming language, not only C++, you just need to code, and code and finally code until you become expert.

Hello World using C++

Just to give you a little excitement about **C++ programming**, I'm going to give you a small conventional C++ Hello World program, you can try it using Demo link

C++ is a super set of C programming with additional implementation of object-oriented concepts.




```
#include <iostream>
using namespace std;

// main() is where program execution begins.
int main() {
    cout << "Hello World"; // prints Hello World
    return 0;
}
```

There are many C++ compilers available which you can use to compile and run above mentioned program:

- Apple C++. Xcode
- Bloodshed Dev-C++
- Clang C++
- Cygwin (GNU C++)
- Mentor Graphics
- MINGW - "Minimalist GNU for Windows"
- GNU CC source
- IBM C++
- Intel C++
- Microsoft Visual C++
- Oracle C++
- HP C++

It is really impossible to give a complete list of all the available compilers. The C++ world is just too large and too much new is happening.

Applications of C++ Programming

As mentioned before, C++ is one of the most widely used programming languages. It has its presence in almost every area of software development. I'm going to list few of them here:

- **Application Software Development** - C++ programming has been used in developing almost all the major Operating Systems like Windows, Mac OSX and Linux. Apart from the operating systems, the core part of many browsers like Mozilla Firefox and Chrome have been written using C++. C++ also has been used in developing the most popular database system called MySQL.
- **Programming Languages Development** - C++ has been used extensively in developing new programming languages like C#, Java, JavaScript, Perl, UNIX's C Shell, PHP and Python, and Verilog etc.
- **Computation Programming** - C++ is the best friends of scientists because of fast speed and computational efficiencies.
- **Games Development** - C++ is extremely fast which allows programmers to do procedural programming for CPU intensive functions and provides greater control over hardware, because of which it has been widely used in development of



gaming engines.

- **Embedded System** - C++ is being heavily used in developing Medical and Engineering Applications like software for MRI machines, high-end CAD/CAM systems etc.

This list goes on, there are various areas where software developers are happily using C++ to provide great software's. I highly recommend you to learn C++ and contribute great softwares to the community.

Audience

This C++ tutorial has been prepared for the beginners to help them understand the basic to advanced concepts related to C++.

Prerequisites

Before you start practicing with various types of examples given in this C++ tutorial, we are making an assumption that you are already aware of the basics of computer program and computer programming language.

2. Overview

C++ is a statically typed, compiled, general-purpose, case-sensitive, free-form programming language that supports procedural, object-oriented, and generic programming.

C++ is regarded as a **middle-level** language, as it comprises a combination of both high-level and low-level language features.

C++ was developed by Bjarne Stroustrup starting in 1979 at Bell Labs in Murray Hill, New Jersey, as an enhancement to the C language and originally named C with Classes but later it was renamed C++ in 1983.

C++ is a superset of C, and that virtually any legal C program is a legal C++ program.

Note – A programming language is said to use static typing when type checking is performed during compile-time as opposed to run-time.

Object-Oriented Programming



C++ fully supports object-oriented programming, including the four pillars of object-oriented development –

- Encapsulation
- Data hiding
- Inheritance
- Polymorphism

Standard Libraries

Standard C++ consists of three important parts –

- The core language giving all the building blocks including variables, data types and literals, etc.
- The C++ Standard Library giving a rich set of functions manipulating files, strings, etc.
- The Standard Template Library (STL) giving a rich set of methods manipulating data structures, etc.

The ANSI Standard

The ANSI standard is an attempt to ensure that C++ is portable; that code you write for Microsoft's compiler will compile without errors, using a compiler on a Mac, UNIX, a Windows box, or an Alpha.

The ANSI standard has been stable for a while, and all the major C++ compiler manufacturers support the ANSI standard.

Learning C++

The most important thing while learning C++ is to focus on concepts.

The purpose of learning a programming language is to become a better programmer; that is, to become more effective at designing and implementing new systems and at maintaining old ones.

C++ supports a variety of programming styles. You can write in the style of Fortran, C, Smalltalk, etc., in any language. Each style can achieve its aims effectively while maintaining runtime and space efficiency.

Use of C++

C++ is used by hundreds of thousands of programmers in essentially every application domain.

C++ is being highly used to write device drivers and other software that rely on direct manipulation of hardware under Realtime constraints.



C++ is widely used for teaching and research because it is clean enough for successful teaching of basic concepts.

Anyone who has used either an Apple Macintosh or a PC running Windows has indirectly used C++ because the primary user interfaces of these systems are written in C++.

3. Environment Setup

Local Environment Setup

If you are still willing to set up your environment for C++, you need to have the following two softwares on your computer.

Text Editor

This will be used to type your program. Examples of few editors include Windows Notepad, OS Edit command, Brief, Epsilon, EMACS, and vim or vi.

Name and version of text editor can vary on different operating systems. For example, Notepad will be used on Windows and vim or vi can be used on windows as well as Linux, or UNIX.

The files you create with your editor are called source files and for C++ they typically are named with the extension .cpp, .cp, or .c.

A text editor should be in place to start your C++ programming.

C++ Compiler

This is an actual C++ compiler, which will be used to compile your source code into final executable program.

Most C++ compilers don't care what extension you give to your source code, but if you don't specify otherwise, many will use .cpp by default.

Most frequently used and free available compiler is GNU C/C++ compiler, otherwise you can have compilers either from HP or Solaris if you have the respective Operating Systems.

Installing GNU C/C++ Compiler

UNIX/Linux Installation

If you are using **Linux** or **UNIX** then check whether GCC is installed on your system by entering



the following command from the command line –

```
$ g++ -v
```

If you have installed GCC, then it should print a message such as the following –

```
Using built-in specs.  
Target: i386-redhat-linux  
Configured with: ../configure --prefix=/usr .....  
Thread model: posix  
gcc version 4.1.2 20080704 (Red Hat 4.1.2-46)
```

If GCC is not installed, then you will have to install it yourself using the detailed instructions available at <https://gcc.gnu.org/install/>

Mac OS X Installation

If you use Mac OS X, the easiest way to obtain GCC is to download the Xcode development environment from Apple's website and follow the simple installation instructions.

Xcode is currently available at developer.apple.com/technologies/tools/.

Windows Installation

To install GCC at Windows you need to install MinGW. To install MinGW, go to the MinGW homepage, www.mingw.org, and follow the link to the MinGW download page. Download the latest version of the MinGW installation program which should be named MinGW-<version>.exe.

While installing MinGW, at a minimum, you must install gcc-core, gcc-g++, binutils, and the MinGW runtime, but you may wish to install more.

Add the bin subdirectory of your MinGW installation to your **PATH** environment variable so that you can specify these tools on the command line by their simple names.

When the installation is complete, you will be able to run gcc, g++, ar, ranlib, dlltool, and several other GNU tools from the Windows command line.

4. Basic Syntax

When we consider a C++ program, it can be defined as a collection of objects that communicate via invoking each other's methods. Let us now briefly look into what a class, object, methods, and instant variables mean.

- **Object** – Objects have states and behaviors. Example: A dog has states - color,



name, breed as well as behaviors - wagging, barking, eating. An object is an instance of a class.

- **Class** – A class can be defined as a template/blueprint that describes the behaviors/states that object of its type support.
- **Methods** – A method is basically a behavior. A class can contain many methods. It is in methods where the logics are written, data is manipulated and all the actions are executed.
- **Instance Variables** – Each object has its unique set of instance variables. An object's state is created by the values assigned to these instance variables.

C++ Program Structure

Let us look at a simple code that would print the words *Hello World*.

```
#include <iostream>
using namespace std;

// main() is where program execution begins.
int main() {
    cout << "Hello World"; // prints Hello World
    return 0;
}
```

Let us look at the various parts of the above program –

- The C++ language defines several headers, which contain information that is either necessary or useful to your program. For this program, the header **<iostream>** is needed.
- The line **using namespace std;** tells the compiler to use the std namespace. Namespaces are a relatively recent addition to C++.
- The next line **'// main() is where program execution begins.'** is a single-line comment available in C++. Single-line comments begin with **//** and stop at the end of the line.
- The line **int main()** is the main function where program execution begins.
- The next line **cout << "Hello World";** causes the message "Hello World" to be displayed on the screen.
- The next line **return 0;** terminates main() function and causes it to return the value 0 to the calling process.

Compile and Execute C++ Program

Let's look at how to save the file, compile and run the program. Please follow the steps given below –

- Open a text editor and add the code as above.
- Save the file as: hello.cpp



- Open a command prompt and go to the directory where you saved the file.
- Type 'g++ hello.cpp' and press enter to compile your code. If there are no errors in your code the command prompt will take you to the next line and would generate a.out executable file.
- Now, type 'a.out' to run your program.
- You will be able to see ' Hello World ' printed on the window.

```
$ g++ hello.cpp
$ ./a.out
Hello World
```

Make sure that g++ is in your path and that you are running it in the directory containing file hello.cpp.

You can compile C/C++ programs using makefile. For more details, you can check our '[Makefile Tutorial](#)'.

Semicolons and Blocks in C++

In C++, the semicolon is a statement terminator. That is, each individual statement must be ended with a semicolon. It indicates the end of one logical entity.

For example, following are three different statements –

```
x = y;
y = y + 1;
add(x, y);
```

A block is a set of logically connected statements that are surrounded by opening and closing braces. For example –

```
{
cout << "Hello World"; // prints Hello World
return 0;
}
```

C++ does not recognize the end of the line as a terminator. For this reason, it does not matter where you put a statement in a line. For example –

```
x = y;
y = y + 1;
add(x, y);
```

is the same as

```
x = y; y = y + 1; add(x, y);
```

C++ Identifiers

A C++ identifier is a name used to identify a variable, function, class, module, or any other user-defined item. An identifier starts with a letter A to Z or a to z or an underscore (_) followed by



zero or more letters, underscores, and digits (0 to 9).

C++ does not allow punctuation characters such as @, \$, and % within identifiers. C++ is a case-sensitive programming language. Thus, **Manpower** and **manpower** are two different identifiers in C++.

Here are some examples of acceptable identifiers –

```
mohd zara abc move_name a_123
myname50 _temp j a23b9 retVal
```

C++ Keywords

The following list shows the reserved words in C++. These reserved words may not be used as constant or variable or any other identifier names.

asm	else	new	this
auto	enum	operator	throw
bool	explicit	private	true
break	export	protected	try
case	extern	public	typedef
catch	false	register	typeid
char	float	reinterpret_cast	typename
class	for	return	union
const	friend	short	unsigned
const_cast	goto	signed	using
continue	if	sizeof	virtual
default	inline	static	void
delete	int	static_cast	volatile
do	long	struct	wchar_t
double	mutable	switch	while
dynamic_cast	namespace	template	



Trigraphs

A few characters have an alternative representation, called a trigraph sequence. A trigraph is a three-character sequence that represents a single character and the sequence always starts with two question marks.

Trigraphs are expanded anywhere they appear, including within string literals and character literals, in comments, and in preprocessor directives.

Following are most frequently used trigraph sequences –

Trigraph	Replacement
??=	#
??/	\
??'	^
??{	[
??}]
??!	
??<	{
??>	}
??~	~

All the compilers do not support trigraphs and they are not advised to be used because of their confusing nature.

Whitespace in C++

A line containing only whitespace, possibly with a comment, is known as a blank line, and C++ compiler totally ignores it.

Whitespace is the term used in C++ to describe blanks, tabs, newline characters and comments. Whitespace separates one part of a statement from another and enables the compiler to identify where one element in a statement, such as int, ends and the next element begins.

Statement 1

```
int age;
```

In the above statement there must be at least one whitespace character (usually a space)



between int and age for the compiler to be able to distinguish them.

Statement 2

```
fruit = apples + oranges; // Get the total fruit
```

In the above statement 2, no whitespace characters are necessary between fruit and =, or between = and apples, although you are free to include some if you wish for readability purpose.

5. Comments

Program comments are explanatory statements that you can include in the C++ code. These comments help anyone reading the source code. All programming languages allow for some form of comments.

C++ supports single-line and multi-line comments. All characters available inside any comment are ignored by C++ compiler.

C++ comments start with `/*` and end with `*/`. For example –

```
/* This is a comment */

/* C++ comments can also
 * span multiple lines
 */
```

A comment can also start with `//`, extending to the end of the line. For example –

```
#include <iostream>
using namespace std;

main() {
    cout << "Hello World"; // prints Hello World

    return 0;
}
```

When the above code is compiled, it will ignore `// prints Hello World` and final executable will produce the following result –

```
Hello World
```

Within a `/*` and `*/` comment, `//` characters have no special meaning. Within a `//` comment, `/*` and `*/` have no special meaning. Thus, you can "nest" one kind of comment within the other kind. For example –



```

/* Comment out printing of Hello World:

cout << "Hello World"; // prints Hello World

*/

```

6. Data Types

While writing program in any language, you need to use various variables to store various information. Variables are nothing but reserved memory locations to store values. This means that when you create a variable you reserve some space in memory.

You may like to store information of various data types like character, wide character, integer, floating point, double floating point, boolean etc. Based on the data type of a variable, the operating system allocates memory and decides what can be stored in the reserved memory.

Primitive Built-in Types

C++ offers the programmer a rich assortment of built-in as well as user defined data types. Following table lists down seven basic C++ data types –

Type	Keyword
Boolean	bool
Character	char
Integer	int
Floating point	float
Double floating point	double
Valueless	void
Wide character	wchar_t

Several of the basic types can be modified using one or more of these type modifiers –

- signed



- unsigned
- short
- long

The following table shows the variable type, how much memory it takes to store the value in memory, and what is maximum and minimum value which can be stored in such type of variables.

Type	Typical Bit Width	Typical Range
char	1byte	-127 to 127 or 0 to 255
unsigned char	1byte	0 to 255
signed char	1byte	-127 to 127
int	4bytes	-2147483648 to 2147483647
unsigned int	4bytes	0 to 4294967295
signed int	4bytes	-2147483648 to 2147483647
short int	2bytes	-32768 to 32767
unsigned short int	2bytes	0 to 65,535
signed short int	2bytes	-32768 to 32767
long int	8bytes	-2,147,483,648 to 2,147,483,647
signed long int	8bytes	same as long int
unsigned long int	8bytes	0 to 4,294,967,295
long long int	8bytes	$-(2^{63})$ to $(2^{63})-1$
unsigned long long int	8bytes	0 to 18,446,744,073,709,551,615
float	4bytes	
double	8bytes	
long double	12bytes	



wchar_t	2 or 4 bytes	1 wide character
---------	--------------	------------------

The size of variables might be different from those shown in the above table, depending on the compiler and the computer you are using.

Following is the example, which will produce correct size of various data types on your computer.

```
#include <iostream>
using namespace std;

int main() {
    cout << "Size of char : " << sizeof(char) << endl;
    cout << "Size of int : " << sizeof(int) << endl;
    cout << "Size of short int : " << sizeof(short int) << endl;
    cout << "Size of long int : " << sizeof(long int) << endl;
    cout << "Size of float : " << sizeof(float) << endl;
    cout << "Size of double : " << sizeof(double) << endl;
    cout << "Size of wchar_t : " << sizeof(wchar_t) << endl;

    return 0;
}
```

This example uses **endl**, which inserts a new-line character after every line and << operator is being used to pass multiple values out to the screen. We are also using **sizeof()** operator to get size of various data types.

When the above code is compiled and executed, it produces the following result which can vary from machine to machine –

```
Size of char : 1
Size of int : 4
Size of short int : 2
Size of long int : 4
Size of float : 4
Size of double : 8
Size of wchar_t : 4
```

typedef Declarations

You can create a new name for an existing type using **typedef**. Following is the simple syntax to define a new type using typedef –

```
typedef type newname;
```

For example, the following tells the compiler that feet is another name for int –

```
typedef int feet;
```



Now, the following declaration is perfectly legal and creates an integer variable called distance –

```
feet distance;
```

Enumerated Types

An enumerated type declares an optional type name and a set of zero or more identifiers that can be used as values of the type. Each enumerator is a constant whose type is the enumeration.

Creating an enumeration requires the use of the keyword **enum**. The general form of an enumeration type is –

```
enum enum-name { list of names } var-list;
```

Here, the enum-name is the enumeration's type name. The list of names is comma separated.

For example, the following code defines an enumeration of colors called colors and the variable c of type color. Finally, c is assigned the value "blue".

```
enum color { red, green, blue } c;  
c = blue;
```

By default, the value of the first name is 0, the second name has the value 1, and the third has the value 2, and so on. But you can give a name, a specific value by adding an initializer. For example, in the following enumeration, **green** will have the value 5.

```
enum color { red, green = 5, blue };
```

Here, **blue** will have a value of 6 because each name will be one greater than the one that precedes it.

7. Variable Types

A variable provides us with named storage that our programs can manipulate. Each variable in C++ has a specific type, which determines the size and layout of the variable's memory; the range of values that can be stored within that memory; and the set of operations that can be applied to the variable.

The name of a variable can be composed of letters, digits, and the underscore character. It must begin with either a letter or an underscore. Upper and lowercase letters are distinct because C++ is case-sensitive –

There are following basic types of variable in C++ as explained in last chapter –



Sr.No	Type & Description
1	bool Stores either value true or false.
2	char Typically a single octet (one byte). This is an integer type.
3	int The most natural size of integer for the machine.
4	float A single-precision floating point value.
5	double A double-precision floating point value.
6	void Represents the absence of type.
7	wchar_t A wide character type.

C++ also allows to define various other types of variables, which we will cover in subsequent chapters like **Enumeration, Pointer, Array, Reference, Data structures, and Classes**.

Following section will cover how to define, declare and use various types of variables.

Variable Definition in C++

A variable definition tells the compiler where and how much storage to create for the variable. A variable definition specifies a data type, and contains a list of one or more variables of that type as follows –

```
type variable_list;
```

Here, **type** must be a valid C++ data type including char, w_char, int, float, double, bool or any



user-defined object, etc., and **variable_list** may consist of one or more identifier names separated by commas. Some valid declarations are shown here –

```
int i, j, k;
char c, ch;
float f, salary;
double d;
```

The line **int i, j, k;** both declares and defines the variables i, j and k; which instructs the compiler to create variables named i, j and k of type int.

Variables can be initialized (assigned an initial value) in their declaration. The initializer consists of an equal sign followed by a constant expression as follows –

```
type variable_name = value;
```

Some examples are –

```
extern int d = 3, f = 5; // declaration of d and f.
int d = 3, f = 5; // definition and initializing d and f.
byte z = 22; // definition and initializes z.
char x = 'x'; // the variable x has the value 'x'.
```

For definition without an initializer: variables with static storage duration are implicitly initialized with NULL (all bytes have the value 0); the initial value of all other variables is undefined.

Variable Declaration in C++

A variable declaration provides assurance to the compiler that there is one variable existing with the given type and name so that compiler proceed for further compilation without needing complete detail about the variable. A variable declaration has its meaning at the time of compilation only, compiler needs actual variable definition at the time of linking of the program.

A variable declaration is useful when you are using multiple files and you define your variable in one of the files which will be available at the time of linking of the program. You will use **extern** keyword to declare a variable at any place. Though you can declare a variable multiple times in your C++ program, but it can be defined only once in a file, a function or a block of code.

Example

Try the following example where a variable has been declared at the top, but it has been defined inside the main function –

```
#include <iostream>
using namespace std;

// Variable declaration:
extern int a, b;
extern int c;
```




```
extern float f;

int main () {
    // Variable definition:
    int a, b;
    int c;
    float f;

    // actual initialization
    a = 10;
    b = 20;
    c = a + b;

    cout << c << endl ;

    f = 70.0/3.0;
    cout << f << endl ;

    return 0;
}
```

When the above code is compiled and executed, it produces the following result –

```
30
23.3333
```

Same concept applies on function declaration where you provide a function name at the time of its declaration and its actual definition can be given anywhere else. For example –

```
// function declaration
int func();
int main() {
    // function call
    int i = func();
}

// function definition
int func() {
    return 0;
}
```

Lvalues and Rvalues

There are two kinds of expressions in C++ –

- **lvalue** – Expressions that refer to a memory location is called "lvalue" expression. An lvalue may appear as either the left-hand or right-hand side of an assignment.
- **rvalue** – The term rvalue refers to a data value that is stored at some address in



memory. An rvalue is an expression that cannot have a value assigned to it which means an rvalue may appear on the right- but not left-hand side of an assignment.

Variables are lvalues and so may appear on the left-hand side of an assignment. Numeric literals are rvalues and so may not be assigned and cannot appear on the left-hand side. Following is a valid statement –

```
int g = 20;
```

But the following is not a valid statement and would generate compile-time error –

```
10 = 20;
```

8. Variable Scope

A scope is a region of the program and broadly speaking there are three places, where variables can be declared –

- Inside a function or a block which is called local variables,
- In the definition of function parameters which is called formal parameters.
- Outside of all functions which is called global variables.

We will learn what is a function and its parameter in subsequent chapters. Here let us explain what are local and global variables.

Local Variables

Variables that are declared inside a function or block are local variables. They can be used only by statements that are inside that function or block of code. Local variables are not known to functions outside their own. Following is the example using local variables –

```
#include <iostream>
using namespace std;

int main () {
    // Local variable declaration:
    int a, b;
    int c;

    // actual initialization
    a = 10;
    b = 20;
```



```

c = a + b;

cout << c;

return 0;
}

```

Global Variables

Global variables are defined outside of all the functions, usually on top of the program. The global variables will hold their value throughout the life-time of your program.

A global variable can be accessed by any function. That is, a global variable is available for use throughout your entire program after its declaration. Following is the example using global and local variables –

```

#include <iostream>
using namespace std;

// Global variable declaration:
int g;

int main () {
    // Local variable declaration:
    int a, b;

    // actual initialization
    a = 10;
    b = 20;
    g = a + b;

    cout << g;

    return 0;
}

```

A program can have same name for local and global variables but value of local variable inside a function will take preference. For example –

```

#include <iostream>
using namespace std;

// Global variable declaration:
int g = 20;

int main () {
    // Local variable declaration:

```



```
int g = 10;

cout << g;

return 0;
}
```

When the above code is compiled and executed, it produces the following result –

```
10
```

Initializing Local and Global Variables

When a local variable is defined, it is not initialized by the system, you must initialize it yourself. Global variables are initialized automatically by the system when you define them as follows –

Data Type	Initializer
int	0
char	'\0'
float	0
double	0
pointer	NULL

It is a good programming practice to initialize variables properly, otherwise sometimes program would produce unexpected result.

9. Constants / Literals

Constants refer to fixed values that the program may not alter and they are called **literals**.

Constants can be of any of the basic data types and can be divided into Integer Numerals, Floating-Point Numerals, Characters, Strings and Boolean Values.

Again, constants are treated just like regular variables except that their values cannot be modified after their definition.



Integer Literals

An integer literal can be a decimal, octal, or hexadecimal constant. A prefix specifies the base or radix: 0x or 0X for hexadecimal, 0 for octal, and nothing for decimal.

An integer literal can also have a suffix that is a combination of U and L, for unsigned and long, respectively. The suffix can be uppercase or lowercase and can be in any order.

Here are some examples of integer literals –

```
212 // Legal
215u // Legal
0xFeeL // Legal
078 // Illegal: 8 is not an octal digit
032UU // Illegal: cannot repeat a suffix
```

Following are other examples of various types of Integer literals –

```
85 // decimal
0213 // octal
0x4b // hexadecimal
30 // int
30u // unsigned int
30l // long
30ul // unsigned long
```

Floating-point Literals

A floating-point literal has an integer part, a decimal point, a fractional part, and an exponent part. You can represent floating point literals either in decimal form or exponential form.

While representing using decimal form, you must include the decimal point, the exponent, or both and while representing using exponential form, you must include the integer part, the fractional part, or both. The signed exponent is introduced by e or E.

Here are some examples of floating-point literals –

```
3.14159 // Legal
314159E-5L // Legal
510E // Illegal: incomplete exponent
210f // Illegal: no decimal or exponent
.e55 // Illegal: missing integer or fraction
```

Boolean Literals

There are two Boolean literals and they are part of standard C++ keywords –

- A value of **true** representing true.
- A value of **false** representing false.



You should not consider the value of true equal to 1 and value of false equal to 0.

Character Literals

Character literals are enclosed in single quotes. If the literal begins with L (uppercase only), it is a wide character literal (e.g., L'x') and should be stored in **wchar_t** type of variable. Otherwise, it is a narrow character literal (e.g., 'x') and can be stored in a simple variable of **char** type.

A character literal can be a plain character (e.g., 'x'), an escape sequence (e.g., '\t'), or a universal character (e.g., '\u02C0').

There are certain characters in C++ when they are preceded by a backslash, they will have special meaning and they are used to represent like newline (\n) or tab (\t). Here, you have a list of some of such escape sequence codes –

Escape sequence	Meaning
\\	\ character
\'	' character
\"	" character
\?	? character
\a	Alert or bell
\b	Backspace
\f	Form feed
\n	Newline
\r	Carriage return
\t	Horizontal tab
\v	Vertical tab
\too	Octal number of one to three digits
\xhh ...	Hexadecimal number of one or more digits

Following is the example to show a few escapes sequence characters –

```
#include <iostream>
using namespace std;
```



```
int main() {
    cout << "Hello\world\n\n";
    return 0;
}
```

When the above code is compiled and executed, it produces the following result –

```
Hello World
```

String Literals

String literals are enclosed in double quotes. A string contains characters that are similar to character literals: plain characters, escape sequences, and universal characters.

You can break a long line into multiple lines using string literals and separate them using whitespaces.

Here are some examples of string literals. All the three forms are identical strings.

```
"hello, dear"
```

```
"hello, \
```

```
dear"
```

```
"hello, " "d" "ear"
```

Defining Constants

There are two simple ways in C++ to define constants –

- Using **#define** preprocessor.
- Using **const** keyword.

The #define Preprocessor

Following is the form to use #define preprocessor to define a constant –

```
#define identifier value
```

Following example explains it in detail –

```
#include <iostream>
using namespace std;

#define LENGTH 10
#define WIDTH 5
#define NEWLINE '\n'
```



```
int main() {  
    int area;  
  
    area = LENGTH * WIDTH;  
    cout << area;  
    cout << NEWLINE;  
    return 0;  
}
```

When the above code is compiled and executed, it produces the following result –

```
50
```

The const Keyword

You can use **const** prefix to declare constants with a specific type as follows –

```
const type variable = value;
```

Following example explains it in detail –

```
#include <iostream>  
using namespace std;  
  
int main() {  
    const int LENGTH = 10;  
    const int WIDTH = 5;  
    const char NEWLINE = '\n';  
    int area;  
  
    area = LENGTH * WIDTH;  
    cout << area;  
    cout << NEWLINE;  
    return 0;  
}
```

When the above code is compiled and executed, it produces the following result –

```
50
```

Note that it is a good programming practice to define constants in CAPITALS.



10. Modifier Types

C++ allows the **char**, **int**, and **double** data types to have modifiers preceding them. A modifier is used to alter the meaning of the base type so that it more precisely fits the needs of various situations.

The data type modifiers are listed here –

- signed
- unsigned
- long
- short

The modifiers **signed**, **unsigned**, **long**, and **short** can be applied to integer base types. In addition, **signed** and **unsigned** can be applied to **char**, and **long** can be applied to **double**.

The modifiers **signed** and **unsigned** can also be used as prefix to **long** or **short** modifiers. For example, **unsigned long int**.

C++ allows a shorthand notation for declaring **unsigned**, **short**, or **long** integers. You can simply use the word **unsigned**, **short**, or **long**, without **int**. It automatically implies **int**. For example, the following two statements both declare unsigned integer variables.

```
unsigned x;
unsigned int y;
```

To understand the difference between the way signed and unsigned integer modifiers are interpreted by C++, you should run the following short program –

```
#include <iostream>
using namespace std;

/* This program shows the difference between
 * signed and unsigned integers.
 */
int main() {
    short int i;        // a signed short integer
    short unsigned int j; // an unsigned short integer

    j = 50000;

    i = j;
    cout << i << " " << j;
```



```
return 0;
}
```

When this program is run, following is the output –

```
-15536 50000
```

The above result is because the bit pattern that represents 50,000 as a short unsigned integer is interpreted as -15,536 by a short.

Type Qualifiers in C++

The type qualifiers provide additional information about the variables they precede.

Sr.No	Qualifier & Meaning
1	const Objects of type const cannot be changed by your program during execution.
2	volatile The modifier volatile tells the compiler that a variable's value may be changed in ways not explicitly specified by the program.
3	restrict A pointer qualified by restrict is initially the only means by which the object it points to can be accessed. Only C99 adds a new type qualifier called restrict.

11. Storage Classes

A storage class defines the scope (visibility) and life-time of variables and/or functions within a C++ Program. These specifiers precede the type that they modify. There are following storage classes, which can be used in a C++ Program



- auto
- register
- static
- extern
- mutable

The auto Storage Class

The **auto** storage class is the default storage class for all local variables.

```
{  
int mount;  
auto int month;  
}
```

The example above defines two variables with the same storage class, auto can only be used within functions, i.e., local variables.

The register Storage Class

The **register** storage class is used to define local variables that should be stored in a register instead of RAM. This means that the variable has a maximum size equal to the register size (usually one word) and can't have the unary '&' operator applied to it (as it does not have a memory location).

```
{  
register int miles;  
}
```

The register should only be used for variables that require quick access such as counters. It should also be noted that defining 'register' does not mean that the variable will be stored in a register. It means that it MIGHT be stored in a register depending on hardware and implementation restrictions.

The static Storage Class

The **static** storage class instructs the compiler to keep a local variable in existence during the life-time of the program instead of creating and destroying it each time it comes into and goes out of scope. Therefore, making local variables static allows them to maintain their values between function calls.

The static modifier may also be applied to global variables. When this is done, it causes that variable's scope to be restricted to the file in which it is declared.

In C++, when static is used on a class data member, it causes only one copy of that member to be

shared by all objects of its class.

```
#include <iostream>

// Function declaration
void func(void);

static int count = 10; /* Global variable */

main() {
    while(count-->0) {
        func();
    }

    return 0;
}

// Function definition
void func( void ) {
    static int i = 5; // local static variable
    i++;
    std::cout << "i is " << i ;
    std::cout << " and count is " << count << std::endl;
}
```

When the above code is compiled and executed, it produces the following result –

```
i is 6 and count is 9
i is 7 and count is 8
i is 8 and count is 7
i is 9 and count is 6
i is 10 and count is 5
i is 11 and count is 4
i is 12 and count is 3
i is 13 and count is 2
i is 14 and count is 1
i is 15 and count is 0
```

The extern Storage Class

The **extern** storage class is used to give a reference of a global variable that is visible to ALL the program files. When you use 'extern' the variable cannot be initialized as all it does is point the variable name at a storage location that has been previously defined.

When you have multiple files and you define a global variable or function, which will be used in other files also, then *extern* will be used in another file to give reference of defined variable or function. Just for understanding *extern* is used to declare a global variable or function in another



file.

The extern modifier is most commonly used when there are two or more files sharing the same global variables or functions as explained below.

First File: main.cpp

```
#include <iostream>
int count ;
extern void write_extern();

main() {
    count = 5;
    write_extern();
}
```

Second File: support.cpp

```
#include <iostream>

extern int count;

void write_extern(void) {
    std::cout << "Count is " << count << std::endl;
}
```

Here, *extern* keyword is being used to declare count in another file. Now compile these two files as follows –

```
$g++ main.cpp support.cpp -o write
```

This will produce **write** executable program, try to execute **write** and check the result as follows –

```
$/write
5
```

The mutable Storage Class

The **mutable** specifier applies only to class objects, which are discussed later in this tutorial. It allows a member of an object to override const member function. That is, a mutable member can be modified by a const member function.


12. C++ Loop Types



There may be a situation, when you need to execute a block of code several number of times. In general, statements are executed sequentially: The first statement in a function is executed first, followed by the second, and so on.

Programming languages provide various control structures that allow for more complicated execution paths.

A loop statement allows us to execute a statement or group of statements multiple times and following is the general from of a loop statement in most of the programming languages –

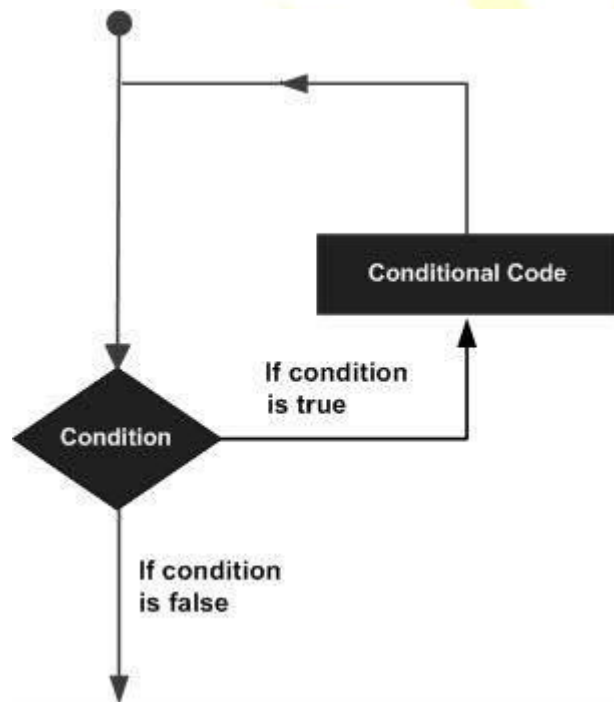

C++ programming language provides the following type of loops to handle looping requirements.

Sr.No	Loop Type & Description
1	<p>while loop</p> <p>Repeats a statement or group of statements while a given condition is true. It tests the condition before executing the loop body.</p>
2	<p>for loop</p> <p>Execute a sequence of statements multiple times and abbreviates the code that manages the loop variable.</p>



3	do...while loop Like a 'while' statement, except that it tests the condition at the end of the loop body.
4	nested loops You can use one or more loop inside any another 'while', 'for' or 'do.while' loop.

Loop Control Statements

Loop control statements change execution from its normal sequence. When execution leaves a scope, all automatic objects that were created in that scope are destroyed.

C++ supports the following control statements.

Sr.No	Control Statement & Description
1	break statement Terminates the loop or switch statement and transfers execution to the statement immediately following the loop or switch.
2	continue statement Causes the loop to skip the remainder of its body and immediately retest its condition prior to reiterating.
3	goto statement Transfers control to the labeled statement. Though it is not advised to use goto statement in your program.

The Infinite Loop

A loop becomes infinite loop if a condition never becomes false. The **for** loop is traditionally used for this purpose. Since none of the three expressions that form the 'for' loop are required, you can make an endless loop by leaving the conditional expression empty.

```
#include <iostream>
using namespace std;

int main () {
    for(;;) {
        printf("This loop will run forever.\n");
    }
}
```




```
}  
  
return 0;  
}
```

When the conditional expression is absent, it is assumed to be true. You may have an initialization and increment expression, but C++ programmers more commonly use the 'for (;;)' construct to signify an infinite loop.

13. C++ Decision Making

Decision making structures require that the programmer specify one or more conditions to be evaluated or tested by the program, along with a statement or statements to be executed if the condition is determined to be true, and optionally, other statements to be executed if the condition is determined to be false.

Following is the general form of a typical decision making structure found in most of the programming languages –

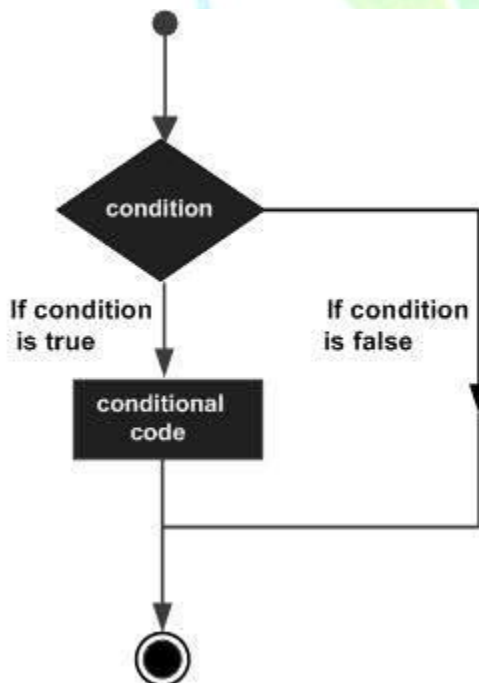

C++ programming language provides following types of decision making statements.



Sr.No	Statement & Description
1	<p>if statement</p> <p>An 'if' statement consists of a boolean expression followed by one or more statements.</p>
2	<p>if...else statement</p> <p>An 'if' statement can be followed by an optional 'else' statement, which executes when the boolean expression is false.</p>
3	<p>switch statement</p> <p>A 'switch' statement allows a variable to be tested for equality against a list of values.</p>
4	<p>nested if statements</p> <p>You can use one 'if' or 'else if' statement inside another 'if' or 'else if' statement(s).</p>
5	<p>nested switch statements</p> <p>You can use one 'switch' statement inside another 'switch' statement(s).</p>

The ? : Operator

We have covered conditional operator “? :” in previous chapter which can be used to replace **if...else** statements. It has the following general form –

```
Exp1 ? Exp2 : Exp3;
```

Exp1, Exp2, and Exp3 are expressions. Notice the use and placement of the colon.

The value of a '?' expression is determined like this: Exp1 is evaluated. If it is true, then Exp2 is evaluated and becomes the value of the entire '?' expression. If Exp1 is false, then Exp3 is evaluated and its value becomes the value of the expression.

14. C++ Functions



A function is a group of statements that together perform a task. Every C++ program has at least one function, which is **main()**, and all the most trivial programs can define additional functions.

You can divide up your code into separate functions. How you divide up your code among different functions is up to you, but logically the division usually is such that each function performs a specific task.

A function **declaration** tells the compiler about a function's name, return type, and parameters. A function **definition** provides the actual body of the function.

The C++ standard library provides numerous built-in functions that your program can call. For example, function **strcat()** to concatenate two strings, function **memcpy()** to copy one memory location to another location and many more functions.

A function is known with various names like a method or a sub-routine or a procedure etc.

Defining a Function

The general form of a C++ function definition is as follows –

```
return_type function_name( parameter list ) {
body of the function
}
```

A C++ function definition consists of a function header and a function body. Here are all the parts of a function –

- **Return Type** – A function may return a value. The **return_type** is the data type of the value the function returns. Some functions perform the desired operations without returning a value. In this case, the return_type is the keyword **void**.
- **Function Name** – This is the actual name of the function. The function name and the parameter list together constitute the function signature.
- **Parameters** – A parameter is like a placeholder. When a function is invoked, you pass a value to the parameter. This value is referred to as actual parameter or argument. The parameter list refers to the type, order, and number of the parameters of a function. Parameters are optional; that is, a function may contain no parameters.
- **Function Body** – The function body contains a collection of statements that define what the function does.

Example

Following is the source code for a function called **max()**. This function takes two parameters num1 and num2 and return the biggest of both –

```
// function returning the max between two numbers
```



```
int max(int num1, int num2) {
// local variable declaration
int result;

if (num1 > num2)
result = num1;
else
result = num2;

return result;
}
```

Function Declarations

A function **declaration** tells the compiler about a function name and how to call the function. The actual body of the function can be defined separately.

A function declaration has the following parts –

```
return_type function_name( parameter list );
```

For the above defined function max(), following is the function declaration –

```
int max(int num1, int num2);
```

Parameter names are not important in function declaration only their type is required, so following is also valid declaration –

```
int max(int, int);
```

Function declaration is required when you define a function in one source file and you call that function in another file. In such case, you should declare the function at the top of the file calling the function.

Calling a Function

While creating a C++ function, you give a definition of what the function has to do. To use a function, you will have to call or invoke that function.

When a program calls a function, program control is transferred to the called function. A called function performs defined task and when its return statement is executed or when its function-ending closing brace is reached, it returns program control back to the main program.

To call a function, you simply need to pass the required parameters along with function name, and if function returns a value, then you can store returned value. For example –

```
#include <iostream>
using namespace std;

// function declaration
```



```

int max(int num1, int num2);

int main () {
    // local variable declaration:
    int a = 100;
    int b = 200;
    int ret;

    // calling a function to get max value.
    ret = max(a, b);
    cout << "Max value is : " << ret << endl;

    return 0;
}

// function returning the max between two numbers
int max(int num1, int num2) {
    // local variable declaration
    int result;

    if (num1 > num2)
        result = num1;
    else
        result = num2;

    return result;
}

```

I kept max() function along with main() function and compiled the source code. While running final executable, it would produce the following result –

```
Max value is : 200
```

Function Arguments

If a function is to use arguments, it must declare variables that accept the values of the arguments. These variables are called the **formal parameters** of the function.

The formal parameters behave like other local variables inside the function and are created upon entry into the function and destroyed upon exit.

While calling a function, there are two ways that arguments can be passed to a function –

Sr.No	Call Type & Description
-------	-------------------------



1	<u>Call by Value</u> This method copies the actual value of an argument into the formal parameter of the function. In this case, changes made to the parameter inside the function have no effect on the argument.
2	<u>Call by Pointer</u> This method copies the address of an argument into the formal parameter. Inside the function, the address is used to access the actual argument used in the call. This means that changes made to the parameter affect the argument.
3	<u>Call by Reference</u> This method copies the reference of an argument into the formal parameter. Inside the function, the reference is used to access the actual argument used in the call. This means that changes made to the parameter affect the argument.

By default, C++ uses **call by value** to pass arguments. In general, this means that code within a function cannot alter the arguments used to call the function and above mentioned example while calling max() function used the same method.

Default Values for Parameters

When you define a function, you can specify a default value for each of the last parameters. This value will be used if the corresponding argument is left blank when calling to the function.

This is done by using the assignment operator and assigning values for the arguments in the function definition. If a value for that parameter is not passed when the function is called, the default given value is used, but if a value is specified, this default value is ignored and the passed value is used instead. Consider the following example –

```
#include <iostream>
using namespace std;

int sum(int a, int b = 20) {
    int result;
    result = a + b;

    return (result);
}

int main () {
    // local variable declaration:
    int a = 100;
    int b = 200;
    int result;
```




```
// calling a function to add the values.
result = sum(a, b);
cout << "Total value is :" << result << endl;

// calling a function again as follows.
result = sum(a);
cout << "Total value is :" << result << endl;

return 0;
}
```

When the above code is compiled and executed, it produces the following result –

```
Total value is :300
Total value is :120
```

15. Numbers in C++

Normally, when we work with Numbers, we use primitive data types such as int, short, long, float and double, etc. The number data types, their possible values and number ranges have been explained while discussing C++ Data Types.

Defining Numbers in C++

You have already defined numbers in various examples given in previous chapters. Here is another consolidated example to define various types of numbers in C++ –

```
#include <iostream>
using namespace std;

int main () {
    // number definition:
    short s;
    int i;
    long l;
    float f;
    double d;

    // number assignments;
```



```

s = 10;
i = 1000;
l = 1000000;
f = 230.47;
d = 30949.374;

// number printing;
cout << "short s :" << s << endl;
cout << "int i :" << i << endl;
cout << "long l :" << l << endl;
cout << "float f :" << f << endl;
cout << "double d :" << d << endl;

return 0;
}

```

When the above code is compiled and executed, it produces the following result –

```

short s :10
int i :1000
long l :1000000
float f :230.47
double d :30949.4

```

Math Operations in C++

In addition to the various functions you can create, C++ also includes some useful functions you can use. These functions are available in standard C and C++ libraries and called **built-in** functions. These are functions that can be included in your program and then use.

C++ has a rich set of mathematical operations, which can be performed on various numbers. Following table lists down some useful built-in mathematical functions available in C++.

To utilize these functions you need to include the math header file **<cmath>**.

Sr.No	Function & Purpose
1	double cos(double); This function takes an angle (as a double) and returns the cosine.
2	double sin(double); This function takes an angle (as a double) and returns the sine.



3	double tan(double); This function takes an angle (as a double) and returns the tangent.
4	double log(double); This function takes a number and returns the natural log of that number.
5	double pow(double, double); The first is a number you wish to raise and the second is the power you wish to raise it t
6	double hypot(double, double); If you pass this function the length of two sides of a right triangle, it will return you the length of the hypotenuse.
7	double sqrt(double); You pass this function a number and it gives you the square root.
8	int abs(int); This function returns the absolute value of an integer that is passed to it.
9	double fabs(double); This function returns the absolute value of any decimal number passed to it.
10	double floor(double); Finds the integer which is less than or equal to the argument passed to it.

Following is a simple example to show few of the mathematical operations –

```
#include <iostream>
#include <cmath>
using namespace std;

int main () {
    // number definition:
    short s = 10;
```



```

int i = -1000;
long l = 100000;
float f = 230.47;
double d = 200.374;

// mathematical operations;
cout << "sin(d) :" << sin(d) << endl;
cout << "abs(i) :" << abs(i) << endl;
cout << "floor(d) :" << floor(d) << endl;
cout << "sqrt(f) :" << sqrt(f) << endl;
cout << "pow( d, 2) :" << pow(d, 2) << endl;

return 0;
}

```

When the above code is compiled and executed, it produces the following result –

```

sign(d) :-0.634939
abs(i) :1000
floor(d) :200
sqrt(f) :15.1812
pow( d, 2 ) :40149.7

```

Random Numbers in C++

There are many cases where you will wish to generate a random number. There are actually two functions you will need to know about random number generation. The first is **rand()**, this function will only return a pseudo random number. The way to fix this is to first call the **srand()** function.

Following is a simple example to generate few random numbers. This example makes use of **time()** function to get the number of seconds on your system time, to randomly seed the **rand()** function –

```

#include <iostream>
#include <ctime>
#include <cstdlib>

using namespace std;

int main () {
    int i,j;

    // set the seed
    srand( (unsigned)time( NULL ) );

    /* generate 10 random numbers. */

```



```

for( i = 0; i < 10; i++ ) {
    // generate actual random number
    j = rand();
    cout << " Random Number : " << j << endl;
}

return 0;
}

```

When the above code is compiled and executed, it produces the following result –

```

Random Number : 1748144778
Random Number : 630873888
Random Number : 2134540646
Random Number : 219404170
Random Number : 902129458
Random Number : 920445370
Random Number : 1319072661
Random Number : 257938873
Random Number : 1256201101
Random Number : 580322989

```

16. C++ Array

C++ provides a data structure, **the array**, which stores a fixed-size sequential collection of elements of the same type. An array is used to store a collection of data, but it is often more useful to think of an array as a collection of variables of the same type.

Instead of declaring individual variables, such as number0, number1, ..., and number99, you declare one array variable such as numbers and use numbers[0], numbers[1], and ..., numbers[99] to represent individual variables. A specific element in an array is accessed by an index.

All arrays consist of contiguous memory locations. The lowest address corresponds to the first element and the highest address to the last element.

Declaring Arrays

To declare an array in C++, the programmer specifies the type of the elements and the number of elements required by an array as follows –




```
type arrayName [ arraySize ];
```

This is called a single-dimension array. The **arraySize** must be an integer constant greater than zero and **type** can be any valid C++ data type. For example, to declare a 10-element array called **balance** of type **double**, use this statement –

```
double balance[10];
```

Initializing Arrays

You can initialize C++ array elements either one by one or using a single statement as follows –

```
double balance[5] = {1000.0, 2.0, 3.4, 17.0, 50.0};
```

The number of values between braces { } cannot be larger than the number of elements that we declare for the array between square brackets []. Following is an example to assign a single element of the array –

If you omit the size of the array, an array just big enough to hold the initialization is created. Therefore, if you write –

```
double balance[] = {1000.0, 2.0, 3.4, 17.0, 50.0};
```

You will create exactly the same array as you did in the previous example.

```
balance[4] = 50.0;
```

The above statement assigns element number 5th in the array a value of 50.0. Array with 4th index will be 5th, i.e., last element because all arrays have 0 as the index of their first element which is also called base index. Following is the pictorial representation of the same array we discussed above –

	0	1	2	3	4
balance	1000.0	2.0	3.4	7.0	50.0

Accessing Array Elements

An element is accessed by indexing the array name. This is done by placing the index of the element within square brackets after the name of the array. For example –

```
double salary = balance[9];
```

The above statement will take 10th element from the array and assign the value to salary variable. Following is an example, which will use all the above-mentioned three concepts viz. declaration, assignment and accessing arrays –

```
#include <iostream>
using namespace std;
```



```

#include <iomanip>
using std::setw;

int main () {

    int n[ 10 ]; // n is an array of 10 integers

    // initialize elements of array n to 0
    for ( int i = 0; i < 10; i++ ) {
        n[ i ] = i + 100; // set element at location i to i + 100
    }
    cout << "Element" << setw( 13 ) << "Value" << endl;

    // output each array element's value
    for ( int j = 0; j < 10; j++ ) {
        cout << setw( 7 ) << j << setw( 13 ) << n[ j ] << endl;
    }

    return 0;
}

```

This program makes use of **setw()** function to format the output. When the above code is compiled and executed, it produces the following result –

```

Element Value
0 100
1 101
2 102
3 103
4 104
5 105
6 106
7 107
8 108
9 109

```

Arrays in C++

Arrays are important to C++ and should need lots of more detail. There are following few important concepts, which should be clear to a C++ programmer –

Sr.No	Concept & Description
-------	-----------------------



1	<u>Multi-dimensional arrays</u> C++ supports multidimensional arrays. The simplest form of the multidimensional array is the two-dimensional array.
2	<u>Pointer to an array</u> You can generate a pointer to the first element of an array by simply specifying the array name, without any index.
3	<u>Passing arrays to functions</u> You can pass to the function a pointer to an array by specifying the array's name without an index.
4	<u>Return array from functions</u> C++ allows a function to return an array.

17. C++ Strings

C++ provides following two types of string representations –

- The C-style character string.
- The string class type introduced with Standard C++.

The C-Style Character String

The C-style character string originated within the C language and continues to be supported within C++. This string is actually a one-dimensional array of characters which is terminated by a **null** character '\0'. Thus a null-terminated string contains the characters that comprise the string followed by a **null**.

The following declaration and initialization create a string consisting of the word "Hello". To hold the null character at the end of the array, the size of the character array containing the string is one more than the number of characters in the word "Hello."

```
char greeting[6] = {'H', 'e', 'l', 'l', 'o', '\0'};
```

If you follow the rule of array initialization, then you can write the above statement as follows –

```
char greeting[] = "Hello";
```



Following is the memory presentation of above defined string in C/C++ –

Index	0	1	2	3	4	5
Variable	H	e	l	l	o	\0
Address	0x23451	0x23452	0x23453	0x23454	0x23455	0x23456

Actually, you do not place the null character at the end of a string constant. The C++ compiler automatically places the '\0' at the end of the string when it initializes the array. Let us try to print above-mentioned string –

```
#include <iostream>

using namespace std;

int main () {

    char greeting[6] = {'H', 'e', 'l', 'l', 'o', '\0'};

    cout << "Greeting message: ";
    cout << greeting << endl;

    return 0;
}
```

When the above code is compiled and executed, it produces the following result –

Greeting message: Hello

C++ supports a wide range of functions that manipulate null-terminated strings –

Sr.No	Function & Purpose
1	strcpy(s1, s2); Copies string s2 into string s1.
2	strcat(s1, s2); Concatenates string s2 onto the end of string s1.



3	strlen(s1); Returns the length of string s1.
4	strcmp(s1, s2); Returns 0 if s1 and s2 are the same; less than 0 if s1<s2; greater than 0 if s1>s2.
5	strchr(s1, ch); Returns a pointer to the first occurrence of character ch in string s1.
6	strstr(s1, s2); Returns a pointer to the first occurrence of string s2 in string s1.

Following example makes use of few of the above-mentioned functions –

```
#include <iostream>
#include <cstring>

using namespace std;

int main () {

    char str1[10] = "Hello";
    char str2[10] = "World";
    char str3[10];
    int len ;

    // copy str1 into str3
    strcpy( str3, str1);
    cout << "strcpy( str3, str1) : " << str3 << endl;

    // concatenates str1 and str2
    strcat( str1, str2);
    cout << "strcat( str1, str2): " << str1 << endl;

    // total length of str1 after concatenation
    len = strlen(str1);
    cout << "strlen(str1) : " << len << endl;

    return 0;
}
```



When the above code is compiled and executed, it produces result something as follows –

```
strcpy( str3, str1) : Hello
strcat( str1, str2): HelloWorld
strlen(str1) : 10
```

The String Class in C++

The standard C++ library provides a **string** class type that supports all the operations mentioned above, additionally much more functionality. Let us check the following example –

```
#include <iostream>
#include <string>

using namespace std;

int main () {

    string str1 = "Hello";
    string str2 = "World";
    string str3;
    int len ;

    // copy str1 into str3
    str3 = str1;
    cout << "str3 : " << str3 << endl;

    // concatenates str1 and str2
    str3 = str1 + str2;
    cout << "str1 + str2 : " << str3 << endl;

    // total length of str3 after concatenation
    len = str3.size();
    cout << "str3.size() : " << len << endl;

    return 0;
}
```

When the above code is compiled and executed, it produces result something as follows –

```
str3 : Hello
str1 + str2 : HelloWorld
str3.size() : 10
```



18. C++ Pointers

C++ pointers are easy and fun to learn. Some C++ tasks are performed more easily with pointers, and other C++ tasks, such as dynamic memory allocation, cannot be performed without them.

As you know every variable is a memory location and every memory location has its address defined which can be accessed using ampersand (&) operator which denotes an address in memory. Consider the following which will print the address of the variables defined –

```
#include <iostream>

using namespace std;
int main () {
    int var1;
    char var2[10];

    cout << "Address of var1 variable: ";
    cout << &var1 << endl;

    cout << "Address of var2 variable: ";
    cout << &var2 << endl;

    return 0;
}
```

When the above code is compiled and executed, it produces the following result –

```
Address of var1 variable: 0xbfebd5c0
Address of var2 variable: 0xbfebd5b6
```

What are Pointers?

A **pointer** is a variable whose value is the address of another variable. Like any variable or constant, you must declare a pointer before you can work with it. The general form of a pointer variable declaration is –

```
type *var-name;
```

Here, **type** is the pointer's base type; it must be a valid C++ type and **var-name** is the name of the pointer variable. The asterisk you used to declare a pointer is the same asterisk that you use for multiplication. However, in this statement the asterisk is being used to designate a variable as a



pointer. Following are the valid pointer declaration –

```
int *ip; // pointer to an integer
double *dp; // pointer to a double
float *fp; // pointer to a float
char *ch // pointer to character
```

The actual data type of the value of all pointers, whether integer, float, character, or otherwise, is the same, a long hexadecimal number that represents a memory address. The only difference between pointers of different data types is the data type of the variable or constant that the pointer points to.

Using Pointers in C++

There are few important operations, which we will do with the pointers very frequently. **(a)** We define a pointer variable. **(b)** Assign the address of a variable to a pointer. **(c)** Finally access the value at the address available in the pointer variable. This is done by using unary operator `*` that returns the value of the variable located at the address specified by its operand. Following example makes use of these operations –

```
#include <iostream>

using namespace std;

int main () {
    int var = 20; // actual variable declaration.
    int *ip;      // pointer variable

    ip = &var;    // store address of var in pointer variable

    cout << "Value of var variable: ";
    cout << var << endl;

    // print the address stored in ip pointer variable
    cout << "Address stored in ip variable: ";
    cout << ip << endl;

    // access the value at the address available in pointer
    cout << "Value of *ip variable: ";
    cout << *ip << endl;

    return 0;
}
```

When the above code is compiled and executed, it produces result something as follows –

```
Value of var variable: 20
Address stored in ip variable: 0xbfc601ac
```



Value of *ip variable: 20

Pointers in C++

Pointers have many but easy concepts and they are very important to C++ programming. There are following few important pointer concepts which should be clear to a C++ programmer –

Sr.No	Concept & Description
1	Null Pointers C++ supports null pointer, which is a constant with a value of zero defined in several standard libraries.
2	Pointer Arithmetic There are four arithmetic operators that can be used on pointers: ++, --, +, -
3	Pointers vs Arrays There is a close relationship between pointers and arrays.
4	Array of Pointers You can define arrays to hold a number of pointers.
5	Pointer to Pointer C++ allows you to have pointer on a pointer and so on.
6	Passing Pointers to Functions Passing an argument by reference or by address both enable the passed argument to be changed in the calling function by the called function.
7	Return Pointer from Functions C++ allows a function to return a pointer to local variable, static variable and dynamically allocated memory as well.



19. C++ Reference

A reference variable is an alias, that is, another name for an already existing variable. Once a reference is initialized with a variable, either the variable name or the reference name may be used to refer to the variable.

References vs Pointers

References are often confused with pointers but three major differences between references and pointers are –

- You cannot have NULL references. You must always be able to assume that a reference is connected to a legitimate piece of storage.
- Once a reference is initialized to an object, it cannot be changed to refer to another object. Pointers can be pointed to another object at any time.
- A reference must be initialized when it is created. Pointers can be initialized at any time.

Creating References in C++

Think of a variable name as a label attached to the variable's location in memory. You can then think of a reference as a second label attached to that memory location. Therefore, you can access the contents of the variable through either the original variable name or the reference. For example, suppose we have the following example –

```
int i = 17;
```

We can declare reference variables for i as follows.

```
int& r = i;
```

Read the & in these declarations as **reference**. Thus, read the first declaration as "r is an integer reference initialized to i" and read the second declaration as "s is a double reference initialized to do.". Following example makes use of references on int and double –

```
#include <iostream>

using namespace std;

int main () {
    // declare simple variables
    int i;
```




```
double d;

// declare reference variables
int& r = i;
double& s = d;

i = 5;
cout << "Value of i : " << i << endl;
cout << "Value of i reference : " << r << endl;

d = 11.7;
cout << "Value of d : " << d << endl;
cout << "Value of d reference : " << s << endl;

return 0;
}
```

When the above code is compiled together and executed, it produces the following result –

```
Value of i : 5
Value of i reference : 5
Value of d : 11.7
Value of d reference : 11.7
```

References are usually used for function argument lists and function return values. So following are two important subjects related to C++ references which should be clear to a C++ programmer –

Sr.No	Concept & Description
1	<u>References as Parameters</u> C++ supports passing references as function parameter more safely than parameters.
2	<u>Reference as Return Value</u> You can return reference from a C++ function like any other data type.

20. C++ Date and Time

The C++ standard library does not provide a proper date type. C++ inherits the structs and functions for date and time manipulation from C. To access date and time related functions and



structures, you would need to include `<ctime>` header file in your C++ program.

There are four time-related types: **clock_t**, **time_t**, **size_t**, and **tm**. The types - `clock_t`, `size_t` and `time_t` are capable of representing the system time and date as some sort of integer.

The structure type **tm** holds the date and time in the form of a C structure having the following elements –

```
struct tm {
int tm_sec; // seconds of minutes from 0 to 61
int tm_min; // minutes of hour from 0 to 59
int tm_hour; // hours of day from 0 to 24
int tm_mday; // day of month from 1 to 31
int tm_mon; // month of year from 0 to 11
int tm_year; // year since 1900
int tm_wday; // days since sunday
int tm_yday; // days since January 1st
int tm_isdst; // hours of daylight savings time
}
```

Following are the important functions, which we use while working with date and time in C or C++. All these functions are part of standard C and C++ library and you can check their detail using reference to C++ standard library given below.

Sr.No	Function & Purpose
1	time_t time(time_t *time); This returns the current calendar time of the system in number of seconds elapsed since January 1, 1970. If the system has no time, .1 is returned.
2	char *ctime(const time_t *time); This returns a pointer to a string of the form <i>day month year hours:minutes:seconds year\n\0</i> .
3	struct tm *localtime(const time_t *time); This returns a pointer to the tm structure representing local time.
4	clock_t clock(void); This returns a value that approximates the amount of time the calling program has been running. A value of .1 is returned if the time is not available.



5	char * asctime (const struct tm * time); This returns a pointer to a string that contains the information stored in the structure pointed to by time converted into the form: day month date hours:minutes:seconds year\n\0
6	struct tm *gmtime(const time_t *time); This returns a pointer to the time in the form of a tm structure. The time is represented in Coordinated Universal Time (UTC), which is essentially Greenwich Mean Time (GMT).
7	time_t mktime(struct tm *time); This returns the calendar-time equivalent of the time found in the structure pointed to by time.
8	double difftime (time_t time2, time_t time1); This function calculates the difference in seconds between time1 and time2.
9	size_t strftime(); This function can be used to format date and time in a specific format.

Current Date and Time

Suppose you want to retrieve the current system date and time, either as a local time or as a Coordinated Universal Time (UTC). Following is the example to achieve the same –

```
#include <iostream>
#include <ctime>

using namespace std;

int main() {
    // current date/time based on current system
    time_t now = time(0);

    // convert now to string form
    char* dt = ctime(&now);

    cout << "The local date and time is: " << dt << endl;
```



```
// convert now to tm struct for UTC
tm *gmtm = gmtime(&now);
dt = asctime(gmtm);
cout << "The UTC date and time is:" << dt << endl;
}
```

When the above code is compiled and executed, it produces the following result –

```
The local date and time is: Sat Jan 8 20:07:41 2011
```

```
The UTC date and time is:Sun Jan 9 03:07:41 2011
```

Format Time using struct tm

The **tm** structure is very important while working with date and time in either C or C++. This structure holds the date and time in the form of a C structure as mentioned above. Most of the time related functions makes use of tm structure. Following is an example which makes use of various date and time related functions and tm structure –

While using structure in this chapter, I'm making an assumption that you have basic understanding on C structure and how to access structure members using arrow -> operator.

```
#include <iostream>
#include <ctime>

using namespace std;

int main() {
    // current date/time based on current system
    time_t now = time(0);

    cout << "Number of sec since January 1,1970 is:: " << now << endl;

    tm *lrm = localtime(&now);

    // print various components of tm structure.
    cout << "Year:" << 1900 + lrm->tm_year<<endl;
    cout << "Month: " << 1 + lrm->tm_mon<< endl;
    cout << "Day: " << lrm->tm_mday << endl;
    cout << "Time: " << 5+lrm->tm_hour << ":";
    cout << 30+lrm->tm_min << ":";
    cout << lrm->tm_sec << endl;
}
```

When the above code is compiled and executed, it produces the following result –



Number of sec since January 1,1970 is:: 1588485717
 Year:2020
 Month: 5
 Day: 3
 Time: 11:31:57

21. C++ Basic Input/Output

The C++ standard libraries provide an extensive set of input/output capabilities which we will see in subsequent chapters. This chapter will discuss very basic and most common I/O operations required for C++ programming.

C++ I/O occurs in streams, which are sequences of bytes. If bytes flow from a device like a keyboard, a disk drive, or a network connection etc. to main memory, this is called **input operation** and if bytes flow from main memory to a device like a display screen, a printer, a disk drive, or a network connection, etc., this is called **output operation**.

I/O Library Header Files

There are following header files important to C++ programs –

Sr.No	Header File & Function and Description
1	<iostream> This file defines the cin , cout , cerr and clog objects, which correspond to the standard input stream, the standard output stream, the un-buffered standard error stream and the buffered standard error stream, respectively.
2	<iomanip> This file declares services useful for performing formatted I/O with so-called parameterized stream manipulators, such as setw and setprecision .



3

<fstream>

This file declares services for user-controlled file processing. We will discuss about it in detail in File and Stream related chapter.

The Standard Output Stream (cout)

The predefined object **cout** is an instance of **ostream** class. The **cout** object is said to be "connected to" the standard output device, which usually is the display screen. The **cout** is used in conjunction with the stream insertion operator, which is written as << which are two less than signs as shown in the following example.

```
#include <iostream>

using namespace std;

int main() {
    char str[] = "Hello C++";

    cout << "Value of str is : " << str << endl;
}
```

When the above code is compiled and executed, it produces the following result –

```
Value of str is : Hello C++
```

The C++ compiler also determines the data type of variable to be output and selects the appropriate stream insertion operator to display the value. The << operator is overloaded to output data items of built-in types integer, float, double, strings and pointer values.

The insertion operator << may be used more than once in a single statement as shown above and **endl** is used to add a new-line at the end of the line.

The Standard Input Stream (cin)

The predefined object **cin** is an instance of **istream** class. The **cin** object is said to be attached to the standard input device, which usually is the keyboard. The **cin** is used in conjunction with the stream extraction operator, which is written as >> which are two greater than signs as shown in the following example.

```
#include <iostream>

using namespace std;

int main() {
    char name[50];
```



```
cout << "Please enter your name: ";
cin >> name;
cout << "Your name is: " << name << endl;

}
```

When the above code is compiled and executed, it will prompt you to enter a name. You enter a value and then hit enter to see the following result –

```
Please enter your name: cplusplus
Your name is: cplusplus
```

The C++ compiler also determines the data type of the entered value and selects the appropriate stream extraction operator to extract the value and store it in the given variables.

The stream extraction operator >> may be used more than once in a single statement. To request more than one datum you can use the following –

```
cin >> name >> age;
```

This will be equivalent to the following two statements –

```
cin >> name;
cin >> age;
```

The Standard Error Stream (cerr)

The predefined object **cerr** is an instance of **ostream** class. The cerr object is said to be attached to the standard error device, which is also a display screen but the object **cerr** is un-buffered and each stream insertion to cerr causes its output to appear immediately.

The **cerr** is also used in conjunction with the stream insertion operator as shown in the following example.

```
#include <iostream>

using namespace std;

int main() {
    char str[] = "Unable to read....";

    cerr << "Error message : " << str << endl;
}
```

When the above code is compiled and executed, it produces the following result –

```
Error message : Unable to read....
```



The Standard Log Stream (clog)

The predefined object **clog** is an instance of **ostream** class. The **clog** object is said to be attached to the standard error device, which is also a display screen but the object **clog** is buffered. This means that each insertion to **clog** could cause its output to be held in a buffer until the buffer is filled or until the buffer is flushed.

The **clog** is also used in conjunction with the stream insertion operator as shown in the following example.

```
#include <iostream>

using namespace std;

int main() {
    char str[] = "Unable to read....";

    clog << "Error message : " << str << endl;
}
```

When the above code is compiled and executed, it produces the following result –

```
Error message : Unable to read....
```

You would not be able to see any difference in **cout**, **cerr** and **clog** with these small examples, but while writing and executing big programs the difference becomes obvious. So it is good practice to display error messages using **cerr** stream and while displaying other log messages then **clog** should be used.

22. C++ Data Structure

C/C++ arrays allow you to define variables that combine several data items of the same kind, but **structure** is another user defined data type which allows you to combine data items of different kinds.

Structures are used to represent a record, suppose you want to keep track of your books in a library. You might want to track the following attributes about each book –

- Title
- Author



- Subject
- Book ID

Defining a Structure

To define a structure, you must use the struct statement. The struct statement defines a new data type, with more than one member, for your program. The format of the struct statement is this –

```
struct [structure tag] {
    member definition;
    member definition;
    ...
    member definition;
} [one or more structure variables];
```

The **structure tag** is optional and each member definition is a normal variable definition, such as `int i;` or `float f;` or any other valid variable definition. At the end of the structure's definition, before the final semicolon, you can specify one or more structure variables but it is optional. Here is the way you would declare the Book structure –

```
struct Books {
    char title[50];
    char author[50];
    char subject[100];
    int book_id;
} book;
```

Accessing Structure Members

To access any member of a structure, we use the **member access operator** (`.`). The member access operator is coded as a period between the structure variable name and the structure member that we wish to access. You would use **struct** keyword to define variables of structure type. Following is the example to explain usage of structure –

```
#include <iostream>
#include <cstring>

using namespace std;

struct Books {
    char title[50];
    char author[50];
    char subject[100];
    int book_id;
};
```



```

int main() {
    struct Books Book1;    // Declare Book1 of type Book
    struct Books Book2;    // Declare Book2 of type Book

    // book 1 specification
    strcpy( Book1.title, "Learn C++ Programming");
    strcpy( Book1.author, "Chand Miyan");
    strcpy( Book1.subject, "C++ Programming");
    Book1.book_id = 6495407;

    // book 2 specification
    strcpy( Book2.title, "Telecom Billing");
    strcpy( Book2.author, "Yakit Singha");
    strcpy( Book2.subject, "Telecom");
    Book2.book_id = 6495700;

    // Print Book1 info
    cout << "Book 1 title : " << Book1.title <<endl;
    cout << "Book 1 author : " << Book1.author <<endl;
    cout << "Book 1 subject : " << Book1.subject <<endl;
    cout << "Book 1 id : " << Book1.book_id <<endl;

    // Print Book2 info
    cout << "Book 2 title : " << Book2.title <<endl;
    cout << "Book 2 author : " << Book2.author <<endl;
    cout << "Book 2 subject : " << Book2.subject <<endl;
    cout << "Book 2 id : " << Book2.book_id <<endl;

    return 0;
}

```

When the above code is compiled and executed, it produces the following result –

```

Book 1 title : Learn C++ Programming
Book 1 author : Chand Miyan
Book 1 subject : C++ Programming
Book 1 id : 6495407
Book 2 title : Telecom Billing
Book 2 author : Yakut Singha
Book 2 subject : Telecom
Book 2 id : 6495700

```

Structures as Function Arguments

You can pass a structure as a function argument in very similar way as you pass any other variable or pointer. You would access structure variables in the similar way as you have accessed



in the above example –

```
#include <iostream>
#include <cstring>

using namespace std;
void printBook( struct Books book );

struct Books {
    char title[50];
    char author[50];
    char subject[100];
    int book_id;
};

int main() {
    struct Books Book1;    // Declare Book1 of type Book
    struct Books Book2;    // Declare Book2 of type Book

    // book 1 specification
    strcpy( Book1.title, "Learn C++ Programming");
    strcpy( Book1.author, "Chand Miyan");
    strcpy( Book1.subject, "C++ Programming");
    Book1.book_id = 6495407;

    // book 2 specification
    strcpy( Book2.title, "Telecom Billing");
    strcpy( Book2.author, "Yakit Singha");
    strcpy( Book2.subject, "Telecom");
    Book2.book_id = 6495700;

    // Print Book1 info
    printBook( Book1 );

    // Print Book2 info
    printBook( Book2 );

    return 0;
}

void printBook( struct Books book ) {
    cout << "Book title : " << book.title << endl;
    cout << "Book author : " << book.author << endl;
    cout << "Book subject : " << book.subject << endl;
    cout << "Book id : " << book.book_id << endl;
}
```



When the above code is compiled and executed, it produces the following result –

```
Book title : Learn C++ Programming
Book author : Chand Miyan
Book subject : C++ Programming
Book id : 6495407
Book title : Telecom Billing
Book author : Yakut Singha
Book subject : Telecom
Book id : 6495700
```

Pointers to Structures

You can define pointers to structures in very similar way as you define pointer to any other variable as follows –

```
struct Books *struct_pointer;
```

Now, you can store the address of a structure variable in the above defined pointer variable. To find the address of a structure variable, place the & operator before the structure's name as follows –

```
struct_pointer = &Book1;
```

To access the members of a structure using a pointer to that structure, you must use the -> operator as follows –

```
struct_pointer->title;
```

Let us re-write above example using structure pointer, hope this will be easy for you to understand the concept –

```
#include <iostream>
#include <cstring>

using namespace std;
void printBook( struct Books *book );

struct Books {
    char title[50];
    char author[50];
    char subject[100];
    int book_id;
};

int main() {
    struct Books Book1;    // Declare Book1 of type Book
    struct Books Book2;    // Declare Book2 of type Book

    // Book 1 specification
```



```

strcpy( Book1.title, "Learn C++ Programming");
strcpy( Book1.author, "Chand Miyan");
strcpy( Book1.subject, "C++ Programming");
Book1.book_id = 6495407;

// Book 2 specification
strcpy( Book2.title, "Telecom Billing");
strcpy( Book2.author, "Yakit Singha");
strcpy( Book2.subject, "Telecom");
Book2.book_id = 6495700;

// Print Book1 info, passing address of structure
printBook( &Book1 );

// Print Book2 info, passing address of structure
printBook( &Book2 );

return 0;
}

// This function accept pointer to structure as parameter.
void printBook( struct Books *book ) {
    cout << "Book title : " << book->title <<endl;
    cout << "Book author : " << book->author <<endl;
    cout << "Book subject : " << book->subject <<endl;
    cout << "Book id : " << book->book_id <<endl;
}

```

When the above code is compiled and executed, it produces the following result –

```

Book title : Learn C++ Programming
Book author : Chand Miyan
Book subject : C++ Programming
Book id : 6495407
Book title : Telecom Billing
Book author : Yakut Singha
Book subject : Telecom
Book id : 6495700

```

The typedef Keyword

There is an easier way to define structs or you could "alias" types you create. For example –

```

typedef struct {
    char title[50];
    char author[50];
    char subject[100];
}

```



```
int book_id;
} Books;
```

Now, you can use *Books* directly to define variables of *Books* type without using struct keyword. Following is the example –

```
Books Book1, Book2;
```

You can use **typedef** keyword for non-structs as well as follows –

```
typedef long int *pint32;
```

```
pint32 x, y, z;
```

x, y and z are all pointers to long ints.

23. C++ Classes & Objects

The main purpose of C++ programming is to add object orientation to the C programming language and classes are the central feature of C++ that supports object-oriented programming and are often called user-defined types.

A class is used to specify the form of an object and it combines data representation and methods for manipulating that data into one neat package. The data and functions within a class are called members of the class.

C++ Class Definitions

When you define a class, you define a blueprint for a data type. This doesn't actually define any data, but it does define what the class name means, that is, what an object of the class will consist of and what operations can be performed on such an object.

A class definition starts with the keyword **class** followed by the class name; and the class body, enclosed by a pair of curly braces. A class definition must be followed either by a semicolon or a list of declarations. For example, we defined the Box data type using the keyword **class** as follows –

```
class Box {
public:
double length; // Length of a box
double breadth; // Breadth of a box
double height; // Height of a box
};
```



The keyword **public** determines the access attributes of the members of the class that follows it. A public member can be accessed from outside the class anywhere within the scope of the class object. You can also specify the members of a class as **private** or **protected** which we will discuss in a sub-section.

Define C++ Objects

A class provides the blueprints for objects, so basically an object is created from a class. We declare objects of a class with exactly the same sort of declaration that we declare variables of basic types. Following statements declare two objects of class Box –

```
Box Box1; // Declare Box1 of type Box
Box Box2; // Declare Box2 of type Box
```

Both of the objects Box1 and Box2 will have their own copy of data members.

Accessing the Data Members

The public data members of objects of a class can be accessed using the direct member access operator (.). Let us try the following example to make the things clear –

```
#include <iostream>

using namespace std;

class Box {
public:
    double length; // Length of a box
    double breadth; // Breadth of a box
    double height; // Height of a box
};

int main() {
    Box Box1;    // Declare Box1 of type Box
    Box Box2;    // Declare Box2 of type Box
    double volume = 0.0; // Store the volume of a box here

    // box 1 specification
    Box1.height = 5.0;
    Box1.length = 6.0;
    Box1.breadth = 7.0;

    // box 2 specification
    Box2.height = 10.0;
    Box2.length = 12.0;
    Box2.breadth = 13.0;
```




```
// volume of box 1
volume = Box1.height * Box1.length * Box1.breadth;
cout << "Volume of Box1 : " << volume << endl;

// volume of box 2
volume = Box2.height * Box2.length * Box2.breadth;
cout << "Volume of Box2 : " << volume << endl;
return 0;
}
```

When the above code is compiled and executed, it produces the following result –

```
Volume of Box1 : 210
Volume of Box2 : 1560
```

It is important to note that private and protected members cannot be accessed directly using direct member access operator (.). We will learn how private and protected members can be accessed.

Classes and Objects in Detail

So far, you have got very basic idea about C++ Classes and Objects. There are further interesting concepts related to C++ Classes and Objects which we will discuss in various sub-sections listed below –

Sr.No	Concept & Description
1	<u>Class Member Functions</u> A member function of a class is a function that has its definition or its prototype within the class definition like any other variable.
2	<u>Class Access Modifiers</u> A class member can be defined as public, private or protected. By default members would be assumed as private.
3	<u>Constructor & Destructor</u> A class constructor is a special function in a class that is called when a new object of the class is created. A destructor is also a special function which is called when created object is deleted.



4	<u>Copy Constructor</u> The copy constructor is a constructor which creates an object by initializing it with an object of the same class, which has been created previously.
5	<u>Friend Functions</u> A friend function is permitted full access to private and protected members of a class.
6	<u>Inline Functions</u> With an inline function, the compiler tries to expand the code in the body of the function in place of a call to the function.
7	<u>this Pointer</u> Every object has a special pointer this which points to the object itself.
8	<u>Pointer to C++ Classes</u> A pointer to a class is done exactly the same way a pointer to a structure is. In fact a class is really just a structure with functions in it.
9	<u>Static Members of a Class</u> Both data members and function members of a class can be declared as static.

24. C++ Inheritance

One of the most important concepts in object-oriented programming is that of inheritance. Inheritance allows us to define a class in terms of another class, which makes it easier to create and maintain an application. This also provides an opportunity to reuse the code functionality and fast implementation time.

When creating a class, instead of writing completely new data members and member functions, the programmer can designate that the new class should inherit the members of an existing class. This existing class is called the **base** class, and the new class is referred to as the **derived** class.



The idea of inheritance implements the **is a** relationship. For example, mammal IS-A animal, dog IS-A mammal hence dog IS-A animal as well and so on.

Base and Derived Classes

A class can be derived from more than one classes, which means it can inherit data and functions from multiple base classes. To define a derived class, we use a class derivation list to specify the base class(es). A class derivation list names one or more base classes and has the form –

```
class derived-class: access-specifier base-class
```

Where access-specifier is one of **public**, **protected**, or **private**, and base-class is the name of a previously defined class. If the access-specifier is not used, then it is private by default.

Consider a base class **Shape** and its derived class **Rectangle** as follows –

```
#include <iostream>

using namespace std;

// Base class
class Shape {
public:
    void set Width(int w) {
        width = w;
    }
    void setHeight(int h) {
        height = h;
    }

protected:
    int width;
    int height;
};

// Derived class
class Rectangle: public Shape {
public:
    int getArea() {
        return (width * height);
    }
};

int main(void) {
    Rectangle Rect;

    Rect.setWidth(5);
```



```

Rect.setHeight(7);

// Print the area of the object.
cout << "Total area: " << Rect.getArea() << endl;

return 0;
}

```

When the above code is compiled and executed, it produces the following result –

```
Total area: 35
```

Access Control and Inheritance

A derived class can access all the non-private members of its base class. Thus base-class members that should not be accessible to the member functions of derived classes should be declared private in the base class.

We can summarize the different access types according to - who can access them in the following way –

Access	public	protected	private
Same class	yes	yes	yes
Derived classes	yes	yes	no
Outside classes	yes	no	no

A derived class inherits all base class methods with the following exceptions –

- Constructors, destructors and copy constructors of the base class.
- Overloaded operators of the base class.
- The friend functions of the base class.

Type of Inheritance

When deriving a class from a base class, the base class may be inherited through **public**, **protected** or **private** inheritance. The type of inheritance is specified by the access-specifier as explained above.

We hardly use **protected** or **private** inheritance, but **public** inheritance is commonly used. While using different type of inheritance, following rules are applied –

- **Public Inheritance** – When deriving a class from a **public** base class, **public** members of the base class become **public** members of the derived class and **protected** members of the base class become **protected** members of the



derived class. A base class's **private** members are never accessible directly from a derived class, but can be accessed through calls to the **public** and **protected** members of the base class.

- **Protected Inheritance** – When deriving from a **protected** base class, **public** and **protected** members of the base class become **protected** members of the derived class.
- **Private Inheritance** – When deriving from a **private** base class, **public** and **protected** members of the base class become **private** members of the derived class.

Multiple Inheritance

A C++ class can inherit members from more than one class and here is the extended syntax –

class derived-class: access baseA, access baseB....

Where access is one of **public**, **protected**, or **private** and would be given for every base class and they will be separated by comma as shown above. Let us try the following example –

```
#include <iostream>

using namespace std;

// Base class Shape
class Shape {
public:
    void setWidth(int w) {
        width = w;
    }
    void setHeight(int h) {
        height = h;
    }

protected:
    int width;
    int height;
};

// Base class PaintCost
class PaintCost {
public:
    int getCost(int area) {
        return area * 70;
    }
};

// Derived class
```




```

class Rectangle: public Shape, public PaintCost {
public:
    int getArea() {
        return (width * height);
    }
};

int main(void) {
    Rectangle Rect;
    int area;

    Rect.setWidth(5);
    Rect.setHeight(7);

    area = Rect.getArea();

    // Print the area of the object.
    cout << "Total area: " << Rect.getArea() << endl;

    // Print the total cost of painting
    cout << "Total paint cost: $" << Rect.getCost(area) << endl;

    return 0;
}

```

When the above code is compiled and executed, it produces the following result –

```

Total area: 35
Total paint cost: $2450

```

25. C++ Overloading (Operator/Function)

C++ allows you to specify more than one definition for a **function** name or an **operator** in the same scope, which is called **function overloading** and **operator overloading** respectively.

An overloaded declaration is a declaration that is declared with the same name as a previously declared declaration in the same scope, except that both declarations have different arguments and obviously different definition (implementation).



When you call an overloaded **function** or **operator**, the compiler determines the most appropriate definition to use, by comparing the argument types you have used to call the function or operator with the parameter types specified in the definitions. The process of selecting the most appropriate overloaded function or operator is called **overload resolution**.

Function Overloading in C++

You can have multiple definitions for the same function name in the same scope. The definition of the function must differ from each other by the types and/or the number of arguments in the argument list. You cannot overload function declarations that differ only by return type.

Following is the example where same function **print()** is being used to print different data types –

```
#include <iostream>
using namespace std;

class printData {
public:
    void print(int i) {
        cout << "Printing int: " << i << endl;
    }
    void print(double f) {
        cout << "Printing float: " << f << endl;
    }
    void print(char* c) {
        cout << "Printing character: " << c << endl;
    }
};

int main(void) {
    printData pd;

    // Call print to print integer
    pd.print(5);

    // Call print to print float
    pd.print(500.263);

    // Call print to print character
    pd.print("Hello C++");

    return 0;
}
```

When the above code is compiled and executed, it produces the following result –

```
Printing int: 5
```



```
Printing float: 500.263
Printing character: Hello C++
```

Operators Overloading in C++

You can redefine or overload most of the built-in operators available in C++. Thus, a programmer can use operators with user-defined types as well.

Overloaded operators are functions with special names: the keyword "operator" followed by the symbol for the operator being defined. Like any other function, an overloaded operator has a return type and a parameter list.

```
Box operator+(const Box&);
```

declares the addition operator that can be used to **add** two Box objects and returns final Box object. Most overloaded operators may be defined as ordinary non-member functions or as class member functions. In case we define above function as non-member function of a class then we would have to pass two arguments for each operand as follows –

```
Box operator+(const Box&, const Box&);
```

Following is the example to show the concept of operator over loading using a member function. Here an object is passed as an argument whose properties will be accessed using this object, the object which will call this operator can be accessed using **this** operator as explained below –

```
#include <iostream>
using namespace std;

class Box {
public:
    double getVolume(void) {
        return length * breadth * height;
    }
    void setLength( double len ) {
        length = len;
    }
    void setBreadth( double bre ) {
        breadth = bre;
    }
    void setHeight( double hei ) {
        height = hei;
    }

    // Overload + operator to add two Box objects.
    Box operator+(const Box& b) {
        Box;
        box.length = this->length + b.length;
        box.breadth = this->breadth + b.breadth;
```



```

        box.height = this->height + b.height;
        return box;
    }

private:
    double length;    // Length of a box
    double breadth;    // Breadth of a box
    double height;    // Height of a box
};

// Main function for the program
int main() {
    Box Box1;          // Declare Box1 of type Box
    Box Box2;          // Declare Box2 of type Box
    Box Box3;          // Declare Box3 of type Box
    double volume = 0.0; // Store the volume of a box here

    // box 1 specification
    Box1.setLength(6.0);
    Box1.setBreadth(7.0);
    Box1.setHeight(5.0);

    // box 2 specification
    Box2.setLength(12.0);
    Box2.setBreadth(13.0);
    Box2.setHeight(10.0);

    // volume of box 1
    volume = Box1.getVolume();
    cout << "Volume of Box1 : " << volume << endl;

    // volume of box 2
    volume = Box2.getVolume();
    cout << "Volume of Box2 : " << volume << endl;

    // Add two object as follows:
    Box3 = Box1 + Box2;

    // volume of box 3
    volume = Box3.getVolume();
    cout << "Volume of Box3 : " << volume << endl;

    return 0;
}

```

When the above code is compiled and executed, it produces the following result –



Volume of Box1 : 210

Volume of Box2 : 1560

Volume of Box3 : 5400

Overloadable/Non-overloadable Operators

Following is the list of operators which can be overloaded –

+	-	*	/	%	^
&		~	!	,	=
<	>	<=	>=	++	--
<<	>>	==	!=	&&	
+=	-=	/=	%=	^=	&=
=	*=	<<=	>>=	[]	()
->	->*	new	new []	delete	delete []

Following is the list of operators, which cannot be overloaded –

::	.*	.	?:
----	----	---	----

Operator Overloading Examples

Here are various operator overloading examples to help you in understanding the concept.

Sr.No	Operators & Example
1	<u>Unary Operators Overloading</u>
2	<u>Binary Operators Overloading</u>
3	<u>Relational Operators Overloading</u>
4	<u>Input/Output Operators Overloading</u>
5	<u>++ and -- Operators Overloading</u>
6	<u>Assignment Operators Overloading</u>
7	<u>Function call () Operator Overloading</u>



8	<u>Subscripting [] Operator Overloading</u>
9	<u>Class Member Access Operator -> Overloading</u>

26. C++ Polymorphism

The word **polymorphism** means having many forms. Typically, polymorphism occurs when there is a hierarchy of classes and they are related by inheritance.

C++ polymorphism means that a call to a member function will cause a different function to be executed depending on the type of object that invokes the function.

Consider the following example where a base class has been derived by other two classes –

```
#include <iostream>
using namespace std;

class Shape {
protected:
    int width, height;

public:
    Shape( int a = 0, int b = 0){
        width = a;
        height = b;
    }
    int area() {
        cout << "Parent class area : " << endl;
        return 0;
    }
};

class Rectangle: public Shape {
public:
    Rectangle( int a = 0, int b = 0):Shape(a, b) {}

    int area () {
        cout << "Rectangle class area : " << endl;
        return (width * height);
    }
};
```



```

class Triangle: public Shape {
public:
    Triangle( int a = 0, int b = 0):Shape(a, b) {}

    int area () {
        cout << "Triangle class area : " << endl;
        return (width * height / 2);
    }
};

// Main function for the program
int main() {
    Shape *shape;
    Rectangle rec(10,7);
    Triangle tri(10,5);

    // store the address of Rectangle
    shape = &rec;

    // call rectangle area.
    shape->area();

    // store the address of Triangle
    shape = &tri;

    // call triangle area.
    shape->area();

    return 0;
}

```

When the above code is compiled and executed, it produces the following result –

```

Parent class area :
Parent class area :

```

The reason for the incorrect output is that the call of the function area() is being set once by the compiler as the version defined in the base class. This is called **static resolution** of the function call, or **static linkage** - the function call is fixed before the program is executed. This is also sometimes called **early binding** because the area() function is set during the compilation of the program.

But now, let's make a slight modification in our program and precede the declaration of area() in the Shape class with the keyword **virtual** so that it looks like this –

```

class Shape {
protected:

```



```

int width, height;

public:
Shape( int a = 0, int b = 0) {
width = a;
height = b;
}
virtual int area() {
cout << "Parent class area : " << endl;
return 0;
}
};

```

After this slight modification, when the previous example code is compiled and executed, it produces the following result –

```

Rectangle class area
Triangle class area

```

This time, the compiler looks at the contents of the pointer instead of its type. Hence, since addresses of objects of tri and rec classes are stored in *shape the respective area() function is called.

As you can see, each of the child classes has a separate implementation for the function area(). This is how **polymorphism** is generally used. You have different classes with a function of the same name, and even the same parameters, but with different implementations.

Virtual Function

A **virtual** function is a function in a base class that is declared using the keyword **virtual**. Defining in a base class a virtual function, with another version in a derived class, signals to the compiler that we don't want static linkage for this function.

What we do want is the selection of the function to be called at any given point in the program to be based on the kind of object for which it is called. This sort of operation is referred to as **dynamic linkage**, or **late binding**.

Pure Virtual Functions

It is possible that you want to include a virtual function in a base class so that it may be redefined in a derived class to suit the objects of that class, but that there is no meaningful definition you could give for the function in the base class.

We can change the virtual function area() in the base class to the following –

```

class Shape {
protected:
int width, height;

```



```
public:
Shape(int a = 0, int b = 0) {
width = a;
height = b;
}

// pure virtual function
virtual int area() = 0;
};
```

The = 0 tells the compiler that the function has no body and above virtual function will be called **pure virtual function**.

27. C++ Data Abstraction

Data abstraction refers to providing only essential information to the outside world and hiding their background details, i.e., to represent the needed information in program without presenting the details.

Data abstraction is a programming (and design) technique that relies on the separation of interface and implementation.

Let's take one real life example of a TV, which you can turn on and off, change the channel, adjust the volume, and add external components such as speakers, VCRs, and DVD players, BUT you do not know its internal details, that is, you do not know how it receives signals over the air or through a cable, how it translates them, and finally displays them on the screen.

Thus, we can say a television clearly separates its internal implementation from its external interface and you can play with its interfaces like the power button, channel changer, and volume control without having any knowledge of its internals.

In C++, classes provides great level of **data abstraction**. They provide sufficient public methods to the outside world to play with the functionality of the object and to manipulate object data, i.e., state without actually knowing how class has been implemented internally.

For example, your program can make a call to the **sort()** function without knowing what algorithm the function actually uses to sort the given values. In fact, the underlying implementation of the sorting functionality could change between releases of the library, and as long as the interface stays the same, your function call will still work.

In C++, we use **classes** to define our own abstract data types (ADT). You can use the **cout** object



of class **ostream** to stream data to standard output like this –

```
#include <iostream>
using namespace std;

int main() {
    cout << "Hello C++" << endl;
    return 0;
}
```

Here, you don't need to understand how **cout** displays the text on the user's screen. You need to only know the public interface and the underlying implementation of 'cout' is free to change.

Access Labels Enforce Abstraction

In C++, we use access labels to define the abstract interface to the class. A class may contain zero or more access labels –

- Members defined with a public label are accessible to all parts of the program. The data-abstraction view of a type is defined by its public members.
- Members defined with a private label are not accessible to code that uses the class. The private sections hide the implementation from code that uses the type.

There are no restrictions on how often an access label may appear. Each access label specifies the access level of the succeeding member definitions. The specified access level remains in effect until the next access label is encountered or the closing right brace of the class body is seen.

Benefits of Data Abstraction

Data abstraction provides two important advantages –

- Class internals are protected from inadvertent user-level errors, which might corrupt the state of the object.
- The class implementation may evolve over time in response to changing requirements or bug reports without requiring change in user-level code.

By defining data members only in the private section of the class, the class author is free to make changes in the data. If the implementation changes, only the class code needs to be examined to see what affect the change may have. If data is public, then any function that directly access the data members of the old representation might be broken.

Data Abstraction Example

Any C++ program where you implement a class with public and private members is an example of data abstraction. Consider the following example –


```

#include <iostream>
using namespace std;

class Adder {
public:
    // constructor
    Adder(int i = 0) {
        total = i;
    }

    // interface to outside world
    void addendum(int number) {
        total += number;
    }

    // interface to outside world
    int getTotal() {
        return total;
    };

private:
    // hidden data from outside world
    int total;
};

int main() {
    Adder a;

    a.addNum(10);
    a.addNum(20);
    a.addNum(30);

    cout << "Total " << a.getTotal() << endl;
    return 0;
}

```

When the above code is compiled and executed, it produces the following result –

```
Total 60
```

Above class adds numbers together, and returns the sum. The public members - **addNum** and **getTotal** are the interfaces to the outside world and a user needs to know them to use the class. The private member **total** is something that the user doesn't need to know about, but is needed for the class to operate properly.

Designing Strategy



Abstraction separates code into interface and implementation. So while designing your component, you must keep interface independent of the implementation so that if you change underlying implementation then interface would remain intact.

In this case whatever programs are using these interfaces, they would not be impacted and would just need a recompilation with the latest implementation.

28. C++ Data Encapsulation

All C++ programs are composed of the following two fundamental elements –

- **Program statements (code)** – This is the part of a program that performs actions and they are called functions.
- **Program data** – The data is the information of the program which gets affected by the program functions.

Encapsulation is an Object Oriented Programming concept that binds together the data and functions that manipulate the data, and that keeps both safe from outside interference and misuse. Data encapsulation led to the important OOP concept of **data hiding**.

Data encapsulation is a mechanism of bundling the data, and the functions that use them and **data abstraction** is a mechanism of exposing only the interfaces and hiding the implementation details from the user.

C++ supports the properties of encapsulation and data hiding through the creation of user-defined types, called **classes**. We already have studied that a class can contain **private**, **protected** and **public** members. By default, all items defined in a class are private. For example –

```
class Box {
public:
double getVolume(void) {
return length * breadth * height;
}

private:
double length; // Length of a box
double breadth; // Breadth of a box
double height; // Height of a box
};
```

The variables length, breadth, and height are **private**. This means that they can be accessed only by other members of the Box class, and not by any other part of your program. This is one way encapsulation is achieved.



To make parts of a class **public** (i.e., accessible to other parts of your program), you must declare them after the **public** keyword. All variables or functions defined after the public specifier are accessible by all other functions in your program.

Making one class a friend of another exposes the implementation details and reduces encapsulation. The ideal is to keep as many of the details of each class hidden from all other classes as possible.

Data Encapsulation Example

Any C++ program where you implement a class with public and private members is an example of data encapsulation and data abstraction. Consider the following example –

```
#include <iostream>
using namespace std;

class Adder {
public:
    // constructor
    Adder(int i = 0) {
        total = i;
    }

    // interface to outside world
    void addNum(int number) {
        total += number;
    }

    // interface to outside world
    int getTotal() {
        return total;
    };

private:
    // hidden data from outside world
    int total;
};

int main() {
    Adder a;

    a.addNum(10);
    a.addNum(20);
    a.addNum(30);

    cout << "Total " << a.getTotal() << endl;
```



```
return 0;
}
```

When the above code is compiled and executed, it produces the following result –

```
Total 60
```

Above class adds numbers together, and returns the sum. The public members **addNum** and **getTotal** are the interfaces to the outside world and a user needs to know them to use the class. The private member **total** is something that is hidden from the outside world, but is needed for the class to operate properly.

Designing Strategy

Most of us have learnt to make class members private by default unless we really need to expose them. That's just good **encapsulation**.

This is applied most frequently to data members, but it applies equally to all members, including virtual functions.

29. C++ Interface

An interface describes the behavior or capabilities of a C++ class without committing to a particular implementation of that class.

The C++ interfaces are implemented using **abstract classes** and these abstract classes should not be confused with data abstraction which is a concept of keeping implementation details separate from associated data.

A class is made abstract by declaring at least one of its functions as **pure virtual** function. A pure virtual function is specified by placing "= 0" in its declaration as follows –

```
class Box {
public:
    // pure virtual function
    virtual double getVolume() = 0;

private:
    double length; // Length of a box
    double breadth; // Breadth of a box
    double height; // Height of a box
}
```



```
};
```

The purpose of an **abstract class** (often referred to as an ABC) is to provide an appropriate base class from which other classes can inherit. Abstract classes cannot be used to instantiate objects and serves only as an **interface**. Attempting to instantiate an object of an abstract class causes a compilation error.

Thus, if a subclass of an ABC needs to be instantiated, it has to implement each of the virtual functions, which means that it supports the interface declared by the ABC. Failure to override a pure virtual function in a derived class, then attempting to instantiate objects of that class, is a compilation error.

Classes that can be used to instantiate objects are called **concrete classes**.

Abstract Class Example

Consider the following example where parent class provides an interface to the base class to implement a function called **getArea()** –

```
#include <iostream>

using namespace std;

// Base class
class Shape {
public:
    // pure virtual function providing interface framework.
    virtual int getArea() = 0;
    void setWidth(int w) {
        width = w;
    }

    void setHeight(int h) {
        height = h;
    }

protected:
    int width;
    int height;
};

// Derived classes
class Rectangle: public Shape {
public:
    int getArea() {
        return (width * height);
    }
}
```




```

};

class Triangle: public Shape {
public:
    int getArea() {
        return (width * height)/2;
    }
};

int main(void) {
    Rectangle Rect;
    Triangle Tri;

    Rect.setWidth(5);
    Rect.setHeight(7);

    // Print the area of the object.
    cout << "Total Rectangle area: " << Rect.getArea() << endl;

    Tri.setWidth(5);
    Tri.setHeight(7);

    // Print the area of the object.
    cout << "Total Triangle area: " << Tri.getArea() << endl;

    return 0;
}

```

When the above code is compiled and executed, it produces the following result –

```

Total Rectangle area: 35
Total Triangle area: 17

```

You can see how an abstract class defined an interface in terms of `getArea()` and two other classes implemented same function but with different algorithm to calculate the area specific to the shape.

Designing Strategy

An object-oriented system might use an abstract base class to provide a common and standardized interface appropriate for all the external applications. Then, through inheritance from that abstract base class, derived classes are formed that operate similarly.

The capabilities (i.e., the public functions) offered by the external applications are provided as pure virtual functions in the abstract base class. The implementations of these pure virtual functions are provided in the derived classes that correspond to the specific types of the application.



This architecture also allows new applications to be added to a system easily, even after the system has been defined.

30. C++ Interview Questions

Dear readers, these **C++ Interview Questions** have been designed specially to get you acquainted with the nature of questions you may encounter during your interview for the subject of **C++**. As per my experience good interviewers hardly plan to ask any particular question during your interview, normally questions start with some basic concept of the subject and later they continue based on further discussion.

What is the full form of OOPS?

Object Oriented Programming System.

What is a class?

Class is a blue print which reflects the entities attributes and actions. Technically defining a class is designing an user defined data type.

What is an object?

An instance of the class is called as object.

List the types of inheritance supported in C++.

Single, Multilevel, Multiple, Hierarchical and Hybrid.

What is the role of protected access specifier?

If a class member is protected then it is accessible in the inherited class. However, outside the both the private and protected members are not accessible.

What is encapsulation?

The process of binding the data and the functions acting on the data together in an entity (class) called as encapsulation.

What is abstraction?

Abstraction refers to hiding the internal implementation and exhibiting only the necessary details.

What is inheritance?

Inheritance is the process of acquiring the properties of the exiting class into the new class. The existing class is called as base/parent class and the inherited class is called as derived/child class.

Explain the purpose of the keyword volatile.



Declaring a variable volatile directs the compiler that the variable can be changed externally. Hence avoiding compiler optimization on the variable reference.

What is an inline function?

A function prefixed with the keyword inline before the function definition is called as inline function. The inline functions are faster in execution when compared to normal functions as the compiler treats inline functions as macros.

What is a storage class?

Storage class specifies the life or scope of symbols such as variable or functions.

Mention the storage classes names in C++.

The following are storage classes supported in C++

auto, static, extern, register and mutable

What is the role of mutable storage class specifier?

A constant class object's member variable can be altered by declaring it using mutable storage class specifier. Applicable only for non-static and non-constant member variable of the class.

Distinguish between shallow copy and deep copy.

Shallow copy does memory dumping bit-by-bit from one object to another. Deep copy is copy field by field from object to another. Deep copy is achieved using copy constructor and or overloading assignment operator.

What is a pure virtual function?

A virtual function with no function body and assigned with a value zero is called as pure virtual function.

What is an abstract class in C++?

A class with at least one pure virtual function is called as abstract class. We cannot instantiate an abstract class.

What is a reference variable in C++?

A reference variable is an alias name for the existing variable. Which mean both the variable name and reference variable point to the same memory location. Therefore updation on the original variable can be achieved using reference variable too.

What is role of static keyword on class member variable?

A static variable does exist though the objects for the respective class are not created. Static member variable share a common memory across all the objects created for the respective class. A static member variable can be referred using the class name itself.

Explain the static member function.

A static member function can be invoked using the class name as it exists before class objects

comes into existence. It can access only static members of the class.

Name the data type which can be used to store wide characters in C++.

wchar_t

What are/is the operator/operators used to access the class members?

Dot (.) and Arrow (->)

Can we initialize a class/structure member variable as soon as the same is defined?

No, Defining a class/structure is just a type definition and will not allocated memory for the same.

What is the data type to store the Boolean value?

bool, is the new primitive data type introduced in C++ language.

What is function overloading?

Defining several functions with the same name with unique list of parameters is called as function overloading.

What is operator overloading?

Defining a new job for the existing operator w.r.t the class objects is called as operator overloading.

Do we have a String primitive data type in C++?

No, it's a class from STL (Standard template library).

Name the default standard streams in C++.

cin, cout, cerr and clog.

Which access specifier/s can help to achieve data hiding in C++?

Private & Protected.

When a class member is defined outside the class, which operator can be used to associate the function definition to a particular class?

Scope resolution operator (::)

What is a destructor? Can it be overloaded?

A destructor is the member function of the class which is having the same name as the class name and prefixed with tilde (~) symbol. It gets executed automatically w.r.t the object as soon as the object loses its scope. It cannot be overloaded and the only form is without the parameters.

What is a constructor?

A constructor is the member function of the class which is having the same as the class name and gets executed automatically as soon as the object for the respective class is created.



What is a default constructor? Can we provide one for our class?

Every class does have a constructor provided by the compiler if the programmer doesn't provides one and known as default constructor. A programmer provided constructor with no parameters is called as default constructor. In such case compiler doesn't provides the constructor.

Which operator can be used in C++ to allocate dynamic memory?

'new' is the operator can be used for the same.

What is the purpose of 'delete' operator?

'delete' operator is used to release the dynamic memory which was created using 'new' operator.

Can I use malloc() function of C language to allocate dynamic memory in C++?

Yes, as C is the subset of C++, we can all the functions of C in C++ too.

Can I use 'delete' operator to release the memory which was allocated using malloc() function of C language?

No, we need to use free() of C language for the same.

What is a friend function?

A function which is not a member of the class but still can access all the member of the class is called so. To make it happen we need to declare within the required class following the keyword 'friend'.

What is a copy constructor?

A copy constructor is the constructor which take same class object reference as the parameter. It gets automatically invoked as soon as the object is initialized with another object of the same class at the time of its creation.

Does C++ supports exception handling? If so what are the keywords involved in achieving the same.

C++ does supports exception handling. try, catch & throw are keyword used for the same.

Explain the pointer – this.

This, is the pointer variable of the compiler which always holds the current active object's address.

What is the difference between the keywords struct and class in C++?

By default the members of struct are public and by default the members of the class are private.

Can we implement all the concepts of OOPS using the keyword struct?

Yes.

What is the block scope variable in C++?



A variable whose scope is applicable only within a block is said so. Also a variable in C++ can be declared anywhere within the block.

What is the role of the file opening mode `ios::trunc`?

If the file already exists, its content will be truncated before opening the file.

What is the scope resolution operator?

The scope resolution operator is used to

- Resolve the scope of global variables.
- To associate function definition to a class if the function is defined outside the class.

What is a namespace?

A namespace is the logical division of the code which can be used to resolve the name conflict of the identifiers by placing them under different name space.

What are command line arguments?

The arguments/parameters which are sent to the `main()` function while executing from the command line/console are called so. All the arguments sent are the strings only.

What is a class template?

A template class is a generic class. The keyword `template` can be used to define a class template.

How can we catch all kind of exceptions in a single catch block? What is keyword `auto` for?

By default every local variable of the function is automatic (`auto`). In the below function both the variables 'i' and 'j' are automatic variables.

```
void f()
{
    int i;

    auto int j;
}
```

NOTE – A global variable can't be an automatic variable.

What is a static variable?

A static local variable retains its value between the function call and the default value is 0. The following function will print 1 2 3 if called thrice.

```
void f()
{
    static int i;

    ++i;
    printf("%d ",i);
}
```



```
}
```

If a global variable is static then its visibility is limited to the same source code.

What is the purpose of extern storage specifier.

Used to resolve the scope of global symbol

```
#include <iostream>

using namespace std;
main() {
    extern int i;

    cout<<i<<endl;
}
int i = 20;
```

What is the meaning of base address of the array?

The starting address of the array is called as the base address of the array.

When should we use the register storage specifier?

If a variable is used most frequently then it should be declared using register storage specifier, then possibly the compiler gives CPU register for its storage to speed up the look up of the variable.

Can a program be compiled without main() function?

Yes, it can be but cannot be executed, as the execution requires main() function definition.

Where an automatic variable is stored?

Every local variable by default being an auto variable is stored in stack memory

What is a container class?

A class containing at least one member variable of another class type in it is called so.

What is a token?

A C++ program consists of various tokens and a token is either a keyword, an identifier, a constant, a string literal, or a symbol.

What is a preprocessor?

Preprocessor is a directive to the compiler to perform certain things before the actual compilation process begins.

What are command line arguments? What are the different ways of passing parameters to the functions? Which to use when?

- **Call by value** – We send only values to the function as parameters. We choose this if we do not want the actual parameters to be modified with formal parameters but just used.



- **Call by address** – We send address of the actual parameters instead of values. We choose this if we do want the actual parameters to be modified with formal parameters.
- **Call by reference** – The actual parameters are received with the C++ new reference variables as formal parameters. We choose this if we do want the actual parameters to be modified with formal parameters.

What is remainder for $5.0 \% 2$?

Error, It is invalid that either of the operands for the modulus operator (%) is a real number.

Which compiler switch to be used for compiling the programs using math library with g++ compiler?

Option -lm to be used as `> g++ -lm <file.cpp>`

Can we resize the allocated memory which was allocated using 'new' operator?

No, there is no such provision available.

Who designed C++ programming language?

Bjarne Stroustrup.

Which operator can be used to determine the size of a data type/class or variable/object?
sizeof

How can we refer to the global variable if the local and the global variable names are same?

We can apply scope resolution operator (::) to the for the scope of global variable.

What are valid operations on pointers?

The only two permitted operations on pointers are

- Comparison ii) Addition/Subtraction (excluding void pointers)

What is recursion?

Function calling itself is called as recursion.

What is the first string in the argument vector w.r.t command line arguments?

Program name.

What is the maximum length of an identifier?

Ideally it is 32 characters and also implementation dependent.

What is the default function call method?

By default the functions are called by value.

What are available mode of inheritance to inherit one class from another?

Public, private & protected

What is the difference between delete and delete[]?

Delete[] is used to release the array allocated memory which was allocated using new[] and delete is used to release one chunk of memory which was allocated using new.

Does an abstract class in C++ need to hold all pure virtual functions?

Not necessarily, a class having at least one pure virtual function is abstract class too.

Is it legal to assign a base class object to a derived class pointer?

No, it will be error as the compiler fails to do conversion.

What happens if an exception is thrown outside a try block?

The program shall quit abruptly.

Are the exceptions and error same?

No, exceptions can be handled whereas program cannot resolve errors.

What is function overriding?

Defining the functions within the base and derived class with the same signature and name where the base class's function is virtual.

Which function is used to move the stream pointer for the purpose of reading data from stream?

seekg()

Which function is used to move the stream pointer for the purpose of writing data from stream?

seekp()

Are class functions taken into consideration as part of the object size?

No, only the class member variables determines the size of the respective class object.

Can we create an empty class? If so what would be the size of such object.

We can create an empty class and the object size will be 1.

What is 'std'?

Default namespace defined by C++.

What is the full form of STL?

Standard template library

What is 'cout'?

cout is the object of ostream class. The stream 'cout' is by default connected to console output device.

What is 'cin'?

cin is the object of istream class. The stream 'cin' is by default connected to console input device.

What is the use of the keyword 'using'?



It is used to specify the namespace being used in.

If a pointer declared for a class, which operator can be used to access its class members?

Arrow (->) operator can be used for the same

What is difference between including the header file with-in angular braces < > and double quotes " "

If a header file is included with in < > then the compiler searches for the particular header file only with in the built in include path. If a header file is included with in " ", then the compiler searches for the particular header file first in the current working directory, if not found then in the built in include path

S++ or S = S+1, which can be recommended to increment the value by 1 and why?

S++, as it is single machine instruction (INC) internally.

What is the difference between actual and formal parameters?

The parameters sent to the function at calling end are called as actual parameters while at the receiving of the function definition called as formal parameters.

What is the difference between variable declaration and variable definition?

Declaration associates type to the variable whereas definition gives the value to the variable.

Which key word is used to perform unconditional branching?

goto.

Is 068 a valid octal number?

No, it contains invalid octal digits.

What is the purpose of #undef preprocessor?

It will be used to undefine an existing macro definition.

Can we nest multi line comments in a C++ code?

No, we cannot.

What is a virtual destructor?

A virtual destructor ensures that the objects resources are released in the reverse order of the object being constructed w.r.t inherited object.

What is the order of objects destroyed in the memory?

The objects are destroyed in the reverse order of their creation.

What is a friend class?

A class members can gain accessibility over other class member by placing the class declaration prefixed with the keyword 'friend' in the destination class.