

When Binarization Beats Full Precision: Effective Dimension and a Controlled Study of Embedding Compression for Dense Retrieval

Sajil Awale¹ and Tathagata Mukherjee¹

¹Department of Computer Science, The University of Alabama in Huntsville

June 19, 2026

Abstract

Dense retrieval systems store one floating-point embedding per document. At billion-scale these indices dominate serving cost, because they must reside in memory for low latency. Embedding compression reduces this cost. However, the literature evaluates post-hoc and training-time methods on different encoders and benchmarks, so practitioners cannot tell which to use. We present a controlled comparison. Three encoders with different retrieval priors (BGE, RoBERTa, and MPNet) are fine-tuned under identical conditions. Each is compressed with post-hoc methods (INT8, binary, Product Quantization (PQ), and TurboQuant), training-time binarization-aware training (BAT) with two gradient surrogates (Straight-Through Estimator and annealed tanh), Matryoshka Representation Learning (MRL), and stacked combinations. All are evaluated on NanoBEIR. We find that no method dominates across encoders. For BGE, which is pre-trained for retrieval, post-hoc PQ leads the Pareto frontier at every compression ratio. For RoBERTa and MPNet, training-time binarization leads instead. Most surprisingly, BAT exceeds the full-precision baseline on RoBERTa, raising Mean Reciprocal Rank at 10 (MRR@10) from 0.530 to 0.590. We trace this to effective dimension. Binarization spreads embedding variance across more axes, and the participation ratio rises from 11% to 30%. This improves ranking without changing recall, and the effect is structural rather than a result of under-training. We release a method-selection guide indexed by encoder and memory budget.

1 Introduction

Dense retrieval underpins many modern systems, including Retrieval-Augmented Generation (RAG) [18], question answering, and semantic search [15, 25]. A bi-encoder maps queries and documents to vectors, and relevance is scored by vector similarity. The corpus vectors are stored in an index that must reside in Random Access Memory (RAM) for low-latency search [13, 22]. This memory is the dominant cost at scale. A single BGE-base embedding is a 768-dimensional float32 vector of 3,072 bytes, so a corpus of one billion passages needs roughly 2.9 TB of RAM for the embeddings alone. Memory-optimized cloud instances are billed accordingly, so reducing the index size translates directly into lower cost [2].

Embedding compression addresses this cost, and two broad families exist. *Post-hoc* methods compress a fixed embedding after training: scalar quantization to INT8, binary quantization with Hamming search [27], Product Quantization (PQ) [12], and recent oblivious quantizers such as TurboQuant [36]. *Training-time* methods bake the compression into the objective: binarization-aware training through a Straight-Through Estimator (STE) [4, 10] or an annealed tanh surrogate [33], and Matryoshka Representation Learning (MRL) [16], which front-loads information so that truncated prefixes remain usable.

The gap. Despite a rich set of methods, a practitioner cannot easily decide which to use. The reason is methodological: prior studies evaluate different methods on different encoders, with different training data and benchmarks. Post-hoc studies and training-time studies rarely meet on common ground, and almost none vary the encoder backbone. So it is unknown whether a conclusion drawn on one encoder transfers to another, and whether training-time compression is worth its added cost relative to a simple post-hoc transform.

This work. We run a controlled comparison. Three encoders with deliberately different retrieval priors, BGE [32], RoBERTa [20], and MPNet [28], are fine-tuned under identical conditions on the same data. Each is then compressed by every method above and by stacked combinations, and all are evaluated on NanoBEIR [37] with paired significance testing. Because the only variable that changes is the compression method (and the backbone), differences are attributable to the method rather than to confounds of data or benchmark.

Findings. The headline result is that no single method dominates, and the winner depends on the encoder. For BGE, which is pre-trained at scale with a contrastive retrieval objective, post-hoc PQ leads the Pareto frontier at every tested compression ratio. For RoBERTa and MPNet, which lack retrieval pre-training, training-time binarization leads instead. Most surprisingly, binarization-aware training *exceeds the full-precision baseline* on RoBERTa, raising MRR@10 from 0.530 to 0.590, even though binarization removes information.

We explain this with the geometry of the embedding space. Encoders without retrieval pre-training produce anisotropic embeddings that occupy a narrow cone [6], which saturates similarities and harms fine-grained ranking. We quantify this with the *effective dimension*, or participation ratio [8, 19]. Binarization-aware training spreads variance across more axes, raising the participation ratio from 11% to 30% of 768 dimensions for RoBERTa. The gain shows up in ranking, not coverage: MRR@10 improves while Recall@10 does not. The effect is present from the first checkpoint and does not close with more training, so it is structural rather than a symptom of under-training. Because ranking under this metric depends on angular separation rather than per-axis precision, one bit per dimension is sufficient to realize the benefit.

Contributions.

- A controlled, cross-encoder comparison of post-hoc, training-time, and stacked embedding compression for dense retrieval, reported as Pareto frontiers with paired significance tests (Sections 3–4).
- The finding that binarization-aware training can exceed full precision on encoders without retrieval pre-training, with a mechanism: binarization raises the effective dimension of the embedding space and improves ranking without changing recall (Section 4, Section 5).
- Evidence that the best gradient surrogate and the value of stacking are backbone-dependent, including that annealed tanh combines with MRL more cleanly than STE, and that MRL+PQ extends the frontier to high compression (Section 4).
- A practical method-selection guide indexed by encoder type and memory budget (Section 5).

2 Related Work

Post-hoc compression. The simplest compressors act on a frozen embedding. Scalar quantization maps float32 to INT8 with per-dimension calibration, and is nearly lossless at $4\times$ [27]. Binary quantization takes the sign of each dimension and searches in Hamming space at $32\times$. Product Quantization (PQ) [12] splits the vector into subspaces and encodes each with a learned

codebook, and remains the strong baseline for learned-to-hash compression. TurboQuant [36] is a recent data-oblivious quantizer that applies a random rotation before scalar quantization to reach near-optimal distortion. These methods are cheap and model-agnostic, but they cannot change the representation they are given.

Training-time compression. A second family changes the representation during training. Binarization is not differentiable, so it is trained with a gradient surrogate: the Straight-Through Estimator (STE) [4, 10] passes gradients through the sign unchanged, while an annealed tanh sharpens a smooth surrogate into a step function over training [26, 33, 34]. Matryoshka Representation Learning (MRL) [16] trains nested sub-vectors so a single model serves many truncation dimensions. These methods can reshape the embedding geometry, but they cost a training run and have mostly been studied in isolation.

Closest prior work. Four lines are closest to ours. CoRECT [5] is the closest *evaluation* study: it compares compression techniques against corpus size and compression ratio across several models, but considers post-hoc methods only, with no training-time compression. QAMA [1] is the closest *method*: it stacks MRL with multi-bit quantization-aware training and learned thresholds, but relies on a penalty loss rather than a differentiable surrogate, and does not compare gradient surrogates. The Binary Passage Retriever (BPR) [33] compares annealed tanh against PQ and full precision, but never against STE. BEBR [7] deploys recurrent residual binarization at scale with runtime-selectable bit depth, but trains the compressor separately from the encoder. Our own prior work on a scientific-domain encoder [24] shows that binarization-aware training beats post-hoc binary, but on a single model and a single domain, using STE only.

Our position. No prior study compares post-hoc, training-time, *and* stacked compression on common ground across encoders with different retrieval priors, nor explains the backbone-dependent behavior we observe. We fill that gap, and we connect the behavior to the anisotropy of contextual embeddings [6] through the effective dimension [8, 19].

3 Experimental Design

Our design isolates the effect of the compression method. We hold the training data, schedule, and benchmark fixed, and vary only the encoder backbone and the compression method.

3.1 Backbones

We use three 768-dimensional encoders chosen for their differing retrieval priors. BGE-base-en-v1.5 [32] is pre-trained at scale with a contrastive retrieval objective and has the strongest prior. RoBERTa-base [20] is pre-trained with masked language modeling only and has the weakest retrieval geometry. MPNet-base [28] sits in between. All three are fine-tuned as bi-encoders [25] with mean pooling and cosine similarity.

3.2 Training

Each backbone is fine-tuned with a Multiple Negatives Ranking Loss (MNRL) [30], which pulls a query toward its positive document and pushes it away from in-batch negatives. The training mixture combines seven public retrieval sources [3, 9, 14, 17, 21, 35] with weighted sampling to rebalance the mixture. All backbones and all training-time variants share one hyperparameter configuration, so differences are not an artifact of per-method tuning. Training uses multi-GPU data-parallelism.

Table 1: Float32 baselines: pre-trained vs fine-tuned, mean MRR@10 over 13 NanoBEIR subsets. Δ is the change from fine-tuning.

Configuration	BGE	RoBERTa	MPNet
Pre-trained	0.691	0.097	0.156
Fine-tuned	0.685	0.530	0.582
Δ	-0.006	+0.434	+0.426

3.3 Compression methods

We evaluate four post-hoc methods, two training-time binarization variants, MRL, and stacked combinations.

Post-hoc. INT8 scalar quantization ($4\times$); binary quantization with Hamming search ($32\times$); PQ [12] over a grid of subspace counts M and code widths $n \in \{4, 8\}$ ($32\times$ to $384\times$); and TurboQuant [36] at 1 to 8 bits per dimension ($4\times$ to $32\times$). Post-hoc transforms reuse a single cached float32 encoding per checkpoint, so they add no encoding cost.

Training-time. Binarization-aware training (BAT) applies a binary layer before the loss, trained either with STE [4] or with annealed tanh at annealing rate $\gamma = 0.1$ [33]; both yield 768-bit codes at inference ($32\times$). MRL [16] trains nested sub-vectors evaluated at $d \in \{32, 64, 128, 256, 512, 768\}$.

Stacked. We pair MRL truncation with a second compressor: pure training-time stacks (MRL+BAT-STE, MRL+BAT-atanh) and hybrid stacks (MRL+post-hoc-binary, MRL+TurboQuant, MRL+PQ), reaching up to $384\times$ and beyond.

3.4 Evaluation

We evaluate on NanoBEIR [37], an efficient proxy for BEIR [29] with 13 subsets, 649 queries, and 57,390 corpus documents. The primary metric is Mean Reciprocal Rank at 10 (MRR@10), macro-averaged over the 13 subsets; we also report Recall@10 and nDCG@10 [11]. Float32 encodings are cached once per checkpoint and all transforms are applied at load time, so methods that share a checkpoint share one encoding. To test whether a difference between two methods is real, we use a paired Wilcoxon signed-rank test on per-query MRR@10 [31], with significance at $\alpha = 0.05$. We report compression as the ratio of float32 index bytes to compressed index bytes, and read off Pareto frontiers in the quality-compression plane.

4 Results

4.1 Float32 baselines

Table 1 reports the float32 ceilings. Fine-tuning helps the general-purpose encoders dramatically (RoBERTa +0.434, MPNet +0.426) but leaves BGE essentially unchanged (-0.006 , not significant, paired Wilcoxon $p = 0.49$), because BGE is already pre-trained for retrieval. These scores are the upper bounds for every compression method.

4.2 Post-hoc compression

INT8 at $4\times$ is near-lossless on all backbones (largest drop -0.015 on MPNet). At $32\times$, the four post-hoc methods separate clearly (Table 2, Figure 1). The ordering PQ > TurboQuant-1bit > post-hoc binary is stable across backbones, and PQ with 8-bit codes is best for BGE and MPNet,

Table 2: Four post-hoc methods at $32\times$, mean MRR@10. Best per backbone in bold; ties at displayed precision bolded together.

Method	Ratio	BGE	RoBERTa	MPNet
Float32 (fine-tuned)	$1\times$	0.685	0.530	0.582
Post-hoc binary	$32\times$	0.646	0.501	0.534
TurboQuant, 1-bit	$32\times$	0.666	0.519	0.547
PQ ($M=192, n=4$)	$32\times$	0.675	0.519	0.549
PQ ($M=96, n=8$)	$32\times$	0.679	0.514	0.562

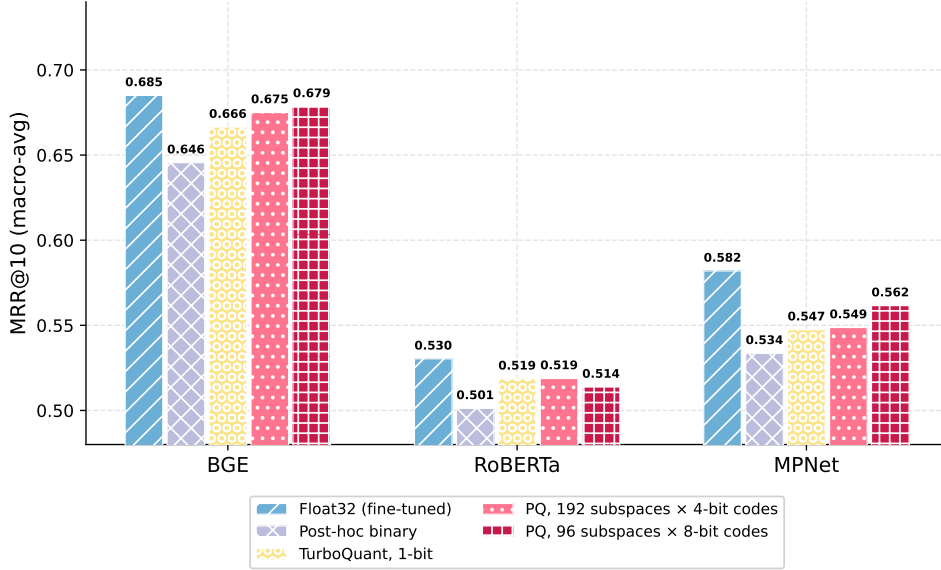


Figure 1: Post-hoc methods at $32\times$, mean MRR@10 by backbone. The y -axis starts at 0.48 to highlight inter-method differences.

recovering all but 0.6 points of the BGE float32 ceiling. Post-hoc binary is the weakest method everywhere.

4.3 Training-time binarization beats post-hoc, and sometimes float32

Both BAT variants beat post-hoc binary on every backbone (Table 3). The gains are largest on the general-purpose encoders: BAT-STE improves over post-hoc binary by 6.4 points on RoBERTa and 4.8 on MPNet, versus 1.3 on BGE. Strikingly, BAT *exceeds the float32 ceiling* on RoBERTa: BAT-STE reaches 0.565 ($p = 0.005$) and BAT-atanh reaches 0.590 ($p < 10^{-3}$), against a float32 baseline of 0.530. BAT-STE matches float32 on MPNet and BAT-STE is best on BGE, so the best surrogate is backbone-dependent.

4.4 Why binarization beats full precision on RoBERTa

The result is counterintuitive, because binarization removes information. We analyze it in three steps.

The gain is in ranking, not coverage. On RoBERTa, MRR@10 rises from 0.530 to 0.565 (STE) and 0.590 (atanh), both significant (Wilcoxon $p = 0.005$ and $p < 0.001$). Recall@10 barely moves (0.553 to 0.552 and 0.560) and is not significant ($p = 0.57$, $p = 0.27$). So the same relevant documents are retrieved, but the correct answers are ranked higher.

Table 3: Binarization-aware training vs post-hoc binary at $32\times$, mean MRR@10. The float32 fine-tune is the ceiling. Best $32\times$ result per backbone in bold.

Method	Ratio	BGE	RoBERTa	MPNet
Float32 (ceiling)	$1\times$	0.685	0.530	0.582
Post-hoc binary	$32\times$	0.645	0.501	0.534
BAT-STE	$32\times$	0.658	0.565	0.582
BAT-atanh ($\gamma=0.1$)	$32\times$	0.638	0.590	0.580

Table 4: Effective dimension d_{eff} (participation ratio) with retrieval quality, on the pooled NanoBEIR corpus. Binarization-aware training raises both d_{eff} and MRR@10 for RoBERTa.

Model	d_{eff}	% of 768	MRR@10	Recall@10
RoBERTa-FT	85	11.0%	0.530	0.553
BGE-FT	135	17.6%	0.685	0.656
MPNet-FT	102	13.3%	0.582	0.583
RoBERTa-BAT-STE	197	25.7%	0.565	0.552
RoBERTa-BAT-atanh	230	30.0%	0.590	0.560

The mechanism is effective dimension. Encoders without retrieval pre-training produce anisotropic embeddings that occupy a narrow cone [6]. We measure this with the effective dimension, or participation ratio [8, 19],

$$d_{\text{eff}} = \frac{(\sum_i \lambda_i)^2}{\sum_i \lambda_i^2}, \quad (1)$$

where λ_i are the 768 eigenvalues of the centered embedding covariance. d_{eff} counts how many axes carry variance. Float32 RoBERTa is the most compressed of the three spaces ($d_{\text{eff}} = 85$, or 11.0% of 768). Binarization-aware training spreads variance across more axes, raising d_{eff} to 25.7% (STE) and 30.0% (atanh), and MRR@10 tracks this increase (Table 4, Figure 2). Because ranking under Hamming and cosine depends on angular separation rather than per-axis precision, one bit per dimension is enough to realize the benefit.

It is RoBERTa-specific, and structural. BGE already has the highest float32 d_{eff} (17.6%), so it has little anisotropy to correct and binarization only costs it quality. MPNet is in between and is near-lossless under BAT. RoBERTa has the most to gain because it starts most compressed, which gives the relative ordering RoBERTa > MPNet > BGE. The gain is not under-training: evaluating intermediate checkpoints every 2,000 steps (Figure 3), both BAT variants sit above the float32 fine-tune from the first checkpoint, and the gap does not close with more training.

4.5 Matryoshka and stacked compression

MRL alone is near-lossless to $d = 256$ ($3\times$) on all backbones, then drops sharply below $d = 128$ (Figure 4). Its value is that it composes with a second compressor. Stacking MRL with a precision-reduction method pushes the frontier well beyond what either axis reaches alone (Figure 5). Three results stand out. First, MRL+PQ dominates the high-compression region: at $\geq 96\times$ it is best on every backbone, and its margin grows with compression (at $384\times$, by 13.0, 6.2, and 7.5 points on BGE, RoBERTa, and MPNet). Second, MRL+BAT-atanh beats MRL+BAT-STE on all backbones and all compression ratios, unlike the standalone case where atanh wins only on RoBERTa; binarizing with a sign before the MRL loss destroys more magnitude information than tanh. Third, MRL+BAT-atanh crosses the float32 ceiling on RoBERTa at $32\times$ (0.560 vs 0.530), the only backbone for which any stacked configuration does so.

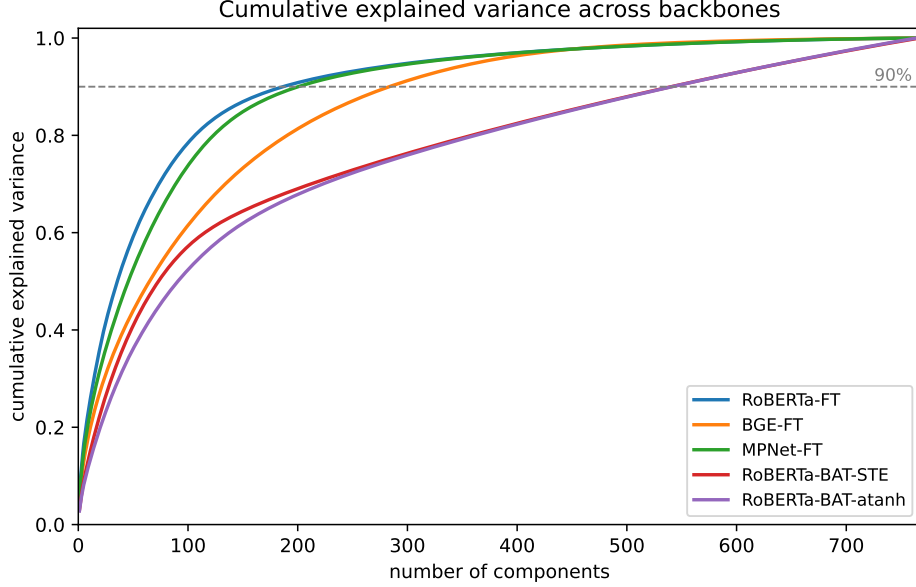


Figure 2: Cumulative explained variance vs number of principal components. A curve that rises quickly indicates a low effective dimension. RoBERTa-FT rises fastest; RoBERTa-BAT-atanh rises slowest.

4.6 Pareto frontiers and cross-backbone generalization

Figure 6 collects every configuration into per-backbone Pareto frontiers. The structure differs by backbone. For BGE the frontier is entirely post-hoc: TurboQuant in the moderate range and PQ (and MRL+PQ) from $32\times$ outward, spanning four orders of magnitude of compression. For RoBERTa and MPNet the $32\times$ frontier point is a *training-time* method instead: BAT-atanh on RoBERTa (0.590, 7.1 points above the best post-hoc point) and BAT-STE on MPNet (0.582, 2.0 points above). Normalizing each method by its own float32 ceiling (Figure 7), the post-hoc methods are backbone-invariant, while BAT-STE and BAT-atanh have the highest cross-backbone variance, with relative benefit ordered RoBERTa > MPNet > BGE. A study run only on a retrieval-specialized backbone therefore would not transfer to general-purpose backbones at high compression.

5 Discussion

Binary constraints as a regularizer. The central finding reframes binarization. On an encoder without retrieval pre-training, a sign constraint is not only a compression step but a regularizer that de-anisotropizes the embedding space. It spreads variance across more axes, de-saturates the similarity distribution, and improves fine-grained ranking. The constraint helps most where the float32 space is most anisotropic, which is why the benefit is ordered RoBERTa > MPNet > BGE and is absent for the retrieval-pre-trained encoder. The effective dimension is thus a cheap *diagnostic*: measuring d_{eff} of an encoder’s float32 embeddings, which costs one eigendecomposition and no training, predicts whether training-time binarization will help or hurt that backbone.

A method-selection guide. Because no method dominates, the practical contribution is a rule indexed by two variables: whether the encoder is pre-trained for retrieval, and the target memory budget (Table 5).

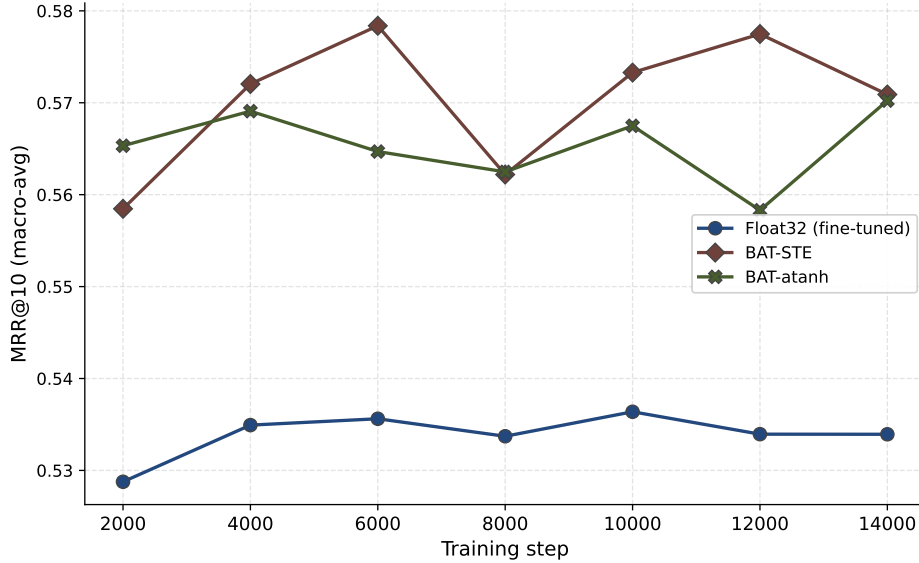


Figure 3: Mean MRR@10 at intermediate RoBERTa checkpoints. The gap from BAT to the float32 fine-tune is present early and does not close with training.

Table 5: Recommended compression method by encoder type and compression budget, from the Pareto frontiers in Section 4.6.

Budget	Retrieval-pre-trained (BGE)	General-purpose (RoBERTa, MPNet)
$\leq 8\times$	INT8 or TurboQuant-4bit (near-lossless)	INT8 or TurboQuant-4bit (near-lossless)
$32\times$	Post-hoc PQ ($n=8$)	Training-time BAT (atanh or STE)
$\geq 96\times$	Stacked MRL+PQ	Stacked MRL+PQ

Threats to validity. We state the limitations plainly. First, evaluation is on NanoBEIR, whose subsets are small; the backbone-dependent conclusions should be confirmed on full BEIR [29] or MTEB [23] at larger corpus scale, where compression behavior can shift. Second, each model is fine-tuned for a single epoch; although the training-trajectory analysis (Section 4.4) rules out under-training as the cause of the BAT gain, longer schedules could change absolute scores. Third, we report compression ratios rather than measured query latency and on-disk index size; these would close the loop from memory savings to end-to-end cost. Finally, the effective-dimension account is correlational across five models; a controlled intervention, such as injecting anisotropy into BGE and observing whether BAT’s relative benefit rises, would strengthen the causal claim.

6 Conclusion

We compared post-hoc, training-time, and stacked embedding compression for dense retrieval on common ground, across three encoders with different retrieval priors. No single method dominates. The right choice depends on whether the encoder is pre-trained for retrieval and on the memory budget: post-hoc PQ leads for the retrieval-pre-trained encoder, while training-time binarization leads for the general-purpose encoders, and stacked MRL+PQ leads at high compression for all. The most surprising result is that binarization-aware training can exceed the full-precision baseline on an encoder without retrieval pre-training. We explained this through effective dimension: binarization spreads embedding variance across more axes, improving ranking without changing recall, and the effect is structural rather than a symptom of under-training.

Future work follows directly. Scaling the evaluation to full BEIR and MTEB, and adding measured latency and index size, would test whether the backbone-dependent frontiers hold

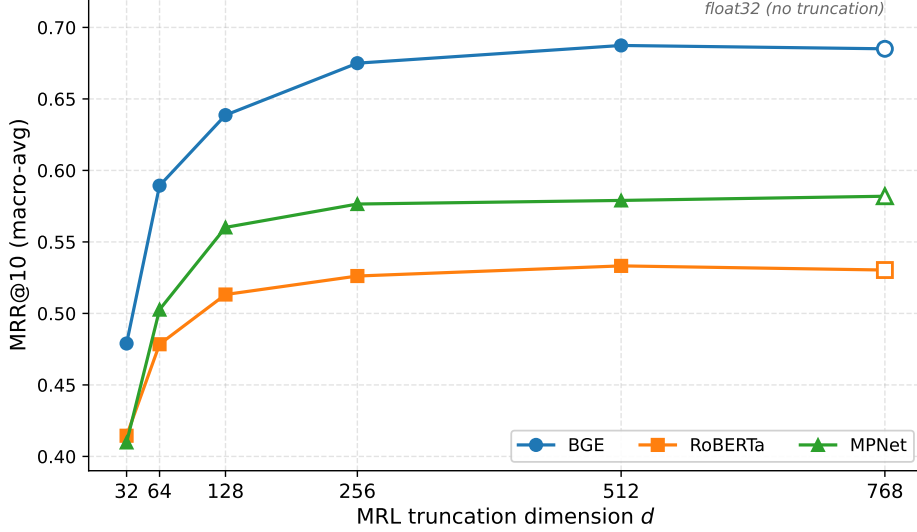


Figure 4: Mean MRR@10 vs MRL truncation dimension d . The point at $d = 768$ is the float32 baseline.

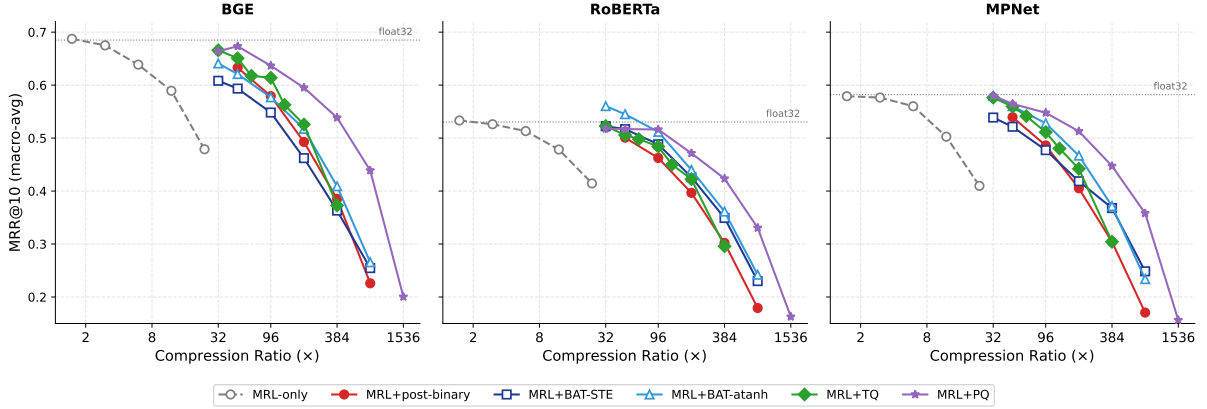


Figure 5: Mean MRR@10 vs compression ratio for the five stacked combinations and MRL-only (grey dashed). Hollow markers are pure training-time stacks; filled markers are hybrid stacks. The dotted line is the float32 baseline.

at deployment scale. Pairing MRL with recurrent residual binarization [7] would give runtime-selectable dimension and bit depth. And a controlled anisotropy intervention would turn the effective-dimension correlation into a causal account of when compression helps retrieval.

References

- [1] Faizan Ahemad. Quantization aware matryoshka adaptation: Leveraging matryoshka learning, quantization, and bitwise operations for reduced storage and improved retrieval speed. In *Proceedings of the 34th ACM International Conference on Information and Knowledge Management (CIKM)*, pages 25–34, 2025. URL <https://dl.acm.org/doi/10.1145/3746252.3761077>.
- [2] Amazon Web Services. Amazon EC2 on-demand pricing. <https://aws.amazon.com/ec2/pricing/on-demand/>, 2024. Accessed: 2026; per-GiB cost of the memory-optimized x2gd family derived from on-demand rates.
- [3] Payal Bajaj, Daniel Campos, Nick Craswell, Li Deng, Jianfeng Gao, Xiaodong Liu, Rangan Majumder, Andrew McNamara, Bhaskar Mitra, Tri Nguyen, et al. MS MARCO: A human

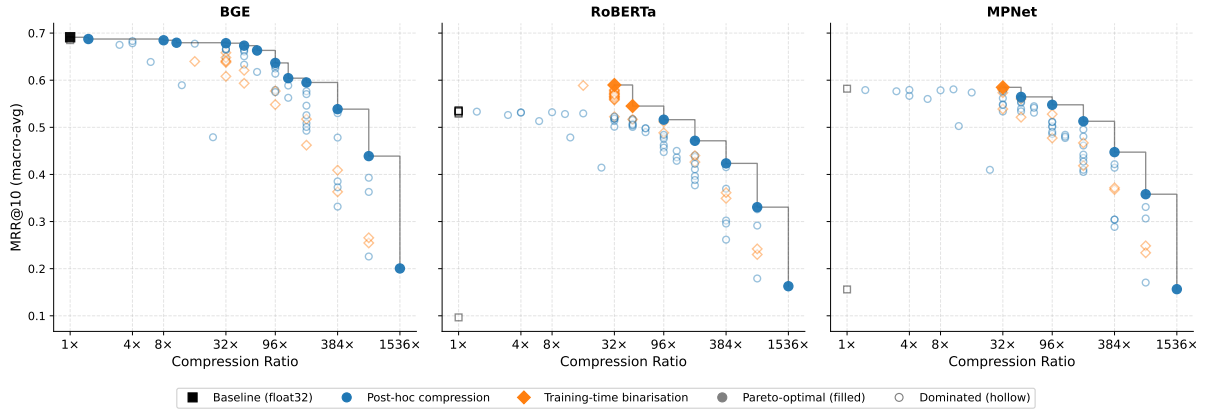


Figure 6: Quality vs compression Pareto frontiers for BGE, RoBERTa, and MPNet (x -axis log scale). Filled markers are Pareto-optimal; hollow markers are dominated. Colour encodes method family.

generated MACHine Reading COMprehension dataset. In *Proceedings of the Workshop on Cognitive Computation: Integrating Neural and Symbolic Approaches (CoCo@NIPS)*, 2016.

- [4] Yoshua Bengio, Nicholas Léonard, and Aaron Courville. Estimating or propagating gradients through stochastic neurons for conditional computation. *arXiv preprint arXiv:1308.3432*, 2013.
- [5] Laura Caspari, Michael Dinzinger, Kanishka Ghosh Dastidar, Christofer Fellicious, Jelena Mitrović, and Michael Granitzer. CoRECT: A framework for evaluating embedding compression techniques at scale. *arXiv preprint arXiv:2510.19340*, 2025.
- [6] Kawin Ethayarajh. How contextual are contextualized word representations? comparing the geometry of BERT, ELMo, and GPT-2 embeddings. In *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing (EMNLP-IJCNLP)*, pages 55–65, 2019.
- [7] Yukang Gan, Yixiao Ge, Chang Zhou, Shupeng Su, Zhouchuan Xu, Xuyuan Xu, Quanchao Hui, Xiang Chen, Yexin Wang, and Ying Shan. Binary embedding-based retrieval at tencent. In *Proceedings of the 29th ACM SIGKDD Conference on Knowledge Discovery and Data Mining*, pages 3966–3977, 2023.
- [8] Peiran Gao, Eric Trautmann, Byron Yu, Gopal Santhanam, Stephen Ryu, Krishna Shenoy, and Surya Ganguli. A theory of multineuronal dimensionality, dynamics and measurement. *bioRxiv*, page 214262, 2017.
- [9] Tianyu Gao, Xingcheng Yao, and Danqi Chen. SimCSE: Simple contrastive learning of sentence embeddings. In *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing*, pages 6894–6910, 2021.
- [10] Itay Hubara, Matthieu Courbariaux, Daniel Soudry, Ran El-Yaniv, and Yoshua Bengio. Binarized neural networks. In *Advances in Neural Information Processing Systems*, volume 29, pages 4107–4115, 2016.
- [11] Kalervo Järvelin and Jaana Kekäläinen. Cumulated gain-based evaluation of IR techniques. *ACM Transactions on Information Systems*, 20(4):422–446, 2002.
- [12] Hervé Jégou, Matthijs Douze, and Cordelia Schmid. Product quantization for nearest neighbor search. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 33(1): 117–128, 2010.

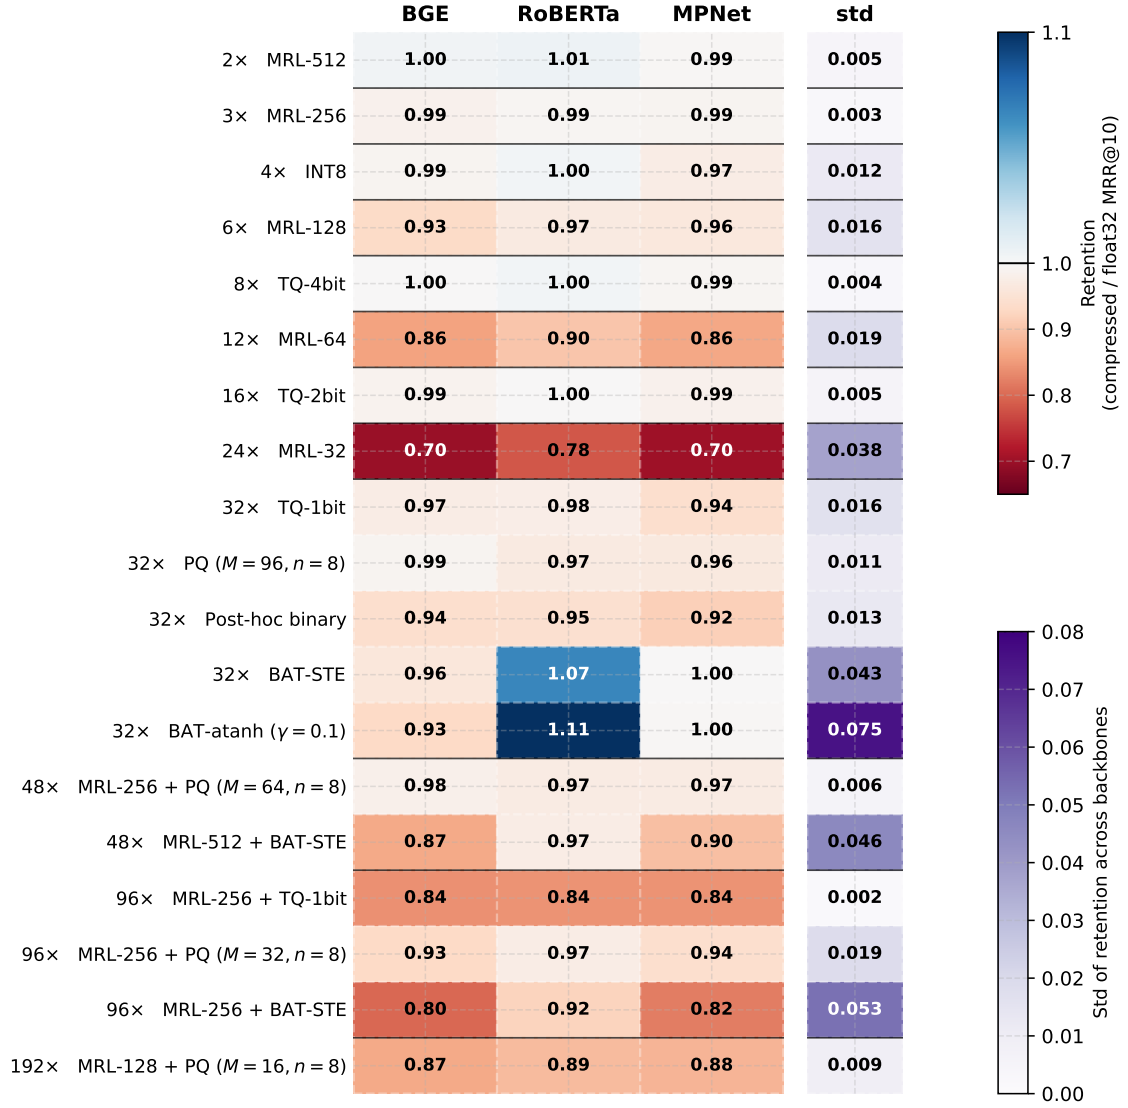


Figure 7: Quality retention (compressed MRR@10 divided by the same backbone’s float32 MRR@10) by configuration. The rightmost column shows the cross-backbone standard deviation.

- [13] Jeff Johnson, Matthijs Douze, and Hervé Jégou. Billion-scale similarity search with GPUs. *IEEE Transactions on Big Data*, 7(3):535–547, 2021.
- [14] Mandar Joshi, Eunsol Choi, Daniel S. Weld, and Luke Zettlemoyer. TriviaQA: A large scale distantly supervised challenge dataset for reading comprehension. In *Proceedings of the 55th Annual Meeting of the Association for Computational Linguistics*, pages 1601–1611, 2017.
- [15] Vladimir Karpukhin, Barlas Oğuz, Sewon Min, Patrick Lewis, Ledell Wu, Sergey Edunov, Danqi Chen, and Wen-tau Yih. Dense passage retrieval for open-domain question answering. In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing*, pages 6769–6781, 2020.
- [16] Aditya Kusupati, Gantavya Bhatt, Aniket Rege, Matthew Wallingford, Aditya Sinha, Vivek Ramanujan, William Howard-Snyder, Kaifeng Chen, Sham Kakade, Prateek Jain, et al. Matryoshka representation learning. In *Advances in Neural Information Processing Systems*, volume 35, pages 30233–30249, 2022.
- [17] Tom Kwiatkowski, Jennimaria Palomaki, Olivia Redfield, Michael Collins, Ankur Parikh,

- Chris Alberti, Danielle Epstein, Illia Polosukhin, Jacob Devlin, Kenton Lee, et al. Natural questions: A benchmark for question answering research. *Transactions of the Association for Computational Linguistics*, 7:452–466, 2019.
- [18] Patrick Lewis, Ethan Perez, Aleksandra Piktus, Fabio Petroni, Vladimir Karpukhin, Naman Goyal, Heinrich Küttler, Mike Lewis, Wen-tau Yih, Tim Rocktäschel, et al. Retrieval-augmented generation for knowledge-intensive NLP tasks. In *Advances in Neural Information Processing Systems*, volume 33, pages 9459–9474, 2020.
- [19] Ashok Litwin-Kumar, Kameron Decker Harris, Richard Axel, Haim Sompolinsky, and L. F. Abbott. Optimal degrees of synaptic connectivity. *Neuron*, 93(5):1153–1164, 2017.
- [20] Yinhan Liu, Myle Ott, Naman Goyal, Jingfei Du, Mandar Joshi, Danqi Chen, Omer Levy, Mike Lewis, Luke Zettlemoyer, and Veselin Stoyanov. RoBERTa: A robustly optimized BERT pretraining approach. *arXiv preprint arXiv:1907.11692*, 2019.
- [21] Kyle Lo, Lucy Lu Wang, Mark Neumann, Rodney Kinney, and Daniel S. Weld. S2ORC: The semantic scholar open research corpus. In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 4969–4983, 2020.
- [22] Yury A. Malkov and Dmitry A. Yashunin. Efficient and robust approximate nearest neighbor search using hierarchical navigable small world graphs. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 42(4):824–836, 2020.
- [23] Niklas Muennighoff, Nouamane Tazi, Loïc Magne, and Nils Reimers. MTEB: Massive text embedding benchmark. In *Proceedings of the 17th Conference of the European Chapter of the Association for Computational Linguistics*, pages 2014–2037, 2023.
- [24] Nishan Pantha, Sajil Awale, Vishnudev Kuruvanthodi, Simran KC, Muthukumaran Ramasubramanian, Carson Davis, Bishwas Praveen, Emily Foshee, Bishwaranjan Bhattacharjee, Kaylin Bugbee, and Rahul Ramachandran. INDUS-SDE: A language model for scientific content curation and discovery. In *Proceedings of the 32nd ACM SIGKDD Conference on Knowledge Discovery and Data Mining V.2 (KDD '26)*, New York, NY, USA, August 2026. Association for Computing Machinery. ISBN 979-8-4007-2259-2/2026/08. doi: 10.1145/3770855.3818847.
- [25] Nils Reimers and Iryna Gurevych. Sentence-BERT: Sentence embeddings using siamese BERT-networks. In *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing*, pages 3982–3992, 2019.
- [26] Karsten Schrödter, Jan Stenkamp, Nina Herrmann, and Fabian Gieseke. Trainable bitwise soft quantization for input feature compression. In *Proceedings of the Third Conference on Parsimony and Learning (CPAL)*, 2026. URL <https://arxiv.org/abs/2603.05172>.
- [27] Aamir Shakir, Tom Aarsen, and Sean Lee. Embedding quantization. <https://huggingface.co/blog/embedding-quantization>, March 2024. Hugging Face Blog. Accessed: 2024.
- [28] Kaitao Song, Xu Tan, Tao Qin, Jianfeng Lu, and Tie-Yan Liu. MPNet: Masked and permuted pre-training for language understanding. In *Advances in Neural Information Processing Systems*, volume 33, pages 16857–16867, 2020.
- [29] Nandan Thakur, Nils Reimers, Andreas Rücklé, Abhishek Srivastava, and Iryna Gurevych. BEIR: A heterogeneous benchmark for zero-shot evaluation of information retrieval models. In *Thirty-fifth Conference on Neural Information Processing Systems Datasets and Benchmarks Track*, 2021.

- [30] Aaron van den Oord, Yazhe Li, and Oriol Vinyals. Representation learning with contrastive predictive coding. *arXiv preprint arXiv:1807.03748*, 2018.
- [31] Frank Wilcoxon. Individual comparisons by ranking methods. *Biometrics Bulletin*, 1(6): 80–83, 1945.
- [32] Shitao Xiao, Zheng Liu, Peitian Zhang, and Niklas Muennighoff. C-Pack: Packaged resources to advance general Chinese embedding. *arXiv preprint arXiv:2309.07597*, 2023.
- [33] Ikuya Yamada, Akari Asai, and Hannaneh Hajishirzi. Efficient passage retrieval with hashing for open-domain question answering. In *Proceedings of the 59th Annual Meeting of the Association for Computational Linguistics and the 11th International Joint Conference on Natural Language Processing (Volume 2: Short Papers)*, pages 979–986, 2021.
- [34] Jiwei Yang, Xu Shen, Jun Xing, Xinmei Tian, Houqiang Li, Bing Deng, Jianqiang Huang, and Xian-Sheng Hua. Quantization networks. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 7308–7316, 2019.
- [35] Zhilin Yang, Peng Qi, Saizheng Zhang, Yoshua Bengio, William W. Cohen, Ruslan Salakhutdinov, and Christopher D. Manning. HotpotQA: A dataset for diverse, explainable multi-hop question answering. In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing*, pages 2369–2380, 2018.
- [36] Amir Zandieh, Majid Daliri, Majid Hadian, and Vahab Mirrokni. TurboQuant: Online vector quantization with near-optimal distortion rate. In *The Thirteenth International Conference on Learning Representations*, 2026. URL <https://openreview.net/forum?id=t03ASKZlok>.
- [37] Zeta Alpha. NanoBEIR: A collection of smaller versions of BEIR datasets. <https://huggingface.co/collections/zeta-alpha-ai/nanobeir-66e1a0af21dfd93e620cd9f6>, 2024. Hugging Face dataset collection.