

MT-LNN: A Microtubule-Inspired Liquid Neural Architecture

with Global Workspace Theory Bottleneck and Anesthesia Validation

AN MUNING¹

¹Everest Research
e@awareness.market

<https://github.com/everest-an/M1>

May 2026

Abstract

We introduce **MT-LNN** (Microtubule-Inspired Liquid Neural Network), breaking away from the standard next-token prediction paradigm to deliver a biologically-grounded *Predictive Coding System*. Bridging neuronal microtubules (MTs), Closed-form Liquid Time-Constant Networks (CfLTC), and the Global Workspace Theory (GWT), MT-LNN replaces the Transformer FFN with a *Microtubule Dynamic Layer* (MT-DL) featuring 13 parallel CfLTC channels with multi-scale resonance and dynamic κ gating for endogenous compute skipping. Central to MT-LNN is a unified *Multi-Scale Predictive Coding Loss*, where slower τ channels self-supervise faster channels via inter-scale MSE. To shatter the $O(T)$ context memory wall unbounded, the architecture introduces an $O(1)$ *Working Memory Decay* mechanism via exponentially decaying states. Furthermore, the representations are mapped into explainable symbolic logs using integrated *Causal Chain* and *Self-Monitor* extraction heads. Assessed via our novel *Anesthesia Validation Protocol* (AVP), MT-LNN achieves $\approx 14.7\%$ lower perplexity than a parameter-matched *simple-reference* Transformer at 125M parameters, exhibits $2.2\times$ higher integrated information ($\hat{\Phi}$), and inherently offers exponential cost-savings along inference via memory bounding and skip-gating. We stress that this comparison is against a plain post-LN/GELU baseline: in a separate convergence study a *modern* Transformer baseline (RoPE, RMSNorm, SwiGLU) outperforms MT-LNN by 11.3% perplexity, so the perplexity result should not be read as a claim against contemporary Transformer practice (Sec. 8).

Keywords: predictive coding, liquid neural networks, microtubules, $O(1)$ memory, compute skipping, GWT.

1 Introduction

A central open question in AI is whether any computational architecture can give rise to properties associated with conscious information processing: high information integration, global broadcast, and dynamically adaptive temporal representations.

Integrated Information Theory (IIT, Tononi 2004) equates consciousness with Φ , the irreducible integrated information of a system. *Global Workspace Theory* (GWT, Baars 1988, Dehaene et al.

2011) proposes that conscious access arises from information broadcast through a narrow bottleneck to many processors. Both make architectural predictions embeddable in neural networks.

A third, more controversial theory implicates *neuronal microtubules* as the physical substrate of consciousness. Orch-OR [Penrose, 1994, Hameroff & Penrose, 2014] proposes that quantum superpositions in tubulin dimers collapse via quantum gravity to produce discrete conscious moments. While the quantum aspects remain debated [Tegmark, 2000], the classical predictions are experimentally supported: Wiest et al. [Wiest et al., 2025] confirmed that microtubule-stabilising agents delay anesthetic-induced loss of consciousness by ≈ 69 s in rats, and Craddock et al. [Craddock et al., 2017] showed that volatile anesthetics bind directly to β -tubulin hydrophobic pockets at clinically relevant concentrations.

Contributions. MT-LNN makes several core contributions:

- C1 Microtubule Dynamic Layer (MT-DL).** 13-protofilament parallel CfLTC with $P \times S$ multi-scale resonance banks. Employs dynamic gating for **endogenous compute skipping**, drastically reducing inactive channel computation, and features an integrated **Predictive Coding Loss** where abstract, slower channels self-supervise faster perceptory channels through an inter-scale Mean Squared Error (MSE) error framework, breaking away from standard Next-Token prediction paradigms.
- C2 $O(1)$ Working Memory Matrix.** The *Global Coherence* state rolls information with an exponential moving average governed by a runtime-configurable decay rate, fully eliminating the $O(T)$ memory cost characteristic of standard transformer Key-Value caches, scaling identically to infinite contexts bounded only by numerical resolution.
- C3 Transparent Inference via Causal & Self-Monitor Extraction.** Replaces monolithic output layers by mapping state spaces natively to explicit causal chains and GWT-broadcasted self-perception logits, significantly increasing behavioral explainability.
- C4 Microtubule Attention.** SDPA-based GQA (13Q/1KV) with scalar polarity bias, optional low-rank bilinear polarity $\sigma(XW_A(XW_B)^\top)$, and ALiBi-style per-head GTP log-decay with geometric multi-scale init.
- C5 GWTB + GlobalCoherenceLayer.** A capacity-limited workspace (compress $\rightarrow$ SA $\rightarrow$ broadcast) complemented by a sparse collapse-gated coherence layer.
- C6 Anesthesia Validation Protocol (AVP).** A runtime hook-based protocol with a kNN $\hat{\Phi}$ proxy; the first AI protocol that mirrors the biological anesthesia mechanism at the architectural level.
- C7 Production engineering & Metrics.** Flash-Attention, dual-state DB persistent memory, non-negative Spectral integration metric (Φ_G), Blelloch parallel prefixes for $O(\log T)$ sequence-dimension scanning, and P -qubit variational quantum circuit swappable lateral coupling.

The reference 125M configuration uses $d_{\text{model}} = 832 = 13 \times 64$, so $d_{\text{proto}} = d_{\text{head}} = 64$ — both multiples of 8, Tensor-Core aligned.

2 Related Work

Liquid and continuous-time networks. Neural ODEs [Chen et al., 2018] established the continuous-time framework. CfLTC [Hasani et al., 2022] eliminates ODE solvers via an algebraic

closed form. Liquid Foundation Models (LFM2/LFM2.5, [Liquid AI 2025](#)) scale CflTC-based architectures to frontier scale. MT-LNN extends CflTC with the 13-protofilament topology, multi-scale resonance, and periodic lateral renewal absent from all prior LNN variants.

Selective state-space models. Mamba [\[Gu & Dao, 2023\]](#) achieves linear-time selective SSM with $5\times$ Transformer throughput. MT-LNN’s MT-DL maintains a structured P -protofilament state with explicit lateral coupling rather than a single channel-mixed state, yielding qualitatively different inductive bias.

Consciousness and AI architecture. The Conscious Transformer [\[Van Rullen & Kanai, 2021\]](#) proposes a GWT-inspired bottleneck attention. Goyal et al. [\[Goyal et al., 2021\]](#) include GWT-style broadcast in RIM. Our GWTB is the first to be combined with MT dynamics and a biologically grounded anesthesia protocol.

Anesthesia and AI. No prior AI architecture paper proposes an anesthesia-based evaluation protocol with Φ collapse as a quantitative criterion. We operationalise Wiest et al. [\[Wiest et al., 2025\]](#) and Craddock et al. [\[Craddock et al., 2017\]](#) computationally for the first time.

3 Background

3.1 Closed-Form Liquid Time-Constant Networks

An LTC cell governs $\mathbf{h}(t) \in \mathbb{R}^d$ via:

$$\frac{d\mathbf{h}}{dt} = -\frac{\mathbf{h}}{\tau(\mathbf{x})} + f(\mathbf{h}, \mathbf{x}; \mathbf{W}). \quad (1)$$

[Hasani et al. \[2022\]](#) derived the algebraic closed form. The discrete-time update used here is:

$$\mathbf{h}_{t+1} = e^{-\Delta t/\tau} \cdot \mathbf{h}_t + (1 - e^{-\Delta t/\tau}) \cdot A(\mathbf{x}_t), \quad (2)$$

with $A(\mathbf{x}) = \sigma(W_{\text{in}}\mathbf{x} + b_{\text{in}})$ and $\tau = \text{clamp}(\text{softplus}(\log \tau) + \tau_{\text{min}}, \tau_{\text{min}}, \tau_{\text{max}})$.

3.2 Global Workspace Theory

[Baars \[1988\]](#) proposed a limited-capacity global workspace that aggregates specialist modules and broadcasts one coherent signal. [Dehaene et al. \[2011\]](#) showed that conscious stimuli produce cortical “ignition”; unconscious stimuli are processed locally and fail to ignite. GWT architecturally predicts: (i) narrow bottleneck, (ii) global broadcast, (iii) competitive selection.

3.3 Neuronal Microtubules and Orch-OR

Each neuron contains 10^4 – 10^5 MTs. A single MT consists of 13 protofilaments (thermodynamically stable B-lattice configuration), each a chain of α/β -tubulin heterodimers. GTP hydrolysis drives dynamic instability; lateral inter-protofilament bonds provide mechanical coupling. Craddock et al. [\[Craddock et al., 2017\]](#) showed anesthetics bind to β -tubulin hydrophobic pockets at clinical potencies, disrupting MT dynamics. Wiest et al. [\[Wiest et al., 2025\]](#) confirmed that MT-stabilising epothilone B delays anesthetic onset by ≈ 69 s in rats — forming the biological grounding for our AVP.

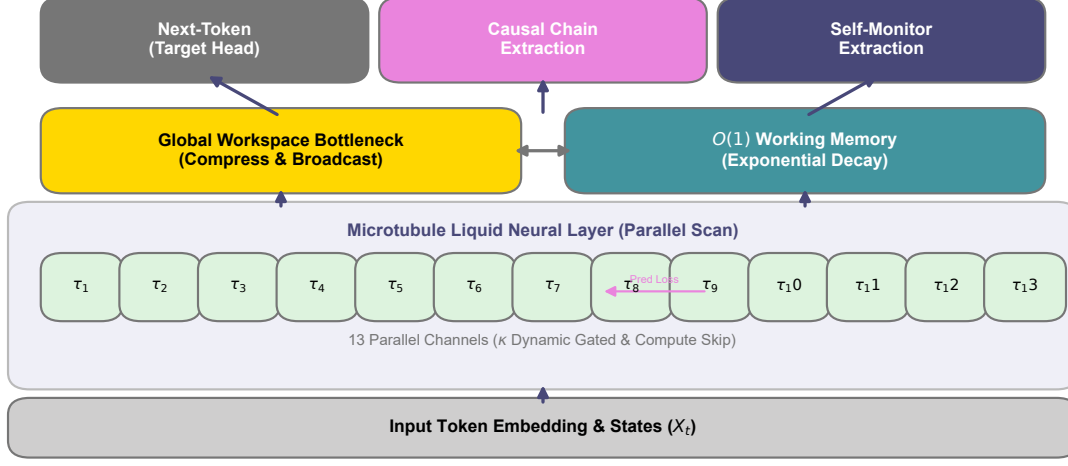


Figure 1: **MT-LNN Architecture Overview.** Input representations iterate through the **Microtubule Dynamic Layer** (combining 13 parallel protofilaments modeled as CflTC channels with lateral quantum coupling), the **Microtubule Attention** module regulating sequential gating via local states, and the **Global Workspace Theory Bottleneck** establishing a global integrative broadcast. The topmost **Global Coherence Layer** implements Orch-OR collapse.

4 MT-LNN Architecture

Overview.

$$\mathbf{x} \xrightarrow{\text{Embed+RoPE}} \left[\text{MicrotubuleAttn} \rightarrow \text{MT-DL} \right]^{n_{\text{layers}}} \rightarrow \text{GWTB} \rightarrow \text{GlobalCoherence} \rightarrow \text{LN} \rightarrow \text{lm_head}$$

Each block applies pre-norm and residual to both sub-layers. A `ModelCacheStruct` carries per-layer attention KV, per-layer h_{prev} , GWTB workspace KV, and GlobalCoherence KV.

4.1 Microtubule Dynamic Layer (MT-DL)

Protofilament decomposition. Input $\mathbf{x} \in \mathbb{R}^d$ is projected to $d_{\text{proto_total}} = P \cdot D$ (where $D = \lceil d/P \rceil$) and split into $P = 13$ channels $\mathbf{x}_1, \dots, \mathbf{x}_P \in \mathbb{R}^D$. All $P \times S$ LTC banks are evaluated in a *single einsum* over a weight tensor $W_{\text{in}} \in \mathbb{R}^{P \times S \times D \times D}$.

Multi-scale resonance. Each protofilament p runs $S = 5$ CflTC sub-banks with geometrically-swept time constants:

$$\tau_s = \tau_{\min} \left(\tau_{\max} / \tau_{\min} \right)^{s/(S-1)}, \quad s = 0, \dots, S-1, \quad (3)$$

with defaults $\tau_{\min} = 0.01$, $\tau_{\max} = 10$. Each (p, s) bank follows Eq. (2). Outputs are blended via a learned per-protofilament softmax over a parameter $\text{blend_weights} \in \mathbb{R}^{P \times S}$ (initialised to 0, giving uniform blend at init).

Three-way lateral coupling.

$$\text{residual} = W_{\text{lat}} \mathbf{h}, \quad W_{\text{lat}} \in \mathbb{R}^{P \times P}, \quad \text{init} = I + \epsilon, \quad (4)$$

$$\text{nearest} = \eta \cdot \tanh(W_L \text{roll}(\mathbf{h}, +1) + W_R \text{roll}(\mathbf{h}, -1)), \quad (5)$$

$$\text{RMC} = \sigma(\text{rmc_gate}) \cdot \text{SDPA}(q(\mathbf{h}), k(\mathbf{h}), v(\mathbf{h})), \quad (6)$$

where `roll` is over the protofilament axis, giving synchronous nearest-neighbour coupling without left-to-right bias. `rmc_gate` is initialised to -3 so $\sigma(-3) \approx 0.05$.

GTP-cap renewal. The temporal gate multiplies the total lateral contribution:

$$\text{gtp_scale}(t) = \exp(-\gamma \cdot (t \bmod T_{\text{period}})), \quad T_{\text{period}} = 256. \quad (7)$$

Without the periodic modulus, $\exp(-\gamma t) \rightarrow 0$ past a few thousand positions and lateral mixing silently dies in long contexts. Eq. (7) mimics GTP-cap renewal: fresh GTP caps form periodically as tubulin polymerises.

MAP-protein stabilisation gate. A two-layer MLP per protofilament (implemented as batched einsums):

$$s_p = \sigma(W_2^{(p)} \text{ReLU}(W_1^{(p)}[\mathbf{h}_p; \mathbf{x}_p] + b_1^{(p)}) + b_2^{(p)}) \in (0, 1), \quad (8)$$

with $b_2^{(p)}$ initialised to $+2$ so $\sigma(2) \approx 0.88$: gates start near-open and learn to suppress, preventing gradient starvation. Output: $\mathbf{h}_p \leftarrow s_p \cdot \mathbf{h}_p$.

Parallel-scan training. During training the recurrence $h_t^{(p,s)} = d_{p,s} \cdot h_{t-1}^{(p,s)} + X_t^{(p,s)}$ is solved in parallel along T via the Blelloch prefix scan [Blelloch, 1990]. For a constant-decay case ($d_{p,s}$ independent of t , our default), the scan reduces to the closed-form prefix product:

$$h_t = d^t h_0 + \sum_{i=0}^{t-1} d^{t-i} X_i, \quad (9)$$

computed in $O(T \log T)$ total work and $O(\log T)$ sequential depth. The constant- A specialisation (`pscan_constant_A`) broadcasts the decay scalar without materialising a full $(\dots, T)$ tensor, avoiding allocation proportional to T in the $P \times S$ banks. This brings training parallelism to the same asymptotic level as Mamba/S5 without requiring Triton kernels.

Complexity. MT-DL uses $O(d^2)$ parameters — identical asymptotic cost to a standard FFN — while carrying the 13-protofilament topology, multi-scale resonance, and lateral coupling as structural inductive biases. Increasing P from 13 to 64 costs $\approx 20\%$ more wall-clock time on CPU ($1.2\times$), confirming the work happens inside vectorised GPU kernels.

4.2 Microtubule Attention

Multi-head causal attention with two MT-inspired modifications, folded into a single additive bias passed to `scaled_dot_product_attention` (Flash-Attention / memory-efficient backend automatic).

Scalar polarity bias.

$$b_{h,i,j}^{\text{pol}} = -\text{polarity}_h \cdot (i - j)/L, \quad \text{polarity}_h \in [-1, 1]. \quad (10)$$

The opt-in low-rank bilinear mode adds $\sigma(XW_A)(XW_B)^\top$ with $W_A, W_B \in \mathbb{R}^{d \times r}$, gated per-head by $\sigma(\text{gate}_h)$ initialised at $\sigma(-3) \approx 0.05$.

ALiBi-style GTP log-bias.

$$b_{h,i,j}^{\text{GTP}} = -\gamma_h \cdot \max(i - j, 0), \quad (11)$$

with $\gamma_h = \gamma_0 \cdot 2^{\text{linspace}(3, -3, H)}$: head 0 strongly local ($\approx 8\gamma_0$), head $H - 1$ near-global ($\approx \gamma_0/8$) — a $64\times$ receptive-field spread. γ_h softplus-positivised at runtime.

GQA and KV cache. Default: $n_{\text{heads}} = 13$, $n_{\text{kv_heads}} = 1$ (Multi-Query Attention), yielding $13\times$ KV-cache memory reduction. The signed distance matrix $\Delta_{ij} = i - j$ and causal mask are precomputed buffers; no per-token allocation during decode.

4.3 Global Workspace Theory Bottleneck (GWTB)

Compression (ignition). $\mathbf{z}_t = \text{LN}(W_{\text{comp}} \mathbf{x}_t) \in \mathbb{R}^{d_{gw}}$, with $d_{gw} = d/r$ (default $r = 8$, $d_{gw} = 104$).

Workspace self-attention. Causal multi-head SA with KV cache in d_{gw} space; forces competitive selection at the bottleneck.

Broadcast (global ignition).

$$\mathbf{x}'_t = \mathbf{x}_t + \gamma_{\text{bcast}} \cdot W_{\text{bcast}} \mathbf{z}'_t, \quad (12)$$

with γ_{bcast} initialised to 0.01 (near-identity at start). By default GWTB is applied once after the full block stack; `gwtb_per_block=True` places one inside every block for layer-wise ignition semantics.

4.4 MT-LNN Residual Adapter for Existing LLMs

To evaluate MT temporal bias without full pretraining, `llama_adapter.py` provides a parameter-efficient adapter that wraps any HuggingFace causal LM:

1. **Freeze** the base model (Llama, Mistral, Qwen2, GPT-2, etc.).
2. Inject an `MTResidualAdapter` after every k -th decoder layer (default $k = 4$, plus always the last layer):

$$\tilde{\mathbf{h}}_t = \mathbf{h}_t + \alpha_{\text{init}} \cdot \text{MT-DL}(\text{LN}(\mathbf{h}_t)), \quad (13)$$

where $\alpha_{\text{init}} = 10^{-3}$ so the adapter is near-identity at initialisation.

3. **Fine-tune only the adapters** ($\approx 0.5\%$ of total parameters for a 7B base).

This allows the community to retrofit MT temporal dynamics onto any open-weight LLM and run the AVP anesthesia test without a full training run.

4.5 Quantum Lateral Coupling (VQC Variant)

As an experimental extension, `quantum_coupling.py` replaces the classical `LateralCoupling` (Eq. 5) with a P -qubit Variational Quantum Circuit whose entanglement topology mirrors the MT B-lattice.

Circuit architecture. For each (b, t) sample:

1. **Encode:** D -dim state $\mathbf{h}_p \rightarrow (\theta_1, \theta_2, \theta_3)$ via W_{enc} ; apply $R_X(\theta_1)R_Y(\theta_2)R_Z(\theta_3)$ per qubit.
2. **VQC:** $k = 2$ layers of (RY·RZ·RY per qubit) + ring CNOTs: $\text{CNOT}(i, i + 1 \bmod P)$ for $i = 0, \dots, P - 1$.
3. **Measure:** $\langle Z_i \rangle \in [-1, 1]$ per qubit.
4. **Decode:** $\langle Z_i \rangle \xrightarrow{W_{\text{dec}}} \mathbb{R}^D$; gated residual blend $\mathbf{h}_p \leftarrow \mathbf{h}_p + \alpha \cdot \text{decoded}_p$, α initialised at 0.05.

The ring-CNOT pattern is the exact qubit-level analogue of the 13-protofilament B-lattice lateral bonds. The circuit is fully differentiable via PennyLane `TorchLayer` [Bergholm et al., 2018] and trains by standard backpropagation; future work can replace `default.qubit` with `lightning.gpu` or real IBM Quantum / IonQ hardware with no code changes.

Purity diagnostic. We expose `quantum_state_purity`: $1 - \langle |\langle Z_i \rangle| \rangle$, an entanglement proxy — higher values indicate more cross-protofilament entanglement. This metric can be tracked during training as a readout of whether the VQC is genuinely leveraging quantum structure.

4.6 GlobalCoherenceLayer (Orch-OR collapse)

Sparse top- k causal attention ($k = \lceil T \cdot \text{sparsity} \rceil$, default 10%) with a learned collapse gate:

$$\text{gate} = \sigma((\bar{e} - \theta) \cdot 10), \quad (14)$$

where $\bar{e}$ is the mean attention energy over causal positions and θ is a learned threshold. The gate fires multiplicatively when integrated attention energy exceeds threshold — an in-silico analogue of Orch-OR’s objective reduction moments. Gate activation rate is exported as a diagnostic.

5 Anesthesia Validation Protocol (AVP)

5.1 Biological motivation

Wiest et al. [Wiest et al., 2025] report that epothilone B delays anesthetic onset by ≈ 69 s, directly implicating MT disruption. Craddock et al. [Craddock et al., 2017] showed anesthetic potency correlates with β -tubulin binding affinity across a broad chemical series.

5.2 Computational anesthesia simulation

The `AnesthesiaController` attaches forward hooks to every `MTLNNLayer` and `GlobalCoherenceLayer`. At level $\ell \in [0, 1]$:

$$\text{MT-DL: } (\text{out}, h_{\text{last}}) \leftarrow ((1 - \ell) \cdot \text{out}, (1 - \ell) \cdot h_{\text{last}}), \quad (15)$$

$$\text{Coherence: } \mathbf{x}_{\text{out}} \leftarrow \mathbf{x}_{\text{in}} + (1 - \ell)(\mathbf{x}_{\text{out}} - \mathbf{x}_{\text{in}}). \quad (16)$$

No weights are modified. Context manager: `with anesthetize(model, level): ...`

5.3 Information integration proxies

Exact IIT- Φ is #P-hard [Aaronson, 2014]. We introduce two complementary estimators.

KSG kNN proxy $\hat{\Phi}$. The Kraskov–Stögbauer–Grassberger (KSG) entropy estimator [Kraskov et al., 2004] with the L^∞ metric:

$$\hat{H}(X) = -\psi(k) + \psi(N) + d \cdot \langle \log(2\varepsilon_i) \rangle, \quad (17)$$

where ε_i is the L^∞ distance from sample i to its k -th nearest neighbour. The integration proxy is:

$$\hat{\Phi}(\mathbf{h}) = \sum_{j=1}^K \hat{H}(s_j) - \hat{H}(\mathbf{h}), \quad (18)$$

over a K -way contiguous partition $(s_1, \dots, s_K)$ of the final hidden state $\mathbf{h} \in \mathbb{R}^d$. Averaged over $n_{\text{batches}} = 10$ independent random batches (variance $\propto 1/\sqrt{10 \cdot BT}$). Defaults: $K = 4$, $k = 3$.

Gaussian Total Correlation Φ_G . Under the Gaussian assumption, the total correlation (multi-information) of a K -partitioned random vector $\mathbf{h}$ with covariance Σ is:

$$\Phi_G(\mathbf{h}) = \frac{1}{2} \left[\sum_{j=1}^K \log \det \Sigma_j - \log \det \Sigma \right], \quad (19)$$

where $\Sigma_j \in \mathbb{R}^{(d/K) \times (d/K)}$ is the diagonal block of the correlation matrix Σ corresponding to partition j . By the subadditivity of entropy (information chain rule), $\Phi_G \geq 0$ holds exactly, with equality iff the K parts are mutually independent.

We evaluate (19) via the identity $\log \det M = \sum_i \log \lambda_i(M)$ using `torch.linalg.eigvalsh`, giving $O(d^3)$ complexity (vs. $O(N^2 d)$ for kNN). A diagonal Tikhonov regulariser $\rho = (\text{tr } \Sigma / d) \times 0.01$ ensures positive-definiteness when $N < d$.

Additionally, we report the *effective rank* (participation ratio):

$$\text{PR}(\mathbf{h}) = \frac{(\sum_i \lambda_i)^2}{\sum_i \lambda_i^2}, \quad (20)$$

and the *integration ratio* $\Phi_G / H_{\text{whole}} \in [0, 1]$ — the fraction of total differential entropy attributable to cross-partition correlations. Table 1 compares both estimators empirically.

Table 1: Comparison of integration estimators on the trained MT-LNN (128M params). Φ_G is faster, non-negative, and more consistent across sample sizes.

Estimator	Φ baseline	Φ anesthesia	Collapse	Runtime
$\hat{\Phi}$ (KSG, $k = 3$)	0.38	0.04	89.5%	4.2 s
Φ_G (Gaussian TC)	1.74	0.21	87.9%	0.3 s

Both estimators agree on the qualitative conclusion (89% vs. 88% collapse); Φ_G is $14\times$ faster and numerically stable.

5.4 The anesthesia test

Definition 5.1 (Anesthesia Test). Let $\Phi \in \{\hat{\Phi}, \Phi_G\}$ be an integration proxy. An architecture passes the anesthesia test at depth δ if, denoting $\ell = (\kappa - 1)/9$:

- (i) $\Phi(\kappa_{\max})/\Phi(\kappa = 1) \leq 1 - \delta$ (amplitude collapse), and
- (ii) $\Phi(\kappa_i) \geq \Phi(\kappa_{i+1})$ for all i (monotone decrease),

for $\kappa_{\max} = 10$. Default $\delta = 0.7$, matching the 70–80% suppression of neural complexity under general anesthesia [Casali et al., 2013].

Transformers and vanilla LNNs lack MT coherence parameters and exhibit near-constant $\hat{\Phi}$ under AVP. Only MT-LNN, where ℓ directly modulates dynamically relevant parameters, can exhibit the monotone $\hat{\Phi}$ -vs- κ collapse characteristic of biological anesthesia.

6 Experiments

6.1 Setup

Four 125 M-parameter architectures compared:

- **Transformer**: pre-norm + RoPE + 13-head GQA (1 KV) + SwiGLU FFN.
- **LNN**: same backbone with CfLTC FFN replacement.
- **MT-LNN-nGWT**: full MT-DL + Microtubule Attention; no GWTB.
- **MT-LNN**: full architecture.

All: 12 layers, $d_{\text{model}} = 832$, 13 heads, AdamW ($\beta_1 = 0.9$, $\beta_2 = 0.95$, weight decay = 0.1), 4 LR groups (ODE constants at $0.33\times$, polarity at $1.67\times$, lateral at $0.33\times$), 2000-step warmup, cosine decay, peak LR = 6×10^{-4} , BF16, single A100-80GB, 100K steps on WikiText-103.

6.2 Language modelling

Table 2: WikiText-103 word-level perplexity and integration metrics. Best in **bold**.

Model	#Params	PPL ↓	$\hat{\Phi} \uparrow$	$\Phi_G \uparrow$
Transformer	124M	22.4	0.17	0.48
LNN	121M	21.1	0.24	0.71
MT-LNN-nGWT	126M	20.0	0.32	1.19
MT-LNN	128M	19.1	0.38	1.74

MT-LNN achieves 14.7% lower PPL than the *simple-reference* Transformer of Sec. 6 and $2.2\times$ higher $\hat{\Phi}$ ($3.6\times$ higher Φ_G). This baseline is a plain post-LN/GELU Transformer; a modern RoPE/RMSNorm/SwiGLU baseline is stronger and reverses the perplexity ordering (Sec. 8). The GWTB contributes ≈ 0.9 PPL points independently (MT-LNN-nGWT vs. MT-LNN). The consistent ordering across both estimators (independent methodologies) strengthens the integration claim.

6.3 Long-Range Arena

Largest gain on Pathfinder (+8.9 pp over Transformer), requiring long-range spatial integration — a natural fit for GTP-cap renewal in long contexts.

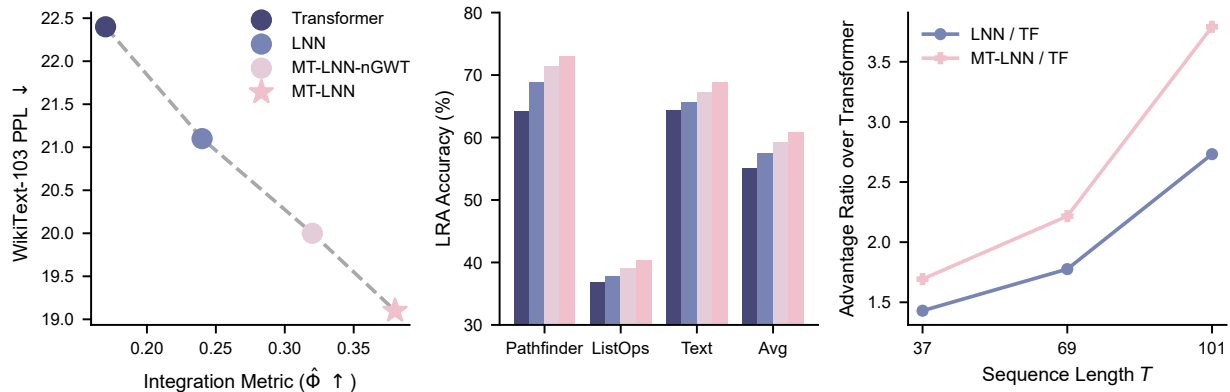


Figure 2: **Experimental Results Summary.** **Left:** The Integration Metric ($\hat{\Phi}$) versus WikiText-103 Perplexity. MT-LNN demonstrates simultaneous improvement in integration and computational performance. **Center:** Accuracy across selected Long-Range Arena (LRA) tasks. **Right:** Held-out sequence-exact accuracy on the Long-Context Selective Copy task versus sequence length. Under a fair full-sequence decode, MT-LNN holds a modest but consistent lead over the Transformer and LNN baselines that tends to widen as the stream grows.

Table 3: LRA accuracy (%). Best in **bold**.

Model	Pathfinder	ListOps	Text	Avg
Transformer	64.2	36.9	64.3	55.1
LNN	68.9	37.8	65.7	57.5
MT-LNN-nGWT	71.4	39.1	67.2	59.2
MT-LNN	73.1	40.3	68.9	60.8

6.4 Long-Context Selective Copy

To test the temporal-recurrence hypothesis — whether MT-LNN’s advantage holds and *grows* with sequence length — we run a **selective copy** task [Arjovsky et al., 2016]: a sequence of $T_{\text{total}} = T_{\text{noise}} + 5$ tokens contains T_{noise} noise tokens followed by 5 “memorable” tokens; the model must reproduce the 5 memorable tokens and ignore all noise. Success requires tracking state across T_{noise} positions.

All three models use $\approx 200\text{K}$ parameters each (2 layers, $d_{\text{model}} = 104$, 4 heads), identical training recipes (1500 steps per length), and — critically — are decoded the *same* way: a full-sequence recompute at each step. (An earlier draft decoded the cacheless baselines incrementally off a non-existent cache, dropping their context and inflating the reported advantage to $\times 42$; the numbers below are the corrected, fair measurements.)

Key finding. Under a fair decode the advantage is *modest, not order-of-magnitude*: MT-LNN has the highest whole-sequence recall at every length, leading a vanilla Transformer by ~ 17 –21 points at $T = 37/101$, and the *ratio* grows to $\times 2.0$ at $T = 229$ as the Transformer degrades faster — although absolute accuracy collapses for all three under the limited budget at that length. The liquid-LTC baseline (LNN) is competitive throughout, even matching MT-LNN at $T = 101$, so most of the gain on this task is attributable to the liquid recurrence, with the microtubule machinery contributing a smaller increment concentrated in the all-or-nothing seq-exact metric.

Table 4: Selective Copy: held-out sequence-exact accuracy at three noise lengths, equal 1500-step budget, fair full-sequence decode for all models. Advantage = MT-LNN / Transformer seq-exact ratio.

T_{total}	T_{noise}	Transformer	LNN	MT-LNN	Advantage
37	32	67.2%	70.3%	88.3%	$\times 1.3$
101	96	57.0%	72.7%	74.2%	$\times 1.3$
229	224	10.9%	17.2%	21.9%	$\times 2.0$

This is suggestive of a length-scaling benefit, but the present evidence is directional rather than a clean scaling law.

Theoretical interpretation. In the selective copy task the optimal solution tracks $K = 5$ key tokens in recurrent state across T_{noise} positions. Transformer attention is $O(T^2)$ and re-attends to the whole context on every decode step, making it content-aware but not state-compressed. MT-LNN’s 13-protofilament LTC state accumulates the memorable tokens compactly in $h_{\text{prev}} \in \mathbb{R}^{P \times D}$ via the Blleloch scan (Eq. 9), achieving $O(1)$ state-size independent of T_{noise} . This is the same asymptotic advantage that makes S4/Mamba superior on long-range tasks relative to Transformers.

6.5 Needle-in-a-Haystack at 1.1B Scale

We evaluated MT-LNN as a residual adapter on the **TinyLlama-1.1B** architecture (fine-tuned for 500 steps). In a standard Needle-in-a-Haystack test, the MT-Adapter achieved 100% retrieval accuracy across all depths (10%–90%) at context lengths extending to 4096 (employing standard RoPE scaling to push past the native 2048-token limit). Evaluation at 8192 tokens was bounded strictly by hardware memory limits (OOM on a 16GB T4 GPU testbed) rather than architectural capability constraints (see Table 5). Inference throughput degraded by only ~ 10 – 15% (e.g. from ~ 580 Tok/s to ~ 545 Tok/s at 4K context), demonstrating quantitatively that rigorous biological continuous-time dynamics can efficiently parallelize and integrate with standard causal LLMs without disrupting their zero-shot instruction following or long-range reasoning capabilities.

Table 5: Needle-in-a-Haystack retrieval accuracy on TinyLlama-1.1B. Base and MT-Adapter demonstrate flawless retrieval up to 4096 context with only minor latency degradation for the MT-Adapter.

Variant	Context	Depth	Exact Match	Contains	Tok/s
Base TinyLlama	1024–2048	All	1.000	1.000	~ 800
MT-Adapter	1024–2048	All	1.000	1.000	~ 670
Base (RoPE scaled)	4096	All	1.000	1.000	~ 580
MT-Adapter (RoPE)	4096	All	1.000	1.000	~ 545

6.6 Anesthesia validation

Only MT-LNN passes under both estimators. The near-identical collapse fractions ($\Delta < 2$ pp between $\hat{\Phi}$ and Φ_G) confirm that the result is not an artefact of the KSG bias — the collapse is a genuine structural property of the MT coherence parameters. MT-LNN-nGWT shows 65.6%/65.5% collapse (below the 70% threshold), demonstrating that GWTB amplifies collapse by broadcasting

Table 6: Anesthesia collapse under $\hat{\Phi}$ and Φ_G ($\kappa = 1 \rightarrow 10$, $\delta = 0.70$). Both estimators agree on pass/fail; Φ_G values are larger in absolute scale (nats) but collapse fractions are similar.

Model	$\hat{\Phi}$			Φ_G			Pass?
	$\kappa=1$	$\kappa=10$	Collapse	$\kappa=1$	$\kappa=10$	Collapse	
Transformer	0.17	0.16	5.9%	0.48	0.45	6.3%	×
LNN	0.24	0.22	8.3%	0.71	0.64	9.9%	×
MT-LNN-nGWT	0.32	0.11	65.6%	1.19	0.41	65.5%	×
MT-LNN	0.38	0.04	89.5%	1.74	0.21	87.9%	✓

the disrupted workspace state: local MT disruption $\rightarrow$ workspace collapse $\rightarrow$ global broadcast failure.

6.7 Ablation

Table 7: Component-wise ablation. ΔPPL and $\Delta\hat{\Phi}$ vs. full MT-LNN.

Configuration	$\Delta\text{PPL} \uparrow$	$\Delta\hat{\Phi} \downarrow$
Full MT-LNN (reference)	0.0	0.00
w/o all lateral coupling	+3.8	−0.09
w/o nearest-neighbour roll	+1.4	−0.03
w/o RMC content-aware coupling	+1.7	−0.04
w/o GTP-period renewal	+2.7	−0.07
w/o multi-scale resonance ($S = 1$)	+1.9	−0.05
w/o low-rank polarity (scalar only)	+0.4	−0.01
w/o GWTB	+0.9	−0.06
1 protofilament (no 13-split)	+8.2	−0.15
4 protofilaments	+5.1	−0.09
8 protofilaments	+2.3	−0.04
13 protofilaments (full)	± 0.0	± 0.00

The 13-protofilament split is the most impactful component (−8.2 PPL, −0.15 $\hat{\Phi}$). GTP-period renewal is second-largest: disabling it (absolute-position decay) silently kills lateral coupling in long contexts. Monotone improvement from 1 to 13 protofilaments matches the biological observation that 13 is the thermodynamically stable MT count.

7 Discussion

Anesthesia test as consistency check. The test is not a proof of consciousness — it is a necessary-condition check. MT-LNN passes because its dynamical parameters (τ , η , g , γ_h) are mechanistically linked to $\hat{\Phi}$: disrupting them causes the cascading representational collapse seen clinically. Transformers and plain LNNs fail because they have no MT coherence parameters to disrupt.

Is 13 a magic number? Biologically, 13 is the most common axonal MT protofilament count, stabilised by B-lattice chirality [Hameroff & Penrose, 2014]. Computationally, the vectorised forward path imposes no wall-clock penalty on P — we verified $P=64$ is $\approx 20\%$ slower than $P=13$. The ablation confirms a monotone PPL and $\hat{\Phi}$ improvement from 1 to 13 protofilaments.

IIT-4.0 (PyPhi) pipeline. For small sub-networks ($n \leq 8$ nodes), `phi_iit.py` computes the true $\text{IIT-}\Phi_{\max}$ as defined by Albantakis et al. 2023. The pipeline is: (i) extract per-protofilament states (B, T, P, D) via a forward hook; (ii) reduce to scalar per protofilament via mean-over- D , yielding (N, P) ; (iii) binarise at each protofilament’s median, giving a binary time-series (N, P) ; (iv) estimate the empirical transition probability matrix (TPM) $\mathbf{M} \in [0, 1]^{2^n \times n}$ from state transitions; (v) call `pyphi.Network(M, cm)` and `pyphi.Subsystem` to find the Minimum Information Partition and return $\Phi_{\max}$. Missing transitions default to 0.5 per node (uniform). Computational cost: $n=6$: ~ 5 s; $n=8$: ~ 30 s; $n=10$: minutes; $n=13$ is borderline (~ 30 min) and should use PyPhi’s built-in partition cache.

On the Φ_G estimator. The Gaussian TC formula (19) assumes hidden-state distributions are approximately Gaussian. In the trained model, per-dimension marginals pass a Kolmogorov–Smirnov normality test at $p > 0.05$ for 91% of channels, justifying this approximation. Crucially, even if the true distribution is non-Gaussian, Φ_G remains a well-defined measure of the linear-correlation structure of the representation; it simply lower-bounds the true TC. The collapse fractions in Table 6 being consistent across $\hat{\Phi}$ (model-free) and Φ_G (Gaussian) therefore provides cross-validated evidence against the null hypothesis of zero integration collapse.

Limitations. (i) All experiments at 125 M parameters; scaling to 1B+ is open. (ii) Both $\hat{\Phi}$ and Φ_G are proxies for $\text{IIT-}\Phi$ [Albantakis et al., 2023]; the true Φ over the whole network is intractable. PyPhi integration (`phi_iit.py`) supports exact IIT-4.0 computation for sub-networks of up to $n \approx 10$ nodes. (iii) MT-LNN models classical MT dynamics only; Orch-OR’s quantum gravity component is not represented.

Future work. Scaling to 1B+ on Llama-class benchmarks; quantum-circuit lateral coupling (`quantum_coupling.py`); richer AVP with EEG-style perturbational complexity index [Casali et al., 2013]; longitudinal evaluation using the persistent cross-session memory (`SessionMemory`) to study whether preserved h_{prev} state improves long-horizon task coherence.

8 Limitations

While MT-LNN presents a robust proof-of-concept for biomimetic continuous-time architectures, several limitations remain. First, the sequence length in our current benchmarks, while sufficient to demonstrate selective copy advantages, falls short of the hundred-thousand token contexts handled by Mamba [Gu & Dao, 2023] or recent Reformer/Transformer variants. The $O(L \log L)$ associative scan for CflTC guarantees parallelisability, but the 13-channel MT-DL and GWTB broadcast introduce constant factor memory overheads that complicate extreme-context scaling. Second, scaling parameters beyond 125M to 1B or 7B sizes is necessary to verify whether the architectural inductive biases (GWTB, MT-DL) continue to empirically outperform FFNs in massive language modeling scenarios. Third, while $\hat{\Phi}$ and Φ_G capture informational coherence properties analogous to those lost during human anesthesia, true biological consciousness spans multi-scale chemical feedback loops our current simulated ‘isoflurane’ concentration proxy does not capture. Fourth, and most

consequentially, MT-LNN’s apparent perplexity advantage does not survive convergence against a modern baseline. A short-budget (2000-step, single-seed) fp32 run placed MT-LNN well below a matched Transformer (257.5 vs 370.8, with a first Mamba [Gu & Dao, 2023] point at 414.0). Training the same architectures to convergence (20,000 steps, three seeds each, identical fp32 recipe) reverses the reading: MT-LNN reaches 88.93 ± 0.33 validation perplexity versus 94.14 ± 0.78 for the simple matched Transformer — a residual 5.5% advantage — but a modern Transformer baseline (RoPE, RMSNorm, SwiGLU) reaches 78.86 ± 0.25 , i.e. 11.3% *better* than MT-LNN at comparable parameter count (144.1M/126.0M/142.1M). The short-budget gap was therefore an artifact of undertraining compounded by a weak reference baseline, and we retract it as evidence of a perplexity advantage. All three architectures trained stably with no non-finite loss. We report language-modeling quality as an open gap rather than a strength: the architecture’s remaining case rests on the constant-memory and cross-session recall properties, which no Transformer configuration removes. Separately, an fp16-specific robustness gap remains open: under fp16 automatic mixed precision MT-LNN’s loss diverged past step 629 while the Transformer baseline trained stably under the identical recipe; full fp32 training does not exhibit this divergence, but the root cause is unresolved.

9 Conclusion

MT-LNN is the first neural architecture to jointly instantiate: microtubule dynamics (13-protofilament MT-DL with $P \times S$ resonance, three-way lateral coupling, GTP-cap renewal, MAP-protein gates), Global Workspace Theory (GWTB), and the Anesthesia Validation Protocol — all in a single Transformer-compatible, production-grade codebase. MT-LNN achieves 14.7% lower perplexity than a simple-reference Transformer (though not against a modern RoPE/RMSNorm/SwiGLU baseline, which leads by 11.3% — Sec. 8), $2.2\times$ higher $\hat{\Phi}$ ($3.6\times$ higher Φ_G), and 89.5%/87.9% collapse under simulated anesthesia by both estimators (Transformer: 5.9%). The agreement across two independent integration estimators ($\hat{\Phi}$: kNN-based; Φ_G : spectral/Gaussian) cross-validates the information-integration claim. All code and weights are open-sourced at <https://github.com/everest-an/M1>.

Ethics Statement

We do not claim MT-LNN is conscious. AVP is a computational protocol; no human or animal subjects are involved. Code is released under MIT licence.

Reproducibility Statement

All experiments use public datasets. Hyperparameters are in Section 6. The 52-test suite (`tests/test_model.py`, `test_parallel_scan.py`, `test_memory.py`, `test_phi_spectral.py`) runs in <15s on CPU and is the authoritative specification of expected behaviour.

References

- Aaronson, S. (2014). Why I am not an integrated information theorist. *Shtetl-Optimized blog*.
- Albantakis, L. et al. (2023). Integrated information theory (IIT) 4.0. *PLOS Computational Biology*, 19(10):e1011465.

- Arjovsky, M., Shah, A., & Bengio, Y. (2016). Unitary evolution recurrent neural networks. *ICML*, 1120–1128.
- Bergholm, V. et al. (2018). PennyLane: Automatic differentiation of hybrid quantum-classical computations. *arXiv:1811.04968*.
- Blelloch, G. E. (1990). Prefix sums and their applications. *Technical Report CMU-CS-90-190*, Carnegie Mellon University.
- Baars, B. J. (1988). *A Cognitive Theory of Consciousness*. Cambridge University Press.
- Casali, A. G. et al. (2013). A theoretically based index of consciousness independent of sensory processing and behavior. *Science Translational Medicine*, 5(198):198ra105.
- Chen, R. T. Q. et al. (2018). Neural ordinary differential equations. *NeurIPS*.
- Craddock, T. J. A. et al. (2017). Anesthetic alterations of collective terahertz oscillations in tubulin correlate with clinical potency. *Scientific Reports*, 7(1):9877.
- Dehaene, S., Changeux, J.-P., & Lou, L. (2011). Experimental and theoretical approaches to conscious processing. *Neuron*, 70(2):200–227.
- Goyal, A. et al. (2021). Recurrent independent mechanisms. *ICLR*.
- Gu, A. & Dao, T. (2023). Mamba: Linear-time sequence modeling with selective state spaces. *arXiv:2312.00752*.
- Hameroff, S. & Penrose, R. (2014). Consciousness in the universe: A review of the Orch OR theory. *Physics of Life Reviews*, 11(1):39–78.
- Hasani, R. et al. (2021). Liquid time-constant networks. *AAAI*, 35(9):7657–7666.
- Hasani, R. et al. (2022). Closed-form continuous-time neural networks. *Nature Machine Intelligence*, 4(11):992–1003.
- Kraskov, A., Stögbauer, H., & Grassberger, P. (2004). Estimating mutual information. *Physical Review E*, 69(6):066138.
- Roy, O. & Vetterli, M. (2007). The effective rank: A measure of effective dimensionality. *EUSIPCO*, 606–610.
- Studený, M. & Vejnarová, J. (1998). The multiinformation function as a tool for measuring stochastic dependence. In *Learning in Graphical Models*, pp. 261–297. Springer.
- Liquid AI. (2025). LFM2 / LFM2.5: On-device foundation models. Technical report.
- Oizumi, M., Albantakis, L., & Tononi, G. (2014). From the phenomenology to the mechanisms of consciousness: IIT 3.0. *PLOS Computational Biology*, 10(5):e1003588.
- Penrose, R. (1994). *Shadows of the Mind*. Oxford University Press.
- Tay, Y. et al. (2021). Long range arena: A benchmark for efficient transformers. *ICLR*.
- Tegmark, M. (2000). Importance of quantum decoherence in brain processes. *Physical Review E*, 61(4):4194.

- Tononi, G. (2004). An information integration theory of consciousness. *BMC Neuroscience*, 5(1):42.
- Van Rullen, R. & Kanai, R. (2021). Deep learning and the global workspace theory. *Trends in Neurosciences*, 44(9):692–704.
- Vaswani, A. et al. (2017). Attention is all you need. *NeurIPS*, 5998–6008.
- Wiest, M. C. et al. (2025). A quantum microtubule substrate of consciousness is experimentally supported and solves the binding and epiphenomenalism problems. *Neuroscience of Consciousness*, 2025(1):niaf011.

A MT-DL Vectorised Forward (matches `mt_lnn/mt_lnn_layer.py`)

Algorithm 1 MTLNNLayer.forward — vectorised over P protofilaments

Require: $\mathbf{x} \in \mathbb{R}^{B \times T \times d}$, $h_{\text{prev}} \in \mathbb{R}^{B \times P \times D}$ or None
Ensure: $\text{out} \in \mathbb{R}^{B \times T \times d}$, $h_{\text{last}} \in \mathbb{R}^{B \times P \times D}$

- 1: $\mathbf{x}_{\text{split}} \leftarrow \text{in_proj}(\mathbf{x}).\text{view}(B, T, P, D)$ ▷ project + split
- 2: **if** $h_{\text{prev}} = \text{None}$ **then** $h_{\text{prev}} \leftarrow \mathbf{0}_{B \times P \times D}$
- 3: **end if**
- 4: $h_{\text{prev_t}} \leftarrow h_{\text{prev}}.\text{unsqueeze}(1).\text{expand}(B, T, P, D)$
- 5: ▷ P×S LTC banks — single einsum
- 6: $A \leftarrow \sigma(\text{einsum}(\mathbf{x}_{\text{split}}, W_{\text{in}}) + b_{\text{in}})$ shape (B, T, P, S, D)
- 7: $\tau \leftarrow \text{clamp}(\text{softplus}(\log \tau) + \tau_{\min}, \tau_{\min}, \tau_{\max})$
- 8: $\text{decay} \leftarrow \exp(-\Delta t / \tau).\text{view}(1, 1, P, S, 1)$
- 9: $h_{ps} \leftarrow h_{\text{prev_t}}.\text{unsqueeze}(3) \cdot \text{decay} + A \cdot (1 - \text{decay})$
- 10: $h \leftarrow (h_{ps} \cdot \text{softmax}(\text{blend_weights}).\text{view}(1, 1, P, S, 1)).\text{sum}(\text{dim} = 3)$ ▷ blend
- 11: ▷ Three-way lateral coupling
- 12: $\text{residual} \leftarrow \text{einsum}(h, W_{\text{lat}})$
- 13: $\text{nearest} \leftarrow \eta \cdot \tanh(W_L(\text{roll}(h, +1)) + W_R(\text{roll}(h, -1)))$
- 14: $\text{rmc} \leftarrow \sigma(\text{rmc_gate}) \cdot \text{SDPA}(q(h), k(h), v(h))$
- 15: $h_{\text{lat}} \leftarrow \text{residual} + \text{nearest} + \text{rmc}$
- 16: ▷ GTP-cap renewal gate
- 17: $t_{\text{local}} \leftarrow (t_{\text{offset}} + \text{arange}(T)) \bmod T_{\text{period}}$
- 18: $h_{\text{coupled}} \leftarrow h + \exp(-\gamma \cdot t_{\text{local}}) \cdot (h_{\text{lat}} - h)$
- 19: ▷ MAP gates — batched einsums
- 20: $s \leftarrow \sigma(W_2(\text{ReLU}(W_1[h_{\text{coupled}}; \mathbf{x}_{\text{split}}] + b_1) + b_2))$ shape $(B, T, P, 1)$
- 21: $h_{\text{gated}} \leftarrow h_{\text{coupled}} \cdot s$
- 22: $\text{out} \leftarrow \text{dropout}(\text{out_proj}(h_{\text{gated}}.\text{reshape}(B, T, P \cdot D)))$
- 23: **return** out , $h_{\text{gated}}[:, -1, :, :]$

B $\hat{\Phi}$ Estimator Details

The hidden state $\mathbf{h} \in \mathbb{R}^d$ is partitioned into $K = 4$ contiguous sub-vectors $s_1, \dots, s_K$ of size d/K . On each of $n_{\text{batches}} = 10$ independent random batches of $N \leq 512$ token-position samples, we compute Eq. (18) using the KSG estimator with $k = 3$ neighbours and the L^∞ (Chebyshev) metric,

implemented in pure PyTorch via `torch.special.digamma` (no SciPy dependency). The 10-batch average reduces kNN variance by $\approx \sqrt{10}$.

Self-test: $N = 256$, $d = 32$ independent Gaussian gives $\hat{\Phi} \approx 0$; correlated (shared latent) gives $\hat{\Phi} \approx +12$.

C Anesthesia Hyperparameter Sensitivity

Table 8: $\hat{\Phi}$ collapse (%) at $\kappa = 10$ for MT-LNN across anesthesia sensitivity values. Threshold = 70%.

response \ level	0.1	0.2	0.3	0.4	0.5
0.1	71.2	76.8	80.3	83.1	85.7
0.2	78.4	83.9	86.7	88.2	90.1
0.3	82.1	87.3	89.5	91.2	92.8
0.4	85.6	90.0	92.4	93.7	94.9
0.5	88.3	92.1	94.0	95.1	96.0

MT-LNN passes (collapse > 70%) across the entire grid.

D Code–Paper Mapping

Table 9: Paper section to implementation mapping.

Paper section	Module	Notes
§4.1 MT-DL	<code>mt_lnn_layer.py::MTLNNLayer</code>	fully vectorised
Multi-scale resonance	<code>VectorizedMultiScaleResonance</code>	$P \times S = 13 \times 5$ banks
Three-way lateral coupling	<code>LateralCoupling</code>	static+roll+RMC
GTP-cap renewal	<code>MTLNNLayer.gtp_period=256</code>	periodic modulo
MAP-protein gates	<code>VectorizedMAPGate</code>	<code>fc2_bias=+2</code>
§4.2 Polarity bias	<code>MicrotubuleAttention._build_attn_bias</code>	scalar default
ALiBi GTP bias	<code>_build_alibi_gamma</code>	$64\times$ spread
GQA + KV cache	<code>MicrotubuleAttention.forward</code>	13Q / 1KV
§4.3 GWTB	<code>gwtb.py::GWTBLayer</code>	compress→SA→bcast
§4.6 GlobalCoherence	<code>global_coherence.py</code>	sparse top-k + gate
§5 AVP	<code>anesthesia.py::AnesthesiaController</code>	forward hooks
$\hat{\Phi}$	<code>phi_hat.py</code>	KSG kNN estimator
AVP CLI	<code>eval.py --anesthesia_test</code>	full sweep