


The doubling method generates all 64 hexagrams in six steps

yang = unbroken line, yin = broken line; the new line is added at the bottom

each step splits every symbol in two by adding one line beneath it: $|G(n)| = 2 |G(n-1)|$

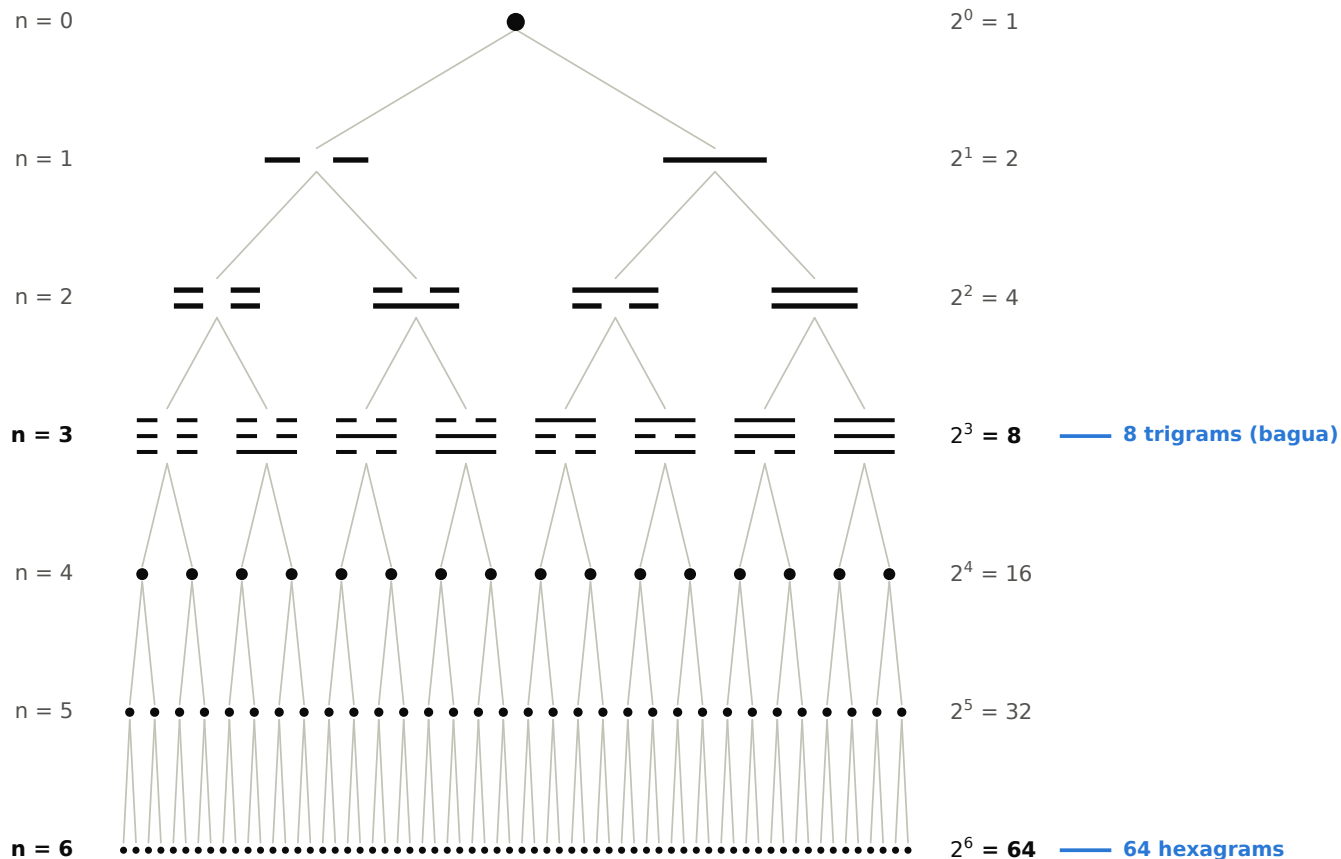

Node counts are `len(encoding.doubling_bottom(n))`, cross-checked against `encoding.brute_force_enumeration(n)`.