HandyHearts Care Tech project documentation

- HandyHearts Care Tech
  - Documents
- Product requirements
  - Contents
  - Summary
  - Background and problem
  - Goals and non-goals
  - Success metrics
  - Audience and personas
  - User stories
  - Functional requirements
  - Non-functional requirements
  - Content requirements
  - Monetization or payments
  - Scope by release
  - Assumptions and constraints
  - Risks
  - Stakeholders and approvals
  - Glossary
  - Open questions
  - Changelog
  - Sources
- Technical requirements
  - Contents
  - Architecture overview
  - Tech stack
  - Repository structure
  - Environments
  - Configuration and secrets
  - Third-party integrations
  - Security
  - Privacy implementation
  - Performance
  - Accessibility implementation
  - SEO and sharing
  - Build and deploy
  - Testing
  - Monitoring and logging
  - Browser and device support
  - Technical debt
  - Glossary
  - Open questions
  - Changelog
  - Sources
- App flow
  - Contents

    - Screen inventory
    - Navigation model
    - Sitemap diagram
    - User journeys
    - Feature states
    - Payment flow
    - Error and edge states
    - Notifications
    - Screenshots
    - Glossary
    - Open questions
    - Changelog
    - Sources
- Design brief
    - Contents
    - Brand overview
    - Logo and mark
    - Color system
    - Typography
    - Spacing, layout, and grid
    - Shape and depth
    - Components
    - Iconography
    - Motion
    - Imagery
    - Voice and copy
    - Accessibility design rules
    - References
    - Do and don’t
    - Screens
    - Glossary
    - Open questions
    - Changelog
    - Sources
- Backend schema
    - Contents
    - Data architecture
    - Entity relationship
    - Tables
    - Client storage
    - API reference
    - Outbound calls
    - Webhooks
    - Background jobs
    - File storage
    - Data lifecycle
    - Migrations
    - Security of data
    - Glossary

    - Open questions
    - Changelog
    - Sources
- Implementation plan
    - Contents
    - Delivery summary
    - Phases
    - Work breakdown
    - Review gates
    - Testing and QA
    - Launch checklist
    - Deployment runbook
    - Post-launch owner actions
    - Roadmap
    - Risks
    - Maintenance
    - Glossary
    - Open questions
    - Changelog
    - Sources
- Combined glossary
    - HH-PRD
    - HH-TRD
    - HH-FLOW
    - HH-DS
    - HH-DATA
    - HH-PLAN
- Combined open questions
    - HH-PRD
    - HH-TRD
    - HH-FLOW
    - HH-DS
    - HH-DATA
    - HH-PLAN

HandyHearts Care Tech

Project documentation. Version 1.0. 2026-10-21 (UTC).

Repository: https://github.com/Awkward8787/Handy-Hearts-Care-Tech

Commit described: d0bdd0c2d4d18144129d93fd37faf5033f96c98f

Live URL: none. The canonical origin recorded in the repository is https://hhcaretech.com.

Operator legal name: not published.

Documents

1. Product requirements (HH-PRD)
2. Technical requirements (HH-TRD)
3. App flow (HH-FLOW)
4. Design brief (HH-DS)
5. Backend schema (HH-DATA)
6. Implementation plan (HH-PLAN)

Product requirements

- Project: HandyHearts Care Tech
- Document title: Product requirements
- Document ID: HH-PRD
- Version: 1.0
- Status: Final (as shipped)
- Date last updated: 2026-10-21 (UTC)
- Author: Cursor cloud agent, for Dondon (owner)
- Repository: https://github.com/Awkward8787/Handy-Hearts-Care-Tech
- Commit described: `d0bdd0c2d4d18144129d93fd37faf5033f96c98f`
- Live URL: none. This repository was not deployed. The public origin recorded in `public/sitemap.xml` and `index.html` is `https://hhcaretech.com`.

Contents

1. Summary
2. Background and problem
3. Goals and non-goals
4. Success metrics
5. Audience and personas
6. User stories
7. Functional requirements
8. Non-functional requirements
9. Content requirements
10. Monetization or payments
11. Scope by release
12. Assumptions and constraints
13. Risks
14. Stakeholders and approvals
15. Glossary
16. Open questions
17. Changelog
18. Sources

Summary

HandyHearts Care Tech lets a visitor request technology help for an older adult without creating an account. The visitor can request a consultation or book a service by leaving a name, an email or a phone number, the topic or service, a preferred date and time, and an address when someone is coming to the home. The product returns a receipt with an order reference. Email and text confirmations are sent when those delivery services are configured. Staff and providers sign in on a separate internal path.

Background and problem

Families need someone to set up a phone, computer, television, printer, or home Wi-Fi, or to sit with an older adult who is learning a device. The previous code in this repository required a customer account, offered a public path that could create an administrator, and mixed a client-side assistant into the family portal. Dondon, the owner, required a different rule for this work and for this document: public customers of Handy Hearts must not need their own account, login, or private session. A visitor must be able to request a consultation or buy or book a service as a guest, with only the contact and booking details needed. Confirmations stay by email or text, plus a receipt. Staff sign-in, if it exists, stays internal.

The product name in the interface is HandyHearts. The owner's wording in the request is "Handy Hearts." This document uses HandyHearts for the product mark and quotes the owner's wording only in this background.

Goals and non-goals

Goals

1. A guest can request a consultation without an account. Shipped. Implements FR-001.
2. A guest can book a service without an account. Shipped. Implements FR-002.
3. Every saved request has a reference and a receipt the guest can open again. Shipped. Implements FR-003.
4. Email and text confirmations are attempted when delivery is configured, and the receipt is still saved when it is not. Shipped. Implements FR-004.
5. A price is quoted only from a staff-entered rate whose name matches the catalog. Shipped. Implements FR-005.
6. Staff and approved providers can sign in and work assigned visits. Shipped. Implements FR-007.

Non-goals

1. Customer accounts, customer passwords, and a private customer session. Removed.
2. A family portal, a device wizard that requires a signed-in user, and a client-side assistant. Removed.
3. Inventing a legal entity, support email, mailing address, governing law, retention period, business time zone, platform-fee percentage, or service price. Those stay with the owner.
4. Deploying the site, submitting the iOS app, or charging a real card from this repository.

Success metrics

No analytics product is installed. Success for this release is observed manually:

Signal	Method	Target
Guest consultation saved	A `consultation_request` row or a file-store consultation, plus a receipt reference	No numeric target. UNCONFIRMED as a business goal.
Guest booking saved	A `service_order` row or a file-store order, plus a receipt	No numeric target.
Confirmation delivered	`confirmation_message.status = sent`	Depends on SMTP and Twilio, which are not configured in this repository.
Payment recorded	`payment_status = paid` after a verified Stripe notice	Only when Stripe is configured and a rate is on file.
Forced customer sign-up	Review of `/`, `/consult`, and `/book`	Must stay absent. Verified in `web/guestHome.test.tsx` and in the browser on 2026-10-21.

Audience and personas

Persona	Context	Need	Device	Comfort	Accessibility
Guest requester	A family member or the older adult, arranging help	Submit a request with the least information that lets someone call or write back	Phone or computer browser. iOS app is in the repo and was not run in a simulator here.	Varies. The form uses plain labels.	44px targets, visible focus, skip link, reduced motion.
Staff admin	Internal operator	See consultations and bookings, add rates, assign a provider	Desktop browser, `/staff`	Comfortable with a sign-in form	Same visual system.
Provider	Person who performs the visit	See assigned visits and move them from assigned to in progress to completed	Phone or desktop, `/staff`	Comfortable with a short task list	Same visual system.

Age ranges are not stored. The audience described in the home page is “technology help for an older adult.” A numeric age band was not supplied by the owner and is UNCONFIRMED.

User stories

US-001 Guest consultation

As a guest, I want to request a consultation with my name, a way to reach me, a topic, and a time, so that someone can follow up without my creating an account.

- Given I am on `/consult` and I am not signed in
- When I enter a name, an email or a phone number, a topic, and a date that is today or later, and I choose Request consultation
- Then I see a receipt whose reference starts with `HH-` and the page does not ask me to sign in

US-002 Guest booking

As a guest, I want to book a service, including an address for an in-home visit, so that the visit can be scheduled.

- Given I am on `/book`
- When I review the booking and choose Place booking
- Then a receipt is saved, payment is taken only when a quoted total is at least $0.50 and card payment is available, and otherwise the receipt says no payment was taken

US-003 Receipt lookup

As a guest, I want to open my receipt later with the reference, so that I still have the confirmation without an account.

- Given I have a reference
- When I open `/receipt` and submit it, or open `/receipt/HH-…`
- Then I see the same summary, or “That receipt was not found.”

US-004 Staff work

As staff, I want a sign-in that guests never have to use, so that I can assign visits and set rates.

- Given I have an approved admin profile
- When I sign in at `/staff`
- Then I can list consultations and bookings and assign a provider

Functional requirements

ID	Requirement	Priority	Status	Stories	Where
FR-001	A guest can submit a consultation with name, email or phone, topic, preferred date, preferred time, and optional notes. No account.	Must	Shipped	US-001	`web/pages/ConsultPage.tsx`, `POST /api/consultations`
FR-002	A guest can book a catalog service with the same contact fields, urgency, in-home or remote, and an address when in-home.	Must	Shipped	US-002	`web/pages/BookPage.tsx`, `POST /api/orders`
FR-003	Each saved consultation or booking gets a reference `HH-` plus 10 characters, and a receipt page.	Must	Shipped	US-001, US-003	`domain/orderReference.ts`, `GET /api/receipts/:reference`
FR-004	Email and text are sent when configured. The receipt states that a message was sent only when the status is `sent`.	Must	Shipped	US-001	`server/confirmationSender.ts`, `web/pages/ReceiptPage.tsx`
FR-005	A price is calculated only when an active service name matches the catalog label. Otherwise the total is 0 and payment status is `not_due`.	Must	Shipped	US-002	`domain/quoteBuilder.ts`
FR-006	When the quote is at least 50 cents and Stripe is configured, the server creates a PaymentIntent and the browser	Must	Shipped	US-002	`server/payments.ts`, `web/pages/BookPage.tsx`

ID	Requirement	Priority	Status	Stories	Where
	can collect the card.				
FR-007	Staff sign-in uses Supabase and is linked from the footer as Staff. The home page has no sign-in.	Must	Shipped	US-004	`web/pages/StaffPage.tsx`, `web/components/PublicLayout.tsx`
FR-008	A provider can apply at `/staff`. The application is not a customer account and is not an admin.	Should	Shipped	US-004	`web/pages/StaffPage.tsx`, SQL trigger
FR-009	An admin assigns a provider. A provider can start a visit and mark it complete. An admin can cancel a visit that is not completed or cancelled.	Should	Shipped	US-004	`server/createApp.ts`
FR-010	Privacy and terms pages explain the guest record, payment, and the unpublished operator identity.	Must	Shipped	US-001	`web/pages/LegalPages.tsx`
FR-011	The services page lists the five catalog categories and a live rate only when the name matches.	Must	Shipped	US-002	`web/pages/ServicesPage.tsx`
FR-012	Unknown paths show “Page not found.”	Must	Shipped	US-003	`web/pages/LegalPages.tsx`

Non-functional requirements

ID	Requirement	Status
NFR-001	Web typecheck, lint, Vitest, and production build run in GitHub Actions on Node 22.	Shipped. `.github/workflows/ci.yml`
NFR-002	Touch targets use a 44px minimum (`.btn` in `index.css`). Focus is a 3px `#2563eb` ring.	Shipped
NFR-003	Text contrast: `#2563eb` on white is 5.17:1 (WCAG AA). `#1d4ed8` on white is 6.70:1. `#475569` on white is 7.58:1. `#047857` on white is 5.48:1 and is used for provider-application notice text. `#10b981` is a fill, not body text on white.	Shipped
NFR-004	`prefers-reduced-motion: reduce` shortens animation and turns off smooth scrolling.	Shipped. `index.css`
NFR-005	Security headers are set by Helmet. The content security policy is in HH-TRD. HSTS max-age is 15552000 seconds, without includeSubDomains and without preload.	Shipped
NFR-006	Guest POSTs are limited to 30 per 15 minutes, receipt GETs to 60, and `/api/staff` to 120, in production.	Shipped
NFR-007	Guest personal data is written by the server with the service role, or by the local file store. The browser anon key cannot list those tables.	Shipped in SQL grants. The migration must be applied by the owner.
NFR-008	Public pages have titles, descriptions, a canonical URL, and an Open Graph image. Staff, receipts, and the 404 are `noindex`.	Shipped
NFR-009	The production build of commit `d0bdd0c` splits the booking and staff pages. Measured sizes: main JS 255,285 bytes, booking JS 20,041 bytes, staff JS 237,887 bytes, CSS 25,364 bytes.	Shipped
NFR-010	English only. No other locale is shipped.	Shipped
NFR-011	Browsers: current Chromium was used for the guest flows on 2026-10-21. A formal support matrix is in HH-TRD.	Shipped as far as that check
NFR-012	Card numbers are entered in Stripe, not stored by HandyHearts.	Shipped

NFR-009 was measured after `App.tsx` started lazy-loading the booking and staff pages. If that edit is in a commit after `d0bdd0c`, the measurement belongs to that later commit. The documents' changelog records which commit contains the split.

Content requirements

Page	Purpose	Key copy
`/`	Offer the two guest actions	“Request help without creating an account.”
`/services`	Explain the five services	“A price is shown only when a rate is on file for that service.”
`/consult`	Guest consultation form	“No account needed.” Button: “Request consultation”
`/book`	Guest booking form	“No account needed.” Buttons: “Review booking”, “Place booking”
`/receipt`	Look up a reference	“No account is required.”
`/privacy`	What a guest record stores	Operator legal name, address, and support email are stated as not published yet
`/terms`	Price rules and payment rules	Weekend 15%, same day $25, expedited $15, emergency $25
`/staff`	Internal sign-in	“This sign-in is for staff and providers.”

Tone is plain. Customer pages do not mention environment variables, terminals, or setup steps.

Monetization or payments

The model is a one-time quoted visit, not a subscription and not an advertisement. Currency is US dollars (`Money.currency` is `usd`). There is no seeded price. A rate exists only after an admin adds a service whose name matches a catalog label: Device Setup, Fix/Repair, Learning, WiFi/Network, or Printers.

When a rate matches, the quote is `max(hours, minHours) * hourly rate`, and the hours used for a booking are the service minimum hours. A weekend adds 15% of that base, rounded to the nearest cent. The same civil day adds $25. Expedited (`medium`) adds $15. Emergency (`high` or `emergency`) adds $25. Same-day and emergency can both apply. If nothing matches, the receipt says the price is to be confirmed and no payment is taken.

Stripe automatic capture is used when the total is at least 50 cents and the server secret is set. The legal entity that receives the funds is UNCONFIRMED. Platform fee and provider payout are stored as 0. Refund copy is not published. Tax calculation is not implemented.

Scope by release

Item	Release	Status
Guest consultation, guest booking, receipt, staff desk	This repository	Shipped
iOS guest screens calling the same API	This repository, not compiled here	Shipped as source
Operator legal identity on the legal pages	Owner	Deferred
Analytics	Not chosen	Deferred
Structured device and accessibility fields	Removed from the guest form. Notes remain.	Removed from the running flow
Customer account	Owner decision	Removed

Assumptions and constraints

- The owner supplies Supabase, Stripe, SMTP, Twilio, the Apple team, and the legal text. This repository ships names only in the example env files.
- The business time zone defaults to `UTC` until the owner sets `BUSINESS_TIMEZONE` and `VITE_BUSINESS_TIMEZONE` to the same IANA name.
- Hosting for `hhcaretech.com` is not recorded as a verified fact in the current code. An older comment in the prior tree is not treated as a current hosting contract.
- No timeline was requested. This document does not estimate one.

Risks

Risk	Likelihood	Impact	Mitigation
A receipt reference is the capability to read a guest's contact details	Medium	High	The reference is 10 characters from a 32-character alphabet. Receipt reads are rate limited. The owner can add a second check later.
Legal pages ship without an operator identity	High until the owner publishes it	High for a public launch	Launch checklist blocks public launch.
Production starts without Supabase and without `DATA_DRIVER=file`	Medium	Guest writes return 503	Health reports `guestStore: false`. README states the rule.
A previously committed Stripe publishable key remains usable	Unknown	Payments or reputation	Owner rotates it. The value is not repeated here.

Stakeholders and approvals

Dondon is the owner and the decision-maker for the guest rule. This document records that decision. No separate written sign-off beyond the request in this task is on file.

Glossary

Term	Meaning
Guest	A visitor with no HandyHearts account.
Reference	Public id shaped `HH-` plus 10 characters. It identifies one consultation or one booking.
Receipt	The page and payload the guest keeps. It includes the summary and the payment line.
Catalog	The five bookable services in `domain/serviceCatalog.ts`. Consultation also offers "Not sure yet."
Staff	An `ADMIN` or `PROVIDER` row in `app_user`.
Priced	A booking whose service name matched an active rate.

Open questions

Question	Owner	Blocked until answered
Legal name, mailing address, support email, governing law, and retention period. UNCONFIRMED.	Dondon	Public launch of the privacy policy and terms.
Business IANA time zone. UNCONFIRMED. Code default is UTC.	Dondon	Same-day and weekend quotes for a real city.
Platform-fee split. UNCONFIRMED. Stored as 0.	Dondon	Provider payout amounts.
Whether a phone without + should assume a country. UNCONFIRMED. The code does not add a country prefix.	Dondon	Text delivery for national numbers.
Whether structured device fields should return. UNCONFIRMED.	Dondon	A richer intake form.
Who receives Stripe funds. UNCONFIRMED.	Dondon	Live charges.

Changelog

Date	Version	Change
2026-10-21	1.0	First final PRD. Customer accounts removed because Dondon required guest consultation and guest booking.

Sources

- Owner request in this task, including the guest rule from Dondon
- `d0bdd0c2d4d18144129d93fd37faf5033f96c98f`
- `web/pages/HomePage.tsx`, `ConsultPage.tsx`, `BookPage.tsx`, `LegalPages.tsx`, `StaffPage.tsx`
- `domain/guestRequest.ts`, `domain/pricingEngine.ts`, `domain/quoteBuilder.ts`
- Browser check on 2026-10-21 against `http://127.0.0.1:3000` with the file store

Technical requirements


- Project: HandyHearts Care Tech
- Document title: Technical requirements
- Document ID: HH-TRD
- Version: 1.0
- Status: Final (as shipped)
- Date last updated: 2026-10-21 (UTC)
- Author: Cursor cloud agent, for Dondon (owner)
- Repository: https://github.com/Awkward8787/Handy-Hearts-Care-Tech
- Commit described: `d0bdd0c2d4d18144129d93fd37faf5033f96c98f`
- Live URL: none. Intended origin in the repo: `https://hhcaretech.com`.

Contents

1. Architecture overview
2. Tech stack
3. Repository structure
4. Environments
5. Configuration and secrets
6. Third-party integrations
7. Security
8. Privacy implementation
9. Performance
10. Accessibility implementation
11. SEO and sharing
12. Build and deploy
13. Testing
14. Monitoring and logging
15. Browser and device support
16. Technical debt
17. Glossary
18. Open questions
19. Changelog
20. Sources

Architecture overview

The browser and the iOS app call an Express API. Guest writes do not check a session. Staff calls send a Supabase access token. The API writes guest rows with the Supabase service role, or with a JSON file in development. Stripe, SMTP, and Twilio are optional.

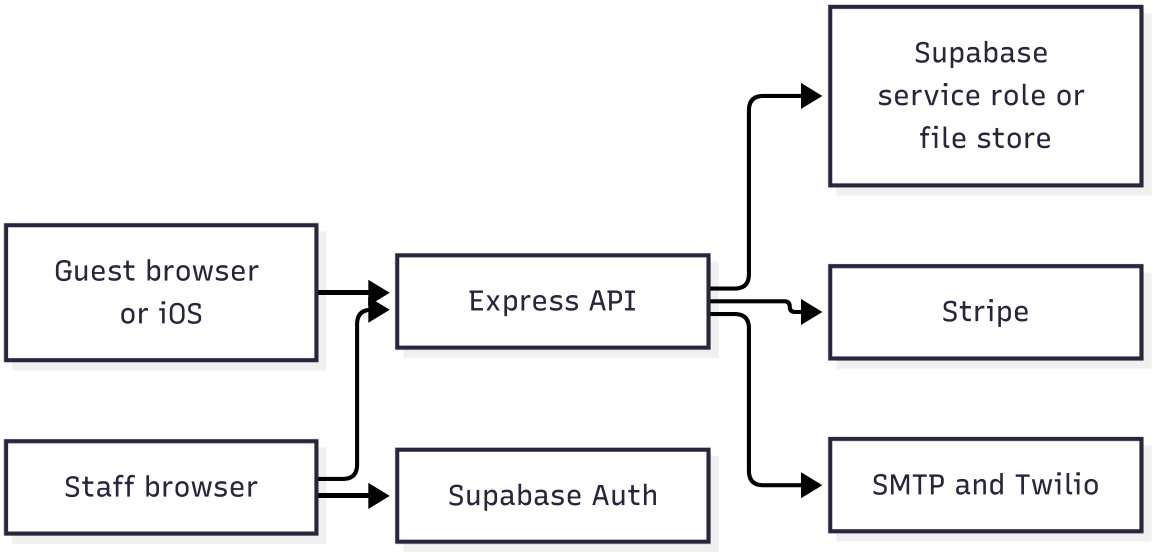

HH-TRD diagram 1

Caption: A guest reaches the API directly. Staff sign-in is the only path that uses Supabase Auth.

A consultation request is validated by `GuestRequest.consultation`, stored, and answered with a receipt. A booking is quoted by `QuoteBuilder.build` before it is stored. Payment status becomes `paid` only when Stripe sends `payment_intent.succeeded` and the amount matches.

Tech stack

Layer	Technology	Version observed	Why	Alternative not used
Language	TypeScript	5.9.3	Already in the repo	Plain JavaScript
Web UI	React	19.3.1	Already in the repo	A second framework
Styling	Tailwind CSS	3.4.19	Already in the repo	A CSS-in-JS runtime
Font	Inter via `@fontsource/inter`	5.3.0	Self-hosted, SIL OFL	A Google Fonts request
Build	Vite	6.4.5	Already in the repo	Webpack
Tests	Vitest	3.2.7	Node and jsdom	Jest
Lint	ESLint	9.39.5	Flat config	A disabled rule set
Server	Express	5.3.0	Small HTTP API	A second host framework
Server bundle	esbuild	0.25.12	One file for `node dist/index.js`	`tsx` in production
Database	Supabase Postgres	Client `@supabase/supabase-js` 2.118.0	Staff auth already pointed at Supabase	A new database product
Payments	Stripe Node	18.5.0, API `2025-08-27.basil`	Card payments for real-world services	In-app purchase
Web cards	`@stripe/stripe-js`	7.10.0	Payment Element	A card form we would store
Email	nodemailer	7.0.13	SMTP when configured	A hard-coded provider
Text	Twilio REST	HTTPS `2010-04-01`	SMS when configured	A second SMS vendor in code
iOS	SwiftUI, StripePaymentSheet	Package 26.14.0 exact	Same guest API	A second pricing engine on device
Node	22	`.nvmrc` is 22. This machine ran 22.23.3	CI image	Node 18

Repository structure

Path	Role
`App.tsx`	Route shell. No Supabase call on load.
`web/pages`	Home, services, consult, book, receipt, legal, staff
`web/routing.ts`	Path matching and `history.pushState`
`domain`	Validation, pricing, references, copy
`types/guest.ts`	Guest records. No customer user id.
`server/createApp.ts`	HTTP routes
`server/index.ts`	Process entry, driver choice, static files
`supabase/migrations/20261021000000_guest_records.sql`	Tables and the signup trigger
`ios/HandyHearts`	SwiftUI guest flows and internal staff sign-in
`public`	Favicon, Open Graph image, robots, sitemap
`docs`	These documents

Environments

Environment	URL	How it runs	Difference
Local web	`http://localhost:5173`	`npm run dev`	Vite proxies `/api` to port 3000
Local API	`http://localhost:3000`	`npm run dev:server`	File store unless Supabase keys are set. Rate limit is on in `server/index.ts`. Tests pass `rateLimit: false`.
Production process	Not deployed	`npm run build && npm run build:server && npm start`	`NODE_ENV=production` without Supabase and without `DATA_DRIVER=file` refuses guest writes
Staging	None	Not applicable	No staging URL was provided
Live site	None from this repo	Not deployed	`https://hhcaretech.com` is the canonical origin written into HTML

Configuration and secrets

Values are never listed. Rotation means replacing the value in the host’s secret store and restarting the process. The owner holds the accounts.

Name	Purpose	Required	Default	Read
VITE_SUPABASE_URL	Staff sign-in	Optional for guests	empty	lib/publicConfig.ts line 5
VITE_SUPABASE_ANON_KEY	Staff sign-in	Optional for guests	empty	lib/publicConfig.ts line 9
VITE_STRIPE_PUBLISHABLE_KEY	Card element	Optional	empty	lib/publicConfig.ts line 13
VITE_API_BASE_URL	API origin	Optional	empty, same origin	lib/publicConfig.ts line 17
VITE_BUSINESS_TIMEZONE	Same-day and weekend	Optional	UTC	lib/publicConfig.ts line 21
VITE_PUBLIC_SITE_URL	Canonical origin	Optional	https://hhcaretech.com	lib/publicConfig.ts line 26
PORT	Listen port	Optional	3000	server/index.ts line 62
CORS_ORIGINS	Allowed origins	Optional	http://localhost:5173	server/index.ts line 47
TRUST_PROXY	Client IP behind a proxy	Optional	off unless true or 1	server/index.ts line 48
BUSINESS_TIMEZONE	Same as the web zone	Optional	UTC	server/index.ts line 36
PUBLIC_SITE_URL	Payout return URL	Required for payout links	https://hhcaretech.com	server/index.ts line 49
DATA_DRIVER	supabase or file	Optional	Supabase if keys exist, else file outside production	server/index.ts line 26
SUPABASE_URL	Auth and store	Required for staff and for the hosted store	empty	server/index.ts line 24
SUPABASE_ANON_KEY	Verify staff tokens	Required for staff	empty	server/index.ts line 42
SUPABASE_SERVICE_ROLE_KEY	Server writes	Required for the hosted store	empty	server/index.ts line 25
STRIPE_SECRET_KEY	PaymentIntents	Required to charge	empty	server/index.ts line 43
STRIPE_WEBHOOK_SECRET	Verify notices	Required to mark paid	empty	server/index.ts line 43
STRIPE_CONNECT_COUNTRY	Connect country	Required for payout links	empty	server/index.ts line 50

Name	Purpose	Required	Default	Read
`SMTP_HOST`, `SMTP_PORT`, `SMTP_FROM`	Email	All three required to send	empty. No default port	`server/confirmationSender.ts` line 20
`SMTP_USER`, `SMTP_PASS`	SMTP auth	Optional	empty	`server/confirmationSender.ts`
`TWILIO_ACCOUNT_SID`, `TWILIO_AUTH_TOKEN`, `TWILIO_FROM`	Text	All three required to send	empty	`server/confirmationSender.ts` line 24

iOS reads `API_BASE_URL`, `STRIPE_PUBLISHABLE_KEY`, `SUPABASE_URL`, `SUPABASE_ANON_KEY`, and `BUSINESS_TIMEZONE` from `ios/Config.example.xcconfig` through `Info.plist`. Local overrides belong in `ios/Config.local.xcconfig`, which is gitignored.

Third-party integrations

Service	Use	Auth	Failure
Supabase Auth	Staff password sign-in and provider apply	Anon key in the browser	Staff page says sign-in is unavailable. Guest pages do not call it.
Supabase Postgres	Guest rows and `app_user`	Service role on the server	Guest POST returns 503 with “That request could not be saved. Please try again.”
Stripe	PaymentIntent, automatic capture, webhook, Connect account link	Secret key. Webhook signing secret. API version `2025-08-27.basil` in `server/payments.ts` line 43	Booking is still saved. `clientSecret` stays null. Connect returns “Payout setup is not available right now.”
SMTP	Email body is the receipt summary	Host, port, from, optional user	Status `queued` if unset, `failed` if send throws
Twilio	SMS, E.164 only	Account SID and token, HTTP Basic	Status `failed` when the number has no leading + and Twilio is configured

No analytics vendor is called.

Security

Guest routes do not read an Authorization header. Staff routes require `Bearer` and `supabase.auth.getUser`, then a service-role read of `app_user`. The role must be `ADMIN` or `PROVIDER`. Signup metadata cannot insert `ADMIN`. The SQL trigger inserts a provider only when metadata role is `PROVIDER`, with `is_approved` false.

Validation limits are in `domain/fieldLimits.ts`: name 120, email 254, phone 10–15 digits, address 500, notes 2000. Service descriptions on create are capped at 500 characters and minimum hours must be greater than 0 and at most 24.

CORS allows a missing Origin and the configured list. It does not allow `*`.

Rate limits, production only: 15-minute window, 30 guest POSTs, 60 receipt GETs, 120 staff requests. The 429 body is “Too many requests. Please wait and try again.”

Helmet content security policy directives from `server/securityPolicy.ts`:

- `default-src 'self'`
- `base-uri 'self'`
- `form-action 'self'`
- `frame-ancestors 'none'`
- `object-src 'none'`
- `script-src 'self' https://js.stripe.com`
- `style-src 'self' 'unsafe-inline'`
- `img-src 'self' data:`
- `font-src 'self'`
- `connect-src 'self' https://*.supabase.co wss://*.supabase.co https://api.stripe.com`
- `frame-src https://js.stripe.com https://hooks.stripe.com`
- `upgrade-insecure-requests`

`crossOriginEmbedderPolicy` is false. Referrer policy is `strict-origin-when-cross-origin`. Frames are denied. `X-Powered-By` is disabled. HSTS max-age is 15552000, includeSubDomains false, preload false.

`lib/repoHygiene.test.ts` fails the build if a live or test Stripe key prefix, a webhook secret prefix, the removed assistant package, or the removed customer backdoor appears outside tests, docs, and the lockfile. `server/serverLog.ts` redacts secrets by composing prefixes so the source file does not contain those literals.

JSON bodies are limited to 32kb. The error handler returns “Something went wrong. Please try again.” and logs the error name only.

`npm audit` reported 11 issues at install time and was not force-fixed. That is recorded as debt, not silenced.

Privacy implementation

Collected for a guest: name, email and/or phone, topic or service, preferred date and time, notes, address for in-home visits, price lines, payment status, and confirmation destinations. Stored in `consultation_request`, `service_order`, `confirmation_message`, and `payment`, or in `server/data/store.json` for the file driver. There is no customer user id.

The browser does not write those records to `localStorage`. Supabase staff auth may persist its own session in the browser storage that `@supabase/supabase-js` uses, and only after `/staff` is opened with keys configured. The iOS staff token is in the keychain.

Retention is “until the operator deletes them.” A period is UNCONFIRMED. The privacy page says the software does not include a feature that sells personal information. A lawyer has not reviewed the page.

Performance

Production build on 2026-10-21, after booking and staff were split out of the main chunk in the working tree:

Asset	Bytes
`dist/assets/index-BSBoAUzG.js`	255285
`dist/assets/BookPage-FmQz9Z57.js`	20041
`dist/assets/StaffPage-BEoaBWpR.js`	237887
`dist/assets/index-UXczGig8.css`	25364

Static files from `server/index.ts` use `maxAge: '1h'`. There is no CDN configuration in the repo. Inter is self-hosted as woff and woff2. The Open Graph image is a 1200 by 630 PNG.

Accessibility implementation

`index.html` sets `lang="en"`. The shell has a skip link to `#main`. Header and footer are `nav` elements with names. Form errors use `role="alert"` in `web/components/Field.tsx`. The receipt lookup and pages use real labels. Focus-visible is a 3px blue outline with a 3px offset. Buttons are at least 44px tall. Reduced motion is honored. The color scheme is forced light. `#10b981` is not used as text on white. There is no dark theme.

SEO and sharing

`lib/documentMeta.ts` sets the title and description per route. Staff, receipt, receipt lookup, and not-found are `noindex`. The canonical link uses `VITE_PUBLIC_SITE_URL` or `https://hhcaretech.com`. `index.html` includes Open Graph and Twitter tags pointing at `/og.png`. `public/sitemap.xml` lists `/`, `/services`, `/consult`, `/book`, `/privacy`, and `/terms` with lastmod `2026-10-21`. `public/robots.txt` disallows `/staff` and `/receipt`. There is no JSON-LD script, because the content security policy does not allow inline scripts.

Build and deploy

```
npm ci
npm run typecheck
npm run lint
npm test
npm run build
npm run build:server
npm start
```

Node 22. `npm test` also runs `node scripts/check-ios.mjs`. The iOS compile command is in the README and was not run here. Deploy steps that need a host account are not in this repo. Rollback is redeploying the previous git revision and restarting the process. Cache purge depends on the host and is UNCONFIRMED.

Testing

File	Asserts
`domain/guest.test.ts`	Reference alphabet, contact rules, confirmation copy
`domain/pricingEngine.test.ts`	Weekend, same-day, and emergency amounts
`server/guest.api.test.ts`	Guest consultation and order without auth, unpriced booking, validation, staff 401, CSP
`web/guestHome.test.tsx`	Home, consult, and book render with no sign-in and no create-account
`lib/repoHygiene.test.ts`	Removed secrets and the AI Studio package are absent
`scripts/check-ios.mjs`	Bundle id, privacy manifest, icon, guest copy

Manual check on 2026-10-21: desktop and mobile guest consultation and guest booking against the file store. iOS Simulator was not available on this Linux machine.

Monitoring and logging

`ServerLog` writes info and error lines. It does not log request bodies. Webhook and payment failures log a fixed sentence. There is no uptime check and no log drain in the repo. `GET /api/health` returns `status`, `guestStore`, `staffSignIn`, `payments`, `email`, and `text`.

Browser and device support

Client	Status
Chromium on Linux, desktop 1440 by 900 and mobile 390 by 844	Exercised on 2026-10-21
Safari, Firefox	Not separately exercised. The CSS is standard. UNCONFIRMED.
iOS app	Source checked, not compiled

Technical debt

Issue	Severity	Proposed fix
`saveProviderAccount` replaces `provider_data` with the Stripe account id and `onboardingComplete: false`	Medium	Merge the previous JSON
Receipt reference is the only guest secret	Medium	Owner decision on a second factor
11 npm audit findings were not force-upgraded	Low until reviewed	Review each advisory before upgrading past a breaking change
Staff chunk is 237,887 bytes because Supabase and the desk load together	Low	Already split from the home page
iOS payment errors use the system description	Low	Map card errors the way the web does

Glossary

Term	Meaning
File store	`server/data/store.json`, used when Supabase is not configured outside production
Service role	Supabase key that bypasses row level security. Server only.
Anon key	Public Supabase key. Used for staff sign-in, not for guest reads.

Open questions

Question	Owner	Blocked
Host and TLS for `hhcaretech.com`. UNCONFIRMED.	Dondon	Deploy
Log drain and uptime monitor. UNCONFIRMED.	Dondon	Operations
Whether to keep the file driver available in production. It works only when `DATA_DRIVER=file`.	Dondon	A production host with no database

Changelog

Date	Version	Change
2026-10-21	1.0	Reverse-documented the guest API, headers, and env names.

Sources

- `server/index.ts`, `server/createApp.ts`, `server/securityPolicy.ts`, `server/payments.ts`, `server/confirmationSender.ts`
- `package.json`, `server/package.json`, lockfile resolved versions on 2026-10-21
- Production build output on 2026-10-21

App flow

- Project: HandyHearts Care Tech
- Document title: App flow
- Document ID: HH-FLOW
- Version: 1.0
- Status: Final (as shipped)
- Date last updated: 2026-10-21 (UTC)
- Author: Cursor cloud agent, for Dondon (owner)
- Repository: https://github.com/Awkward8787/Handy-Hearts-Care-Tech
- Commit described: `d0bdd0c2d4d18144129d93fd37faf5033f96c98f`
- Live URL: none. Flows below were exercised at `http://127.0.0.1:3000` on 2026-10-21.

Contents

1. Screen inventory
2. Navigation model
3. Sitemap diagram
4. User journeys
5. Feature states
6. Payment flow
7. Error and edge states
8. Notifications
9. Screenshots
10. Glossary
11. Open questions
12. Changelog
13. Sources

Screen inventory


Path	Name	Purpose	Entry	Exit	Account	File
`/`	Home	Two guest actions	Direct, logo	Consult, book, services	No	`web/pages/HomePage.tsx`
`/services`	Services	Five categories	Header Services	Consult, book	No	`web/pages/ServicesPage.tsx`
`/consult`	Consultation	Guest form	Header, home card	Receipt	No	`web/pages/ConsultPage.tsx`
`/book`	Book	Guest form, review, optional card	Header, home card	Receipt or pay step	No	`web/pages/BookPage.tsx`
`/receipt`	Find a receipt	Reference form	Footer	`/receipt/HH-…`	No	`web/pages/ReceiptPage.tsx`
`/receipt/:reference`	Receipt	Confirmation the guest keeps	After submit, lookup	Print, home	No	`web/pages/ReceiptPage.tsx`
`/privacy`	Privacy	Guest data explanation	Footer	Other footer links	No	`web/pages/LegalPages.tsx`
`/terms`	Terms	Price and payment rules	Footer	Other footer links	No	`web/pages/LegalPages.tsx`
`/staff`	Staff	Internal sign-in and desk	Footer Staff only	Sign out	Staff only	`web/pages/StaffPage.tsx`
other	Not found	Unknown path	Direct	Back to the start	No	`web/pages/LegalPages.tsx`

iOS uses the same three guest jobs and a Staff link. It has no URL paths. The first screen is `RootView` in `ios/HandyHearts/HandyHeartsApp.swift`.

Navigation model

The header brand goes to `/`. Header links are Services, Consultation, and Book. There is no Sign in and no Create account in the header. The footer links are Privacy policy, Terms of use, Look up a receipt, and Staff. Links call `Navigation.go`, which uses `pushState` and a `popstate` event, and they still have real `href` values. The browser Back button works because the route state listens for `popstate`. There are no breadcrumbs and no mobile drawer. The 404 heading is “Page not found.” with “Back to the start.”

Sitemap diagram

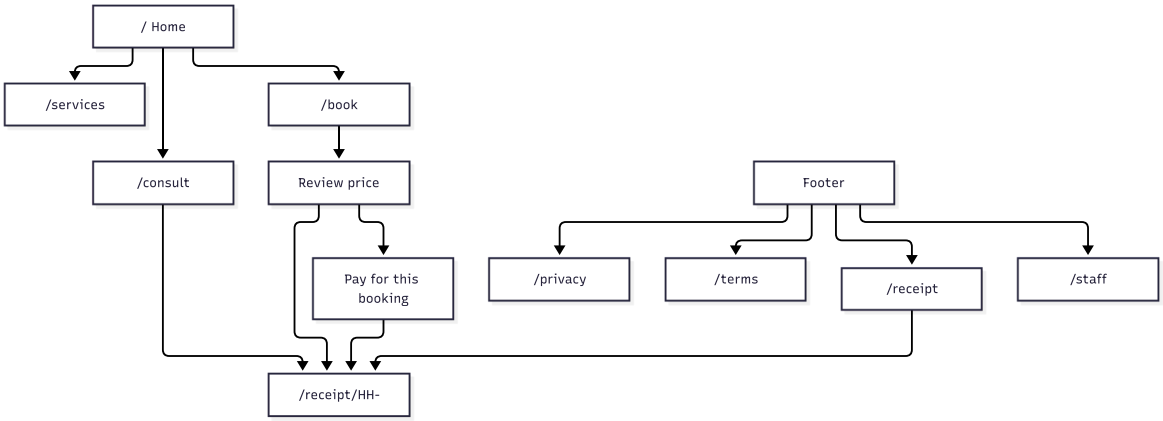

HH-FLOW diagram 1

Caption: Guests move from home to a consultation or a booking and land on a receipt. Staff is only in the footer.

The header and footer are on every page, including the receipt. A guest never has to pass through `/staff`.

User journeys

FLOW-001 First visit

Trigger: open `/`. Goal: choose consultation or booking.


1. The visitor sees “Request help without creating an account.”
2. They choose the card “Request a consultation” or “Book a service.”
3. No API call is required to see the form.

Success: a form with “No account needed.” Failure: if JavaScript does not run, the server still returns `index.html` for non-API paths, and the page does not render the form. There is no noscript message.

FLOW-002 Guest consultation

Trigger: the visitor wants to talk before booking. Goal: a receipt. Implements FR-001.

1. Open Consultation.
2. Fill Your name, Email and/or Phone, What do you want to talk about, Preferred date, Preferred time, and optional Anything else.
3. Choose Request consultation.
4. The browser sends `POST /api/consultations` with no Authorization header.
5. The server validates, allocates `HH-` plus 10 characters, stores the row, queues or sends email and text, and returns the receipt.
6. The browser opens `/receipt/:reference`.

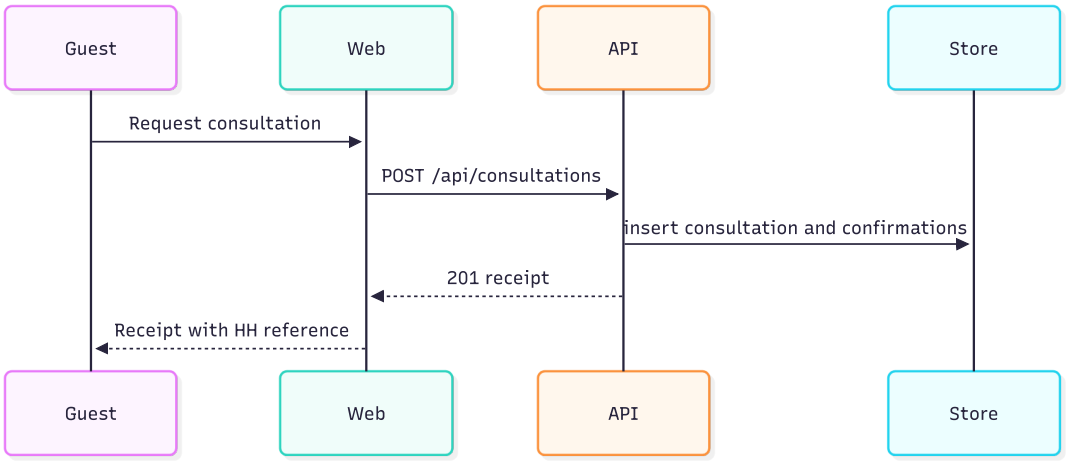

HH-FLOW diagram 2

Caption: The consultation sequence has no sign-in step.

Success: the receipt summary names the person, topic, and time. Failure copy is in the error table below. On 2026-10-21 a browser run saved consultation `HH-ZH8SAS2U8S` for the example name Jane Morales. That reference is sample data, not a customer.

FLOW-003 Guest booking

Trigger: the visitor wants a visit. Goal: a booking receipt. Implements FR-002.

1. Open Book.
2. Choose Service, How soon, Where, Address if in-home, Preferred date, Preferred time, Your name, Email and/or Phone, and optional notes.
3. Choose Review booking. The browser sends `POST /api/quotes`.
4. If no rate matches, the review says “Price to be confirmed. No payment will be taken when you place this booking.”
5. Choose Place booking. The browser sends `POST /api/orders`.
6. If the response has a client secret and a publishable key, the page shows Pay for this booking. Otherwise it opens the receipt.

On 2026-10-21, with an empty service list, booking `HH-WKFAW254X2` was saved for an in-home visit at 100 Example Street. The receipt said the price was to be confirmed and that no payment was taken. No sign-in appeared.

FLOW-004 Returning with a reference

Trigger: the guest has a reference. Goal: see the receipt again.

1. Footer, Look up a receipt.
2. Enter the reference and choose Show receipt.
3. The browser opens `/receipt/HH-…` and sends `GET /api/receipts/:reference`.

Success: the receipt card. Failure: “That receipt was not found.”


FLOW-005 Staff

Trigger: a staff member opens the footer Staff link. Goal: work the queue. Guests are not sent here.

1. Sign in with email and password, or apply as a provider.

2. The browser uses Supabase only on this page, then calls `/api/staff/me` with the access token.
3. An admin sees consultations, bookings, assignment, and service rates. A provider sees assigned visits. A pending provider sees “Your provider application is waiting for approval.”

Feature states

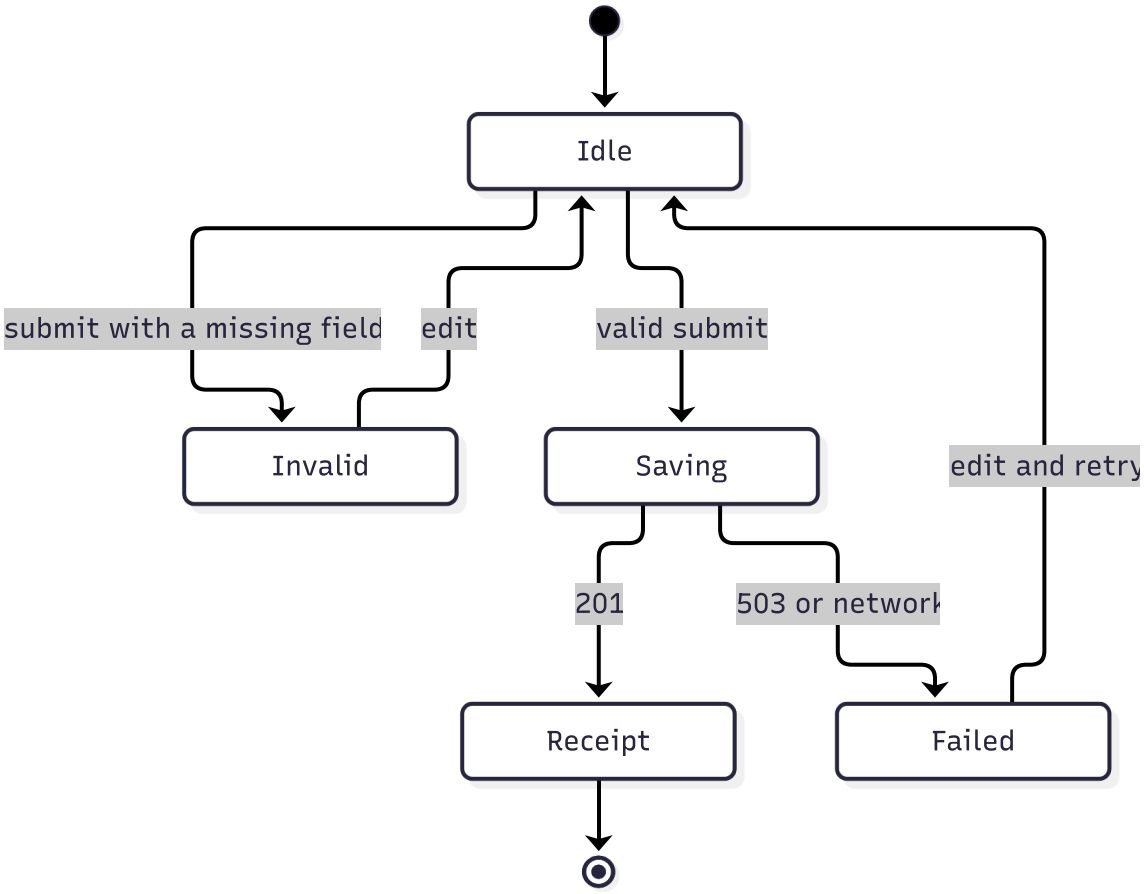


HH-FLOW diagram 3

Caption: Consultation and booking share this form state machine. Booking adds a review state before Saving.

Booking urgency radios are Standard, Expedited, and Emergency. Where radios are In-home visit and Remote help. The address field is shown only for in-home. There is no timer and no score. Nothing is written to the browser except the staff session when that page is used.

Visit status for staff, from `domain/visitStatus.ts`: a provider may move `assigned` or `scheduled` to `in_progress` (“Start visit”), then `in_progress` to `completed` (“Mark visit complete”). An admin may set `cancelled` when the visit is not completed or cancelled. Assign sets `assigned`.

Payment flow

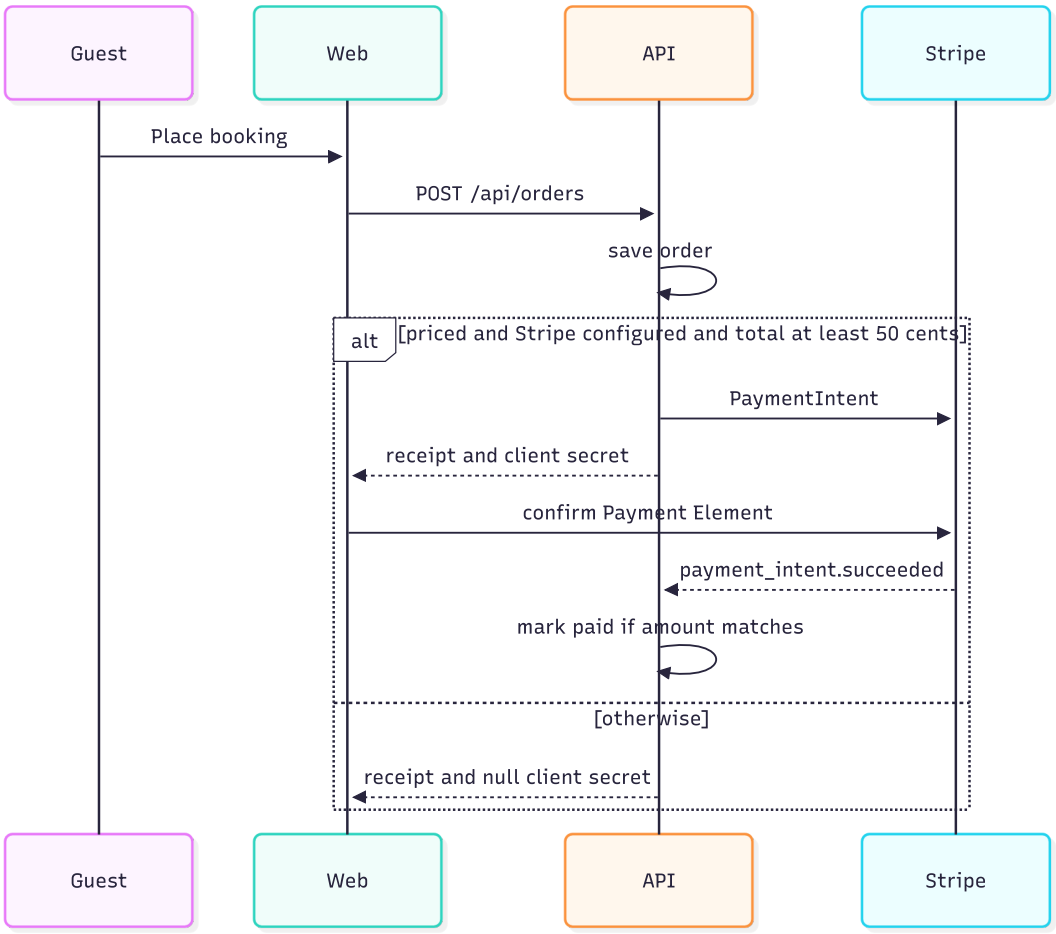

HH-FLOW diagram 4

Caption: The booking is saved before any card step. A missing Stripe configuration does not discard the booking.

Card errors of type `card_error` or `validation_error` show Stripe's message. Other card failures show "The card payment did not go through. No payment was taken." The return URL is `/receipt/:reference`. The webhook is the writer of `paid`. A mismatched amount returns 500 so Stripe can retry. The idempotency key is `order-${reference}-${amount}`.

Error and edge states

Situation	Copy
Missing name	Enter your name.
No email and no phone	Enter an email or a phone number.
Bad email	Enter a valid email.
Short phone	Enter a phone number with at least 10 digits.
Bad service	Choose a service.
Past date	Choose a date that is today or later.
Date too far	Choose a date within the next two years.
In-home without address	Enter the address for an in-home visit.
Store down	That request could not be saved. Please try again.
Network	HandyHearts can’t reach the service right now. Please try again later.
Unknown receipt	That receipt was not found.
Rate limit	Too many requests. Please wait and try again.
Unknown API path	That address was not found.
Unknown page	Page not found.
Staff auth down	Staff sign-in is unavailable right now. Please try again later.
Not staff	This sign-in is for staff.
Suspended	This account has been suspended.

JavaScript disabled: the HTML shell loads and the form does not. Offline: the network sentence above, once the page is open and a request fails.

Notifications

There are no toasts. Errors are inline. The receipt adds “A confirmation was sent to your email.” only when email status is `sent`, and “A text confirmation was sent to your phone.” only when text status is `sent`. Queued and failed stay off the customer page.

Email subject is `HandyHearts consultation HH-…` or `HandyHearts booking HH-….` The body is the summary. SMS is the summary trimmed to 320 characters. When delivery is not configured, the stored status is `queued` and the guest still has the receipt.

Screenshots


Captured 2026-10-21 from the local production server with the file store. Example contact data only.


Home on a desktop browser, route /


Caption: route `/`, desktop. No account and no sign-in.


Consultation form on a desktop browser, route /consult

Caption: route `/consult`, desktop, filled and not yet submitted.


Consultation receipt on a desktop browser

Caption: consultation receipt after submit. Reference shown, no account prompt.


Booking form on a desktop browser, route /book


Caption: route `/book`, desktop, in-home address filled.


Booking review on a desktop browser

Caption: review states the price is to be confirmed and no payment will be taken.


Booking receipt on a desktop browser


Caption: booking receipt. No payment was taken.


Home on a phone-width browser, route /

Caption: route `/`, 390px wide.


Consultation form on a phone-width browser

Caption: route `/consult`, 390px wide.


Consultation receipt on a phone-width browser

Caption: consultation receipt, 390px wide.


Booking form on a phone-width browser

Caption: route `/book`, 390px wide.


Booking receipt on a phone-width browser

Caption: booking receipt, 390px wide.


Page not found on a desktop browser

Caption: unknown path.

Glossary

Term	Meaning
Review booking	The button that calls `POST /api/quotes` before the order is saved.
Place booking	The button that calls `POST /api/orders`.
Staff	Footer link to `/staff`. Not a customer action.

Open questions

Question	Owner	Blocked
Whether a guest should also receive a printable PDF by email. UNCONFIRMED. The page has Print receipt.	Dondon	Email attachment work
iOS screenshots. UNCONFIRMED in this environment because no simulator ran.	Dondon, on a Mac	App Store images

Changelog

Date	Version	Change
2026-10-21	1.0	Documented guest consultation and guest purchase as the only customer paths, with screenshots from the local run.

Sources

- `web/routing.ts`, `web/components/PublicLayout.tsx`, page components
- Browser session on 2026-10-21, references `HH-ZH8SAS2U8S` and `HH-WKFAW254X2`
- `docs/assets` images from that session

Design brief

- Project: HandyHearts Care Tech
- Document title: Design brief
- Document ID: HH-DS
- Version: 1.0
- Status: Final (as shipped)
- Date last updated: 2026-10-21 (UTC)
- Author: Cursor cloud agent, for Dondon (owner)
- Repository: https://github.com/Awkward8787/Handy-Hearts-Care-Tech
- Commit described: `d0bdd0c2d4d18144129d93fd37faf5033f96c98f`
- Live URL: none.

Contents

1. Brand overview
2. Logo and mark
3. Color system
4. Typography
5. Spacing, layout, and grid
6. Shape and depth
7. Components
8. Iconography
9. Motion
10. Imagery
11. Voice and copy
12. Accessibility design rules
13. References
14. Do and don’t
15. Screens
16. Glossary
17. Open questions
18. Changelog
19. Sources

Brand overview

The name on the page is HandyHearts. There is no separate tagline field. The home sentence is “Request help without creating an account.” The audience is a person arranging technology help for an older adult, plus internal staff.

Personality, each as a choice the interface already makes:

Trait	Shown by	Avoided
Direct	“Request a consultation”, “Book a service”	A command-console voice
Calm	White canvas, one blue action	Alarm colors for ordinary text
Concrete	Name, email or phone, date, address	A required account before those fields
Sturdy	4px black borders and a hard shadow	Soft glass panels
Honest	“Price to be confirmed” when no rate exists	A made-up dollar amount

Logo and mark

There is no separate logo file beyond the word HandyHearts in the header and the heart mark used for icons.

Asset	Path	Size
Favicon SVG	`public/favicon.svg`	Vector, blue square, white heart
Favicon ICO	`public/favicon.ico`	16, 32, and 64
Apple touch	`public/apple-touch-icon.png`	180
Open Graph	`public/og.png`	1200 by 630
iOS icon	`ios/HandyHearts/Assets.xcassets/AppIcon.appiconset/AppIcon.png`	1024, RGB, no alpha

The mark is a blue `#2563eb` field with a white heart. Do not recolor it in marketing without the owner. Minimum practical size is the 16px favicon. It sits on blue or, for the Open Graph image, beside black text on `#f8fafc`.

Color system

Tokens are in `tailwind.config.js` and `index.css`.

Token	Hex	RGB	Role	Pair	Contrast	AA	AAA
brand.blue	`#2563eb`	37, 99, 235	Primary button fill, focus	White text on this blue	5.17:1	Pass	Fail
brand.blueDark	`#1d4ed8`	29, 78, 216	Hover, eyebrow text	On white	6.70:1	Pass	Fail
brand.green	`#10b981`	16, 185, 129	Fill only	White on this green	2.54:1	Fail	Fail
brand.greenInk	`#047857`	4, 120, 87	Notice text	On white	5.48:1	Pass	Fail
brand.ink	`#111827`	17, 24, 39	Body text	On white	17.74:1	Pass	Pass
brand.paper	`#ffffff`	255, 255, 255	Cards	Ink on white	Pass	Pass	Pass
brand.canvas	`#f8fafc`	248, 250, 252	Page background	Ink on canvas	Pass	Pass	Pass
slate-700	`#334155`	51, 65, 85	Secondary text	On white	10.35:1	Pass	Pass
slate-600	`#475569`	71, 85, 105	Hints	On white	7.58:1	Pass	Pass
brand.danger	`#dc2626`	220, 38, 38	Error text	On white	4.83:1	Pass for large and UI, body text is 4.83 so AA body fails by a small margin	Fail
brand.warning	`#facc15`	250, 204, 21	Not used as text on white	Black on this yellow	13.71:1	Pass	Pass
black	`#000000`	0, 0, 0	Borders, ink buttons	White on black	21:1	Pass	Pass

`#dc2626` is available as `brand.danger`. Error text in the staff notice uses `text-brand-greenInk`. Form errors use the alert component. If an error is rendered in `#dc2626` at body size, it sits just under 4.5:1. The shipped error component should be checked against the computed style. `ErrorNote` does not set a red class in `web/components/Field.tsx`; it uses the default ink color. That passes. `#10b981` is not used for text on white.

Color is not the only status signal. Payment status is a sentence: “No payment was taken.” or “Payment received.”

Typography

Inter is self-hosted from `@fontsource/inter` weights 400 through 900, imported in `index.tsx`. License: SIL Open Font License. Fallback: `ui-sans-serif, system-ui, sans-serif`.

Level	Class in use	Weight
Display	`text-4xl` to `text-6xl font-black`	900
Section	`text-2xl font-black`	900
Body	`text-lg`	400 to 600
Label	`text-sm font-bold`	700
Button	`font-extrabold` via `.btn` weight 800	800

There is no custom letter-spacing except uppercase eyebrows (`tracking-wide`). Type scales with the viewport through Tailwind's `md:` prefix on the home and form headings.

Spacing, layout, and grid

Tailwind's default 4px scale is used (`p-4`, `p-6`, `p-8`, `gap-6`, `mt-8`). Page containers are `max-w-6xl` for home and services, `max-w-3xl` for forms and legal pages, and `max-w-xl` for receipt lookup. Breakpoint `md` is 768px. The home actions are one column, then two columns from `md`. Horizontal padding is `px-4`.

Shape and depth

Token	Value	Where
Card border	4px solid black	`.neo-card`
Card shadow	8px 8px 0 0 #000	`.neo-card`, `shadow-neo`
Button border	4px solid black	`.btn`
Primary shadow	4px 4px 0 0 #000	`.btn-primary`
Radius	0 on cards and buttons	The mark SVG uses `rx="8"` only
Header rule	8px black bottom border	`PublicLayout`

Primary press moves the button 2px and removes the shadow.

Components

Component	Anatomy	States	File
Skip link	Black bar, white text	Off-screen until focus, then `top: 1rem`	`index.css`
Header link	Underlined bold text	Hover is the browser underline	`PublicLayout.tsx`
Action card	Eyebrow, title, body, whole card is a link	Hover fills `#2563eb` with white text	`HomePage.tsx`
Primary button	`.btn.btn-primary`	Hover `#1d4ed8`, active shift, disabled	`index.css`
Quiet button	`.btn.btn-quiet`	Used for radios and secondary actions	`index.css`
Ink button	`.btn.btn-ink`	Place booking	`index.css`
Field	Label, optional hint, control `.field`	Invalid copy in `ErrorNote` with `role="alert"`	`web/components/Field.tsx`
Radio	Native input inside a button-styled label	Checked is the native control	Book page
Receipt card	Reference, summary, definition list, payment line	Print hides header and footer	`ReceiptPage.tsx`
Error boundary	"Something went wrong on this page." and Reload	Render error	`ErrorBoundary.tsx`

Inputs use a 4px black border through `.field`. Disabled buttons keep the border and do not remove the label.

Iconography

`lucide-react` is a dependency and is not required for the guest pages shipped in this pass. The visible mark is the heart in the favicon and app icon. Illustrations are that heart plus the wordmark on `public/og.png`. Stroke icons are not part of the guest flow.

Motion

Hover and active use CSS. Duration is the browser default for color, plus the 2px press. `prefers-reduced-motion: reduce` sets animation and transition duration to 0.01ms and turns off smooth scroll. There is no celebration animation.

Imagery

Icons are SVG and PNG. The Open Graph image is PNG. Alt text: the heart images are decorative in the favicon and app icon and have no page alt. The Open Graph image is metadata, not an `img`. Content images are not used on the pages. Screenshots in `docs/assets` are documentation, not product UI.

Voice and copy

Use short sentences. Name the thing: consultation, booking, receipt, reference. Say “No account needed.” Say “Price to be confirmed” when no rate is on file. Do not say a message was sent unless the status is `sent`.

Avoid on customer pages: API, environment variable, node, terminal, sequence, fault, and setup instructions. Staff pages may say sign-in because that audience is internal.

Example already shipped: “Tell us what you need, when you want it, and how to reach you. You get a receipt with a reference.”

Accessibility design rules

- Focus ring: 3px solid `#2563eb`, offset 3px.
- Minimum target: 44px on `.btn`.
- Contrast minimum for text: WCAG AA 4.5:1. Primary white-on-blue passes. Do not put white text on `#10b981`.
- Do not use color alone. Status is a sentence.
- Every form control in the guest forms has a visible label.
- The interface is light. `UIUserInterfaceStyle` on iOS is Light. The web page does not offer a dark theme.

References

The hard border and offset shadow were already the visual direction of this repository. The guest rewrite kept that border system and replaced theatrical console labels with plain sentences. No external brand site was copied.

Do and don’t

Do:

1. Lead with the action and the fact that no account is required.
2. Ask for an address only when the visit is in the home.
3. Show the reference in large type on the receipt.
4. Keep Staff in the footer.
5. Use Inter and the blue `#2563eb` for the main action.

Don’t:

1. Add Create account to the home page.
2. Invent a price when no rate is on file.
3. Tell the guest an email was sent when delivery is only queued.
4. Use `#10b981` as text on white.
5. Put developer setup words on a customer page.

Screens

The annotated set is the same capture as HH-FLOW.


Home

Caption: route `/`. Two actions, no account control.


Consultation receipt

Caption: receipt typography, reference first.


Booking review

Caption: honest empty-price state.


Phone home

Caption: the same hierarchy at 390px.

Glossary

Term	Meaning
Neo card	White panel, 4px black border, 8px hard shadow
Ink button	Black fill, white label, used for Place booking

Open questions

Question	Owner	Blocked
A wordmark drawn by a designer, separate from the text logo. UNCONFIRMED.	Dondon	A replacement for the text header
Dark mode. Not shipped. UNCONFIRMED whether it is wanted.	Dondon	A second color theme

Changelog

Date	Version	Change
2026-10-21	1.0	Recorded the shipped tokens, the heart mark, and the guest voice.

Sources

- `tailwind.config.js`, `index.css`, `index.tsx`, `public/favicon.svg`
- Contrast ratios computed for the pairs in the color table
- `docs/assets` screenshots

Backend schema


- Project: HandyHearts Care Tech
- Document title: Backend schema
- Document ID: HH-DATA
- Version: 1.0
- Status: Final (as shipped)
- Date last updated: 2026-10-21 (UTC)
- Author: Cursor cloud agent, for Dondon (owner)
- Repository: https://github.com/Awkward8787/Handy-Hearts-Care-Tech
- Commit described: `d0bdd0c2d4d18144129d93fd37faf5033f96c98f`
- Live URL: none.

Contents

1. Data architecture
2. Entity relationship
3. Tables
4. Client storage
5. API reference
6. Outbound calls
7. Webhooks
8. Background jobs
9. File storage
10. Data lifecycle
11. Migrations
12. Security of data
13. Glossary
14. Open questions
15. Changelog
16. Sources

Data architecture

Guest consultations and bookings are keyed by an order reference plus the contact details on the row. They are not keyed by a user account. Staff profiles are the only rows tied to `auth.users`.

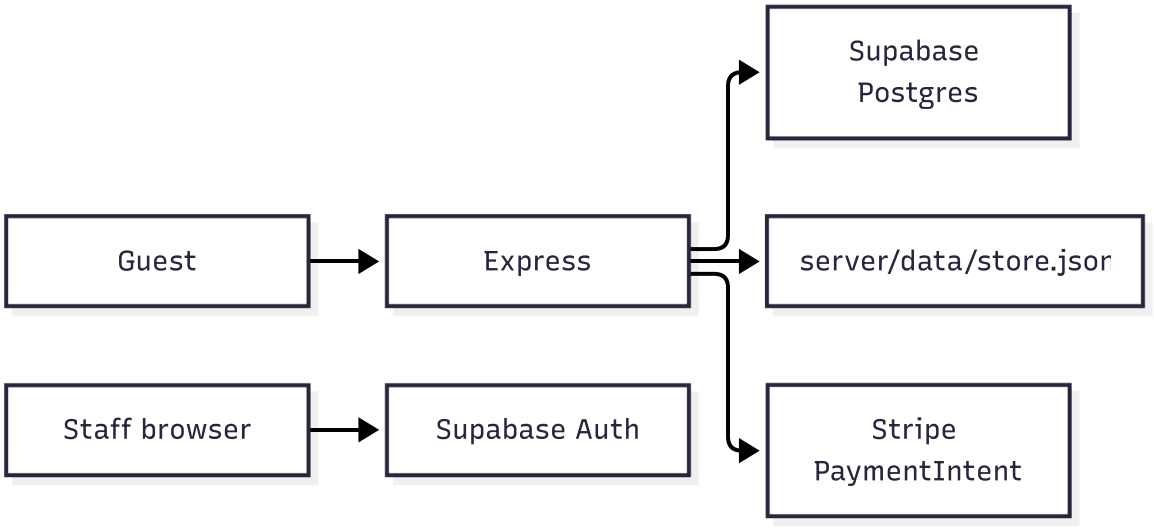


HH-DATA diagram 1

Caption: The same guest records live in Postgres when the service role is configured, and in a JSON file otherwise, outside production.

The file driver is not a second schema. It stores the same objects as `types/guest.ts`.

Entity relationship

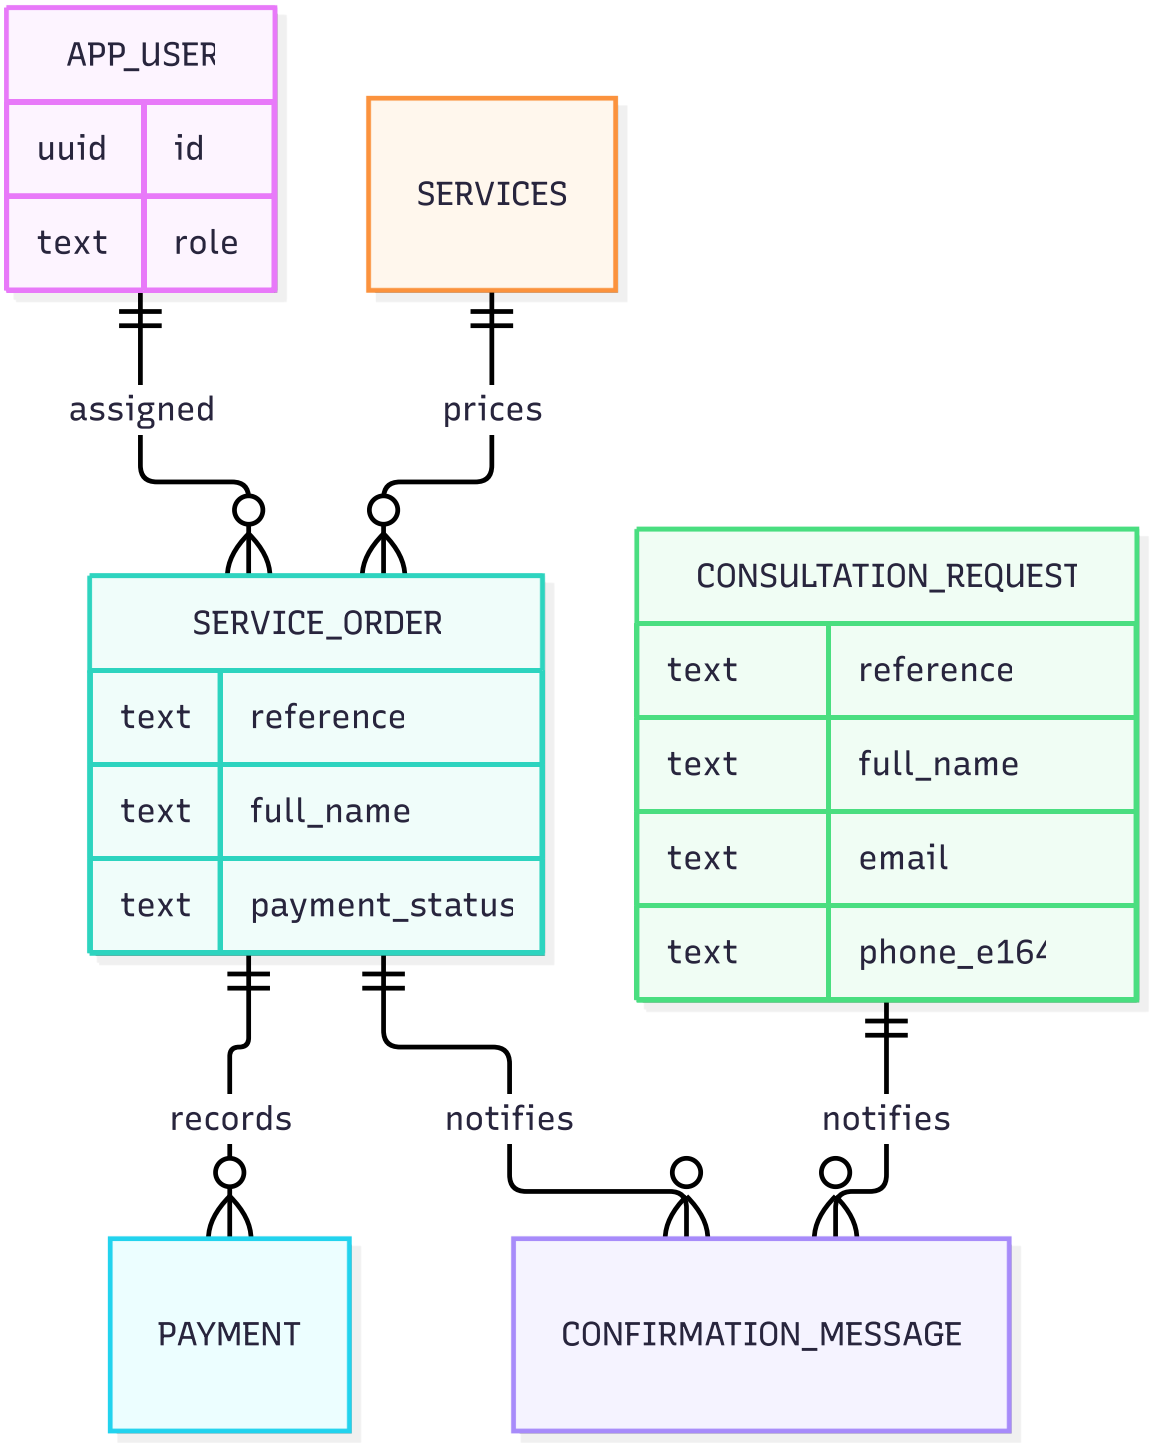

HH-DATA diagram 2

Caption: Guest tables have no customer user id. A provider assignment is the only user foreign key, and it is nullable.

Confirmation rows point at a reference that may be either a consultation or an order, so the database does not use a single foreign key for that column.

Tables

Column names are the SQL names. The server maps them to camelCase in `server/supabaseRepository.ts`. Example values are fake.

app_user

Staff and providers only.

Field	Type	Null	Default	Constraints	PII
id	uuid	no		PK, FK to `auth.users`	yes
email	text	yes			yes
name	text	no			yes
role	text	no		`ADMIN` or `PROVIDER`	no
is_approved	boolean	no	false		no
is_banned	boolean	no	false		no
phone_e164	text	yes			yes
provider_data	jsonb	no	`{}`	Stripe account id lives here	indirect

consultation_request

Field	Type	Null	Default	Constraints	PII
reference	text	no		PK, `HH-` plus 10 alphabet characters	no
full_name	text	no			yes
email	text	yes		contact check with phone	yes
phone_e164	text	yes		stored as typed-normalized digits, leading + kept when present	yes
topic	text	no		catalog id or `unsure`	no
preferred_date	text	no		`YYYY-MM-DD`	no
preferred_time	text	no		anytime, morning, afternoon, evening	no
notes	text	yes			yes
status	text	no	submitted	submitted or closed	no
created_at	timestamptz	no			no

There is no `user_id`.

service_order

Field	Type	Null	Default	Constraints	PII
reference	text	no		PK, same reference pattern	no
full_name	text	no			yes
email	text	yes		contact check	yes
phone_e164	text	yes			yes
service_category	text	no		catalog id, not `unsure`	no
service_id	uuid	yes		FK to `services` when priced	no
urgency	text	no		low, medium, high, emergency	no
preferred_date	text	no			no
preferred_time	text	no			no
service_type	text	no		in_home or remote	no
address	text	yes		required by check when in_home	yes
notes	text	yes			yes
total_price_cents	integer	no		`>= 0`	no
price_items	jsonb	no	`[]`	label and amount	no
provider_payout_cents	integer	no	0		no
platform_fee_cents	integer	no	0		no
payment_intent_id	text	yes			no
payment_status	text	no		not_due, unpaid, paid	no
status	text	no		draft through cancelled	no
assigned_provider_user_id	uuid	yes		FK `app_user`	yes
created_at	timestamptz	no			no
updated_at	timestamptz	no			no

confirmation_message

Field	Type	Null	Notes	PII
id	bigint identity	no	PK	no
reference	text	no	consultation or order reference	no
channel	text	no	email or sms	no
destination	text	no	email or phone	yes
subject	text	yes	email subject	no
body	text	no	summary	yes
status	text	no	sent, queued, failed	no
created_at	timestamptz	no		no

Index: `(reference, created_at)`.

payment

Field	Type	Null	Notes	PII
id	text	no	Stripe PaymentIntent id	no
reference	text	no	FK to `service_order`	no
amount_cents	integer	no		no
status	text	no	only `paid`	no
created_at	timestamptz	no		no

services

Field	Type	Null	Notes	PII
id	uuid	no	PK	no
name	text	no	Must match a catalog label to price a booking	no
description	text	no	max 500 on create	no
base_rate_cents	integer	no	`>= 0`	no
min_hours	numeric	no	`> 0` and `<= 24`	no
is_active	boolean	no	default true	no

No prices are seeded.

Client storage

Store	Key	When	Cleared
Supabase auth storage	The library's default session key, only after `/staff` with both public env vars set	Staff sign-in	Sign out
iOS keychain	service `com.hhcaretech.handyhearts.staff`, account `access-token`	Staff sign-in	Sign out
localStorage for guests	none		
Cookies set by this app	none in our code		

Guest receipts are not cached in the browser beyond the page.

API reference

All JSON errors use `{ "error": { "code": "...", "message": "..." } }`. Guest routes do not require Authorization. Implementing file: `server/createApp.ts`.

ID	Method	Path	Auth	Limit	Effect
API-001	GET	`/api/health`	no	none	Flags for store, staff, payments, email, text
API-002	GET	`/api/services`	no	none	Active services, or `[]` if the store is down
API-003	POST	`/api/quotes`	no	30 / 15 min	Quote only. No write.
API-004	POST	`/api/consultations`	no	30 / 15 min	201 `{ receipt }`
API-005	POST	`/api/orders`	no	30 / 15 min	201 `{ receipt, clientSecret }`
API-006	GET	`/api/receipts/:reference`	no	60 / 15 min	`{ receipt }` or 404
API-007	POST	`/api/stripe/webhook`	Stripe signature	none	Marks paid
API-008	GET	`/api/staff/me`	bearer	120 / 15 min	Portal name
API-009	GET	`/api/staff/consultations`	admin	120	List
API-010	GET	`/api/staff/orders`	staff	120	Admin sees all. Provider sees assigned.
API-011	GET	`/api/staff/services`	admin	120	List including inactive handling in the repo
API-012	POST	`/api/staff/services`	admin	120	Create a rate
API-013	PATCH	`/api/staff/services/:id`	admin	120	`{ baseRateCents }` integer
API-014	GET	`/api/staff/providers`	admin	120	Approved providers
API-015	POST	`/api/staff/orders/:reference/assign`	admin	120	Sets status assigned
API-016	POST	`/api/staff/orders/:reference/status`	staff	120	Provider transition or admin cancel
API-017	POST	`/api/staff/consultations/:reference/close`	admin	120	Status closed
API-018	POST	`/api/staff/connect-link`	approved provider	120	Stripe Connect URL

Example consultation body:

```
{
  "fullName": "Jane Morales",
  "email": "jane@example.com",
  "phone": "5555550100",
  "topic": "device_setup",
  "preferredDate": "2026-11-03",
  "preferredTime": "morning",
  "notes": ""
}
```

Example success: `201` and a receipt whose `reference` matches `HH-` plus 10 characters, `emailConfirmation` and `smsConfirmation` of `sent`, `queued`, `failed`, or `skipped`. The body does not include a user id.

Example order adds `serviceCategory`, `urgency`, `serviceType`, and `address`. `clientSecret` is null when payment is not due or Stripe is off.

Validation failures are HTTP 400 with the sentences in HH-FLOW. Store failures are HTTP 503.

Outbound calls

Call	When	Mapping
Stripe PaymentIntent create	Unpaid total `>= 50` and secret set	Amount, currency `usd`, metadata reference, receipt email, idempotency `order-${reference}-${amount}`
Stripe account link	Provider payout	Country from `STRIPE_CONNECT_COUNTRY`, return and refresh `PUBLIC_SITE_URL/staff`
SMTP send	Email destination and SMTP trio set	Subject and text summary
Twilio `Messages.json`	SMS destination starts with `+` and Twilio trio set	To, From, Body

Webhooks

Incoming only: `POST /api/stripe/webhook`, raw body, header `stripe-signature`. Event used: `payment_intent.succeeded`. The reference comes from metadata. If the amount does not match `total_price_cents`, the handler returns 500. Duplicate notices upsert the payment id. Other event types return `{ "received": true }` without a write. Unsigned or unconfigured webhooks return 400 or 503 with “The payment notice could not be verified.”

No outgoing webhooks.

Background jobs

Not applicable. Nothing is scheduled. Confirmations are sent during the request that created the row.

File storage

`server/data/store.json` holds consultations, orders, confirmations, services, payments, and providers. The directory is gitignored. The path is beside the server package: `data/store.json` when the source is `server/index.ts`, and

`../data/store.json` when the bundle is `server/dist/index.js`. There is no object store and no sweep job.

Data lifecycle

Records stay until the operator deletes them. A retention period is UNCONFIRMED. Backups are the database host's backups when Supabase is used, and the file itself when the file driver is used. Restore is a host restore or replacing the JSON file. This repo does not configure backups.

Deleting a guest is a SQL delete by reference, or editing the JSON file. There is no self-serve delete button.

Migrations

Apply `supabase/migrations/20261021000000_guest_records.sql` once, in the owner's Supabase project. It creates the tables, `is_admin()`, the signup trigger, enables row level security, and revokes anon and authenticated access. It does not insert prices and does not insert an admin.

After the owner creates their auth user, they promote an admin with their own id and email:

```
        insert into public.app_user (id, email, name, role, is_approved, is_banned)
        values ('<auth user uuid>', '<email>', '<name>', 'ADMIN', true, false);
```

Rollback is dropping the tables. Do that only on a database that has not yet stored real guest records.

Security of data

Row level security is on. Anon and authenticated have no grants on the guest tables or `app_user`. The service role bypasses row level security and is the only writer. Passwords are Supabase's, not a hash in `app_user`. Guest phones and emails are stored as submitted after normalization, not hashed, because staff must be able to call or write. The receipt reference is unguessable enough for a capability URL and is not a password. Payment card numbers are not stored.

Glossary

Term	Meaning
Reference	Primary key of a consultation or an order
not_due	Payment status when the quote total is 0
phone_e164	Column name. The value is E.164 only when the guest typed a leading plus.

Open questions

Question	Owner	Blocked
Retention period. UNCONFIRMED.	Dondon	A delete job
Platform fee. UNCONFIRMED. Columns exist and are written as 0.	Dondon	Payout math
Whether `phone_e164` should reject numbers without `+`. UNCONFIRMED. They are stored and SMS then fails only if Twilio is on.	Dondon	Stricter validation

Changelog

Date	Version	Change
2026-10-21	1.0	Guest tables keyed by reference and contact, not by a customer account, matching Dondon’s rule.

Sources

- `supabase/migrations/20261021000000_guest_records.sql`
- `types/guest.ts`, `server/supabaseRepository.ts`, `server/fileRepository.ts`, `server/createApp.ts`
- `domain/orderReference.ts`, `domain/phoneNumber.ts`

Implementation plan

- Project: HandyHearts Care Tech
- Document title: Implementation plan
- Document ID: HH-PLAN
- Version: 1.0
- Status: Final (as shipped)
- Date last updated: 2026-10-21 (UTC)
- Author: Cursor cloud agent, for Dondon (owner)
- Repository: https://github.com/Awkward8787/Handy-Hearts-Care-Tech
- Commit described: `d0bdd0c2d4d18144129d93fd37faf5033f96c98f`
- Live URL: none. Not deployed.

Contents

1. Delivery summary
2. Phases
3. Work breakdown
4. Review gates
5. Testing and QA
6. Launch checklist
7. Deployment runbook
8. Post-launch owner actions
9. Roadmap
10. Risks
11. Maintenance
12. Glossary
13. Open questions
14. Changelog
15. Sources


Delivery summary

On 2026-10-21 the repository was repaired so a visitor can request a consultation or book a service without an account, and so the web app, API, and iOS project can be built from documented commands. The work is commit `d0bdd0c2d4d18144129d93fd37faf5033f96c98f` plus the documentation commit that adds this file. Nothing was deployed and no store submission was made.

What was broken before that commit, from the tree at `315e2ce`:

Problem	What replaced it
Customer sign-in was required for the family flow, and a public screen could create an administrator	Guest `/consult` and `/book`. Staff sign-in is `/staff` only. SQL refuses admin from signup metadata.
A live Stripe publishable key and a Supabase project reference were in client source	Keys come from env names. The old literals are rejected by `lib/repoHygiene.test.ts`.
The server start script did not match the TypeScript entry, and CORS was open	`server` workspace builds with esbuild. CORS uses a list.
The iOS file was not an Xcode project	`ios/HandyHearts.xcodeproj` with a privacy manifest, icon, and guest screens
README and metadata were AI Studio scaffolding	README describes install, env names, and commands

Phases

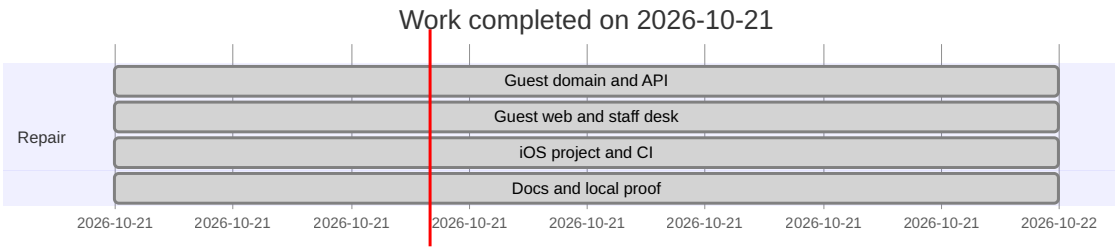

HH-PLAN diagram 1

Caption: The repair happened in one working session. Dates are the day of the commit, not an estimate of future effort.

Phase	Status
Guest model and API	Shipped in `d0bdd0c`
Web guest UI and internal staff	Shipped in `d0bdd0c`
iOS source and structural check	Shipped in `d0bdd0c`. Compile not run.
Documentation and PDFs	This documentation commit

Work breakdown

ID	Task	Requirement	Status	Notes
TASK-001	Guest validation, reference, quote, receipt copy	FR-001, FR-002, FR-003, FR-005	Shipped	`domain/`
TASK-002	Consultation and order APIs, confirmations, webhook	FR-004, FR-006	Shipped	`server/createApp.ts`
TASK-003	Guest pages and receipt	FR-001, FR-002, FR-010, FR-012	Shipped	`web/pages`
TASK-004	Staff desk	FR-007, FR-008, FR-009	Shipped	`/staff`
TASK-005	SQL migration without a customer user id	FR-001	Shipped	Owner must apply it
TASK-006	CI typecheck, lint, test, build	NFR-001	Shipped	`.github/workflows/ci.yml`
TASK-007	iOS guest flows	FR-001, FR-002	Shipped as source	No simulator here
TASK-008	Icons, sitemap, robots, legal pages	NFR-008, FR-010	Shipped	
TASK-009	Six documents and PDFs	Documentation pack	Shipped with the docs commit	
TASK-010	Deploy		Deferred	Owner host
TASK-011	Publish legal identity	FR-010	Deferred	Owner

Review gates

Review	Date	Verdict	Findings
Guest rule from Dondon	2026-10-21	Accepted and implemented	Customer account removed from the public paths
Automated tests	2026-10-21	Pass	23 Vitest tests and `scripts/check-ios.mjs`
Browser guest flows	2026-10-21	Pass	Consultation `HH-ZH8SAS2U8S` and booking `HH-WKFAW254X2` with no sign-in
Accessibility spot check	2026-10-21	Pass for shipped pairs	Focus ring, skip link, labels, 44px buttons. Formal audit not commissioned.
Security spot check	2026-10-21	Pass for the removed secrets	Hygiene test. npm audit findings not force-fixed.
iOS compile		Not run	Linux environment
Counsel review of legal pages		Not done	Owner

Testing and QA

Automated: `npm test` on 2026-10-21, 23 tests passed, iOS structure check passed. `npm run typecheck`, `npm run lint`, `npm run build`, and `npm run build:server` passed.

Manual script used in Chromium:

1. Open `/`. Confirm the heading and the absence of Sign in and Create account.
2. Submit a consultation for an example person. Confirm an `HH-` receipt and no account prompt.
3. Submit an in-home booking. Confirm the review says the price is to be confirmed, then the receipt says no payment was taken.
4. Open an unknown path. Confirm “Page not found.”
5. Repeat the home, form, and receipt at 390px width.

Desktop and mobile screenshots are in `docs/assets` and in the pull request artifacts. iOS was not launched.

Launch checklist

Item	State	Evidence
Domain and DNS	Not done	`hhcaretech.com` is written as the canonical origin. Hosting is UNCONFIRMED.
TLS	Not done	No deploy
Env and secrets	Not done	Example files have empty values
Payments live-tested	Not done	Stripe keys are not in this environment. Unpriced booking was tested.
Legal pages	Present, identity missing	`web/pages/LegalPages.tsx`
Analytics	None by design	No vendor in the client
Security headers	Done in code	`server/guest.api.test.ts` checks CSP and HSTS
404	Done	Browser check
Favicon and Open Graph image	Done	`public/`
Accessibility spot check	Done	See review gates
Backups	Not done	Owner’s database host
Monitoring	Not done	Health endpoint only

Do not launch publicly until the legal identity is on the privacy and terms pages.

Deployment runbook

This repository does not deploy itself.

1. Apply the SQL migration in the owner’s Supabase project.
2. Promote one admin with that person’s auth user id.
3. Set the server env names and the `VITE_` names. Use the same `BUSINESS_TIMEZONE` on both.
4. On the host: `npm ci`, `npm run build`, `npm run build:server`, `NODE_ENV=production npm start`.
5. Put TLS in front. Set `TRUST_PROXY` if the proxy is trusted. Set `CORS_ORIGINS` to the public origin.
6. Point Stripe’s webhook at `https://<origin>/api/stripe/webhook`.

7. Open `/api/health` and confirm the flags that should be true.
8. Submit one guest consultation and open its receipt.

Rollback: deploy the previous git revision and restart. Database rollback is only safe before real guest rows exist.

iOS: on a Mac, fill `ios/Config.local.xcconfig`, set the team, and run the `xcodebuild` command in the README. Access to Apple and to the host is the owner's.

Post-launch owner actions

1. Rotate any Stripe key that was previously committed. Do not reuse it.
2. Confirm which Supabase project is in use. Set the URL, anon key, and service role. Apply the migration.
3. Insert the admin row with the owner's own email. Do not use a sample address from this document.
4. Choose the IANA time zone and set it on the web and the server.
5. Set `STRIPE_CONNECT_COUNTRY` before provider payout links.
6. Set SMTP and Twilio before email and text can leave the building. Receipts still save without them.
7. Register bundle id `com.hhcaretech.handyhearts` and the Apple team.
8. Publish legal name, mailing address, support email, governing law, and retention period. Have counsel read the pages.
9. Decide the platform-fee split. The code stores 0.
10. Decide whether `hhcaretech.com` is the production host.

Roadmap

ID	Task	Depends on	Status
TASK-201	Merge existing `provider_data` when saving a Connect account	TASK-004	Deferred
TASK-202	Structured device notes if the owner wants them back	Owner answer	Deferred
TASK-203	Second factor on receipt lookup if the reference is considered too weak	Owner answer	Deferred
TASK-204	Dark theme	Owner answer	Deferred

Sizing is not estimated in days.

Risks

Risk	Mitigation
File store used by mistake in production	Production refuses it unless `DATA_DRIVER=file`
Guest PII in a screenshot or a local JSON file	`server/data` is gitignored. Docs use the example name only.
iOS binary differs from source	Compile on a Mac before submission. The structural check is not a compile.

Maintenance

- Update npm dependencies on a cadence the owner chooses. Do not use a force audit fix without reading the advisory.
- Rotate Supabase service role, Stripe secret, webhook secret, SMTP password, and Twilio token if they leak.
- TLS renewal is the host’s.
- Content updates to prices happen in `/staff`, not in a seed file.
- Re-read the legal pages when the operator identity is added, and regenerate these PDFs if the behavior changes.

Glossary

Term	Meaning
File driver	JSON store used for local proof and for non-production without Supabase
Owner action	A step that needs an account, a legal fact, or a credential this repo must not invent

Open questions

The open questions in HH-PRD, HH-TRD, and HH-DATA remain open. None of them were answered by inventing a value.

Changelog

Date	Version	Change
2026-10-21	1.0	Recorded the guest repair, the checks that passed, and the owner actions still open.

Sources

- Git history: `315e2ce` then `d0bdd0c2d4d18144129d93fd37faf5033f96c98f`
- `npm test` and the production build on 2026-10-21
- Browser guest flows the same day

Combined glossary

HH-PRD

Term	Meaning
Guest	A visitor with no HandyHearts account.
Reference	Public id shaped `HH-` plus 10 characters. It identifies one consultation or one booking.
Receipt	The page and payload the guest keeps. It includes the summary and the payment line.
Catalog	The five bookable services in `domain/serviceCatalog.ts`. Consultation also offers “Not sure yet.”
Staff	An `ADMIN` or `PROVIDER` row in `app_user`.
Priced	A booking whose service name matched an active rate.

HH-TRD

Term	Meaning
File store	`server/data/store.json`, used when Supabase is not configured outside production
Service role	Supabase key that bypasses row level security. Server only.
Anon key	Public Supabase key. Used for staff sign-in, not for guest reads.

HH-FLOW

Term	Meaning
Review booking	The button that calls `POST /api/quotes` before the order is saved.
Place booking	The button that calls `POST /api/orders`.
Staff	Footer link to `/staff`. Not a customer action.

HH-DS

Term	Meaning
Neo card	White panel, 4px black border, 8px hard shadow
Ink button	Black fill, white label, used for Place booking

HH-DATA

Term	Meaning
Reference	Primary key of a consultation or an order
not_due	Payment status when the quote total is 0
phone_e164	Column name. The value is E.164 only when the guest typed a leading plus.

HH-PLAN

Term	Meaning
File driver	JSON store used for local proof and for non-production without Supabase
Owner action	A step that needs an account, a legal fact, or a credential this repo must not invent

Combined open questions

HH-PRD

Question	Owner	Blocked until answered
Legal name, mailing address, support email, governing law, and retention period. UNCONFIRMED.	Dondon	Public launch of the privacy policy and terms.
Business IANA time zone. UNCONFIRMED. Code default is UTC.	Dondon	Same-day and weekend quotes for a real city.
Platform-fee split. UNCONFIRMED. Stored as 0.	Dondon	Provider payout amounts.
Whether a phone without + should assume a country. UNCONFIRMED. The code does not add a country prefix.	Dondon	Text delivery for national numbers.
Whether structured device fields should return. UNCONFIRMED.	Dondon	A richer intake form.
Who receives Stripe funds. UNCONFIRMED.	Dondon	Live charges.

HH-TRD

Question	Owner	Blocked
Host and TLS for `hhcaretech.com`. UNCONFIRMED.	Dondon	Deploy
Log drain and uptime monitor. UNCONFIRMED.	Dondon	Operations
Whether to keep the file driver available in production. It works only when `DATA_DRIVER=file`.	Dondon	A production host with no database

HH-FLOW

Question	Owner	Blocked
Whether a guest should also receive a printable PDF by email. UNCONFIRMED. The page has Print receipt.	Dondon	Email attachment work
iOS screenshots. UNCONFIRMED in this environment because no simulator ran.	Dondon, on a Mac	App Store images

HH-DS

Question	Owner	Blocked
A wordmark drawn by a designer, separate from the text logo. UNCONFIRMED.	Dondon	A replacement for the text header
Dark mode. Not shipped. UNCONFIRMED whether it is wanted.	Dondon	A second color theme

HH-DATA

Question	Owner	Blocked
Retention period. UNCONFIRMED.	Dondon	A delete job
Platform fee. UNCONFIRMED. Columns exist and are written as 0.	Dondon	Payout math
Whether `phone_e164` should reject numbers without `+`. UNCONFIRMED. They are stored and SMS then fails only if Twilio is on.	Dondon	Stricter validation

HH-PLAN

The open questions in HH-PRD, HH-TRD, and HH-DATA remain open. None of them were answered by inventing a value.