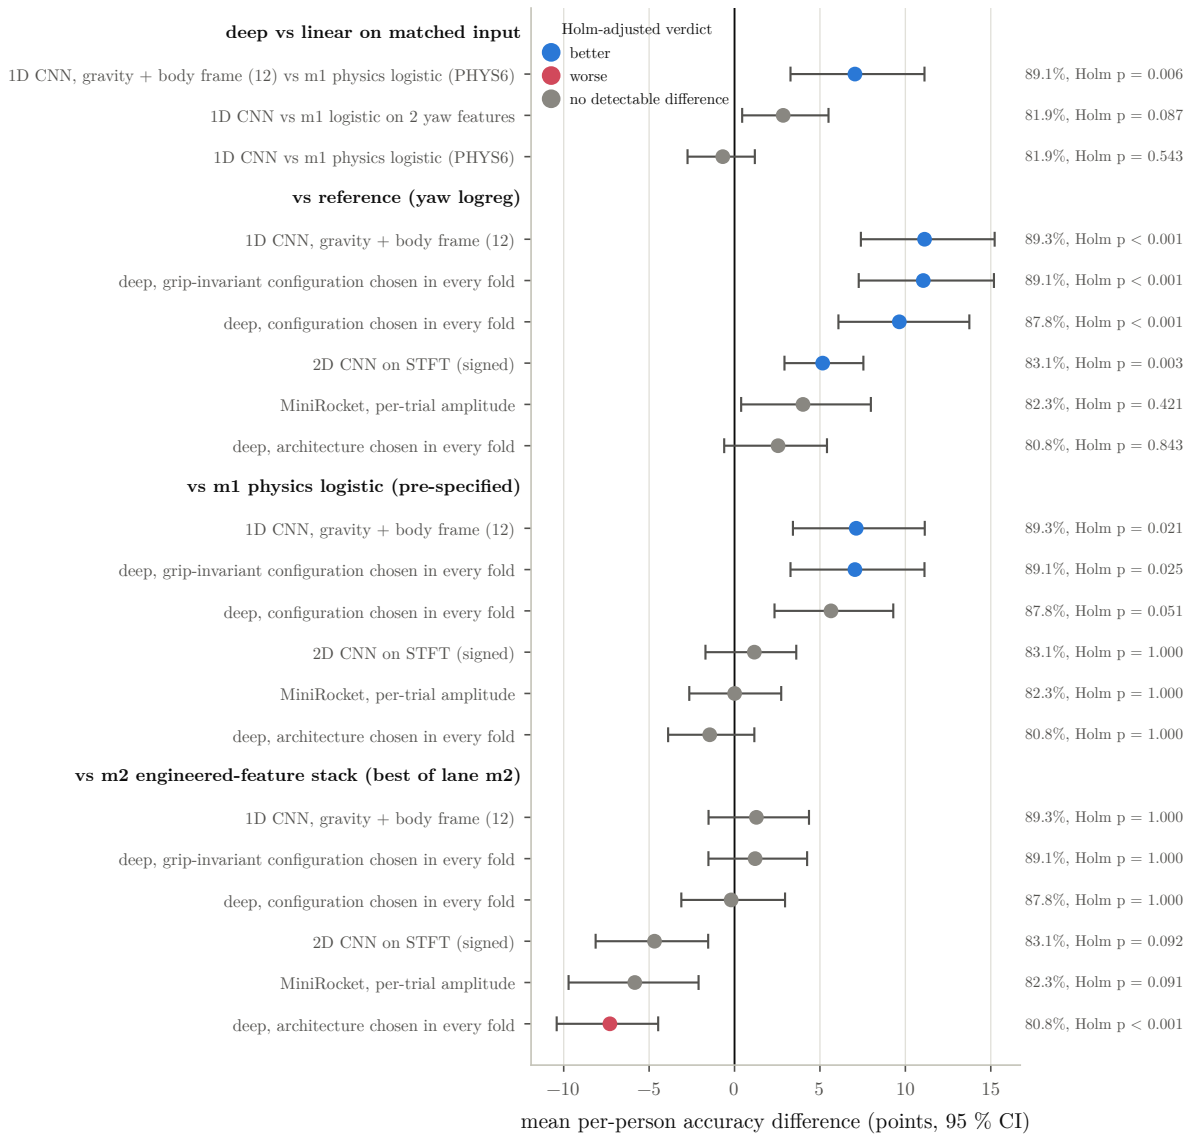
deep vs linear on matched input
1D CNN, gravity + body frame (12) vs m1 physics logistic (PHYS6)
1D CNN vs m1 logistic on 2 yaw features
1D CNN vs m1 physics logistic (PHYS6)
vs reference (yaw logreg)
1D CNN, gravity + body frame (12)
deep, grip-invariant configuration chosen in every fold
deep, configuration chosen in every fold
2D CNN on STFT (signed)
MiniRocket, per-trial amplitude
deep, architecture chosen in every fold
vs m1 physics logistic (pre-specified)
1D CNN, gravity + body frame (12)
deep, grip-invariant configuration chosen in every fold
deep, configuration chosen in every fold
2D CNN on STFT (signed)
MiniRocket, per-trial amplitude
deep, architecture chosen in every fold
vs m2 engineered-feature stack (best of lane m2)
1D CNN, gravity + body frame (12)
deep, grip-invariant configuration chosen in every fold
deep, configuration chosen in every fold
2D CNN on STFT (signed)
MiniRocket, per-trial amplitude
deep, architecture chosen in every fold
Holm-adjusted verdict
better
worse
no detectable difference
89.1%, Holm p = 0.006
81.9%, Holm p = 0.087
81.9%, Holm p = 0.543
89.3%, Holm p < 0.001
89.1%, Holm p < 0.001
87.8%, Holm p < 0.001
83.1%, Holm p = 0.003
82.3%, Holm p = 0.421
80.8%, Holm p = 0.843
89.3%, Holm p = 0.021
89.1%, Holm p = 0.025
87.8%, Holm p = 0.051
83.1%, Holm p = 1.000
82.3%, Holm p = 1.000
80.8%, Holm p = 1.000
89.3%, Holm p = 1.000
89.1%, Holm p = 1.000
87.8%, Holm p = 1.000
83.1%, Holm p = 0.092
82.3%, Holm p = 0.091
80.8%, Holm p < 0.001
−10
−5
0
5
10
15
mean per-person accuracy difference (points, 95 % CI)