


Work-Package 7: “Primary tool chain”

Report on the final choices for the primary toolchain

Decision on the final choice for the means of description (O7.1.4), tools (O7.1.8) and tool platform (O7.1.11)

Marielle Petit-Doche and all participants of the decision process

July 2013

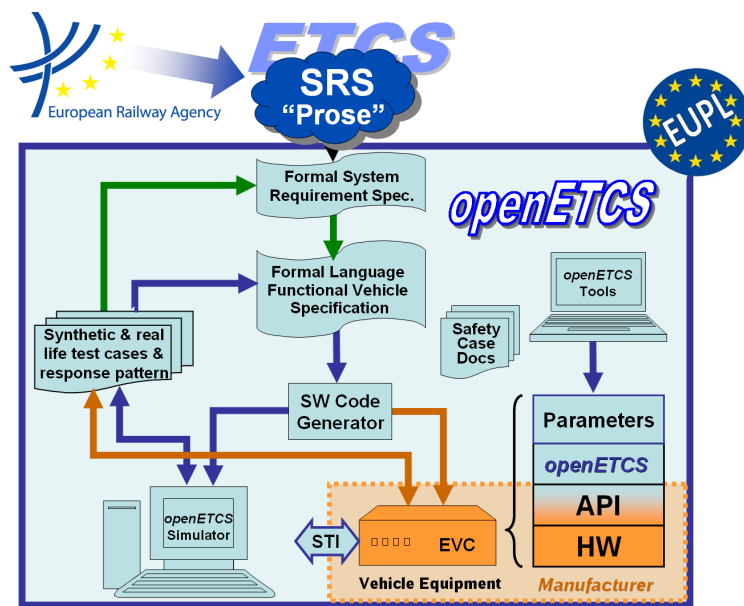

Funded by:


 Federal Ministry
 of Education
 and Research

 Région de
 Bruxelles-
 Capitale

 GOBIERNO
 DE ESPAÑA

 MINISTERIO
 DE INDUSTRIA, ENERGÍA
 Y TURISMO

This page is intentionally left blank

Work-Package 7: “Primary tool chain”

**OETCS/WP7/D7.1 – 00/03
July 2013**

Report on the final choices for the primary toolchain

**Decision on the final choice for the means of description (O7.1.4), tools (O7.1.8) and
tool platform (O7.1.11)**

Marielle Petit-Doche

Systerel

all participants of the decision process

WP7 partners

Deliverable

Prepared for openETCS@ITEA2 Project

Abstract: This document gives a description and the results of the first task of WP7. The objectives of the task are to analyse and recommend, means, tools and platform to develop the primary tool chain of Open ETCS.

Disclaimer: This work is licensed under the "openETCS Open License Terms" (oOLT) dual Licensing: European Union Public Licence (EURL v.1.1+) AND Creative Commons Attribution-ShareAlike 3.0 – (cc by-sa 3.0)

THE WORK IS PROVIDED UNDER openETCS OPEN LICENSE TERMS (oOLT) WHICH IS A DUAL LICENSE AGREEMENT INCLUDING THE TERMS OF THE EUROPEAN UNION PUBLIC LICENSE (VERSION 1.1 OR ANY LATER VERSION) AND THE TERMS OF THE CREATIVE COMMONS PUBLIC LICENSE ("CCPL"). THE WORK IS PROTECTED BY COPYRIGHT AND/OR OTHER APPLICABLE LAW. ANY USE OF THE WORK OTHER THAN AS AUTHORIZED UNDER THIS OLT LICENSE OR COPYRIGHT LAW IS PROHIBITED.

BY EXERCISING ANY RIGHTS TO THE WORK PROVIDED HERE, YOU ACCEPT AND AGREE TO BE BOUND BY THE TERMS OF THIS LICENSE. TO THE EXTENT THIS LICENSE MAY BE CONSIDERED TO BE A CONTRACT, THE LICENSOR GRANTS YOU THE RIGHTS CONTAINED HERE IN CONSIDERATION OF YOUR ACCEPTANCE OF SUCH TERMS AND CONDITIONS.

<http://creativecommons.org/licenses/by-sa/3.0/>
<http://joinup.ec.europa.eu/software/page/eupl/licence-eupl>

Table of Contents

Figures and Tables.....	v
1 Introduction.....	1
1.1 T7.1 objective.....	1
1.2 T7.1 activities	1
1.3 Glossary	1
2 Results on means and tools for primary tool chain	4
2.1 Initial list of candidates	4
2.2 Evaluation results	4
2.3 Short list	7
3 Results on tool platform.....	9
3.1 Initial list of candidates	9
3.2 Eclipse.....	9
3.3 Version Management	11
3.4 Topcased and Polarsys.....	11
3.4.1 State of Topcased and Polarsys	11
4 Decision	13
4.1 Decision on the tool platform	13
4.2 Decisions for high level step	13
4.3 Propositions of approach to cover all the design process	13
4.4 Conclusion	13
References.....	14
Appendix A: SysML and Scade	16
A.0.1 Requirements management	17
A.0.2 Semiformal System and Subsystem Modelling with SCADE System / Papyrus	17
A.0.3 Formal Modelling with SCADE Suite	17
A.0.4 Model Verification	18
A.1 Description of the approach for OpenETCS design process.....	18
A.2 Integration of the approach with SysML/Papyrus	18
A.3 Integration of the approach with Eclipse	18
A.4 Benefits versus OpenETCS requirements.....	19
A.5 Shortcomings versus OpenETCS requirements.....	19
A.6 On going work for openETCS project.....	19
A.7 Conclusion and other comments.....	19
Appendix B: SysML, ErtmsFormalSpec and Eclipse/Polarsys	20
B.1 Description of the approach for OpenETCS design process.....	20
B.2 Integration of the approach with SysML/Papyrus	20
B.3 Integration of the approach with Eclipse	20
B.4 Benefits versus OpenETCS requirements.....	22
B.5 Shortcomings versus OpenETCS requirements.....	22
B.6 On going work for openETCS project.....	23
B.7 Conclusion and other comments.....	23

Appendix C: SysML and ClassicalB.....	24
C.1 Description of the approach for OpenETCS design process.....	24
C.2 Integration of the approach with SysML/Papyrus	24
C.3 Integration of the approach with Eclipse	24
C.4 Benefits versus OpenETCS requirements.....	24
C.5 Shortcomings versus OpenETCS requirements.....	24
C.6 On going work for openETCS project.....	24
C.7 Conclusion and other comments.....	24

Figures and Tables

Figures

Figure 1. Main OpenETCS process	2
Figure 2. Repository of models	5
Figure 3. Use of the approaches during process phases	5
Figure 4. Results of candidates	6
Figure 5. Use of the approaches according activities	6
Figure 6. Short list of candidates	8
Figure A1. SysML SCADE Toolchain	16

Tables

Document information	
Work Package	WP7
Deliverable ID or doc. ref.	D.7.1 (including O7.1.4, O7.1.8, O7.1.11)
Document title	Report on the final choices for the primary toolchain
Document version	00.03
Document authors (org.)	Marielle Petit-Doche (Systerel) and WP7 partners

Review information	
Last version reviewed	00.0x
Main reviewers	

Approbation			
	Name	Role	Date
Written by	Marielle Petit-Doche	WP7-T7.1 Sub-Task Leader	
	Michael Jastram		
	Cécile Braunstein		
	Uwe Steinke		
	Stanisla Pinte		
	Alexander Stante		
Approved by	Michael Jastram	WP7 leader	

Document evolution			
Version	Date	Author(s)	Justification
00.01	08/07/2013	M. Petit-Doche	Document creation
00.02	18/07/2013	M. Jastram, C. Braunstein	Complements in § 3
00.03	19/07/2013	U. Steinke	Draft version of appendix A
		M. Petit-Doche	Complements in § 2 and § 4

1 Introduction

The aim of this document is to report the results of the task T7.1 of WP7 : "Primary tool Chain analyses and recommendations".

1.1 T7.1 objective

The objectives of this task are to identify the modelling languages, the tools and the tool platform suitable to define the primary tool chain of OpenETCS project. This primary tool chain shall cover all specification and design activities of the OpenETCS process (part in blue in 1). For more details see D2.3 [1] and D2.6-9 [2]. Means and tools for other activities described on figure 1 (mainly verification, validation and safety activities) are going to be discussed during the task T7.2 of WP7.

1.2 T7.1 activities

The activities have started in November 2012, with a proposal of benchmark organisation. After selection of a set of case studies (specified in D2.5 [3]), different approaches have been proposed and models have been stored on a common open github repository. All the methods have been presented during a public meeting in April 2013.

Besides, a set of criteria have been defined according the D2.6-9 requirement document [2]. The results are recorded in the outputs O7.1.3-O7.1.7 [4] for means and tools and O7.1.9 [5] for tool platform.

A decision meeting took place the 4th of July 2013 to analyse the results of the benchmark and to decide which means and tools will be retained during the process.

Results of the decision are given in this current document.

1.3 Glossary

API Application Programming Interface

FIS Functional Interface Specification

HW Hardware

I/O Input/Output

OBU On-Board Unit

PHA Preliminary Hazard Analysis

SIL Safety Integrity Level

SRS System Requirement Specification

SSHA Sub-System Hazard Analysis

SSRS Sub-System Requirement Specification

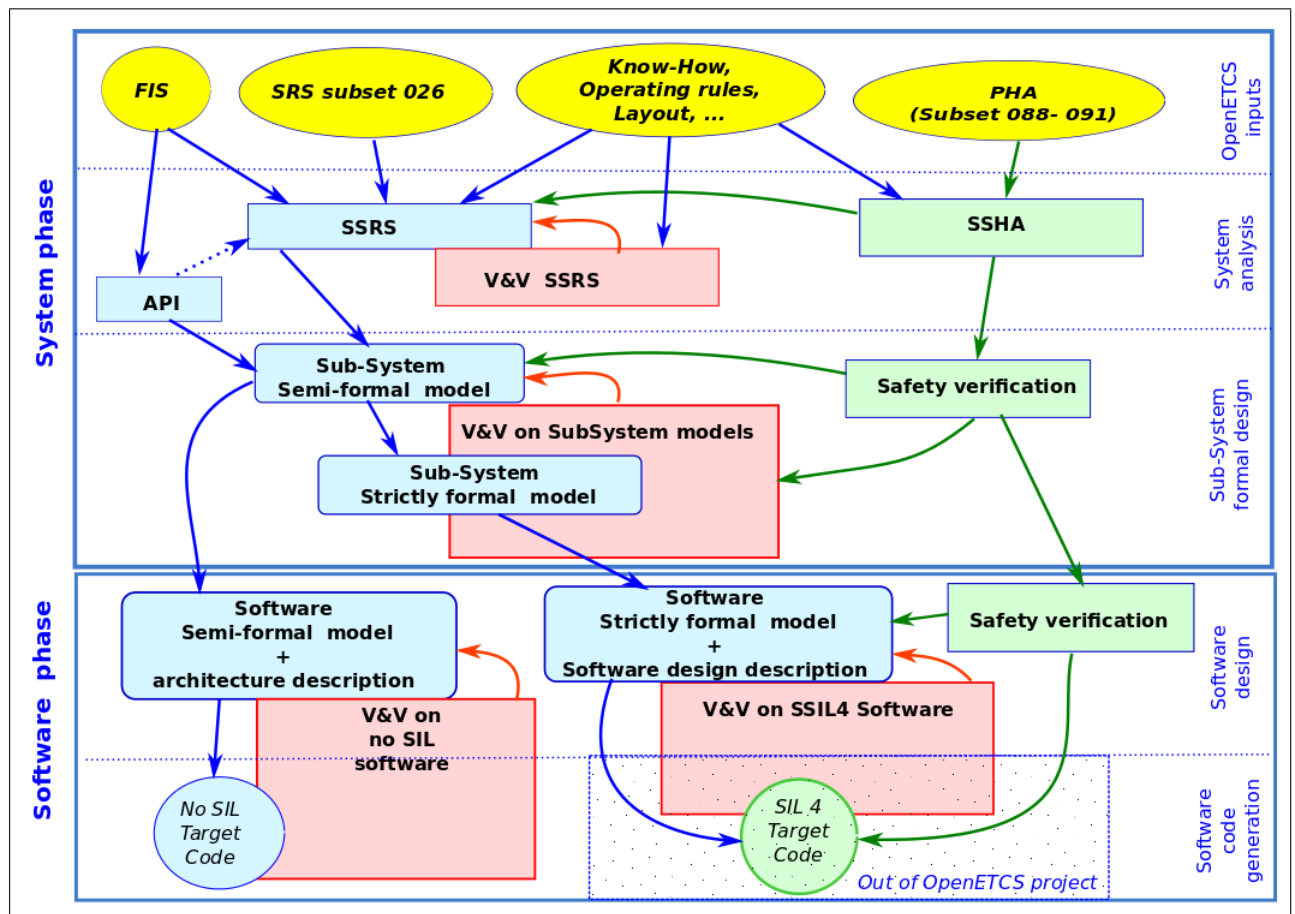


Figure 1. Main OpenETCS process

SW Software

V&V Verification & Validation

2 Results on means and tools for primary tool chain

2.1 Initial list of candidates

The initial list of candidates is the following:

1. GOPRR
2. CORE
3. ERTMSFormalSpecs
4. SysML with Papyrus
5. SysML with Enterprise Architect
6. SCADE
7. EventB with Rodin
8. Classical B with Atelier B
9. Petri Nets
10. System C
11. UPPAAL
12. Why3
13. GNATprove

For each approach and tool, the initial author of the evaluation is the partner in charge of the modelling. Two assessors, for each approaches, are in charge of the review of the evaluation and can correct it or add comments. For each approaches, the models are available on the public github <https://github.com/openETCS/model-evaluation/tree/master/model> (see 2). Scores of each approaches according the evaluation criteria are record in appendix of the outputs O7.1.3-O7.1.7 [4].

2.2 Evaluation results

In the conclusion part of O7.1.3-O7.1.7 [4], the first table (see 3) show how the evaluated approaches cover the openETCS design process:

The highest score is 9 and means that the criteria is fully respected, the lowest score is 0. The higher scores (more than 6) for each approach is graphically represented on figure 4.

The second table (see 5) in the conclusion part of O7.1.3-O7.1.7 [4], shows that all evaluated approaches, except GnatProve, are adapted to modeling and design activities:

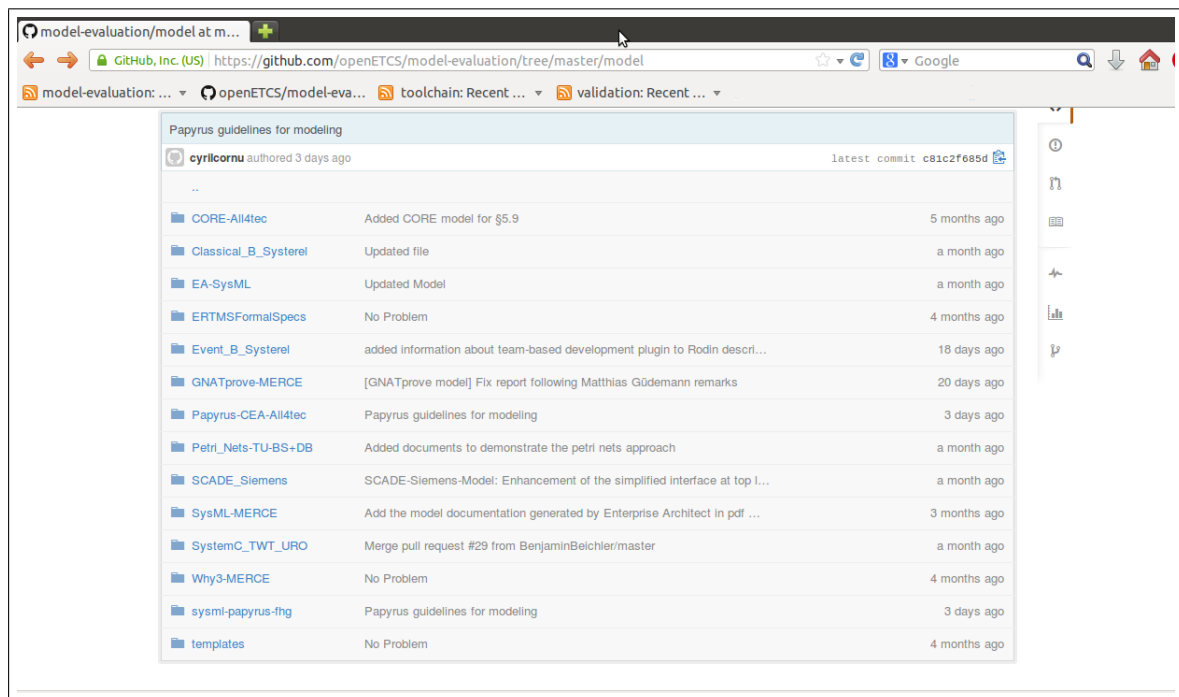


Figure 2. Repository of models

	GOPRR	ERTMSFormalSpecs	SysML with Papyrus	SysML with EA	SCADE	EventB	Classical B	System C	Petri Nets	GNATprove
System Analysis	5	1	7	9	3	9	3	2	6(9)	2 (3)
Sub-system formal design	9	9	6	7	9	9	5	5	6(9)	3 (4)
Software design	9	0	6	7	9	6	9	9	6(9)	6(9)
Software code generation	9	0	3	3	9	3	9	6	2 (3)	6(9)

Figure 3. Use of the approaches during process phases

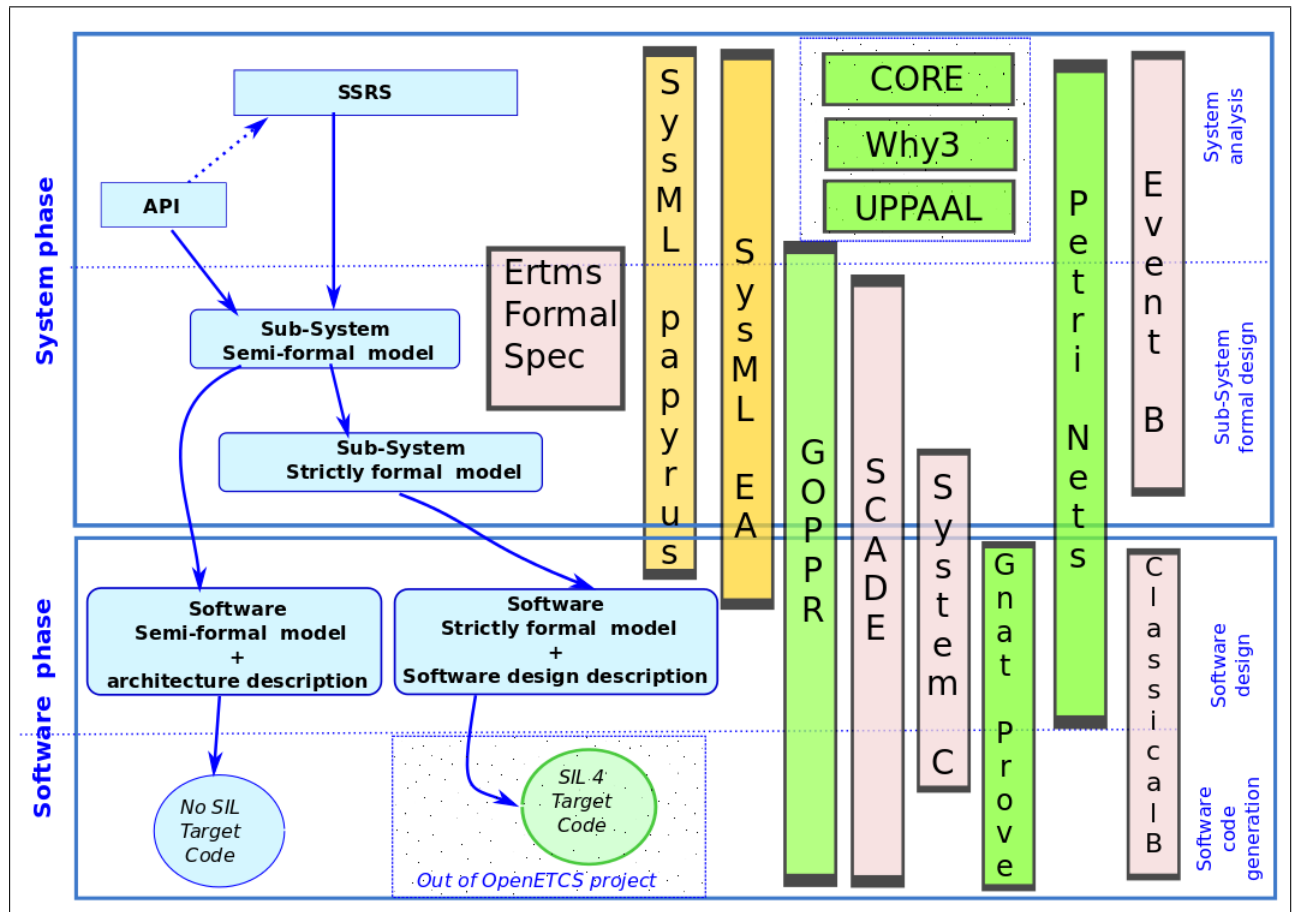


Figure 4. Results of candidates

	GOPRR	ERTMSFormalSpecs	SysML with Papyrus	SysML with EA	SCADE	EventB	Classical B	System C	Petri Nets	GNATprove
Documentation	3	7	6	7	8	7	0	0	2 (3)	2 (3)
Modeling	9	9	9	9	9	9	9	8	6(9)	2 (3)
Design	6	9	6	7	9	7	8	9	5(7)	3 (4)
Code generation	9	1	3	4	9	3	9	5 *	2 (3)	6(9)
Verification	0	7	6	3	8	9	9	4 *	6(9)	6(9)
Validation	0	9	5	4	8	9	4	7	6(9)	6(9)
Safety analyses	0	0	4 *	6	1	6	3	3 *	5(7)	2(3)

Figure 5. Use of the approaches according activities

2.3 Short list

The evaluation process has not been completed for three approaches:

CORE The tool is not open source and difficult to obtain, it seems possible to cover the same task with an open-source approach as SysML

Why3 Gnat-Prove covers at least the same service and seems more efficient

UPPAAL It is a tool dedicated to the verification and validation of time-constraints properties, for example joined with SystemC. It has been proposed for the benchmark on secondary tools (T7.2).

At the end of the evaluation, three others approaches have been discard from the primary tool chain :

GOPPR SysML seems a better candidate to offer the same services.

GnatProve According the results (see 5), GantProve has been proposed to joined the evaluation of secondary tools (task T7.2).

PetriNets However it is a well-known formal approaches, more recent approaches seems more adapted to the goals of the project.

Two tools associated to the SysML approach have been proposed to the evaluation: Papyrus and Enterprise Architect. After discussion on pros and cons of each, partners agree that Papyrus covers better the objectives of the project, especially the open-source requirement.

Due to the evaluation and discussion during the decision meeting, the partners agreed on a short-list of approaches (see 6):

1. ERTMSFormalSpecs
2. SysML with Papyrus
3. SCADE
4. EventB with Rodin
5. Classical B with Atelier B
6. System C

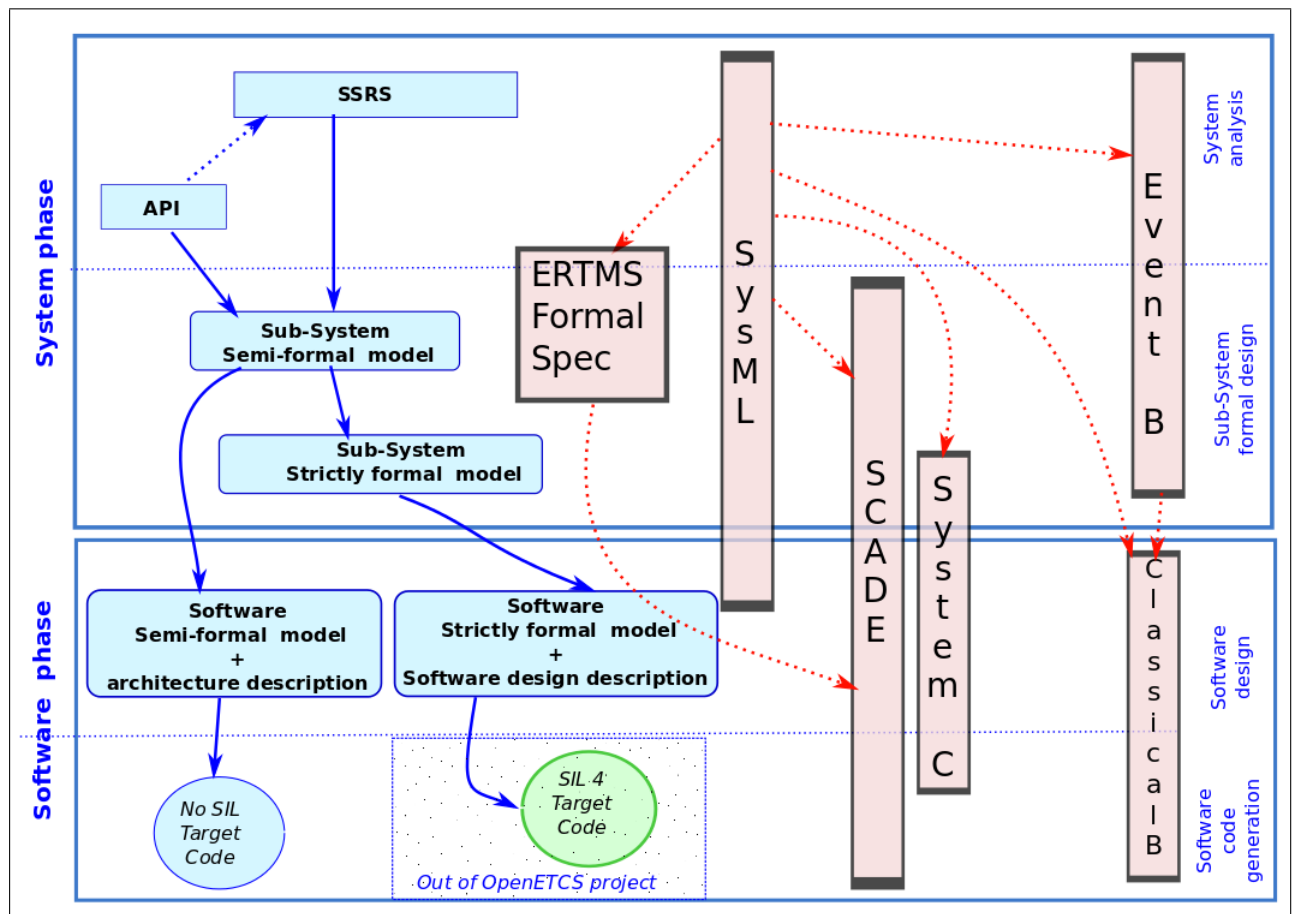


Figure 6. Short list of candidates

3 Results on tool platform

The tool platform should provide mechanisms to integrate various tools. The tool platform is not the primary nor secondary tools, nor the tool chain. It is the support for the tool chain implementation, it shall help to integrate the tools into a seamless tool chain. The evaluation will focus on the integration capabilities of the tool platform.

Todo: Description of the candidates by Cecile Braunstein

3.1 Initial list of candidates

- Eclipse
- TopCased/Polarsys
- RTP-Cesar
- Mono/.NET
- SCADE

After a first round, Mono/.NET and SCADE were discarded because they do not comply to our tool platform definition. RTP-CESAR was also discarded, the maturity of this project is not yet usable. Finally, **Eclipse with the modeling framework (EMF)** has been chosen as a tool platform, the possibility to use Polarsys and take some part of the TopCased tool chain as well as which version of Eclipse and EMF to choose are discussed in the next sections.

Eclipse can also integrate framework, It has also been decided that any framework added to the Eclipse platform within the OpenETCS tool chain should be documented (version, usage ...) and clearly justify.

3.2 Eclipse

Eclipse is an open source Tool Platform originally developed at IBM. It has been explicitly designed as an extensible platform to enable different tools to exchange data and share common functionality. Additionally Eclipse is a rich open source ecosystem with a variety of frameworks for different purposes, such as versioning, code generation, language support and many more. The Eclipse Modeling Framework (EMF) as a top level project bundles all modeling frameworks at Eclipse. Additionally it technically provides a common data format for modeling purposes. Originally it has implemented the OMG Standard Meta-Object Facility (MOF) and has then been reduced to the OMG standard essential MOF (eMOF). EMF provides model-driven approach to develop modeling languages. It allows to define custom meta-models and generate code from them. Additionally it provides common features such as command-based editing and XMI serialization for generated models. In the following we show how Eclipse and EMF aligns with the openETCS requirements.

Open Source

All Eclipse core components including EMF are open source and under the Eclipse Public licenses, which allows for commercial use and is compatible to the EUPL. The Eclipse Foundation and the Eclipse Development process assure the management of the intellectual properties for all Eclipse projects. Additionally all Eclipse projects follow a common infrastructure and process allowing external partners to contribute and maintain projects.

Long-Term Maintenance

The Eclipse Foundation also provides infrastructure and a process for Long-Term Maintenance for all Eclipse projects. It enables users of a technology to contract service providers to maintain current and older versions of these technologies. These service providers do not necessarily have to be committers on the original projects.

Portability

Eclipse itself is implemented in Java and therefore portable to all major operating systems. The underlying UI technology SWT is implemented for all major and even most uncommon window kits. As SWT uses native widgets, the performance of the UI is close to native applications. The Eclipse Java IDE has a user base of several million developers, which ensures, that the platform runs stable on the supported platforms. Since version 4.2, EMF is part of the core platform. However, EMF does not contain any OS specific components and is therefore highly portable.

Tools Interoperability

The Eclipse Platform has been explicitly designed to enable various tools of the software lifecycle to collaborate. It provides mechanisms, such as a service oriented architecture and extension points to enable the communication between different parts of a tool chain. EMF is well-suited as a common data-format. The collaboration of a large number of tools is shown and validated in the various Eclipse packages, which are released in the yearly release train.

Modularity

Eclipse is based on OSGi, a standard for modularization of Java applications. The Eclipse OSGi runtime Equinox is the reference implementation of OSGi. OSGi enables to modularize a system, in this case the tool chain. Additionally it allows to specify the API of modules and the dependencies between them. Additionally, the existing platform provides many possibilities to be extended by new features. The extensibility and OSGi as an underlying technology allow fully customizing the Eclipse Platform. Existing pieces and frameworks can be added to a tool chain, new parts can be developed.

Framework Support

Over the last ten years, a rich ecosystem of frameworks has developed around the Eclipse Platform. All these frameworks are developed under the EPL and checked for IP cleanliness. Eclipse frameworks cover all different kinds of purposes, however there is a strong focus in support for tool development and modeling. Modeling technologies are almost all compatible with EMF as a common data format. Technologies provided by Eclipse projects include:

1. Textual Modeling and DSL (e.g. Xtext)

2. Language Support (e.g. CDT, JDT)
3. Source Code Versioning Clients (e.g. Egit, Subclipse, Subversion)
4. Model Repositories and Versioning (e.g. EMFCompare, EMF Diff/merge, EMFStore and CDO)
5. Code Generation (e.g. Xpand, Xtend)
6. Model Transformation (e.g. ATL, QVT)
7. Model Development Tools (e.g. Papyrus, OCL, RMF, Sphinx, eTrice)
8. Graphical Modeling (e.g. Graphiti, GMF)
9. User Interfaces (e.g. JFace, Databinding, EMF Client Platform, EEF)
10. ALM Tooling (e.g. Mylyn)

3.3 Version Management

3.4 Topcased and Polarsys

Topcased is a tool for systems engineering, based on Eclipse and various Eclipse projects. Polarsys is a project concerned with the long term support of the Topcased tool chain. There is an overlap between Topcased and the openETCS tool chain. There is also an overlap between the objectives of openETCS and Polarsys:

Topcased and openETCS tool chain. Both, Topcased and the openETCS tool chain are based on Eclipse. Further, the openETCS tool chain will definitely use Papyrus, which is also part of Topcased. And last, both are concerned with covering all aspects of the V-Model, although for different domains (aviation vs. rail).

Polarsys and openETCS. The objectives of Polarsys and openETCS overlap significantly as well: Both are concerned with tools in a safety-critical domain, requiring tool qualification, etc. They are also concerned with long term support through open source.

3.4.1 State of Topcased and Polarsys

While the state of the art document mentions Topcased [], it was not evaluated as a whole. Merely the Papyrus component of Topcased was evaluated, but a newer version than the one used by Topcased.

Topcased is using a fork of an old version of Papyrus (Ver. 0.8.2) which is no more supported by the CEA (actual version 0.10.X) and, as the CEA is not part of Topcased, no more code development over this version/Topcased will be done by CEA. Unfortunately, the development on Topcased modeler (forked version of Papyrus) is not so active anymore: 60 commits on the 3 last months (as of July 2013) against more than 1600 commit for Papyrus. Further, the actual version of Papyrus have been greatly improved with respect to stability since version 0.8.2, and some stability issues may have not been corrected in Topcased.

To conclude, Topcased requires Eclipse 3.7.2 Indigo (1.5 year-old version) which is no more supported by the Eclipse foundation. Some part of Topcased initiative (plugins/add-ons) may still be very useful to the openETCS project, so we will reach out to the Polarsys community to

see whether there is an interest in aligning versions for long term support. The versions currently used in Topcased are not suitable for the openETCS tool chain, unfortunately.

4 Decision

This chapter gives the decision done during the meeting of the 4th of July 2013.

4.1 Decision on the tool platform

By vote, all the partners agree on the use of **Eclipse** as tool platform.

The last release is Kepler 4.3, launched the 26 of June 2013.

4.2 Decisions for high level step

By vote, all the partners agree on the use of the **SysML** approach supported by the **Papyrus** tool to cover the higher level of the OpenETCS V-cycle.

SysML 1.1 is completely supported on Papyrus, 1.2 is largely supported, moreover not implemented part of the norm may be added through motivated requests. The last release of Papyrus is 0.10.0, launched the 26 of June 2013 and is based on Eclipse Kepler 4.3.

4.3 Propositions of approach to cover all the design process

No vote has been done during the meeting on the approaches to cover the lower levels of OpenETCS V-cycle. Three propositions of chain are still under evaluation:

- a combination of **SysML and Scade** described in A
- a combination of **SysML, ERTMSFormalSpec and Topcased** described in B
- a combination of **SysML and Classical B** described in C

For the moment, all the candidates of the short-list (see figure 6) are still take in consideration for example to cover lack of the main tool chain or verification and validation purposes.

4.4 Conclusion

Todo: To complete if necessary.

References

- [1] Marielle Petit-Doche and Matthias Güdemann. openETCS process. Technical Report D2.3, OpenETCS, 2013.
- [2] Sylvain Baro and Jan Welte. Requirements for openETCS. Technical Report D2.6, OpenETCS, 2013.
- [3] Guillaume Pottier David Mentre, Stanislas Pinte and WP2 participants. Methods and tools benchmarking methodology. Technical Report D2.5, OpenETCS, 2013.
- [4] Marielle Petit-Doche and WP7 partners. Evaluation of the means and tools against the WP2 requirements. Results O7.1.3-O7.1.7, OpenETCS, 2013.
- [5] Cécile Braunstein and WP7 partners. Evaluation of tool platforms against the WP2 requirements. Results O7.1.9, OpenETCS, 2013.
- [6] Michael Jastram, Marielle Petit-Doche, Jonas Helming, and Jan Peleska. openETCS toolchain WP7 descripton of work. Defin D01, OpenETCS, February 2013.
- [7] Rico Kaseroni. Project quality assurance plan. Technical Report D1.3.1, OpenETCS, 2013.
- [8] Merlin Pokam and Norbert Schäfer. Report on CENELEC standards. Technical Report D2.2, OpenETCS, 2013.
- [9] Jan Welte and Hansjörg Manz. Report on existing methodologies. Technical Report D2.1, OpenETCS, 2013.
- [10] Hardi Hungar. Report on v&v plan and methodology. Technical Report D4.1, openETCS, 2013.
- [11] Jani Welte. Safety plan. Technical Report O 4.4.1, openETCS, October 2013.
- [12] Klaus-Rüdiger Hase. Project outline full project proposal annex openETCS. Technical Report v2.2, openETCS, 2011.
- [13] UNISIG. SUBSET-026 – System Requirements Specification. Technical Report 3.3.0, ERA, March 2012.
- [14] UNISIG. SUBSET-076 – Test related ERTMS documentation (this version is related to version 2.3.y of SUBSET-026). Technical Report 2.3.y, ERA.
- [15] UNISIG. SUBSET-088 2.3.0 - ETCS Application Levels 1 & 2 - Safety Analysis. Technical Report 2.3.0, ERA.
- [16] UNISIG. SUBSET-091 3.2.0 — Safety Requirements for the Technical Interoperability of ETCS in Levels 1 & 2. Technical Report 3.2.0, ERA.
- [17] UNISIG. SUBSET-034 3.0.0 — Train interface FIS. Technical Report 3.0.0, ERA.
- [18] Comission Decision. CCS TSI for HS and CR transeuropean rail. Technical Report 2012/88/EU, EU, January 2012.

- [19] European Standard. *Railway applications-Communication, signalling and processing system- Software for railway control and protection system*. CENELEC EN 50128. DIN, October 2011.
- [20] European Standard. *Railways applications — The specification and demonstration of Reliability, Availability, Maintainability and Safety (RAMS) — Part 1: Basic requirements and generic process*. CENELEC EN 50126_1. DIN, January 2000.
- [21] European Standard. *Railway applications — Communication, signalling and processing systems — Safety related electronic systems for signalling*. CENELEC EN 50129. DIN, May 2003.

Appendix A: SysML and Scade

Todo: Description of the approach by Uwe Steinke.

Diagram A1 illustrates the most important components and operational relationships of a system and software modelling toolchain based on SysML, Papyrus, SCADE and Eclipse. All components and links shown with solid lines are available, while the dashed ones are intended to be implemented within the openETCS project.

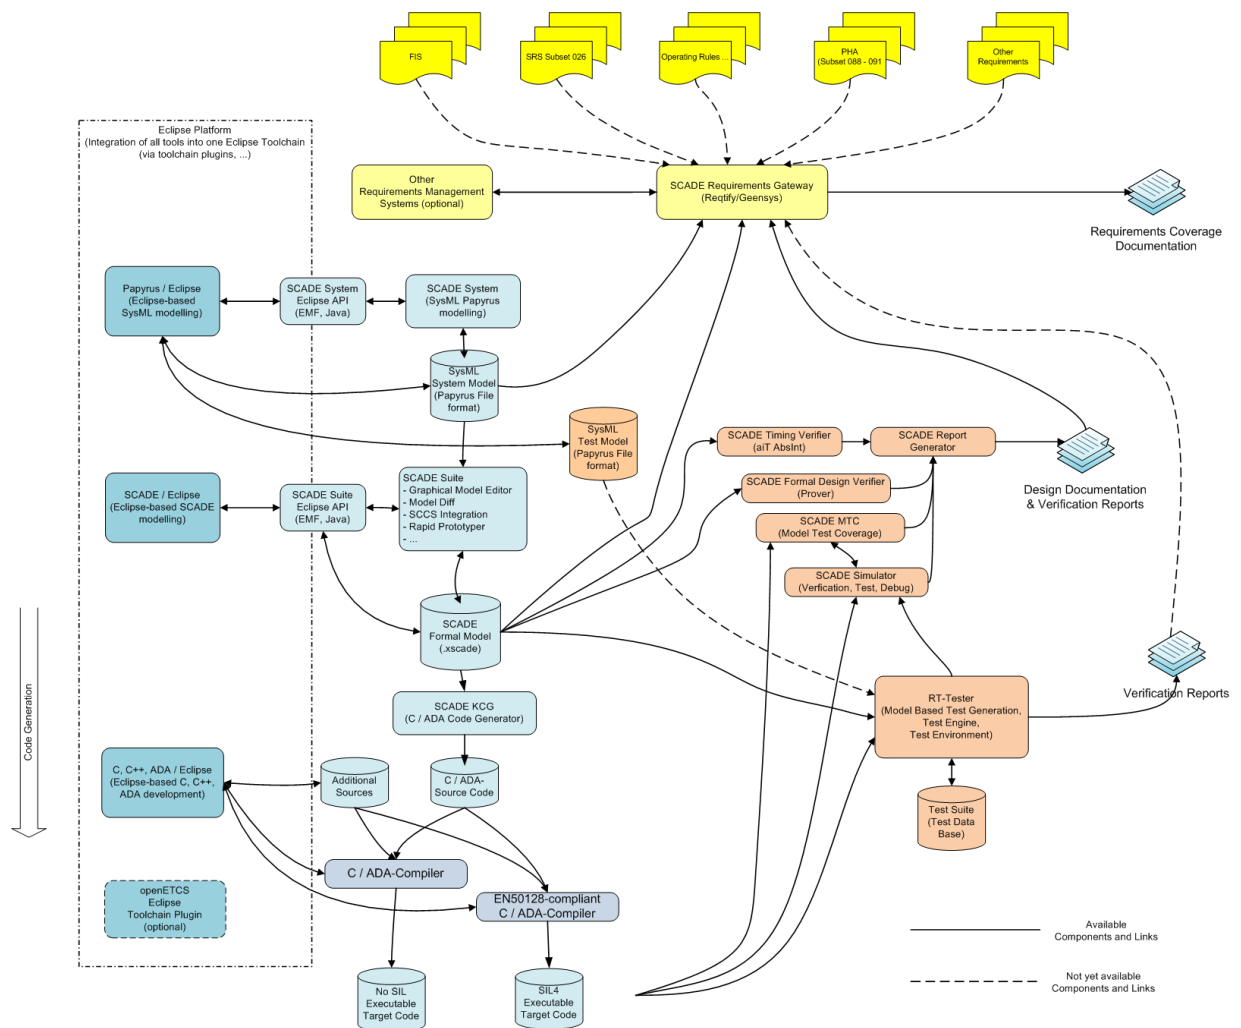


Figure A1. SysML SCADE Toolchain

The diagram colors are chosen related to the colors in 1:

- Requirements and requirements management components in yellow
- "Blue" openETCS design process (see 1) elements in light and dark blue
- Eclipse is painted dark blue

- Verification elements in red

Within the following paragraphs and subsections a short description of this approach will be given by walking through the tool chain and the design process.

A.0.1 Requirements management

The SCADE Requirements Management Gateway is based on Reqtify from Geensoft / Dassault Systems and serves to collect and link all requirements from the openETCS input documents and related objects as design and verification documents, model and source code artefacts, test cases, test protocols etc. It supports impact analyses and generates requirements traceability and requirements coverage reports. If needed for the openETCS process, it can be complemented with other requirement management systems and already comes with interfaces to these.

A.0.2 Semiformal System and Subsystem Modelling with SCADE System / Papyrus

SCADE System is an integration of Papyrus into the SCADE IDE intended for SysML system modelling. It allows to modelize the interactions and hierarchical dependencies between the various parts of a complex system through design elements representing functions, data and interfaces.

The idea is to model system structures, data types / data dictionaries, inputs, outputs, interfaces and relationships between blocks with SysML and transfer it to native SCADE for behavioral modelling automatically. Since Papyrus and SCADE System are using the same file formats, there is no prevention of using all SysML capabilities that Papyrus supports, but in this case without automatic transfer to native SCADE.

SCADE System supports SysML Block Definition Diagrams (BDD) and Internal Block Diagrams (IBD).

A.0.3 Formal Modelling with SCADE Suite

SCADE Suite integrates all modelling, verification and supporting SCADE tools under the roof of the SCADE IDE. The components relevant for descending part of the development "V" process are

- SCADE Suite Editor (Graphical and textual modelling)
- SCADE Requirements Gateway Integration (Linking of model artefacts with requirements)
- SCADE Model Check (model syntax check)
- SCADE Model Diff (model comparison)
- SCADE Simulator (graphical debugging, simulation and testing)
- SCADE Rapid Prototyper (quick control and display elements for rapid prototyping, optional)
- SCADE Code Generator KCG (C / ADA code generation)
- SCADE Reporter ((Design) report generator)

The most important tools for modelling are editor and code generator. The others mentioned are mainly verification tools, but very useful and practically indispensable for agile development.

At least, to cover all elements of the "blue" design process in 1 a C / C++ / ADA compiler is required. For building not safety-relevant executables any C-Compiler (gnu c, ...) is suitable, for safety relevant executables the compiler must be compliant with EN50128.

A.0.4 Model Verification

Will be completed soon.

A.1 Description of the approach for OpenETCS design process

Todo: How the proposed approach covers all "blue" design process (see 1) ?

The approach as specified in the previous subsections (Chapt. A0) (insert ref xxx) covers all elements of the "blue" design process (see 1) by using the SCADE tool chain including requirements management, semiformal system and formal subsystem/software modelling, code and executable generation. An Eclipse integration is provided (see following Chapt. xxx).

A.2 Integration of the approach with SysML/Papyrus

Todo: How the proposed approach can be integrated with the SysML/ Papyrus selected for the high level of design process ?

Because SCADE System is an integration of Papyrus into the SCADE IDE and SCADE System uses Papyrus file formats, the integration with SysML / Papyrus is available. A thrilling question for the openETCS process might be, if and - if yes - which of the artefacts on system level should be modelled with SysML, that can not be transferred to native SCADE automatically.

A.3 Integration of the approach with Eclipse

Todo: How the proposed approach can be integrated with the Eclipse, selected as platform for OpenETCS tool chain ?

Most of the the SCADE tools can be run and controlled via command line and/or via automation interfaces.

SCADE System (SysML modelling) and SCADE Suite (SCADE modelling) already come with Eclipse API plugins based on EMF. These enable to access (read and modify) the model project information, meta and model data from within Eclipse. The plugins additionally display the model structure, but they don't show the model graphic in Eclipse.

If graphical modelling should be done within Eclipse, this has to be implemented by openETCS. It is in doubt, if the effort for this activity would be applicable; without any effort, the SCADE editor should be used instead.

Nevertheless, the provided Eclipse integration is worthwhile to supply all openETCS users, that are not directly working on the SCADE models, with an integrated Eclipse tool chain. The idea

of such an integration is to have one build tool chain, that starts and runs an openETCS executable build process with one button click beginning from all (heterogeneous) sources and performing all necessary model transformations, code and executable generation. This could be achieved with an "openETCS Eclipse Tool Chain Plugin", implemented as part of the openETCS project with the goals ease-of-use and convenience.

In summary, an Eclipse integration is available. An optional "openETCS Eclipse Tool Chain Plugin" could improve the convenience for openETCS tool chain users.

A.4 Benefits versus OpenETCS requirements

Todo: Discuss the benefits in regards of OpenETCS requirements and expected results.

The most important benefit of the SysML/SCADE approach is its seamless integration, completeness, maturity and qualification for safety critical development: it covers almost all aspects of the openETCS process and lets expect to fill gaps with manageable effort.

Therefore, the modelling work for openETCS can begin immediately.

A.5 Shortcomings versus OpenETCS requirements

Todo: Discuss the shortcomings in regards of OpenETCS requirements and expected results.

The main drawback of the approach: it is mainly not open Source.

A.6 On going work for openETCS project

Will be completed soon.

Todo: Which are the elements to clarify, to specify or to develop, in order the approach suit the openETCS process ?

How can we evaluate and plan this work ?

which skills is needed ?

A.7 Conclusion and other comments

Appendix B: SysML, ErtmsFormalSpec and Eclipse/Polarsys

Todo: Description of the approach by Stanislas Pinte.

The proposed approach combines three tools existing today to provide an integrated toolchain, from system design to code generation.

B.1 Description of the approach for OpenETCS design process

Todo: How the proposed approach covers all "blue" design process (see 1) ?

The blue boxes of the overall design process are covered in the following manner:

SSRS box: Using Papyrus for modelling the high-level system design in SysML language.

Sub-system semi-formal model box: Using ERTMSFormalSpecs to model the complete SSRS into a semi-formal model.

Software semi-formal model + architecture description box: Shall be done inside Eclipse/Polarsys tools for transforming a semi-formal model into software source code. The exact mix of Eclipse/Polarsys tools is to be decided by the participants of task T3.8.

Target source code box: This box is covered by the source code generated by the Eclipse/Polarsys tools. This source code can then be compiled and executed on the demonstrator hardware.

B.2 Integration of the approach with SysML/Papyrus

Todo: How the proposed approach can be integrated with the SysML/ Papyrus selected for the high level of design process ?

The proposed approach uses SysML/Papyrus as top-level component. Moreover, as SysML/Papyrus and ERTMSFormalSpecs both support an EMF-based interface, technical integration between both tools is not an issue.


As ERTMSFormalSpecs is already implementing 44% of Subset-026, some questions are open:

- How can the SysML system-level model be connected with the ERTMSFormalSpecs semi-formal model? - Can a SysML system-level model be generated based on the existing 44% of Subset-026, so that this SysML system-level model can then be improved,

B.3 Integration of the approach with Eclipse

Todo: How the proposed approach can be integrated with the Eclipse, selected as platform for OpenETCS tool chain ?

100% Open Source Proposal
Papyrus / ERTMSFormalSpecs / Eclipse-Polarsys

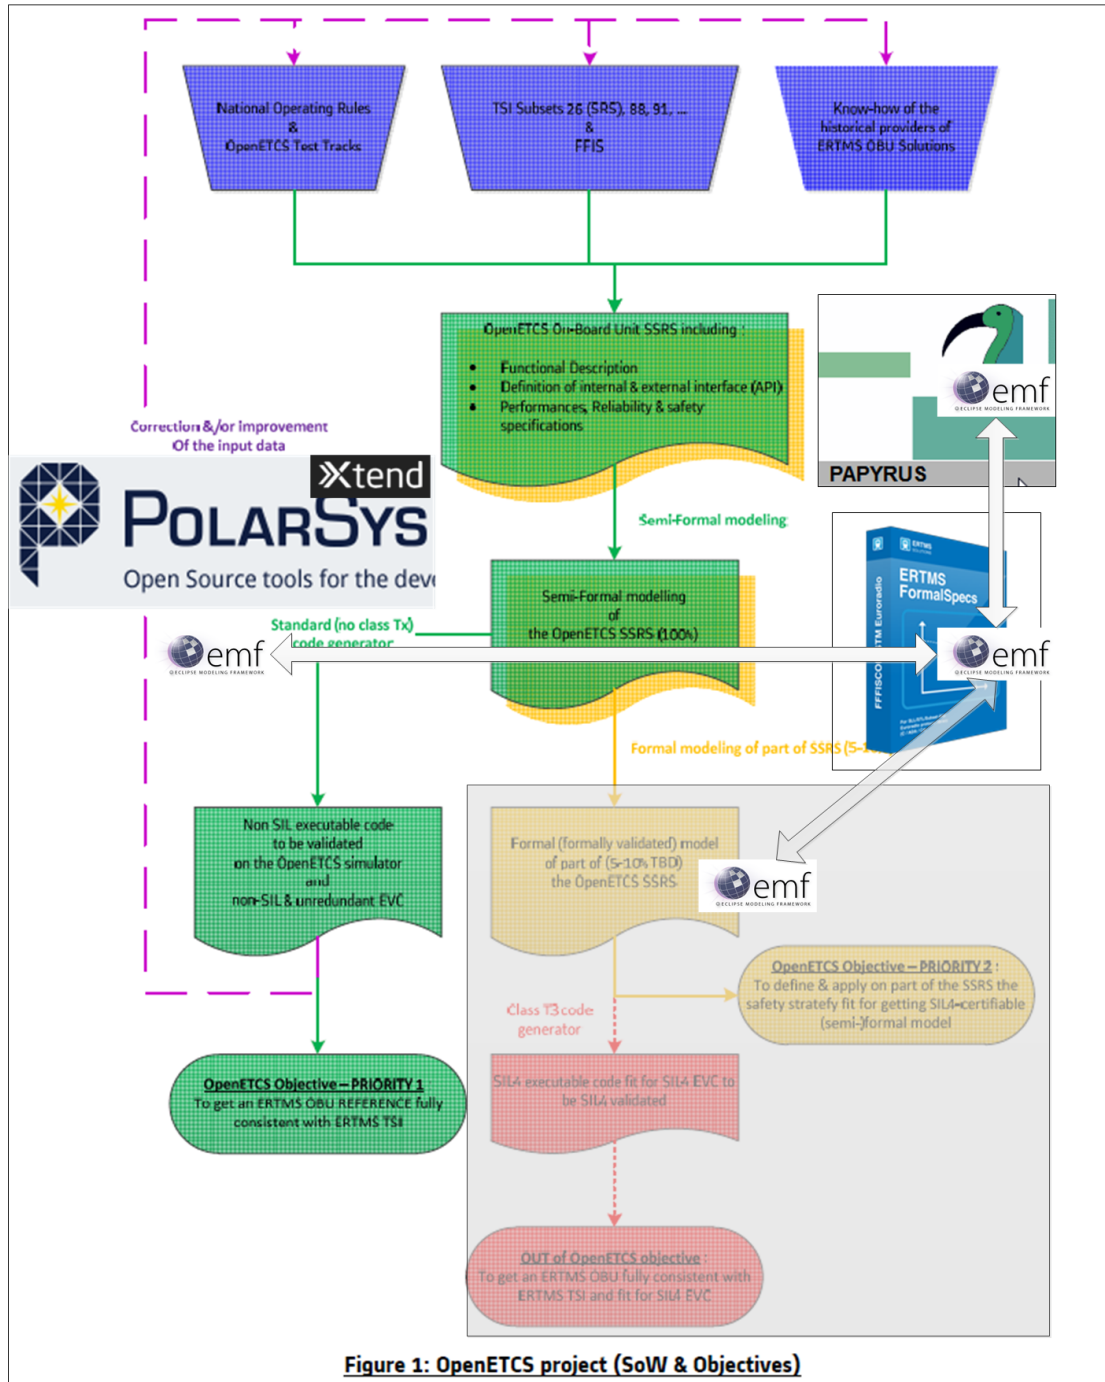

SysML/Papyrus is completely based on Eclipse.

ERTMSFormalSpecs supports today an EMF interface, enabling Eclipse-based tools to reuse the existing ERTMSFormalSpecs model.

Eclipse/Polarsys tools are also based on Eclipse, raison no integration concerns.

B.4 Benefits versus OpenETCS requirements

Todo: Discuss the benefits in regards of OpenETCS requirements and expected results.

The benefits of the SysML/Papyrus/ERTMSFormalSpecs/Eclipse/Polarsys proposal are the following:

- As of today, already 44% of Subset-026 requirements modelled. This proposal enables the OpenETCS project to start with a headstart, instead of nothing.
- ERTMSFormalSpecs is the only semi-formal candidate to have built-in braking curves modellings and visualization, verified with the ERA model
- ERTMSFormalSpecs has very strong support for traceability to the Subset-26, and to the Subset-076 for test cases
- ERTMSFormalSpecs has its domain-specific language, which is productive for this field, thanks to its expressivity, illustrated by the primitives developed for braking curves and scalable, as is demonstrated by the large fraction of the Subset26 which has been represented so far
- Fully open-source (ERTMSFormalSpecs under EUPL license, others open source)
- ERTMSFormalSpecs model can be transformed automatically to SCADE model (confirmed by ESTEREL Technologies in Munich meeting), allowing to choose SCADE as a code generation backend in case Eclipse/Polarsys would not meet the project requirements
- The three elements of the toolchain (Papyrus, ERTMSFormalSpecs and Eclipse) boast an active community of users and are supported by open-source business cases

B.5 Shortcomings versus OpenETCS requirements

Todo: Discuss the shortcomings in regards of OpenETCS requirements and expected results.

The shortcomings of the SysML/Papyrus/ERTMSFormalSpecs/Eclipse/Polarsys proposal are the following:

- ERTMSFormalSpecs has a perfectible look and feel and lacks graphical rendering of the architecture
- As of today, the code generation in Eclipse/Polarsys, transforming the ERTMSFormalSpecs in generated source code, is not yet available, and must be developed during task 3.8 of the project.

B.6 On going work for openETCS project

Todo: Which are the elements to clarify, to specify or to develop, in order the approach suit the openETCS process ?

How can we evaluate and plan this work ?

which skills is needed ?

The following elements should be further developed during the OpenETCS project, to alleviate the shortcomings listed above:

1. Further develop ERTMSFormalSpecs model to cover 100% of Subset-026, 100% of Subset-076, and to fully test the model within ERTMSFormalSpecs.
2. Either implement a full eclipse-based version of the ERTMSFormalSpecs workbench for model development, traceability and testing, or improve the ERTMSFormalSpecs user interface to be fully productive for T3.5 and T3.6 tasks
3. Develop code-generation strategies during T3.8 tasks

Among theses tasks, Task 1 and 3 fit inside the WP3 existing tasks, and do not need additional skills than the ones present in the OpenETCS consortium as of today.

Task 2 (porting the ERTMSFormalSpecs workbench to Eclipse) is a task that falls in the scope of WP7, and for which Eclipse development and integration skills are required.

B.7 Conclusion and other comments

As a conclusion, the SysML/Papyrus/ERTMSFormalSpecs/Eclipse/Polarsys proposal has as key strength to be fully available today, to already model 44% of Subset-026, and to be fully open-source. Moreover, it proposes a realistic technical foundation to achieve the WP3 and projects top-priority objectives with the skills and resources available in the project.

Appendix C: SysML and ClassicalB

Todo: Description of the approach by Alexander Stante.

C.1 Description of the approach for OpenETCS design process

Todo: How the proposed approach covers all "blue" design process (see 1) ?

C.2 Integration of the approach with SysML/Papyrus

Todo: How the proposed approach can be integrated with the SysML/ Papyrus selected for the high level of design process ?

C.3 Integration of the approach with Eclipse

Todo: How the proposed approach can be integrated with the Eclipse, selected as platform for OpenETCS tool chain ?

C.4 Benefits versus OpenETCS requirements

Todo: Discuss the benefits in regards of OpenETCS requirements and expected results.

C.5 Shortcomings versus OpenETCS requirements

Todo: Discuss the shortcomings in regards of OpenETCS requirements and expected results.

C.6 On going work for openETCS project

Todo: Which are the elements to clarify, to specify or to develop, in order the approach suit the openETCS process ?

How can we evaluate and plan this work ?

which skills is needed ?

C.7 Conclusion and other comments