


a

```
FUNCTION K92R (J ,M ,K ,L ,R , JA )
C BY ANATOL RAPOPORT
C TYPED BY AX 3/27/79 ( SAME AS ROUND ONE TIT FOR TAT )
c replaced by actual code , Ax 7/27/93
c T =0
c  K92R = ITFTR (J ,M ,K ,L ,T , R )
      k92r =0
      k92r = j
c test 7/30
c  write (6 ,77) j , k92r
c77  format ( ' _ test _ k92r . _ j , k92r : _ ' , 2 i3 )
      RETURN
      END
```

b

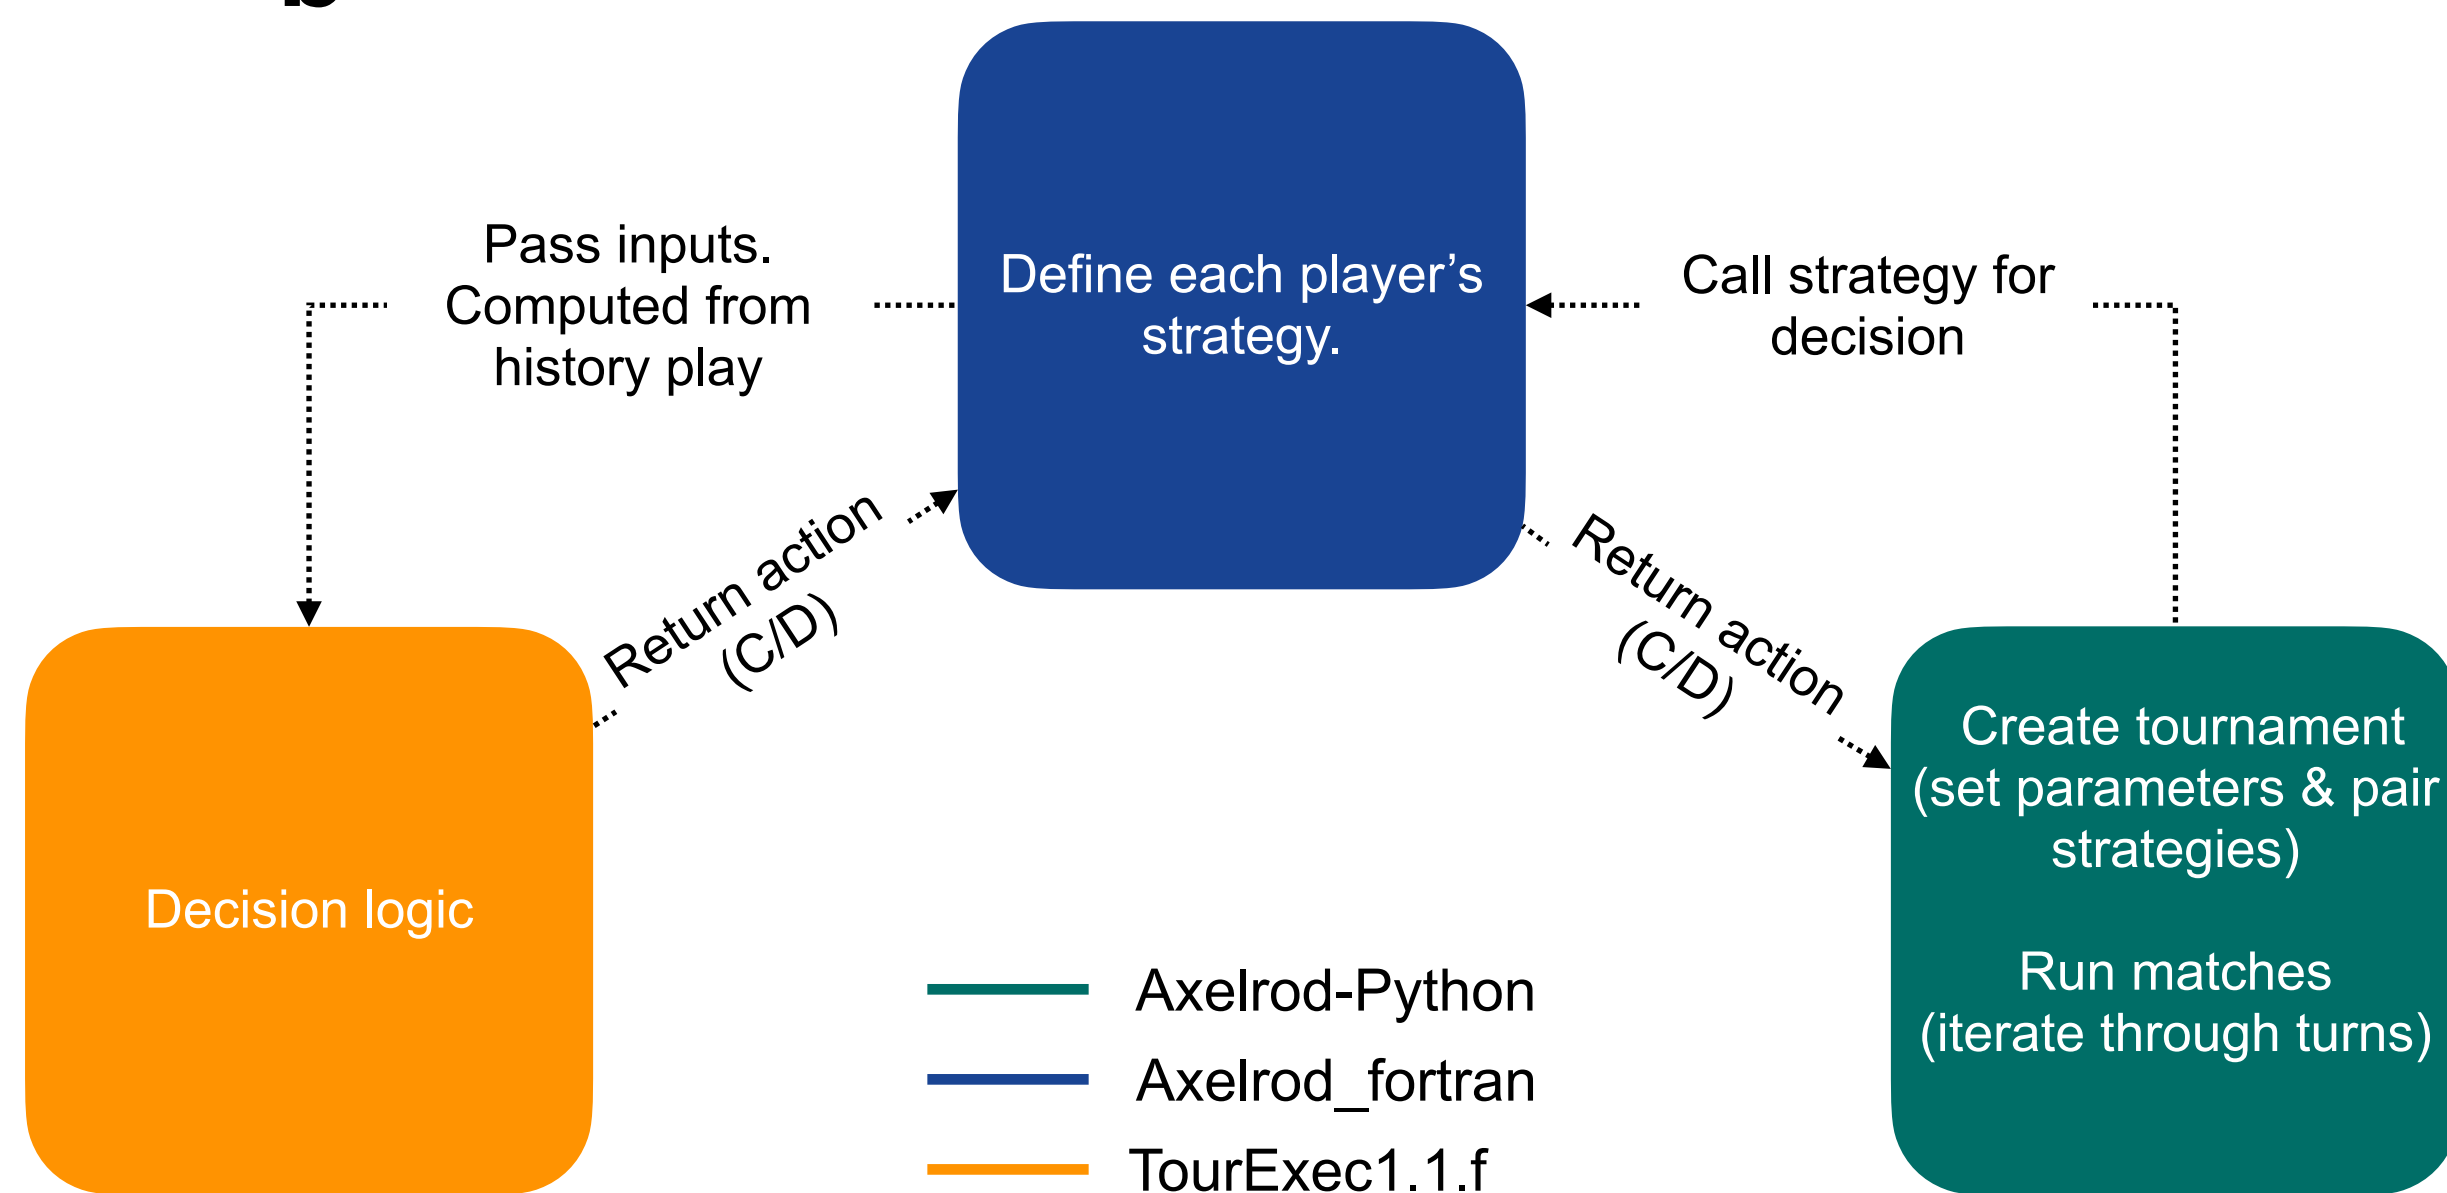

c

