


ADITYA KUMAR SINGH
RA2311003010916

Practice-6

CI/CD Pipeline for a Web App (GitHub Actions)

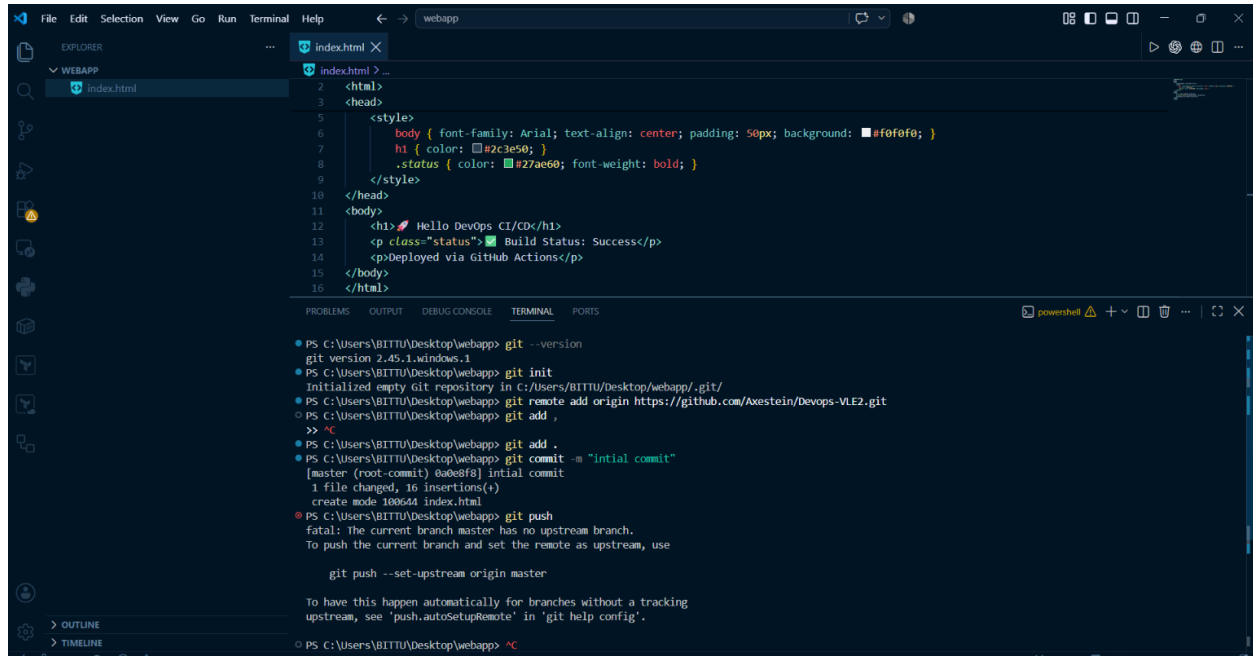

The screenshot shows the VS Code interface with a file explorer on the left showing a project named 'WEBAPP' containing 'index.html'. The main editor displays the 'index.html' file with the following content:


```
<html>
<head>
  <style>
    body { font-family: Arial; text-align: center; padding: 50px; background: #f0f0f0; }
    h1 { color: #2c3e50; }
    .status { color: #27ae60; font-weight: bold; }
  </style>
</head>
<body>
  <h1> Hello DevOps CI/CD</h1>
  <p class="status"> Build Status: Success</p>
  <p>Deployed via GitHub Actions</p>
</body>
</html>
```

The terminal at the bottom shows the following commands and output:

```
PS C:\Users\BITTU\Desktop\webapp> git --version
git version 2.45.1.windows.1
PS C:\Users\BITTU\Desktop\webapp> git init
Initialized empty Git repository in c:/Users/BITTU/Desktop/webapp/.git/
PS C:\Users\BITTU\Desktop\webapp> git remote add origin https://github.com/Axestein/Devops-VLE2.git
PS C:\Users\BITTU\Desktop\webapp> git add .
>> ^C
PS C:\Users\BITTU\Desktop\webapp> git add .
PS C:\Users\BITTU\Desktop\webapp> git commit -m "initial commit"
[master (root-commit) 0a0e8f8] initial commit
1 file changed, 16 insertions(+)
create mode 100644 index.html
PS C:\Users\BITTU\Desktop\webapp> git push
fatal: The current branch master has no upstream branch.
To push the current branch and set the remote as upstream, use

    git push --set-upstream origin master

To have this happen automatically for branches without a tracking
upstream, see 'push.autoSetupRemote' in 'git help config'.
```

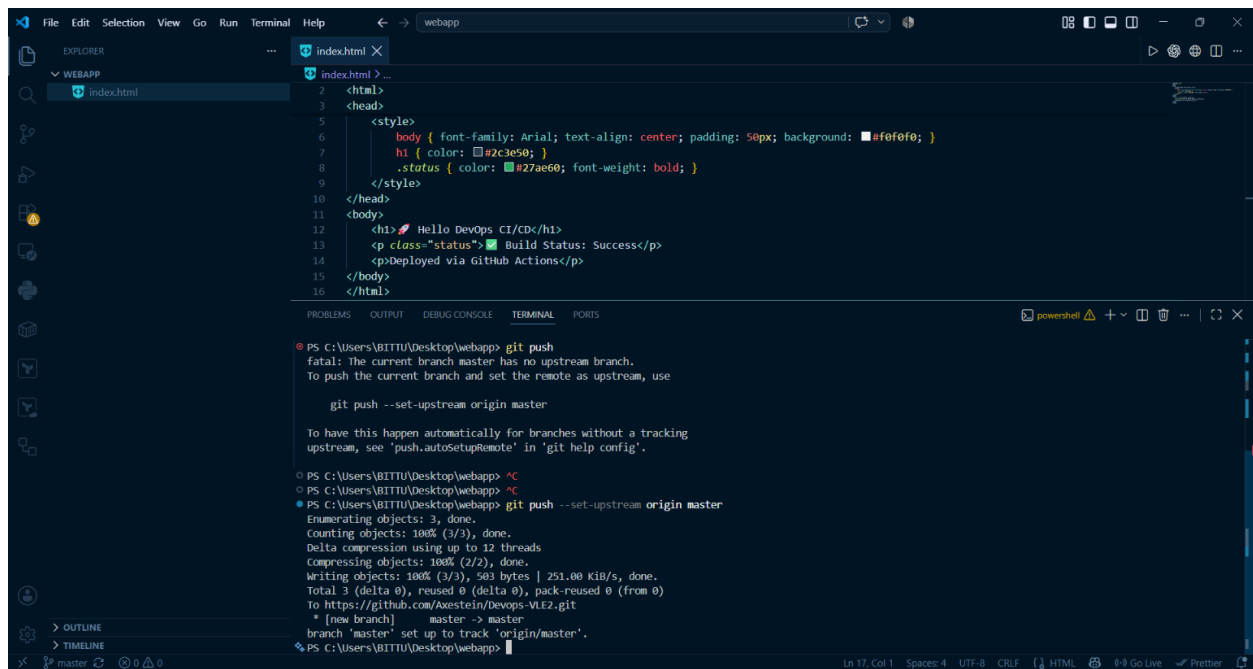

The screenshot shows the same VS Code interface as the previous one, but the terminal now shows the successful push of the code to GitHub:


```
PS C:\Users\BITTU\Desktop\webapp> git push
fatal: The current branch master has no upstream branch.
To push the current branch and set the remote as upstream, use

    git push --set-upstream origin master


To have this happen automatically for branches without a tracking
upstream, see 'push.autoSetupRemote' in 'git help config'.
```


The terminal also shows the output of the push command:

```
PS C:\Users\BITTU\Desktop\webapp> git push --set-upstream origin master
Enumerating objects: 3, done.
Counting objects: 100% (3/3), done.
Delta compression using up to 12 threads
Compressing objects: 100% (2/2), done.
Writing objects: 100% (3/3), 503 bytes | 251.00 KiB/s, done.
Total 3 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
To https://github.com/Axestein/Devops-VLE2.git
 * [new branch] master -> master
branch 'master' set up to track 'origin/master'.
PS C:\Users\BITTU\Desktop\webapp>
```

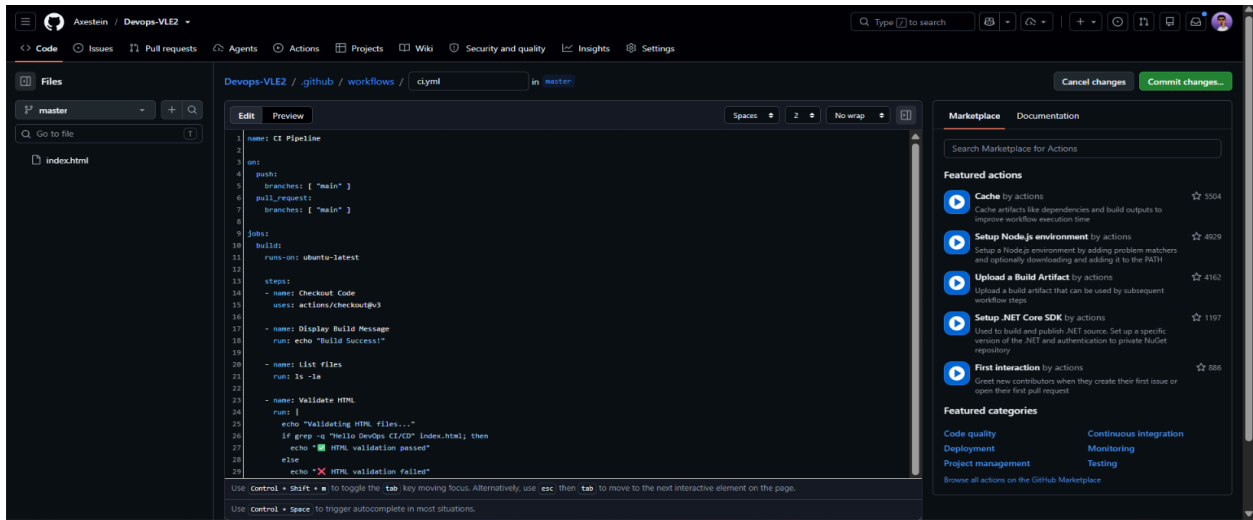

ChatOps Notifications (Slack / Teams + GitHub Actions)

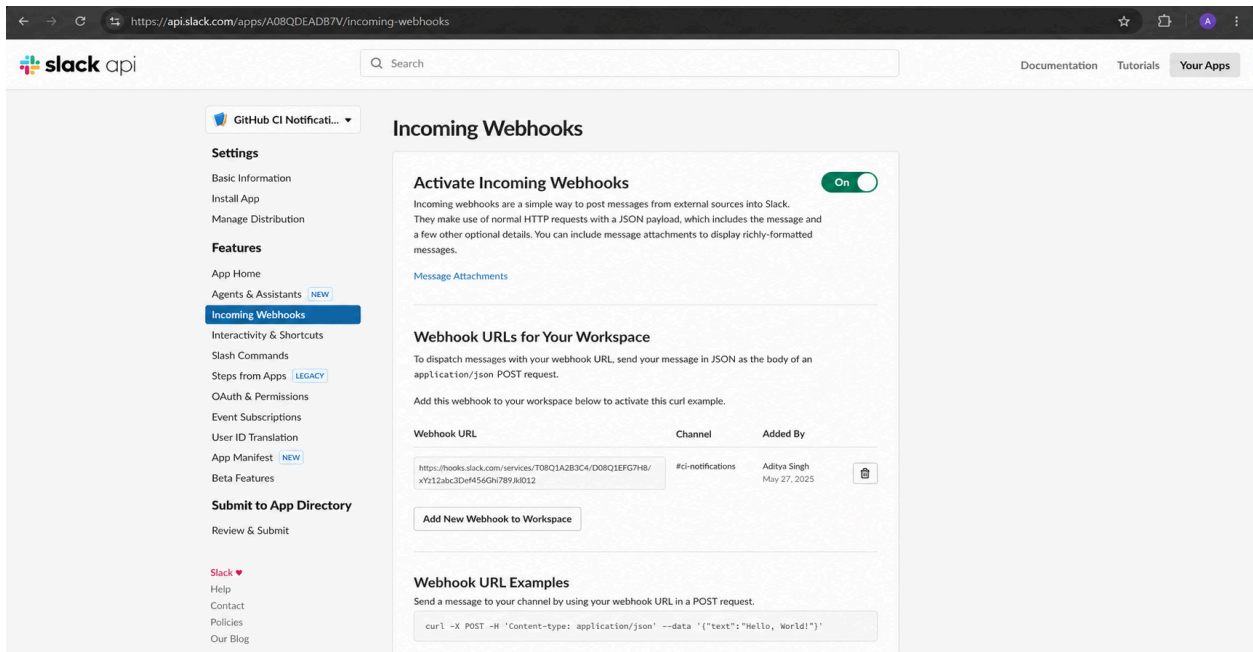

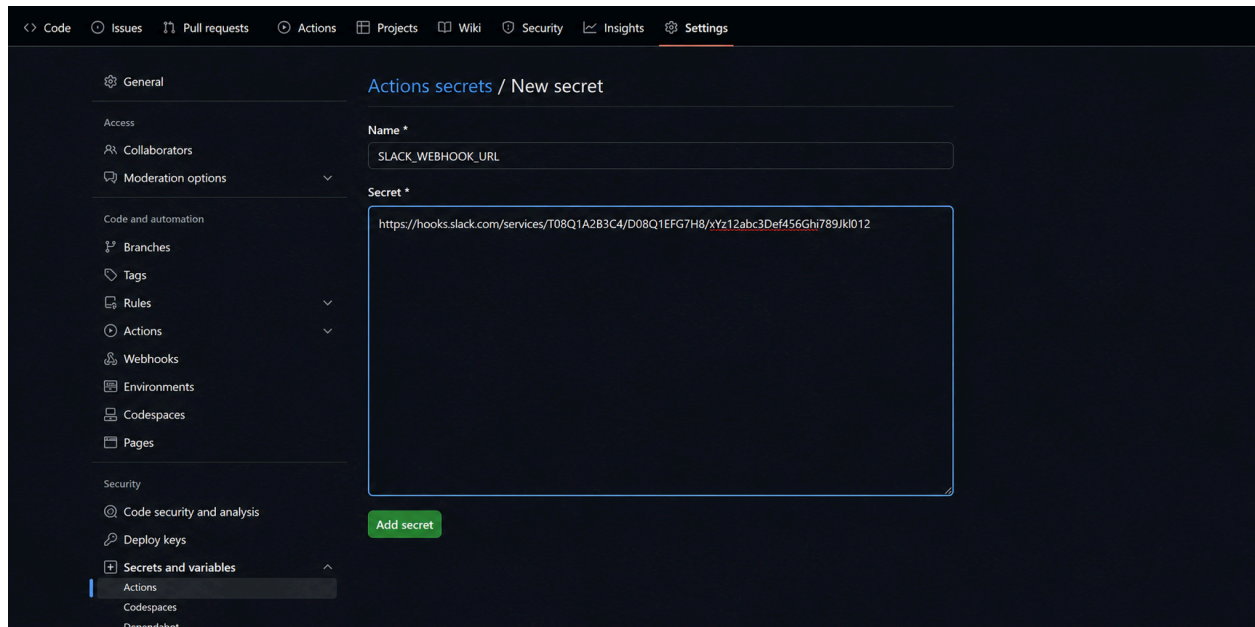

CI/CD for Static Website (Netlify/Vercel)

