


ADITYA KUMAR SINGH , RA2311003010916


Phase 1: Development Setup

1. Create a GitHub repository named devops-webapp
2. Clone to local system
3. Add a simple web app (HTML/React/Angular)

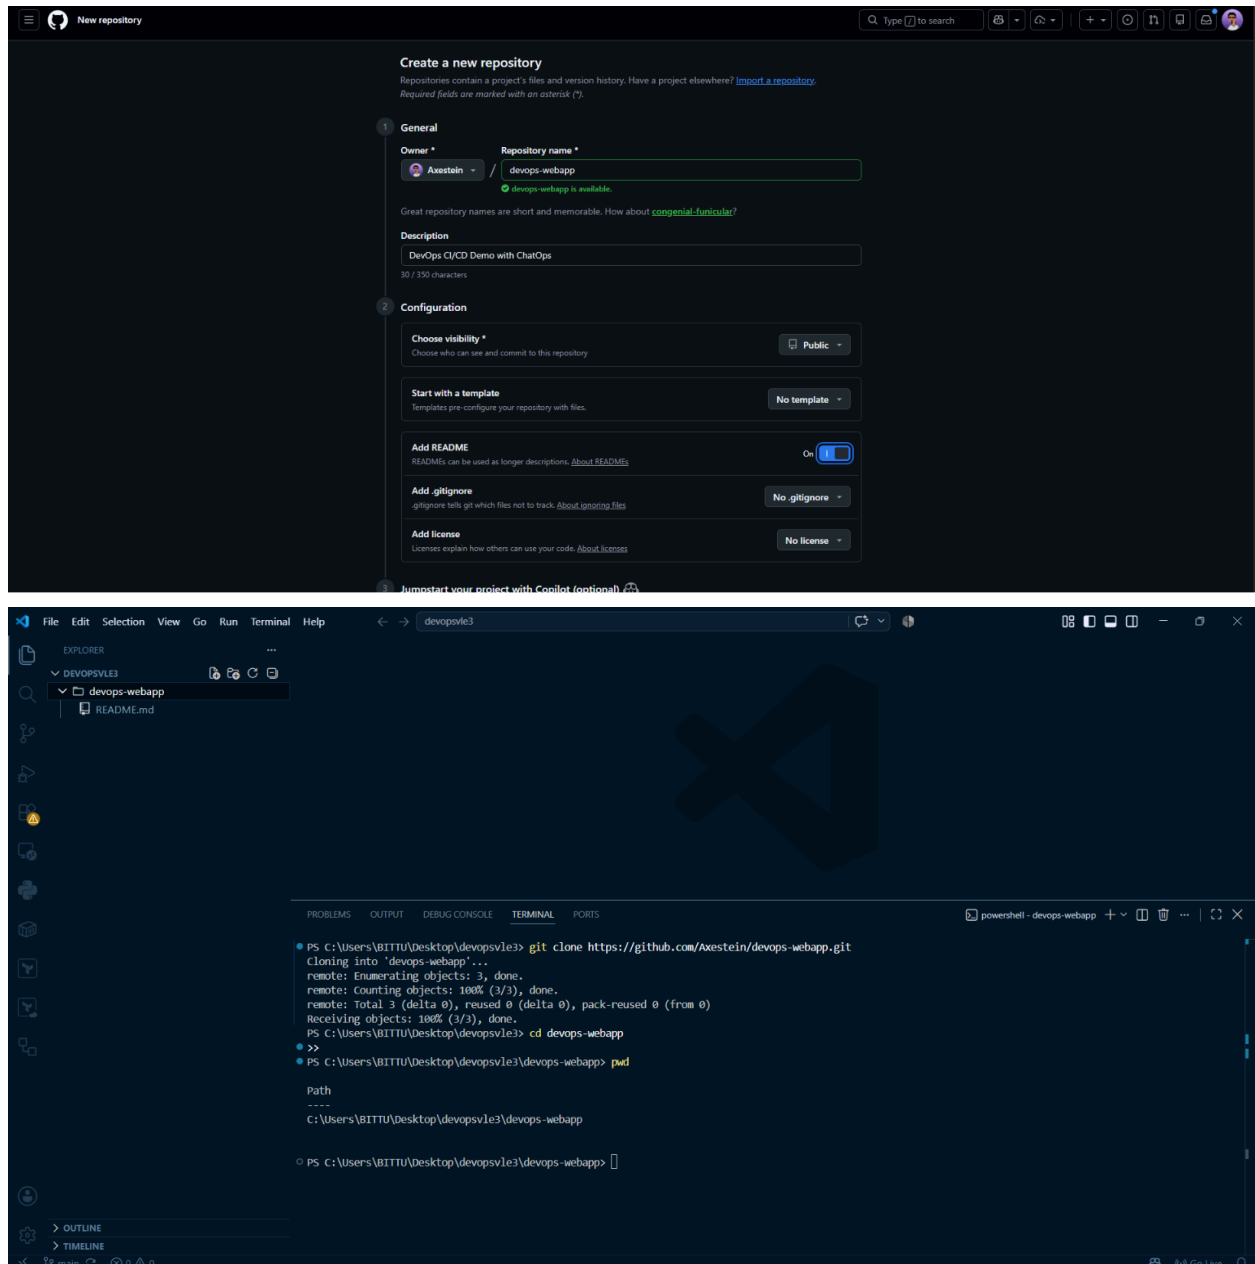


Phase 2: Version Control Workflow

1. Initialize git
2. Add & commit code
3. Push to GitHub
4. Verify code reflected in repository

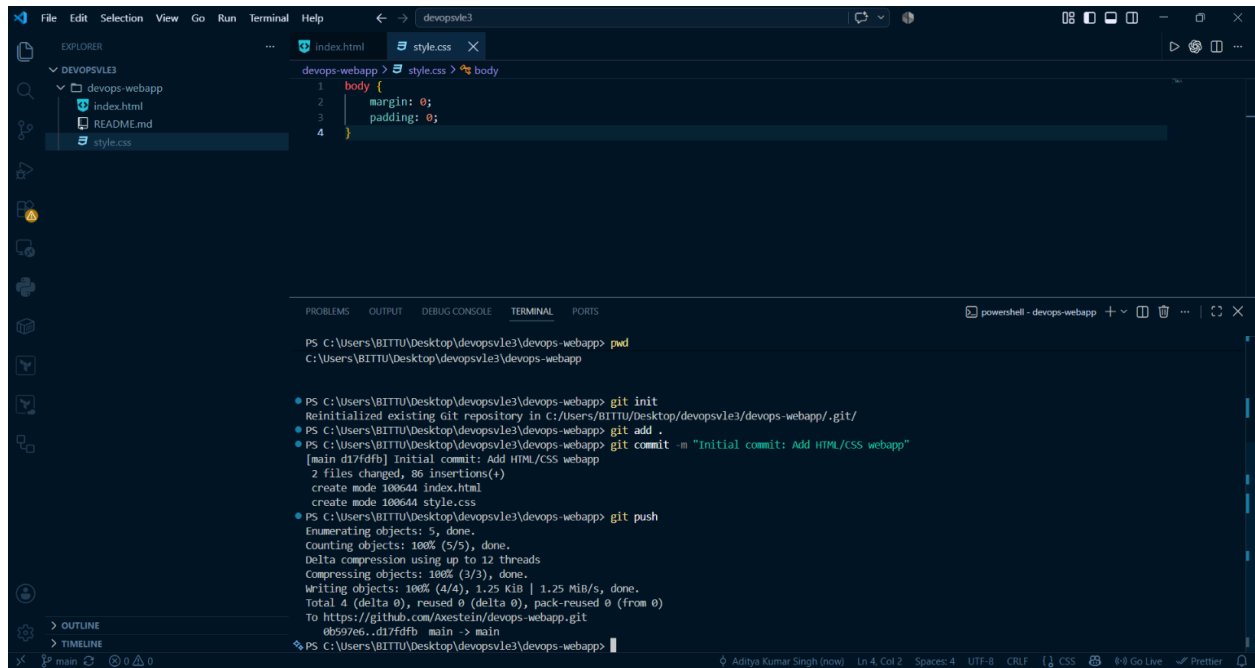


```
PS C:\Users\BITTU\Desktop\devopsvle3\devops-webapp> pwd
C:\Users\BITTU\Desktop\devopsvle3\devops-webapp

• PS C:\Users\BITTU\Desktop\devopsvle3\devops-webapp> git init
Reinitialized existing Git repository in C:/Users/BITTU/Desktop/devopsvle3/devops-webapp/.git/
• PS C:\Users\BITTU\Desktop\devopsvle3\devops-webapp> git add .
• PS C:\Users\BITTU\Desktop\devopsvle3\devops-webapp> git commit -m "Initial commit: Add HTML/CSS webapp"
[main d17fd6b] Initial commit: Add HTML/CSS webapp
2 files changed, 86 insertions(+)
create mode 100644 index.html
create mode 100644 style.css
• PS C:\Users\BITTU\Desktop\devopsvle3\devops-webapp> git push
Enumerating objects: 5, done.
Counting objects: 100% (5/5), done.
Delta compression using up to 12 threads
Compressing objects: 100% (3/3), done.
Writing objects: 100% (4/4), 1.25 KiB | 1.25 MiB/s, done.
Total 4 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
To https://github.com/Axestein/devops-webapp.git
0059706..d17fd6b main -> main
• PS C:\Users\BITTU\Desktop\devopsvle3\devops-webapp> |
```

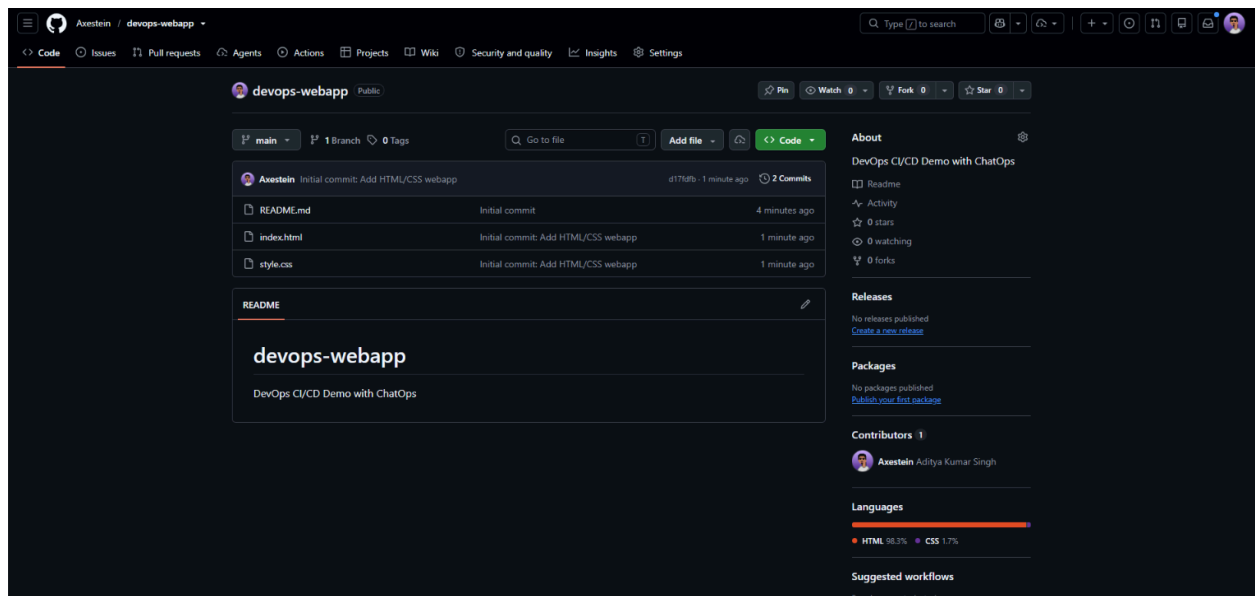


Phase 3: CI Pipeline Configuration (GitHub Actions)

1. Create .github/workflows/ci.yml
 2. Configure pipeline to:
 - o Checkout code
 - o Build project
 - o Run tests (if applicable)
- o Generate output logs ✓ Demonstrates CI concepts from your Model 1

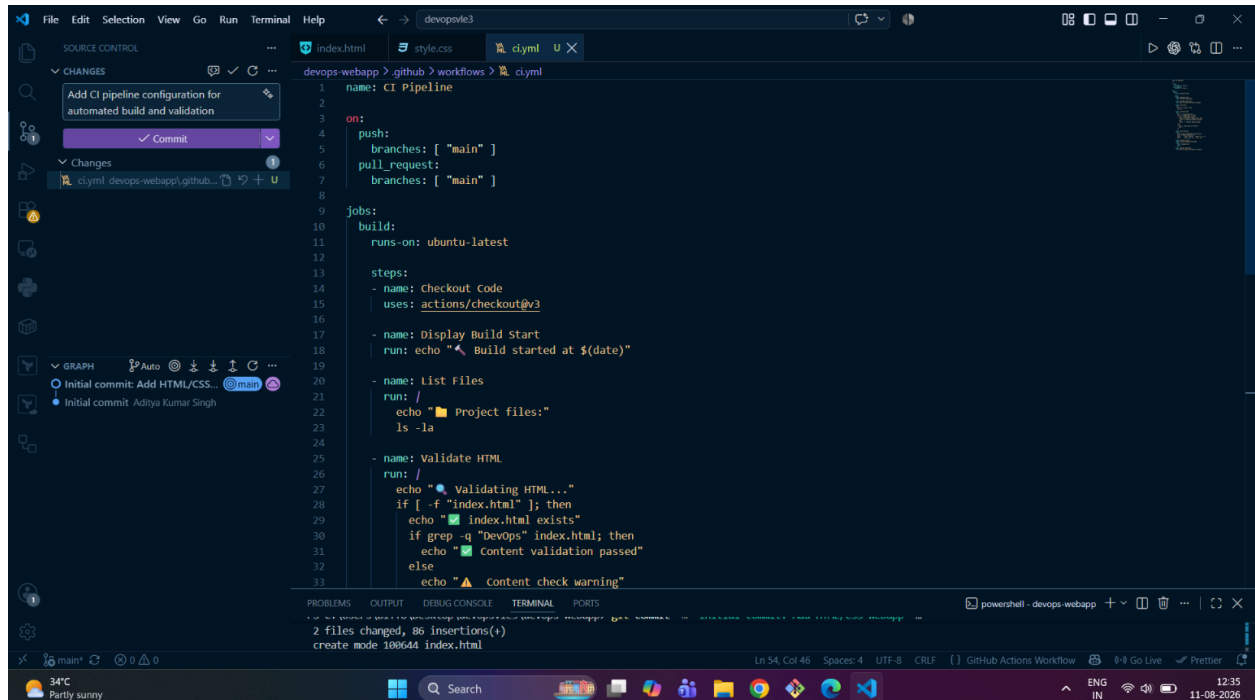

The screenshot shows the VS Code editor with the file `ci.yml` open. The file contains a GitHub Actions workflow configuration for a CI pipeline. The workflow is triggered on a push to the `main` branch. It includes a `build` job that runs on `ubuntu-latest`. The job steps are: checkout code, display build start, list files, and validate HTML. The terminal output shows the successful execution of the workflow, including the creation of `index.html`.

```
1 name: CI Pipeline
2
3 on:
4   push:
5     branches: [ "main" ]
6   pull_request:
7     branches: [ "main" ]
8
9 jobs:
10  build:
11    runs-on: ubuntu-latest
12
13    steps:
14      - name: Checkout Code
15        uses: actions/checkout@v3
16
17      - name: Display Build Start
18        run: echo "👉 Build started at $(date)"
19
20      - name: List Files
21        run: |
22          echo "📁 Project files:"
23          ls -la
24
25      - name: Validate HTML
26        run: |
27          echo "🔍 Validating HTML..."
28          if [ -f "index.html" ]; then
29            echo "✅ index.html exists"
30            if grep -q "DevOps" index.html; then
31              echo "✅ Content validation passed"
32            else
33              echo "⚠️ Content check warning"
```

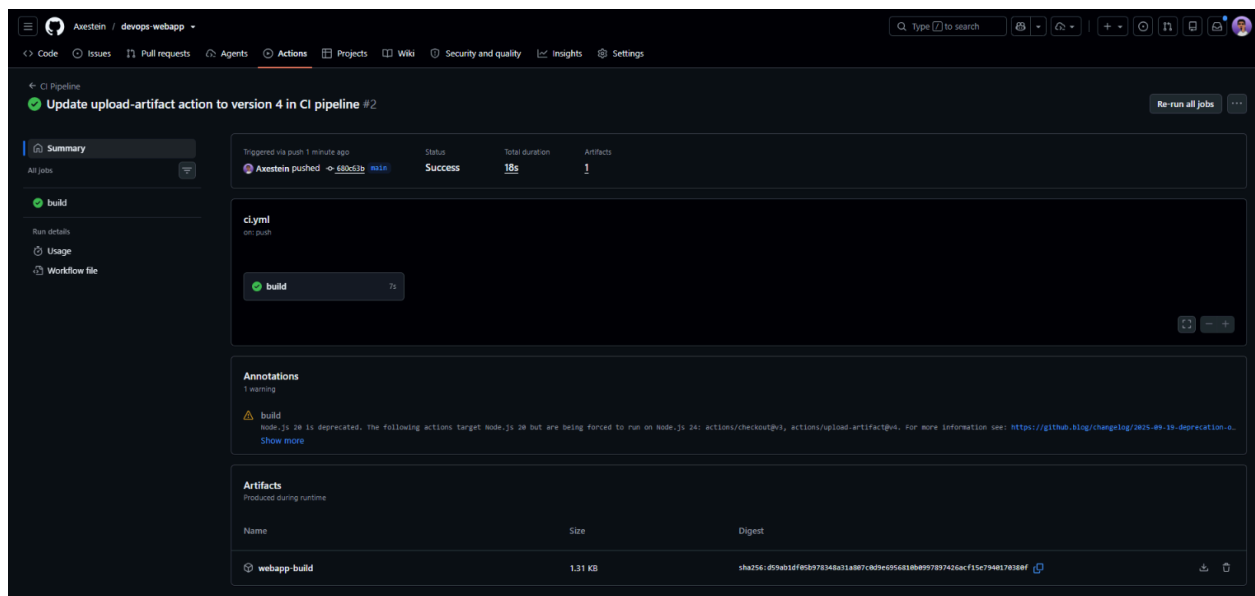

The screenshot shows the GitHub Actions interface for the `ci.yml` workflow. The workflow is titled "Update upload-artifact action to version 4 in CI pipeline #2". It shows a successful run triggered by a push to the `main` branch. The run details include a summary, a build job, annotations, and artifacts.

Summary

Triggered via push 1 minute ago
Status: Success
Total duration: 10s
Artifacts: 1

Build Job

`ci.yml`
on: push

Annotations

Warning
build
Node.js 20 is deprecated. The following actions target Node.js 20 but are being forced to run on Node.js 24: actions/checkout@v3, actions/upload-artifact@v4. For more information see: <https://github.blog/changelog/2025-09-19-deprecation-o->
[Show more](#)



Artifacts

Produced during runtime

Name	Size	Digest
webapp-build	1.31 KB	sha256:0594b16f010970340d1180f70d96095681050997097426bcf55c7340170180f

Phase 4: ChatOps Integration

1. Create a Slack/MS Teams channel: #ci-cd-alerts
2. Configure Incoming Webhook
3. Add webhook as GitHub secret
4. Modify pipeline to send: o Success notification o Failure notification ✓ Demonstrates ChatOps from your Model 1

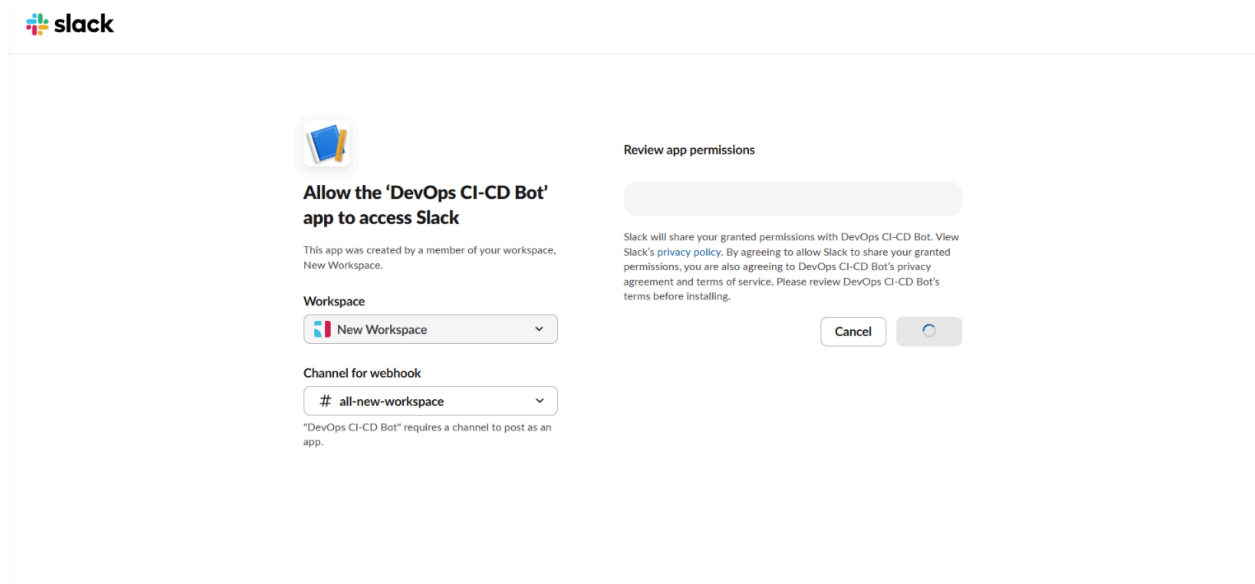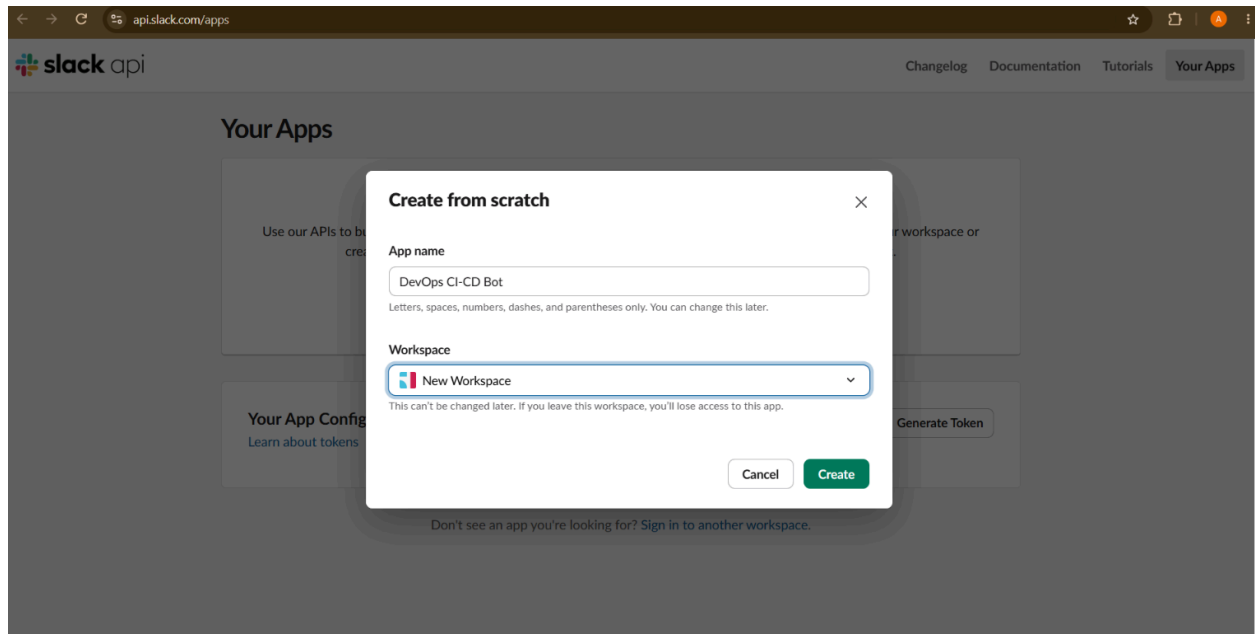

Your Apps

Create New App

If your app is (or will be) listed in the Slack Marketplace, please review our [Slack Marketplace Agreement](#). These terms are in addition to the existing Developer Policy, API TOS, and Brand Guidelines.

By keeping your app in the Slack Marketplace or review process, you're confirming your agreement to the Slack Marketplace Agreement and to providing additional information for security review, if requested. If you don't agree with this Agreement, please send an email to feedback@slack.com, and we'll remove your app from the Slack Marketplace or the review process.

I Agree

Filter apps by name or workspace

App Name	Workspace	App ID	App Type	Distribution Status
DevOps CI-CD Bot	New Workspace	A0BP79FPMLK	Modern	Not distributed

Your App Configuration Tokens

Generate Token

[Learn about tokens](#)

Don't see an app you're looking for? [Sign in to another workspace.](#)

DevOps CI-CD ...

Settings

Basic Information

Collaborators

Socket Mode

Install App

Manage Distribution

Features

App Home

Agents

Work Object Previews New

Workflow Steps

Org Level Apps

Incoming Webhooks

Interactivity & Shortcuts

Slash Commands

Steps from Apps LEGACY

OAuth & Permissions

MCP Servers New

Event Subscriptions

User ID Translation

App Manifest

Beta Features

Submit to Slack Marketplace

Review & Submit

Give feedback

Incoming Webhooks

Activate Incoming Webhooks

On

Incoming webhooks are a simple way to post messages from external sources into Slack. They make use of normal HTTP requests with a JSON payload, which includes the message and a few other optional details. You can include [message attachments](#) to display richly-formatted messages.

Adding incoming webhooks requires a bot user. If your app doesn't have a [bot user](#), we'll add one for you.

Each time your app is installed, a new Webhook URL will be generated.

If you deactivate incoming webhooks, new Webhook URLs will not be generated when your app is installed to your team. If you'd like to remove access to existing Webhook URLs, you will need to [Revoke All OAuth Tokens](#).

Webhook URLs for Your Workspace

To dispatch messages with your webhook URL, send your [message](#) in JSON as the body of an `application/json` POST request.

Add this webhook to your workspace below to activate this curl example.


Sample curl request to post to a channel:

```
curl -X POST -H 'content-type: application/json' -d '{\"text\": \"hello, world!\"}' https://hooks.slack.com/services/T00194659S1/BB6X9N0ZU/90m5um7M6c0TfM5v35g
```

Copy


Webhook URL	Channel	Added By
https://hooks.slack.com/services/ Copy	#all-new-workspace	Aditya Kumar Singh Aug 11, 2026


Add More Webhooks

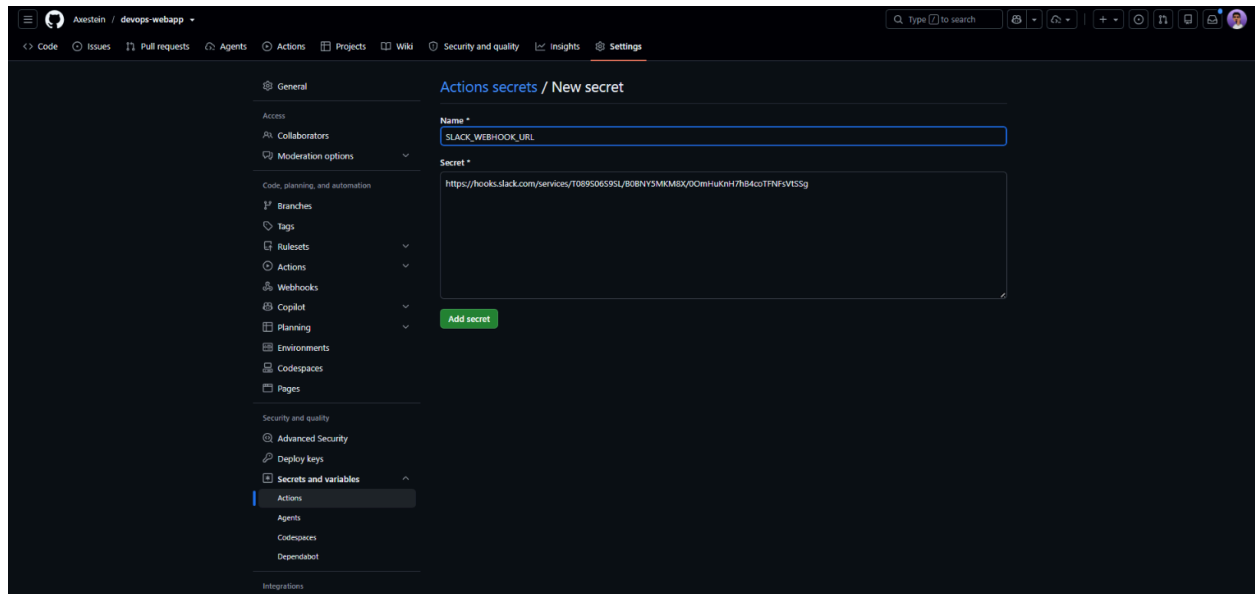

Phase 5: CD for Static Deployment

1. Log in to Netlify or Vercel
2. Import GitHub repository
3. Enable "Auto Deploy on Commit"
4. Verify:
 - o Build logs
 - o Deployment previews
 - o Final production URL ✓ Demonstrates static CI/CD concept from Model 1

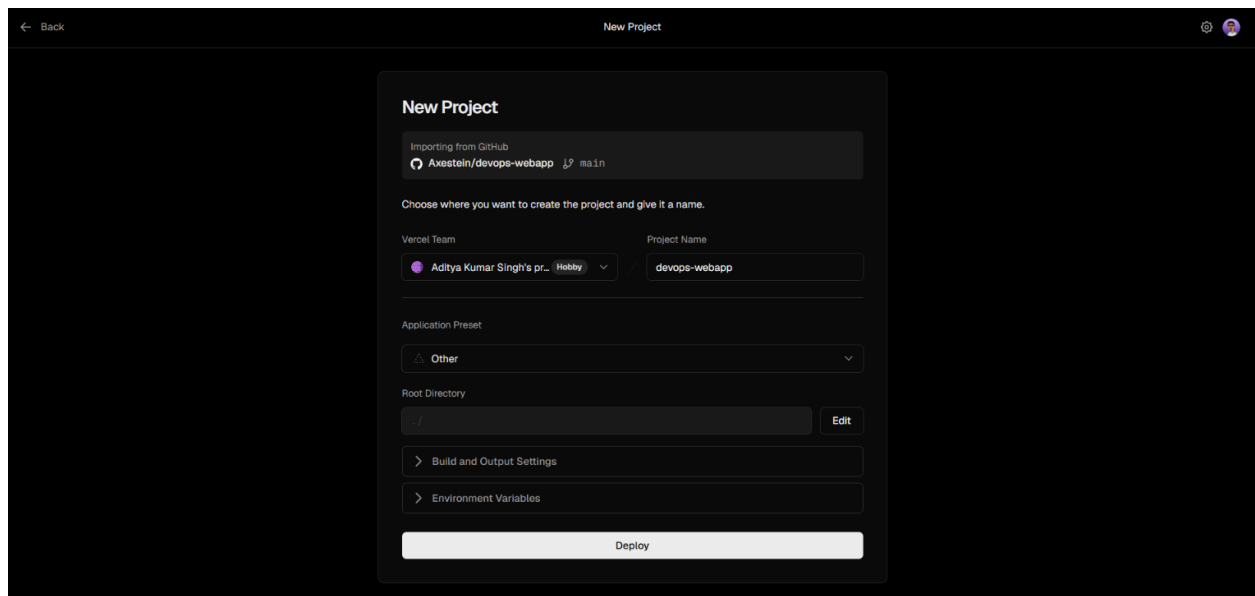

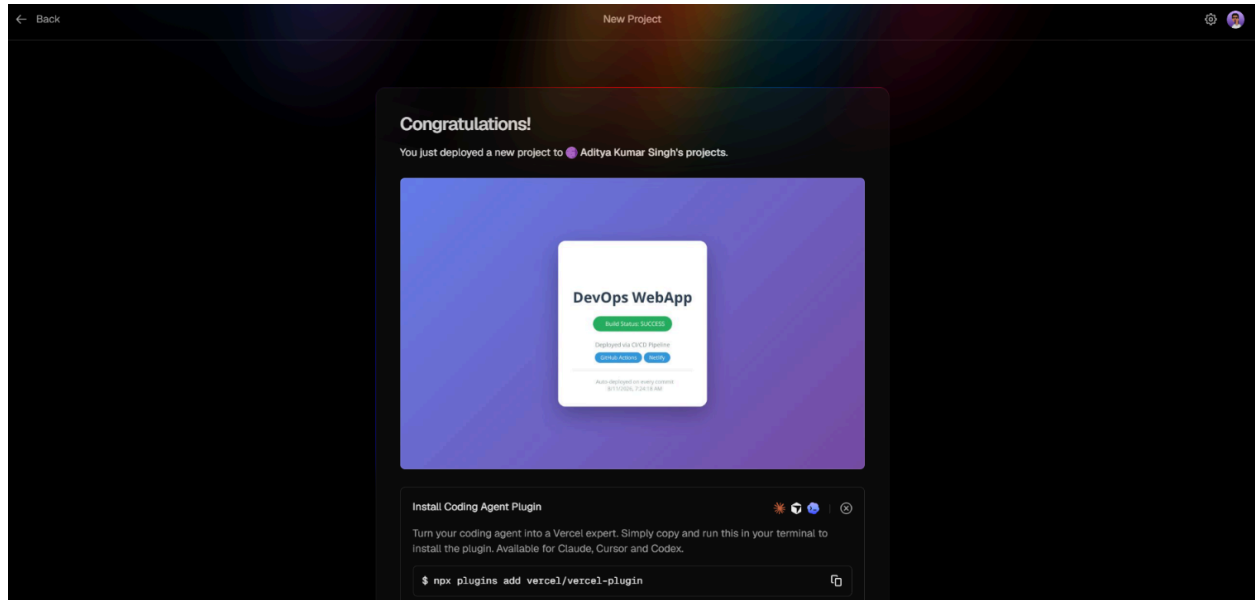

<https://devops-webapp-six.vercel.app/>