
CLOC: preserving learned behavior as an optimization constraint

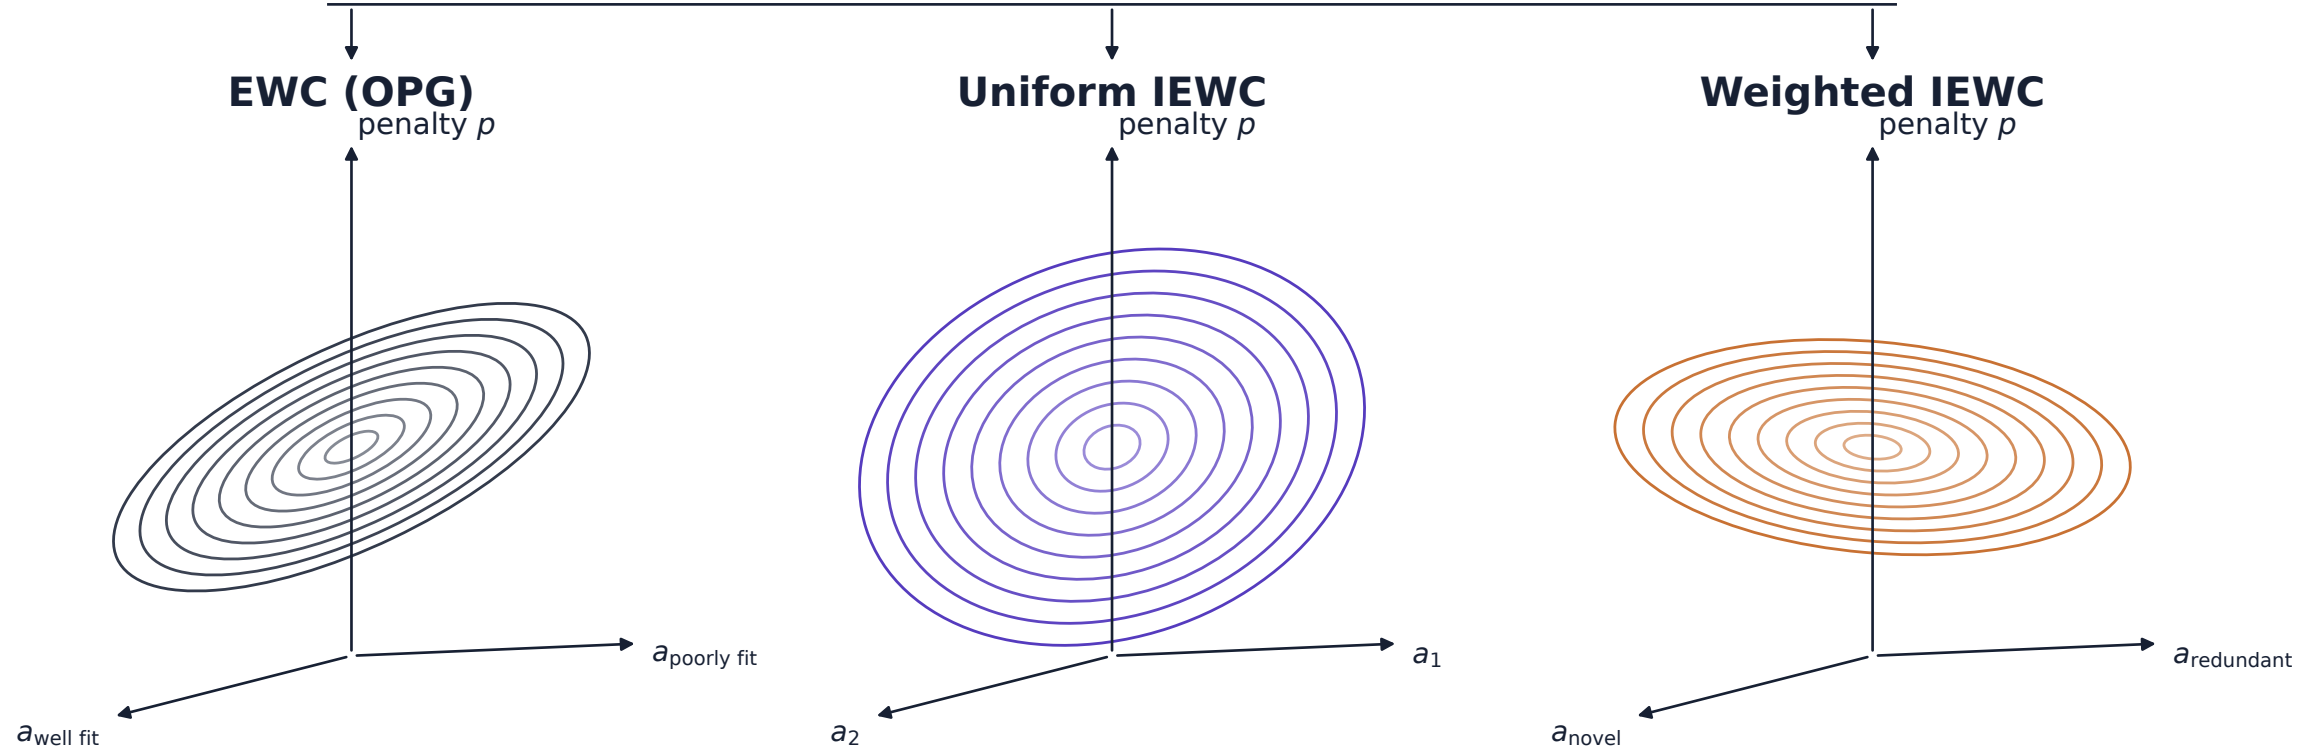

$$p = \lambda(s_p a_p^2 + s_w a_w^2), \quad s_p \gg s_w$$

Implicitly favors high-gradient samples

$$p = \lambda(a_1^2 + a_2^2)$$

Estimates normalized task sensitivity

$$p = \lambda(h_r a_r^2 + h_n a_n^2), \quad h_r \ll h_n$$

Makes the aggregation measure explicit