
CLOC: choose the old behavior to preserve

Scalar-loss change → OPG matrix

Loss-level-set normal → IEF matrix


OPG · uniform

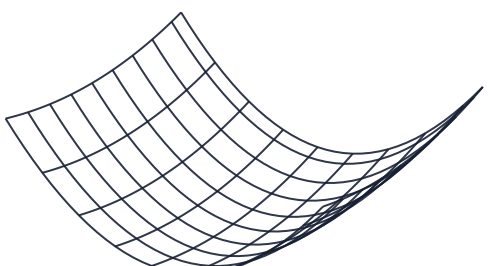

large s_n small s_n

$$\sum_n s_n \, a_n a_n^\top$$


IEF · uniform

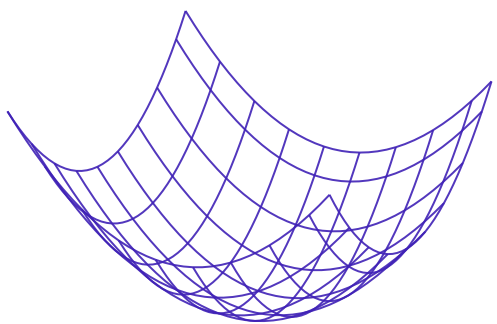

normalized a_1 normalized a_2

$$\sum_n a_n a_n^\top$$

IEF · RDW (illustrative)

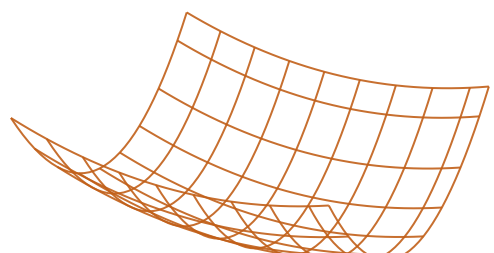

redundant novel

$$\sum_n \bar{h}_n \, a_n a_n^\top$$

Normalization chooses the matrix; aggregation is a separate axis.

The confirmatory 2×2 design crosses OPG/IEF with uniform/RDW weighting.