
CLOC: preserving learned behavior as an optimization constraint


EWC (OPG)

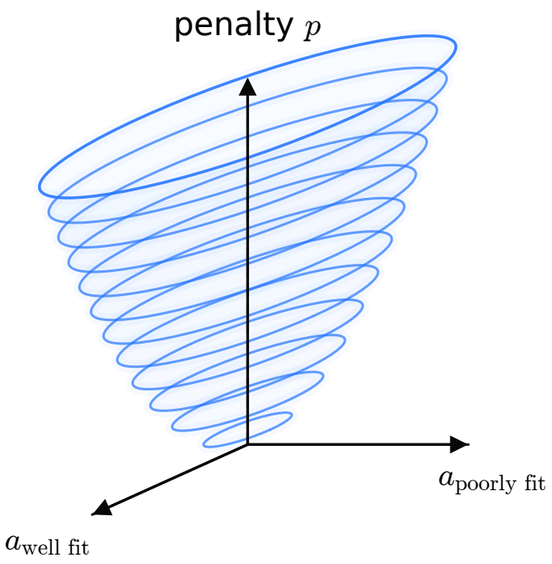

$$p = \lambda(s_p(a_{\text{poorly fit}})^2 + s_w(a_{\text{well fit}})^2), \quad s_p \gg s_w$$

Implicitly favors high-gradient samples


Uniform IEWC

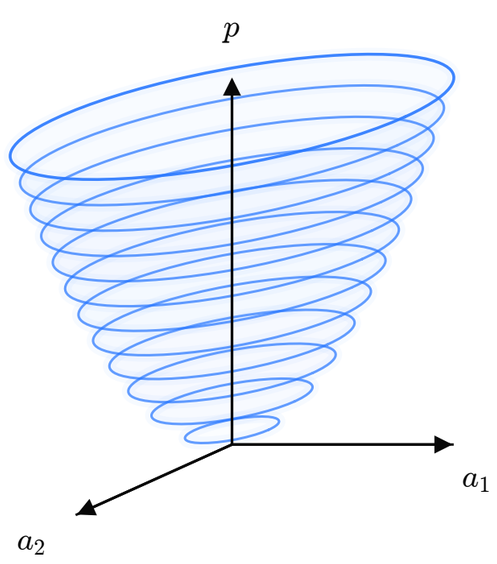

$$p = \lambda((a_1)^2 + (a_2)^2)$$

Estimates normalized task sensitivity

Weighted IEWC

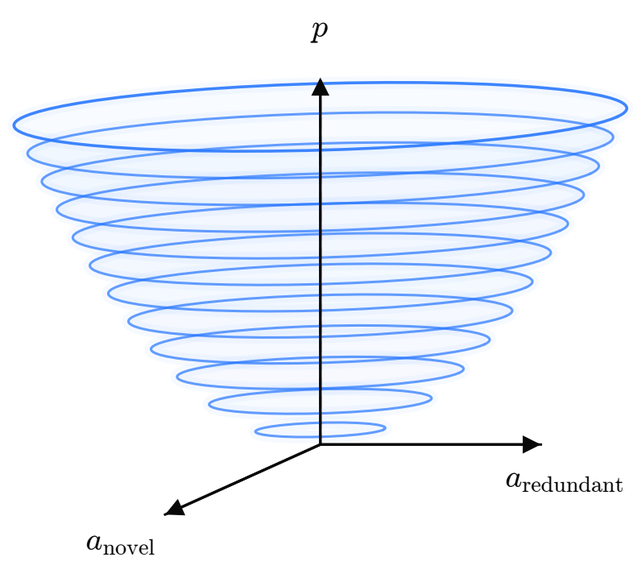

$$p = \lambda(h_r(a_{\text{redundant}})^2 + h_n(a_{\text{novel}})^2), \quad h_r \ll h_n$$

Favors novel / diverse samples