


Experiment No.: 1

Program based on Remote procedure call using RMI

Running EC2 Instance:

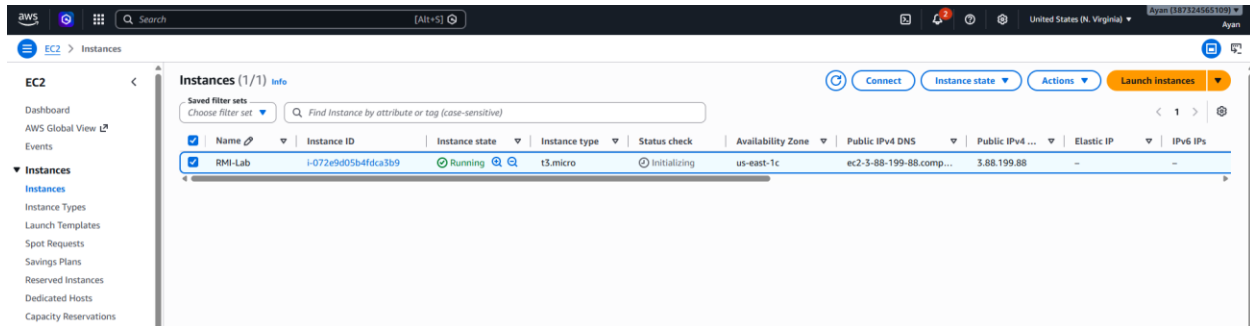

Server Side:

```
[ec2-user@ip-172-31-19-125 ~]$ java -version
openjdk version "11.0.31" 2026-04-21 LTS
OpenJDK Runtime Environment Corretto-11.0.31.11.1 (build 11.0.31+11-LTS)
OpenJDK 64-Bit Server VM Corretto-11.0.31.11.1 (build 11.0.31+11-LTS, mixed mode)
[ec2-user@ip-172-31-19-125 ~]$ mkdir RMIExperiment
[ec2-user@ip-172-31-19-125 ~]$ cd RMIExperiment
[ec2-user@ip-172-31-19-125 RMIExperiment]$ nano MyRemoteInterface.java
[ec2-user@ip-172-31-19-125 RMIExperiment]$ nano MyRemoteImplementation.java
[ec2-user@ip-172-31-19-125 RMIExperiment]$ nano MyRemoteServer.java
[ec2-user@ip-172-31-19-125 RMIExperiment]$ nano MyRemoteClient.java
[ec2-user@ip-172-31-19-125 RMIExperiment]$ javac *.java
[ec2-user@ip-172-31-19-125 RMIExperiment]$ ls
MyRemoteClient.class  MyRemoteImplementation.class  MyRemoteInterface.class  MyRemoteServer.class
MyRemoteClient.java  MyRemoteImplementation.java  MyRemoteInterface.java  MyRemoteServer.java
[ec2-user@ip-172-31-19-125 RMIExperiment]$ java MyRemoteServer
```

Client Side

```
[ec2-user@ip-172-31-19-125 ~]$ cd RMIExperiment
[ec2-user@ip-172-31-19-125 RMIExperiment]$ java MyRemoteClient
Message from server: Hello from the server!
Result of calculation: 8
[ec2-user@ip-172-31-19-125 RMIExperiment]$ |
```