



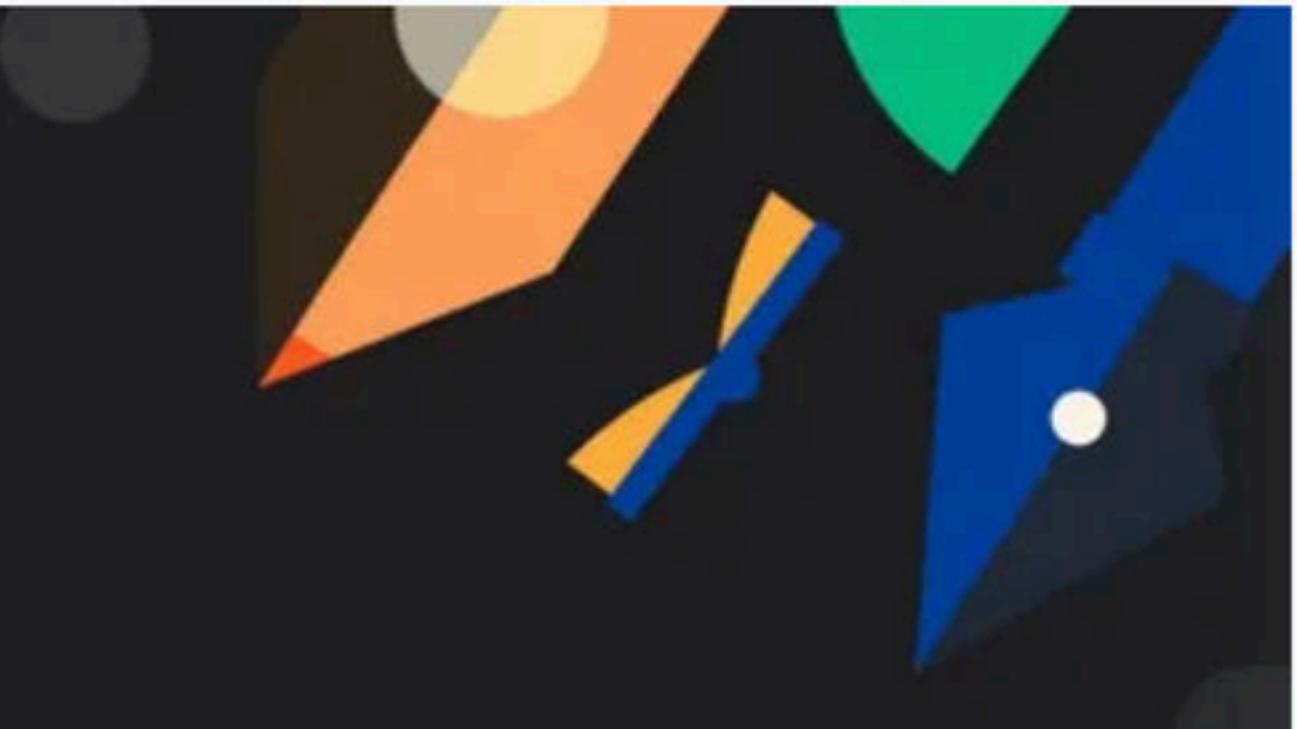


Binary Search Trees Class - 3

Special class

① BT $\xrightarrow{\quad}$ construct BT using In/Pre/Post

BST $\xrightarrow{\quad}$ create BST using Inorder/
Sorted Array

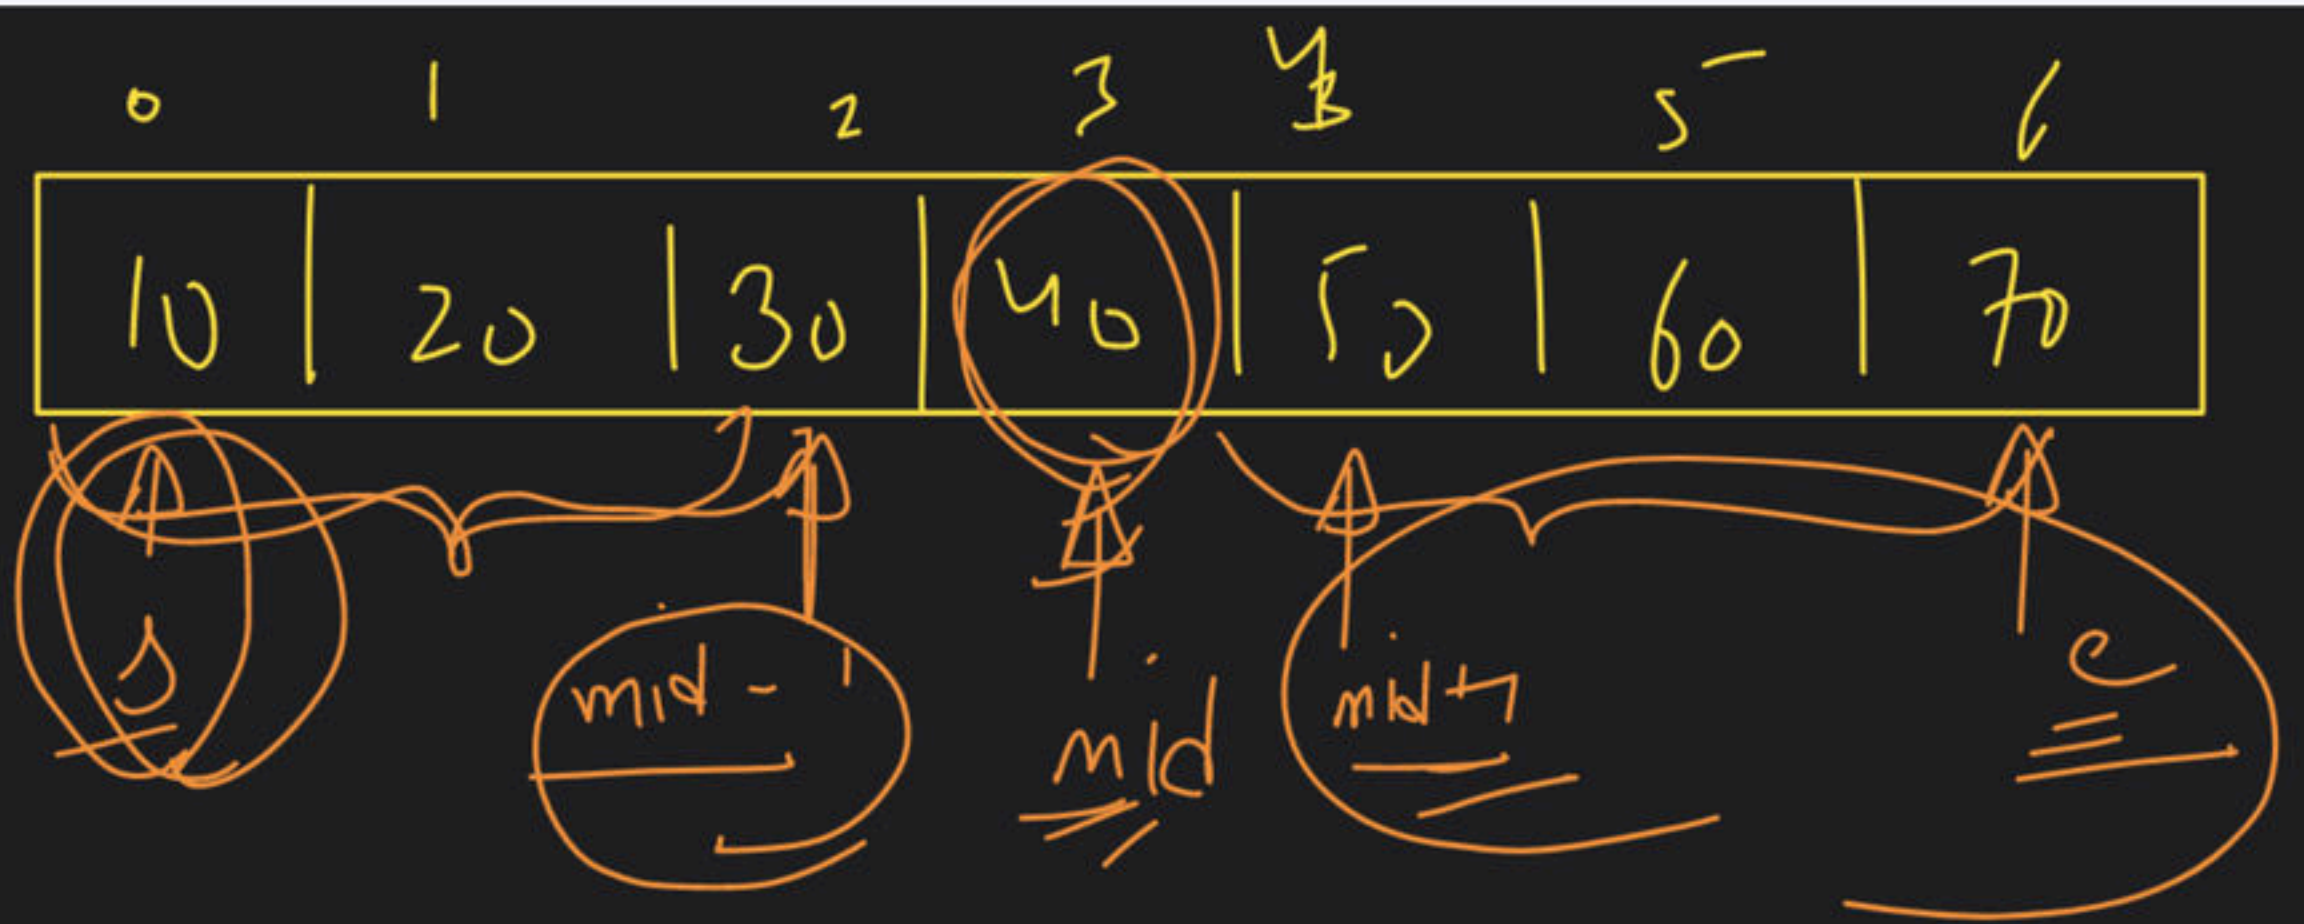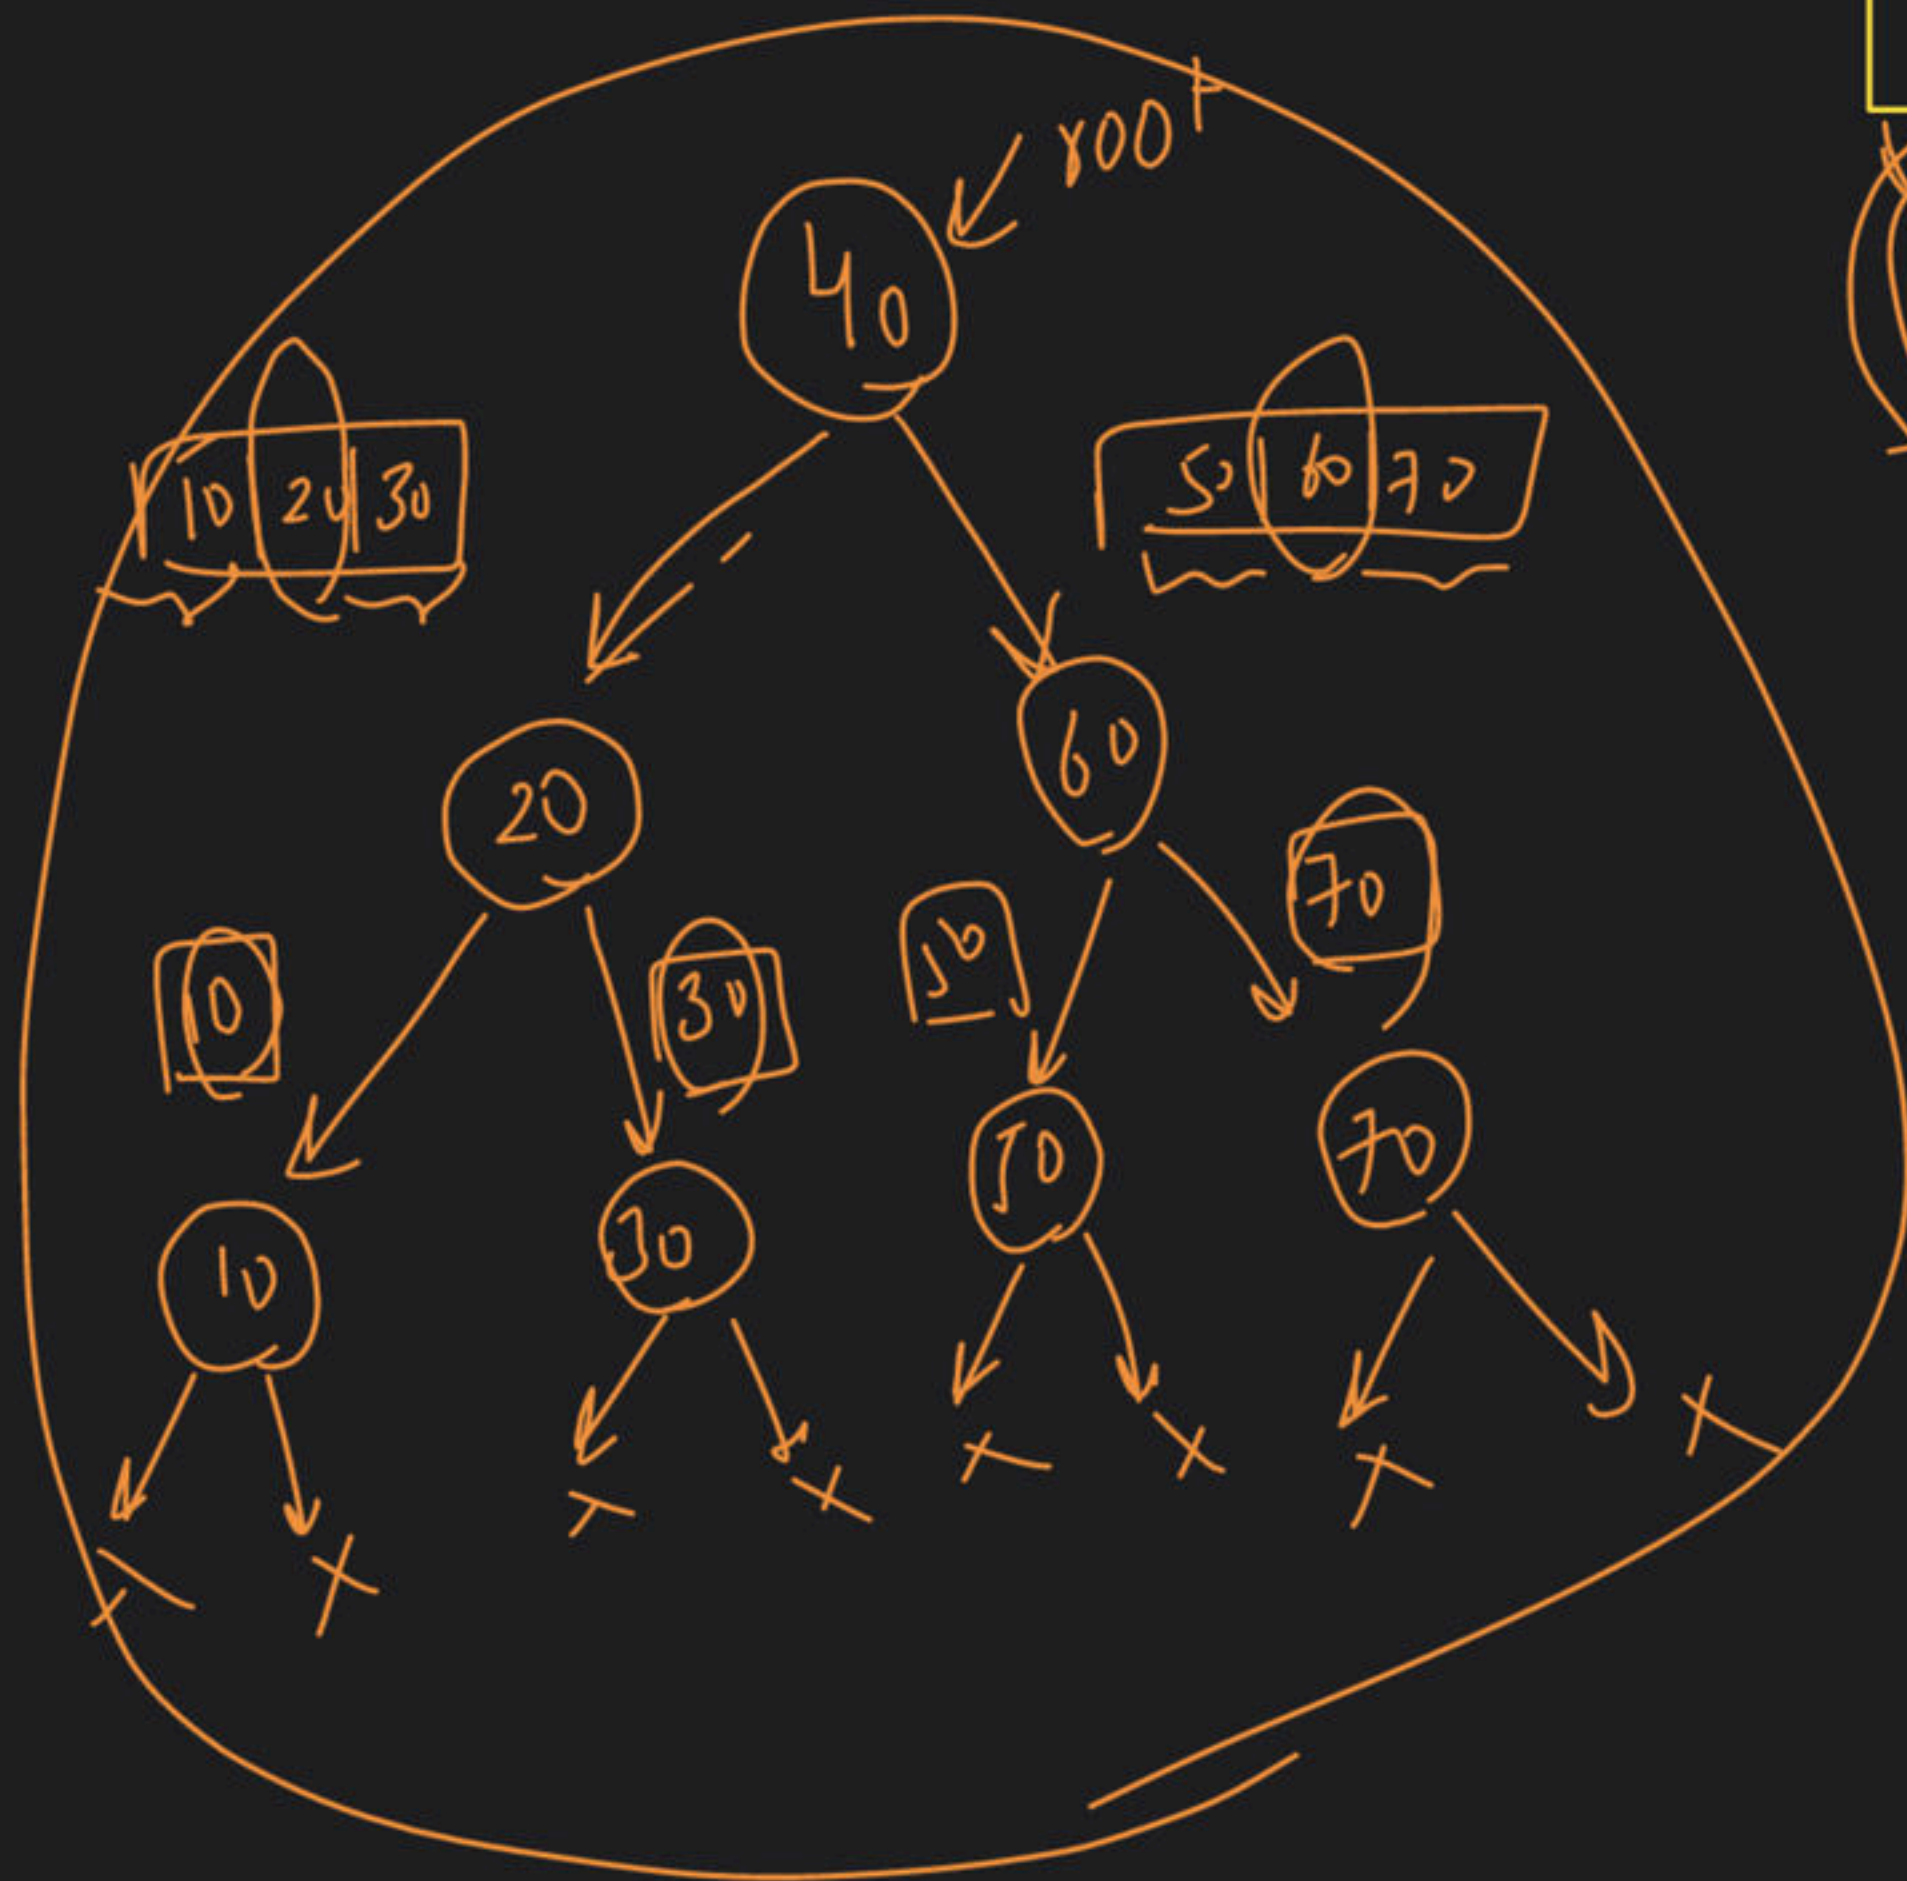


→ BT → DLL → sorted


BST → DLL → o/p
↳ sorted

→ BI to DLL

↳ In → LNR
pre → NLR
post → LRN


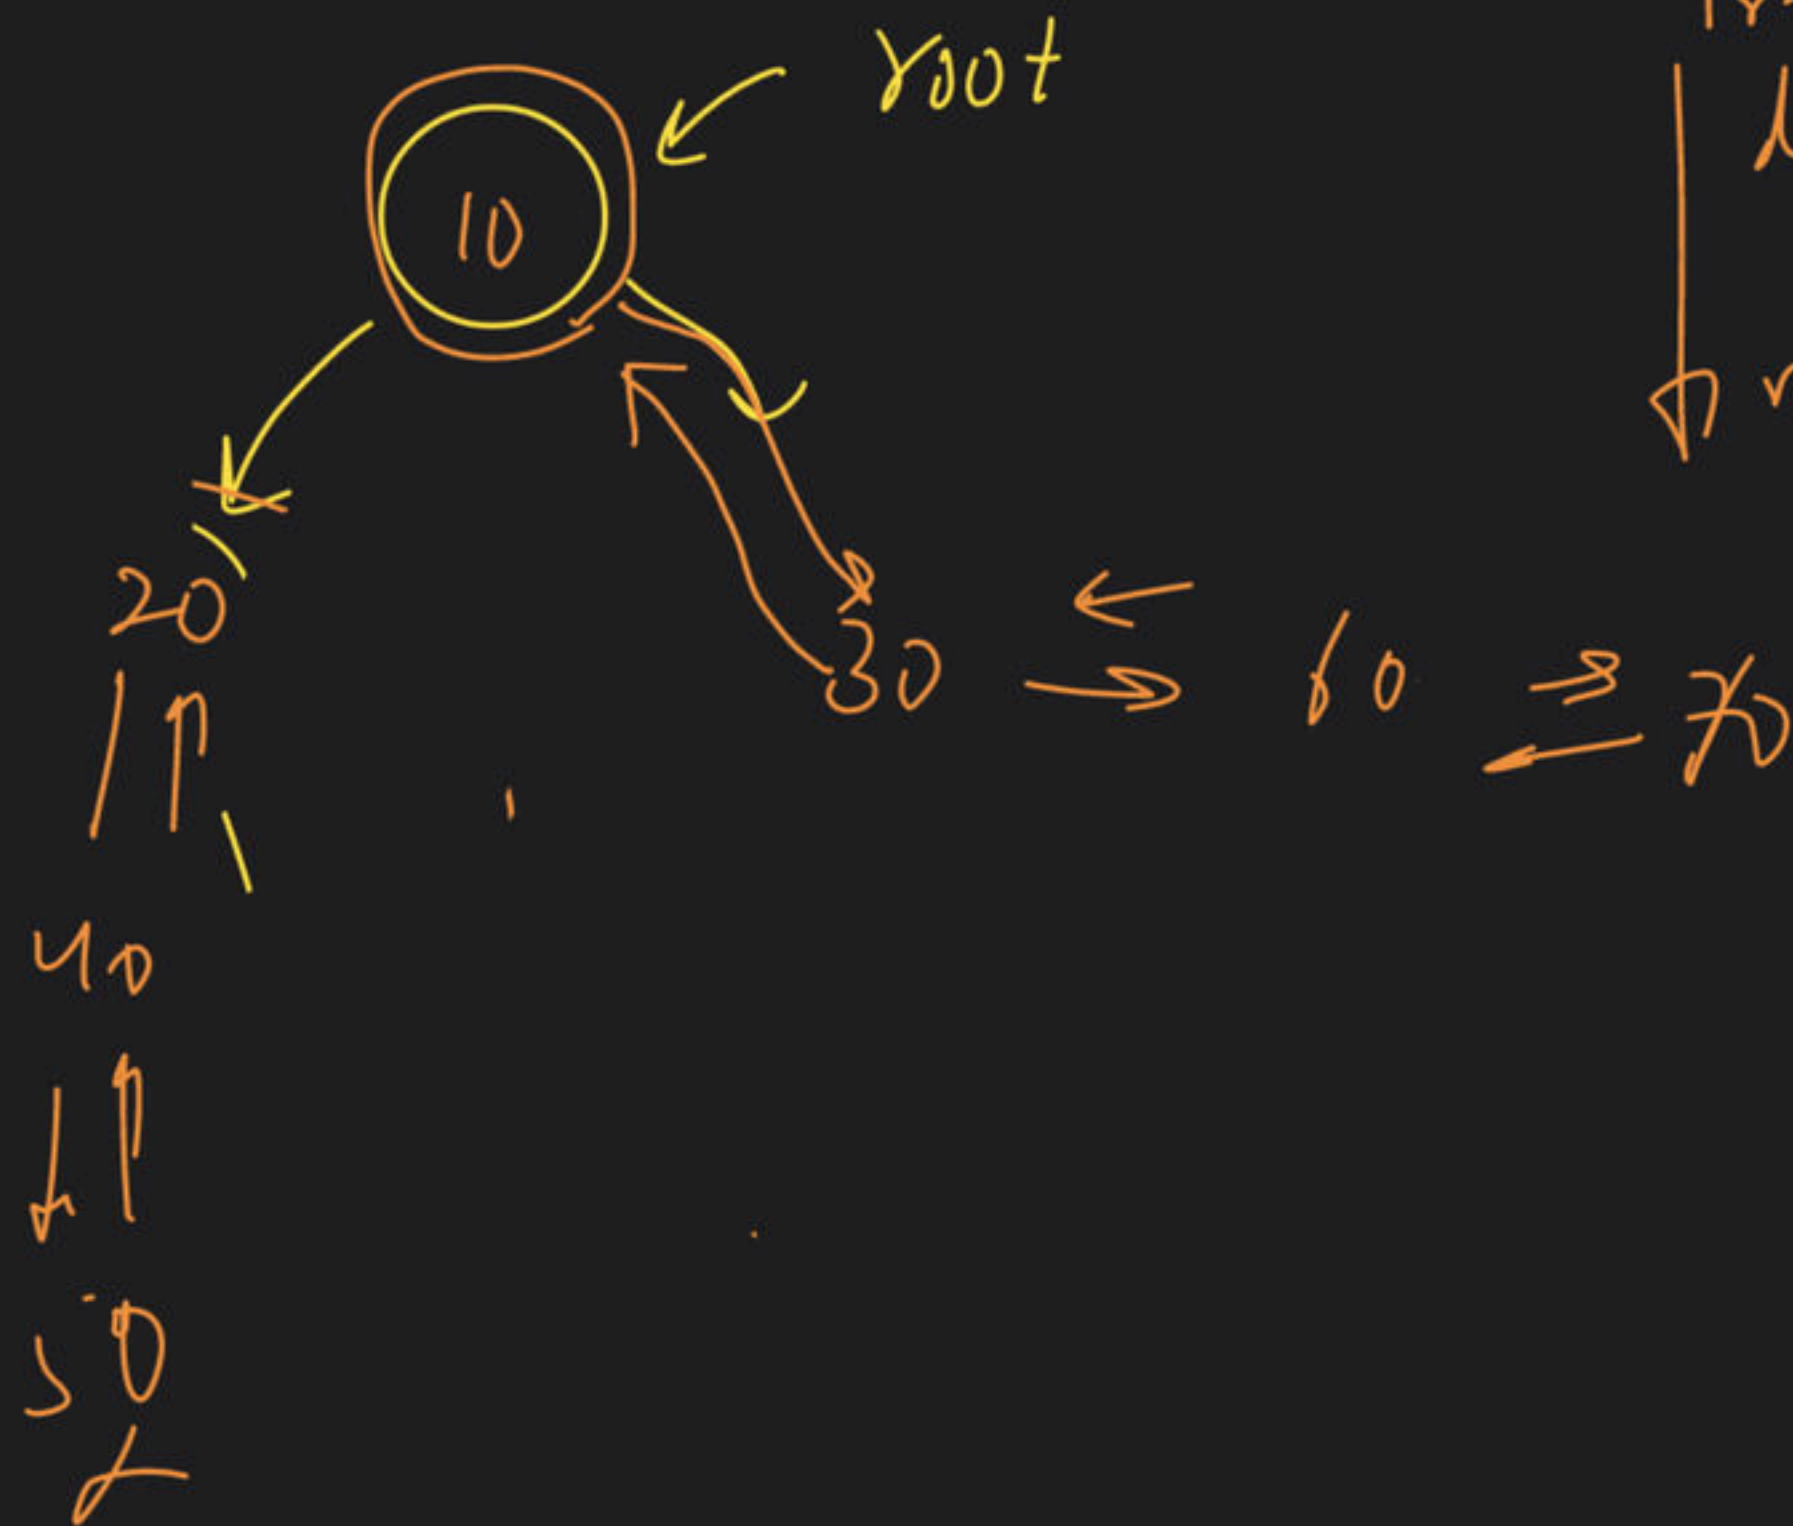



head = NULL

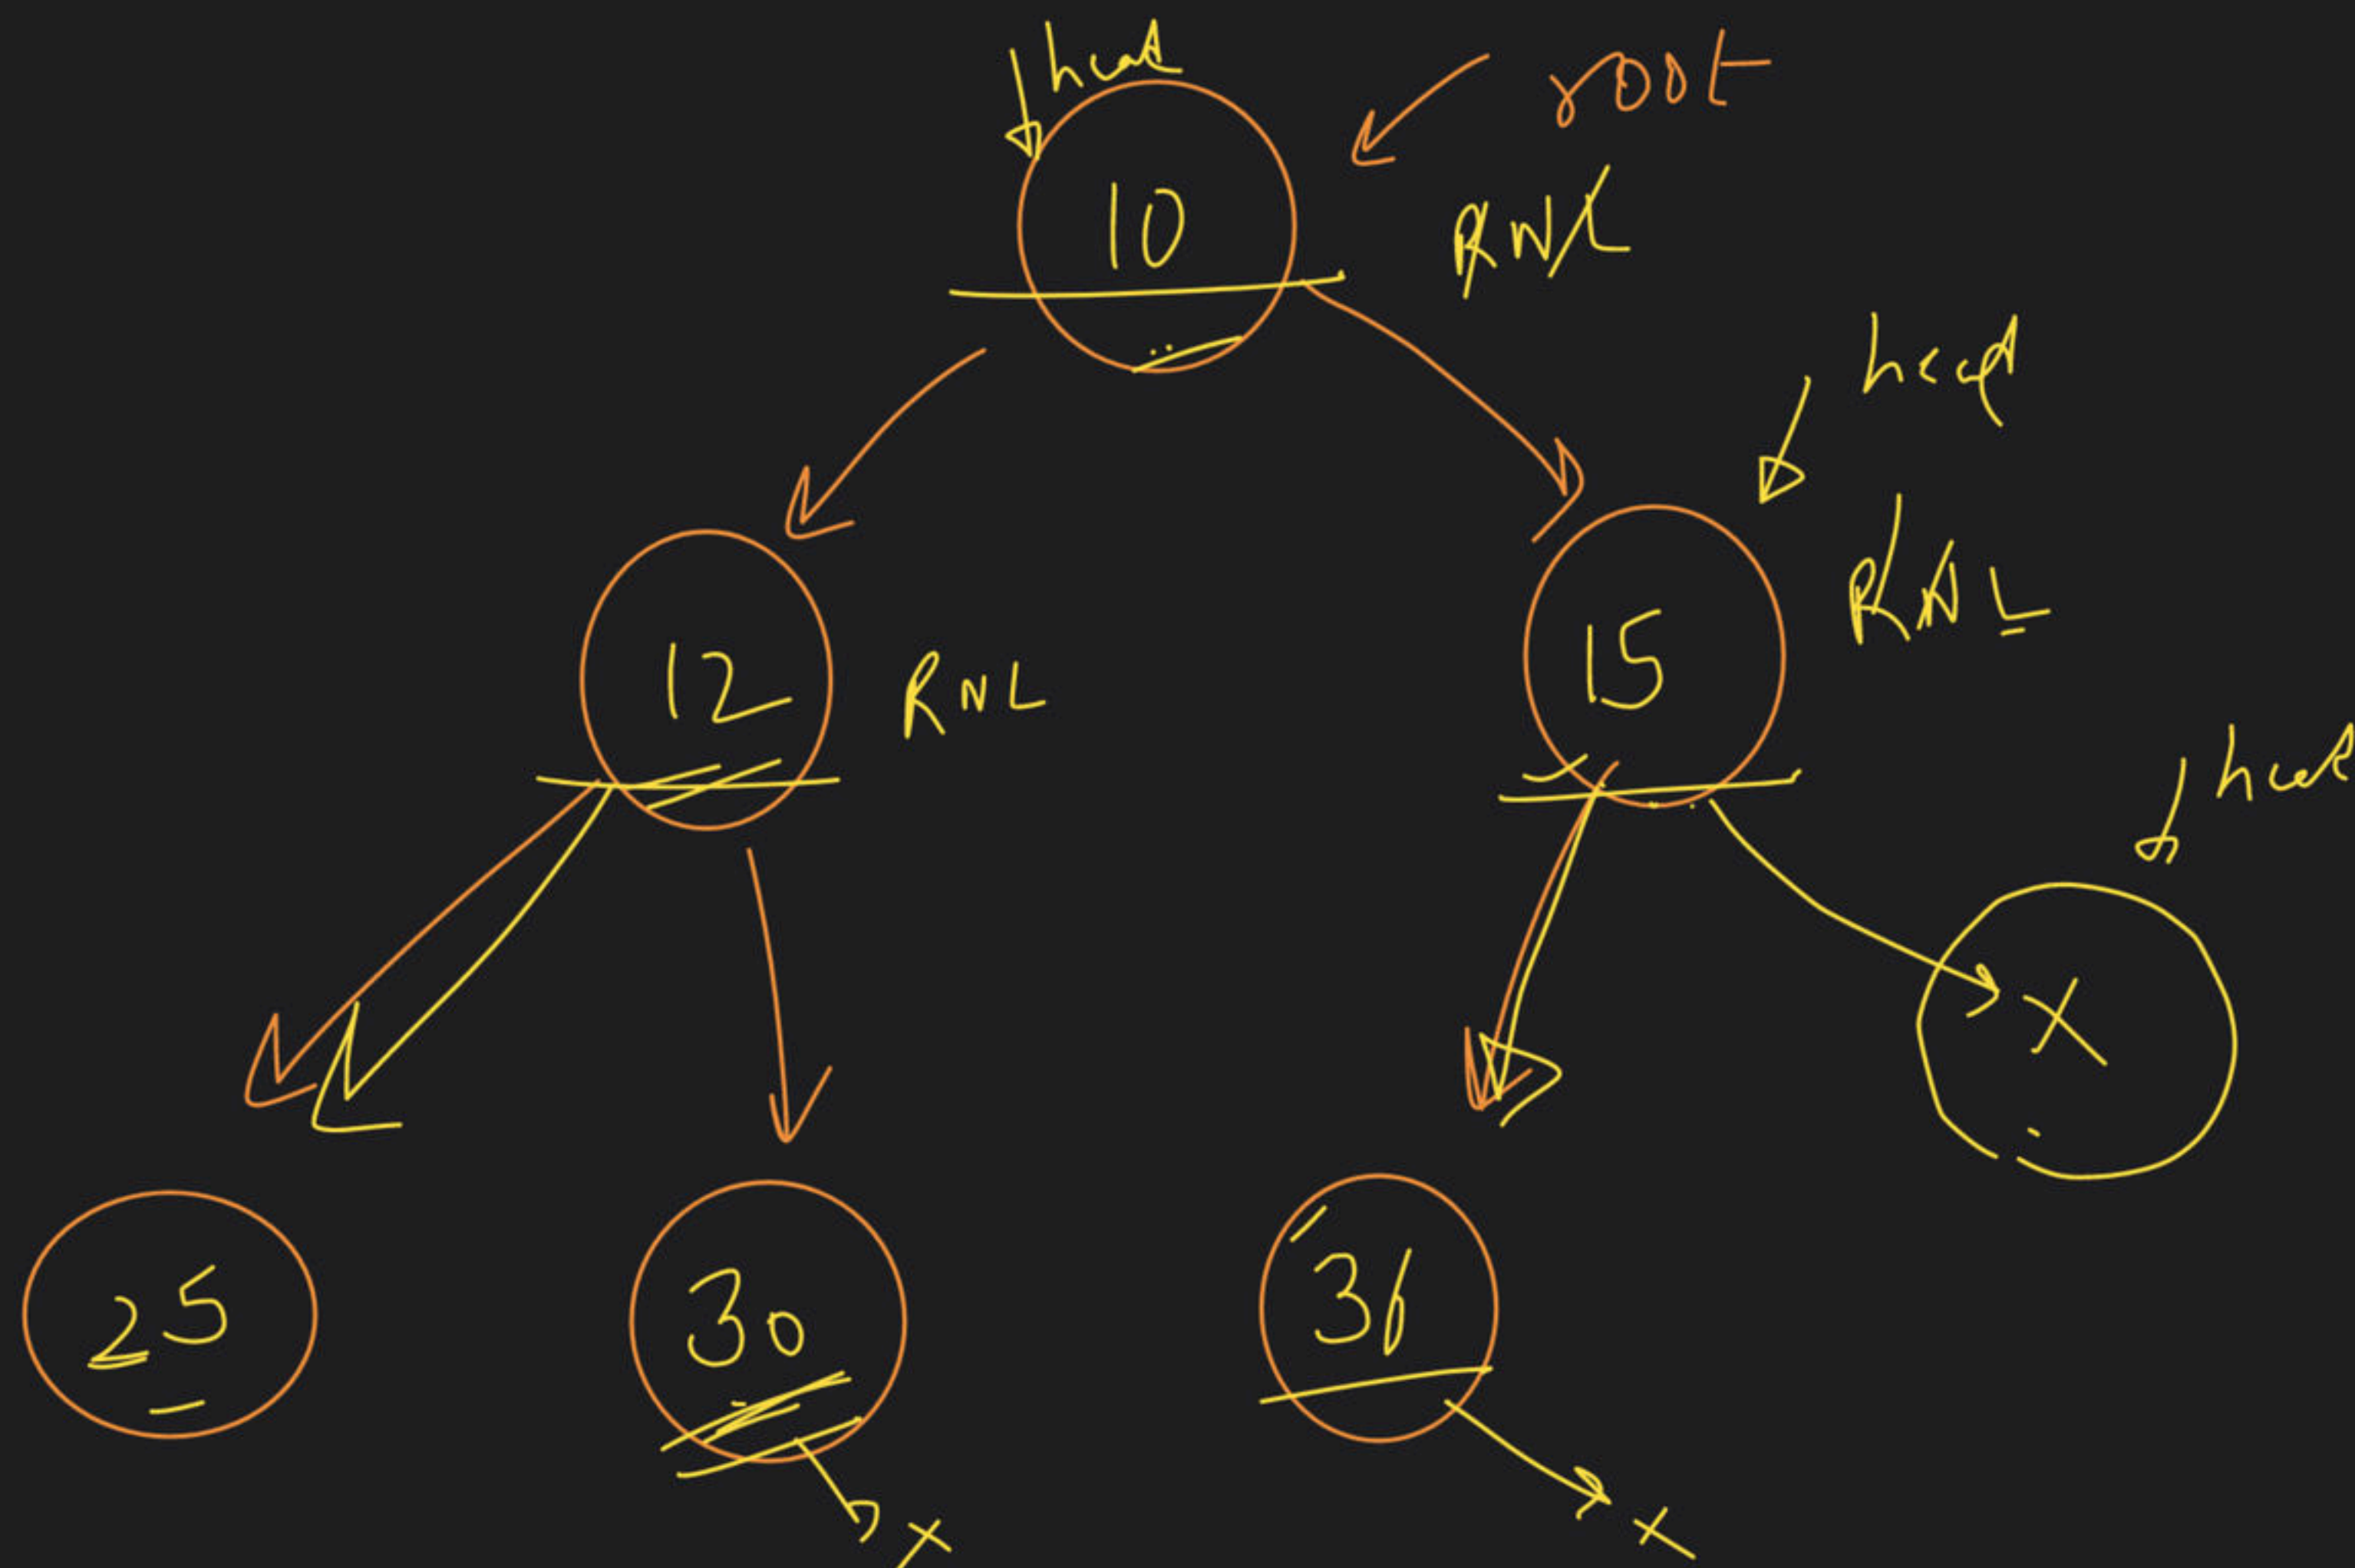


25 → 12 → 30 → 10 → 36 → 15 → X

Approach

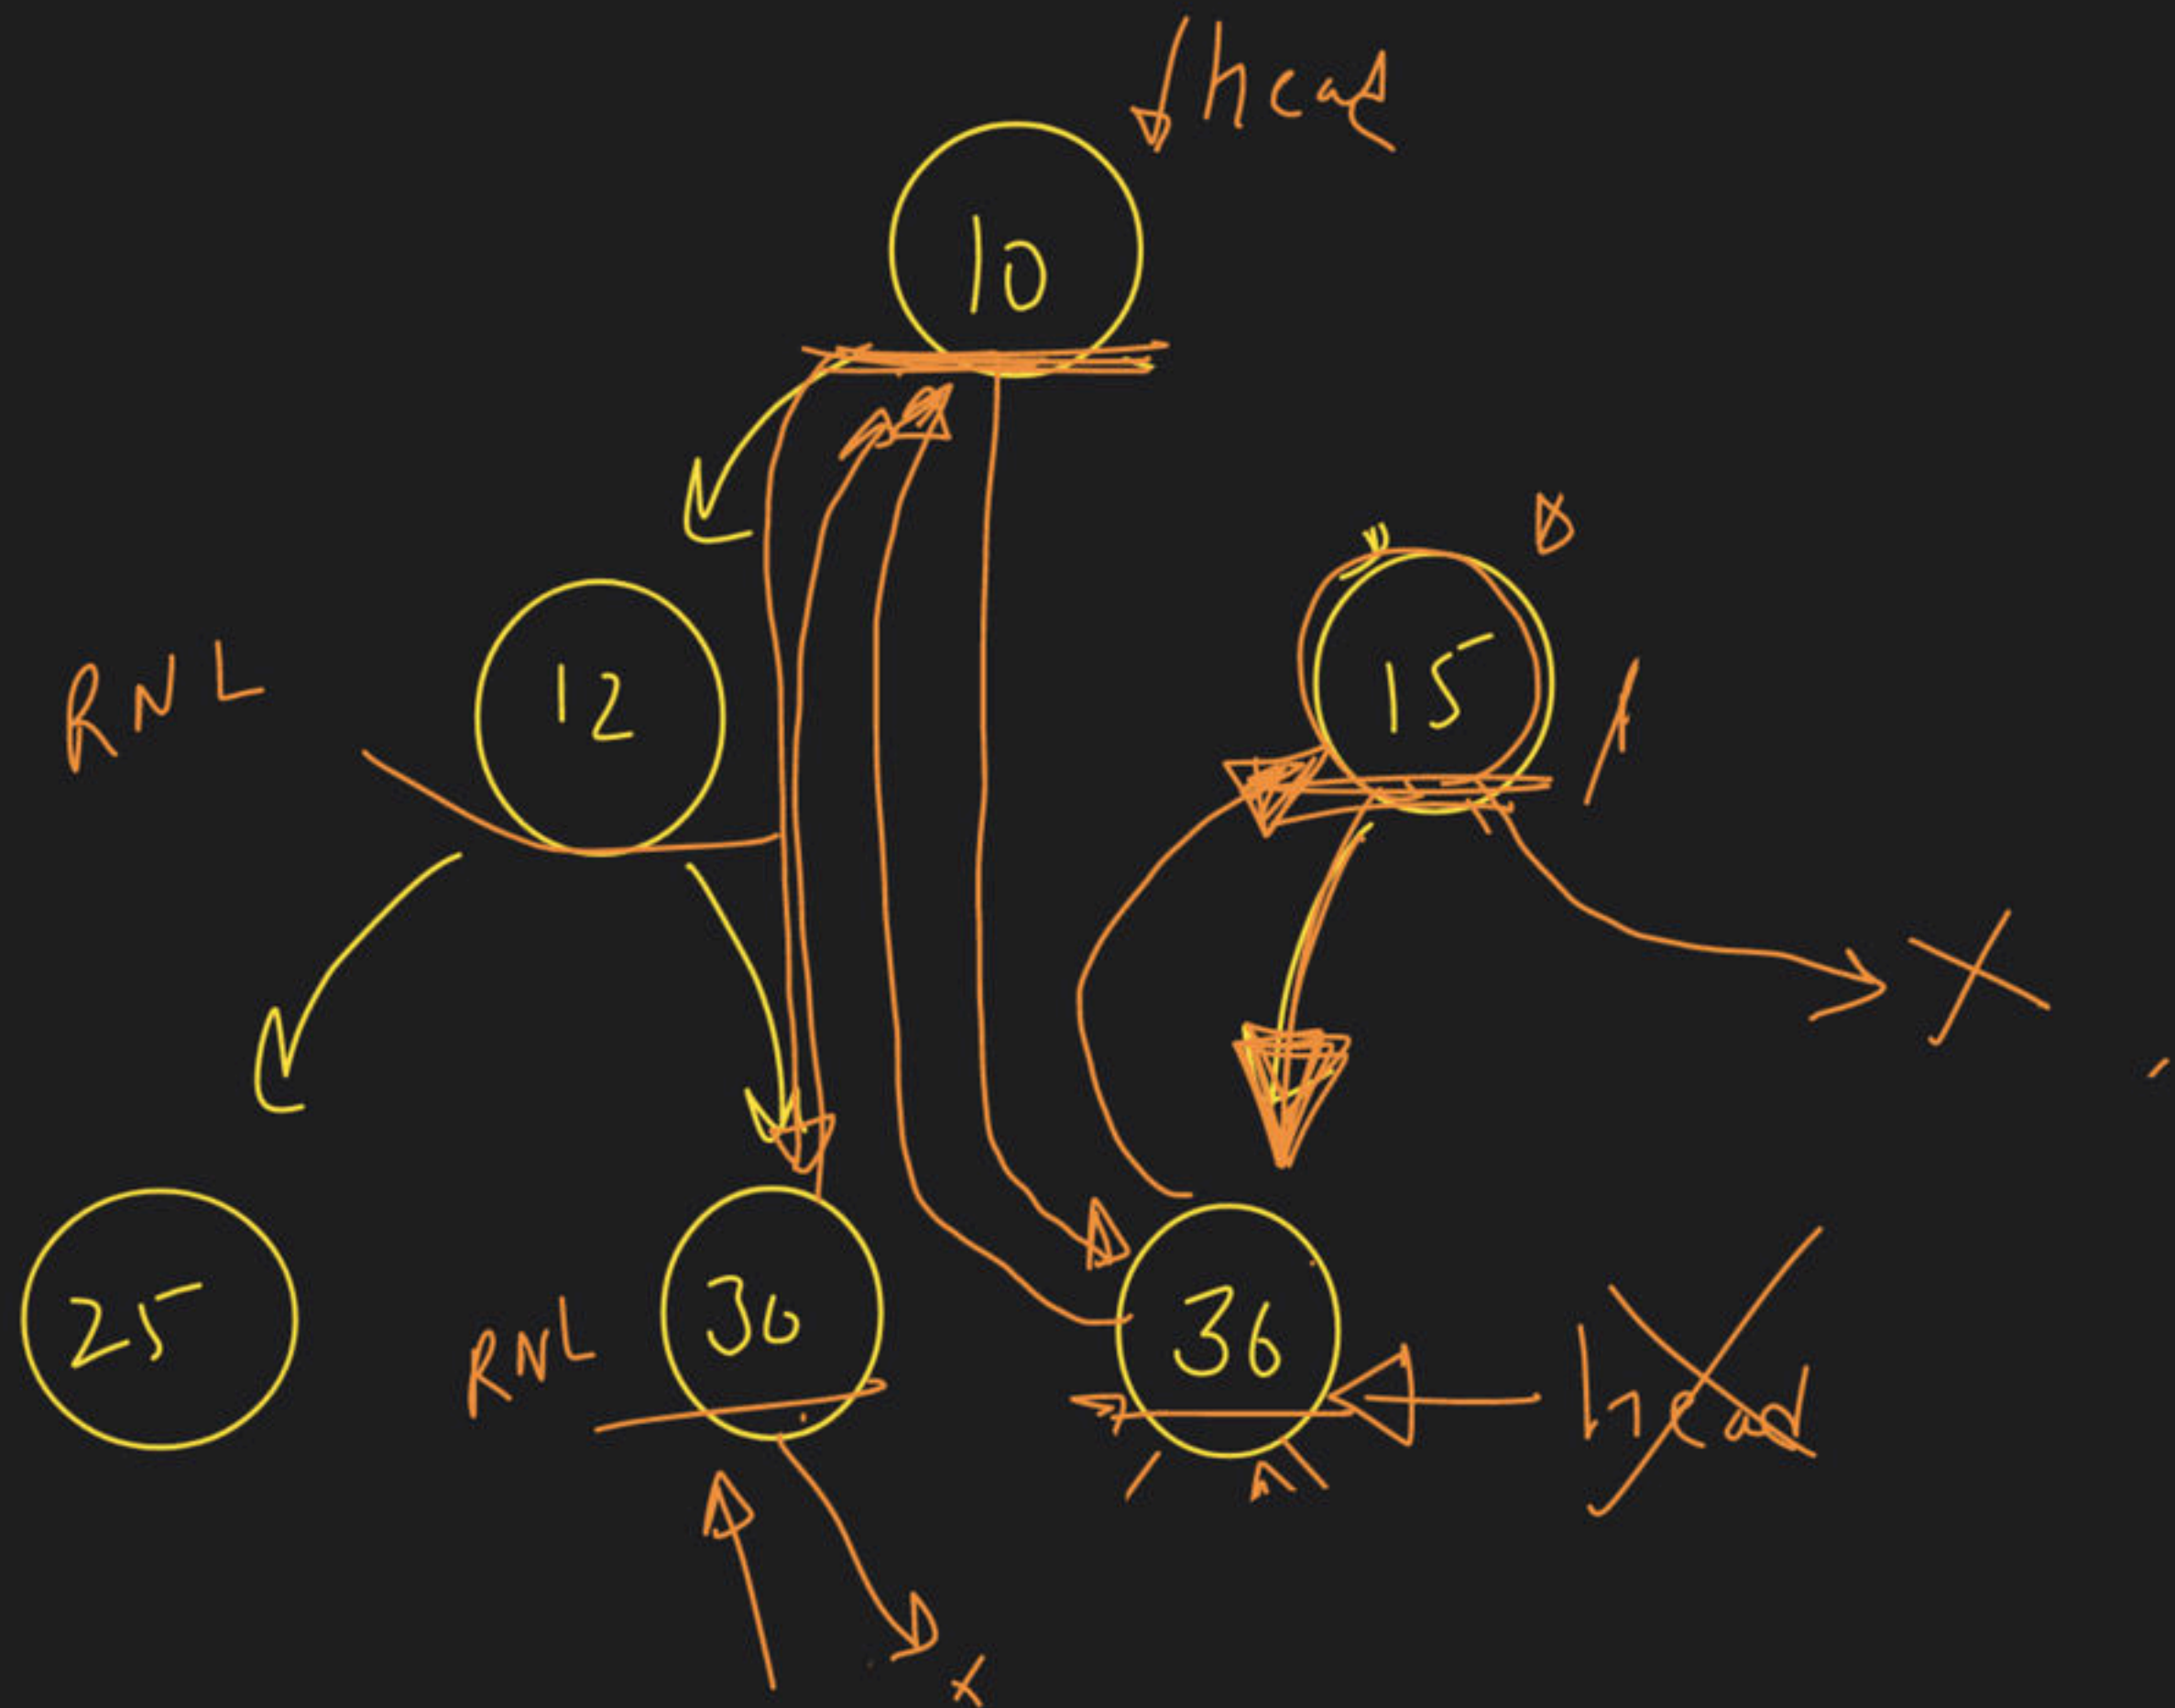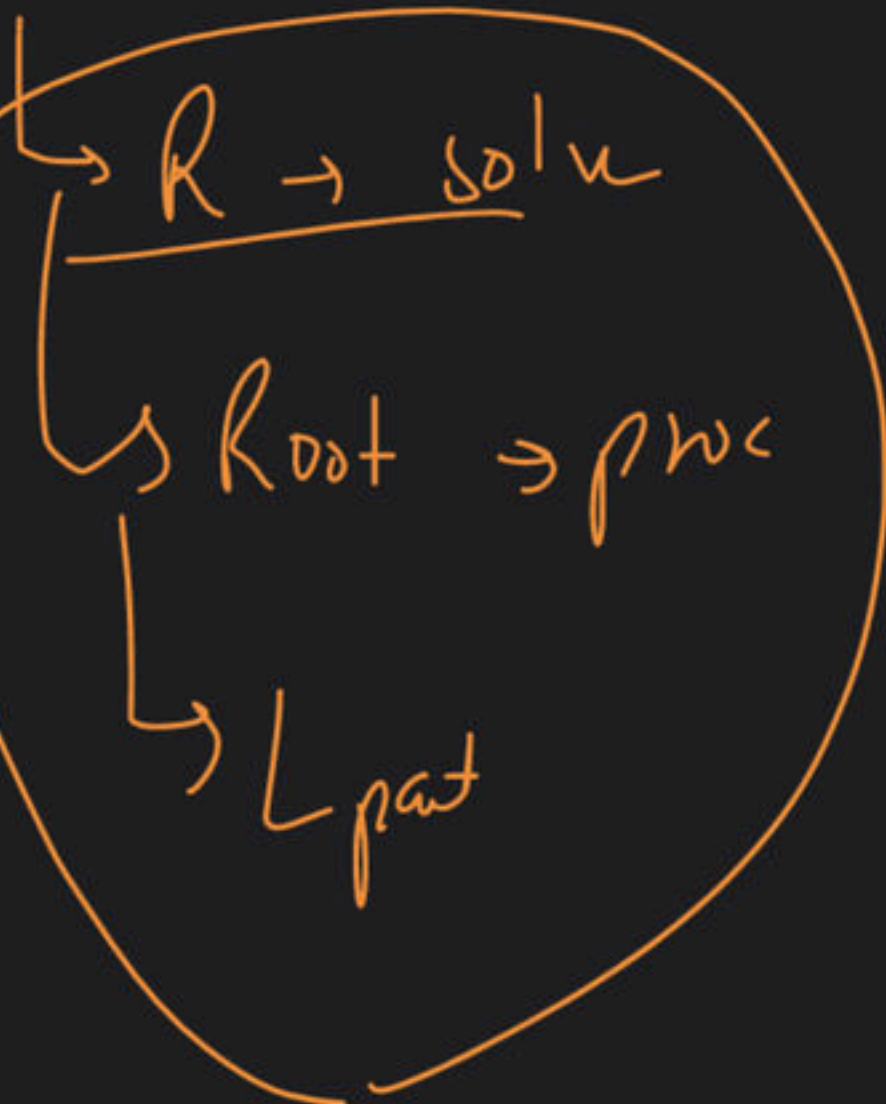

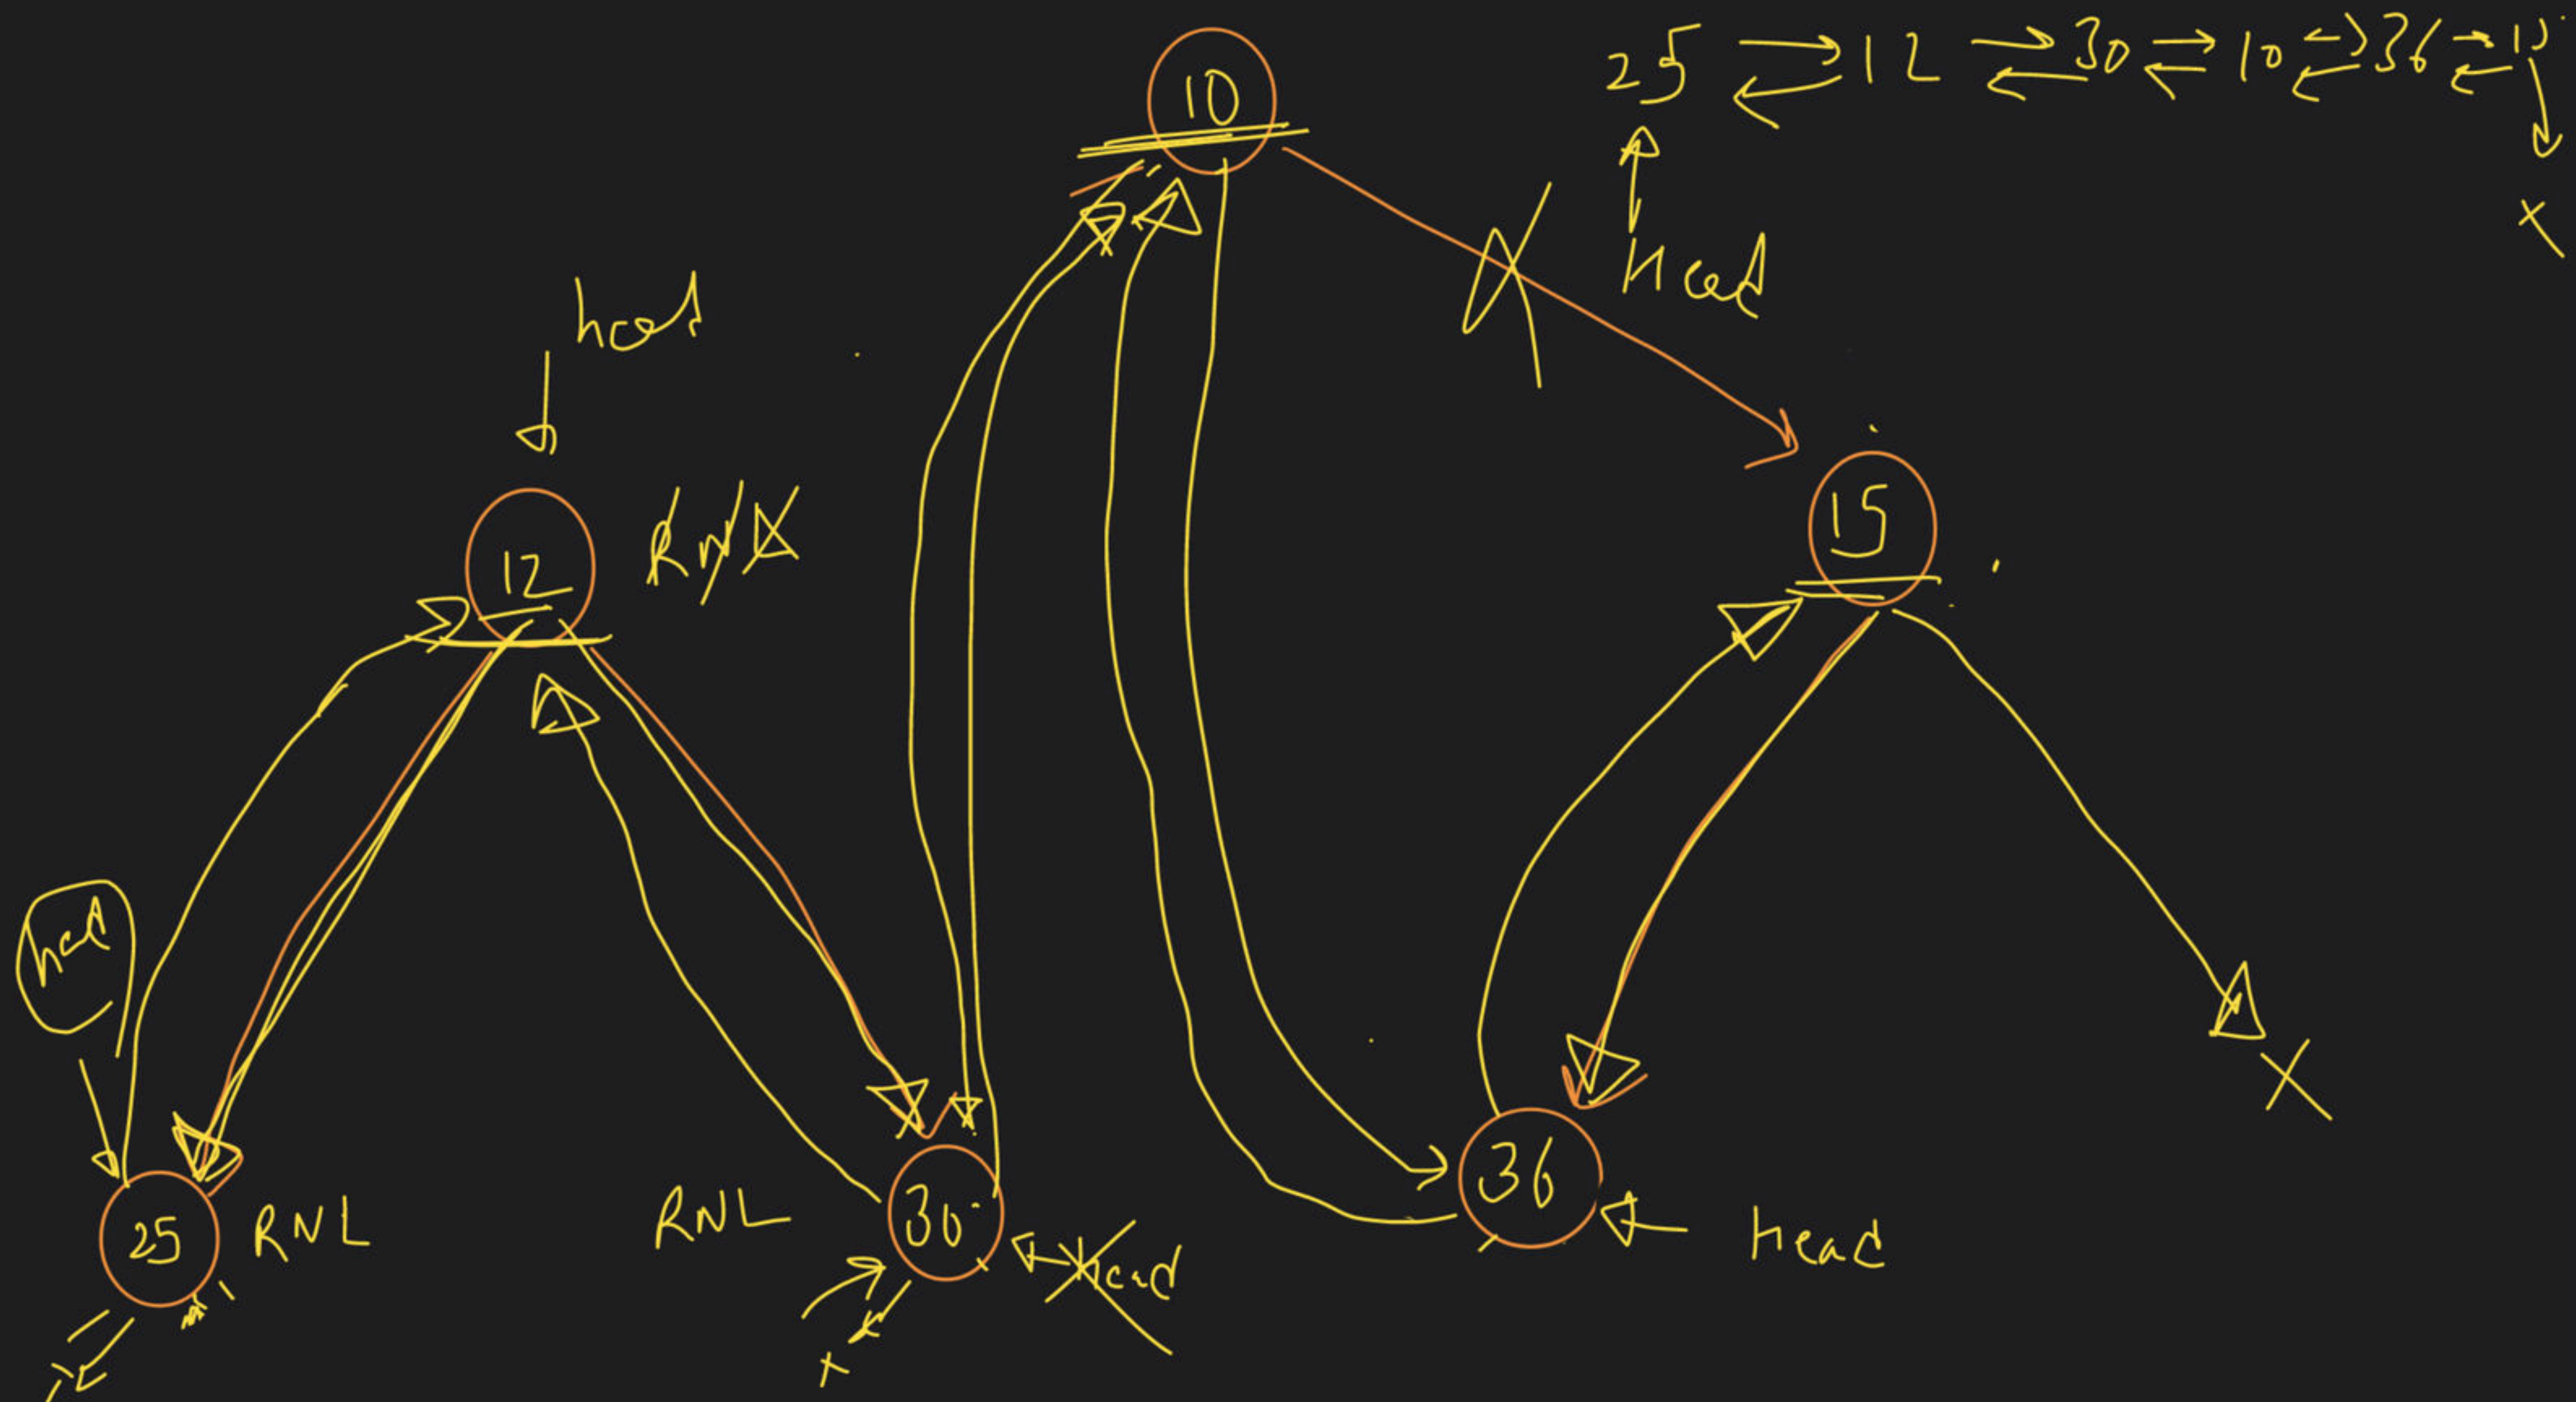


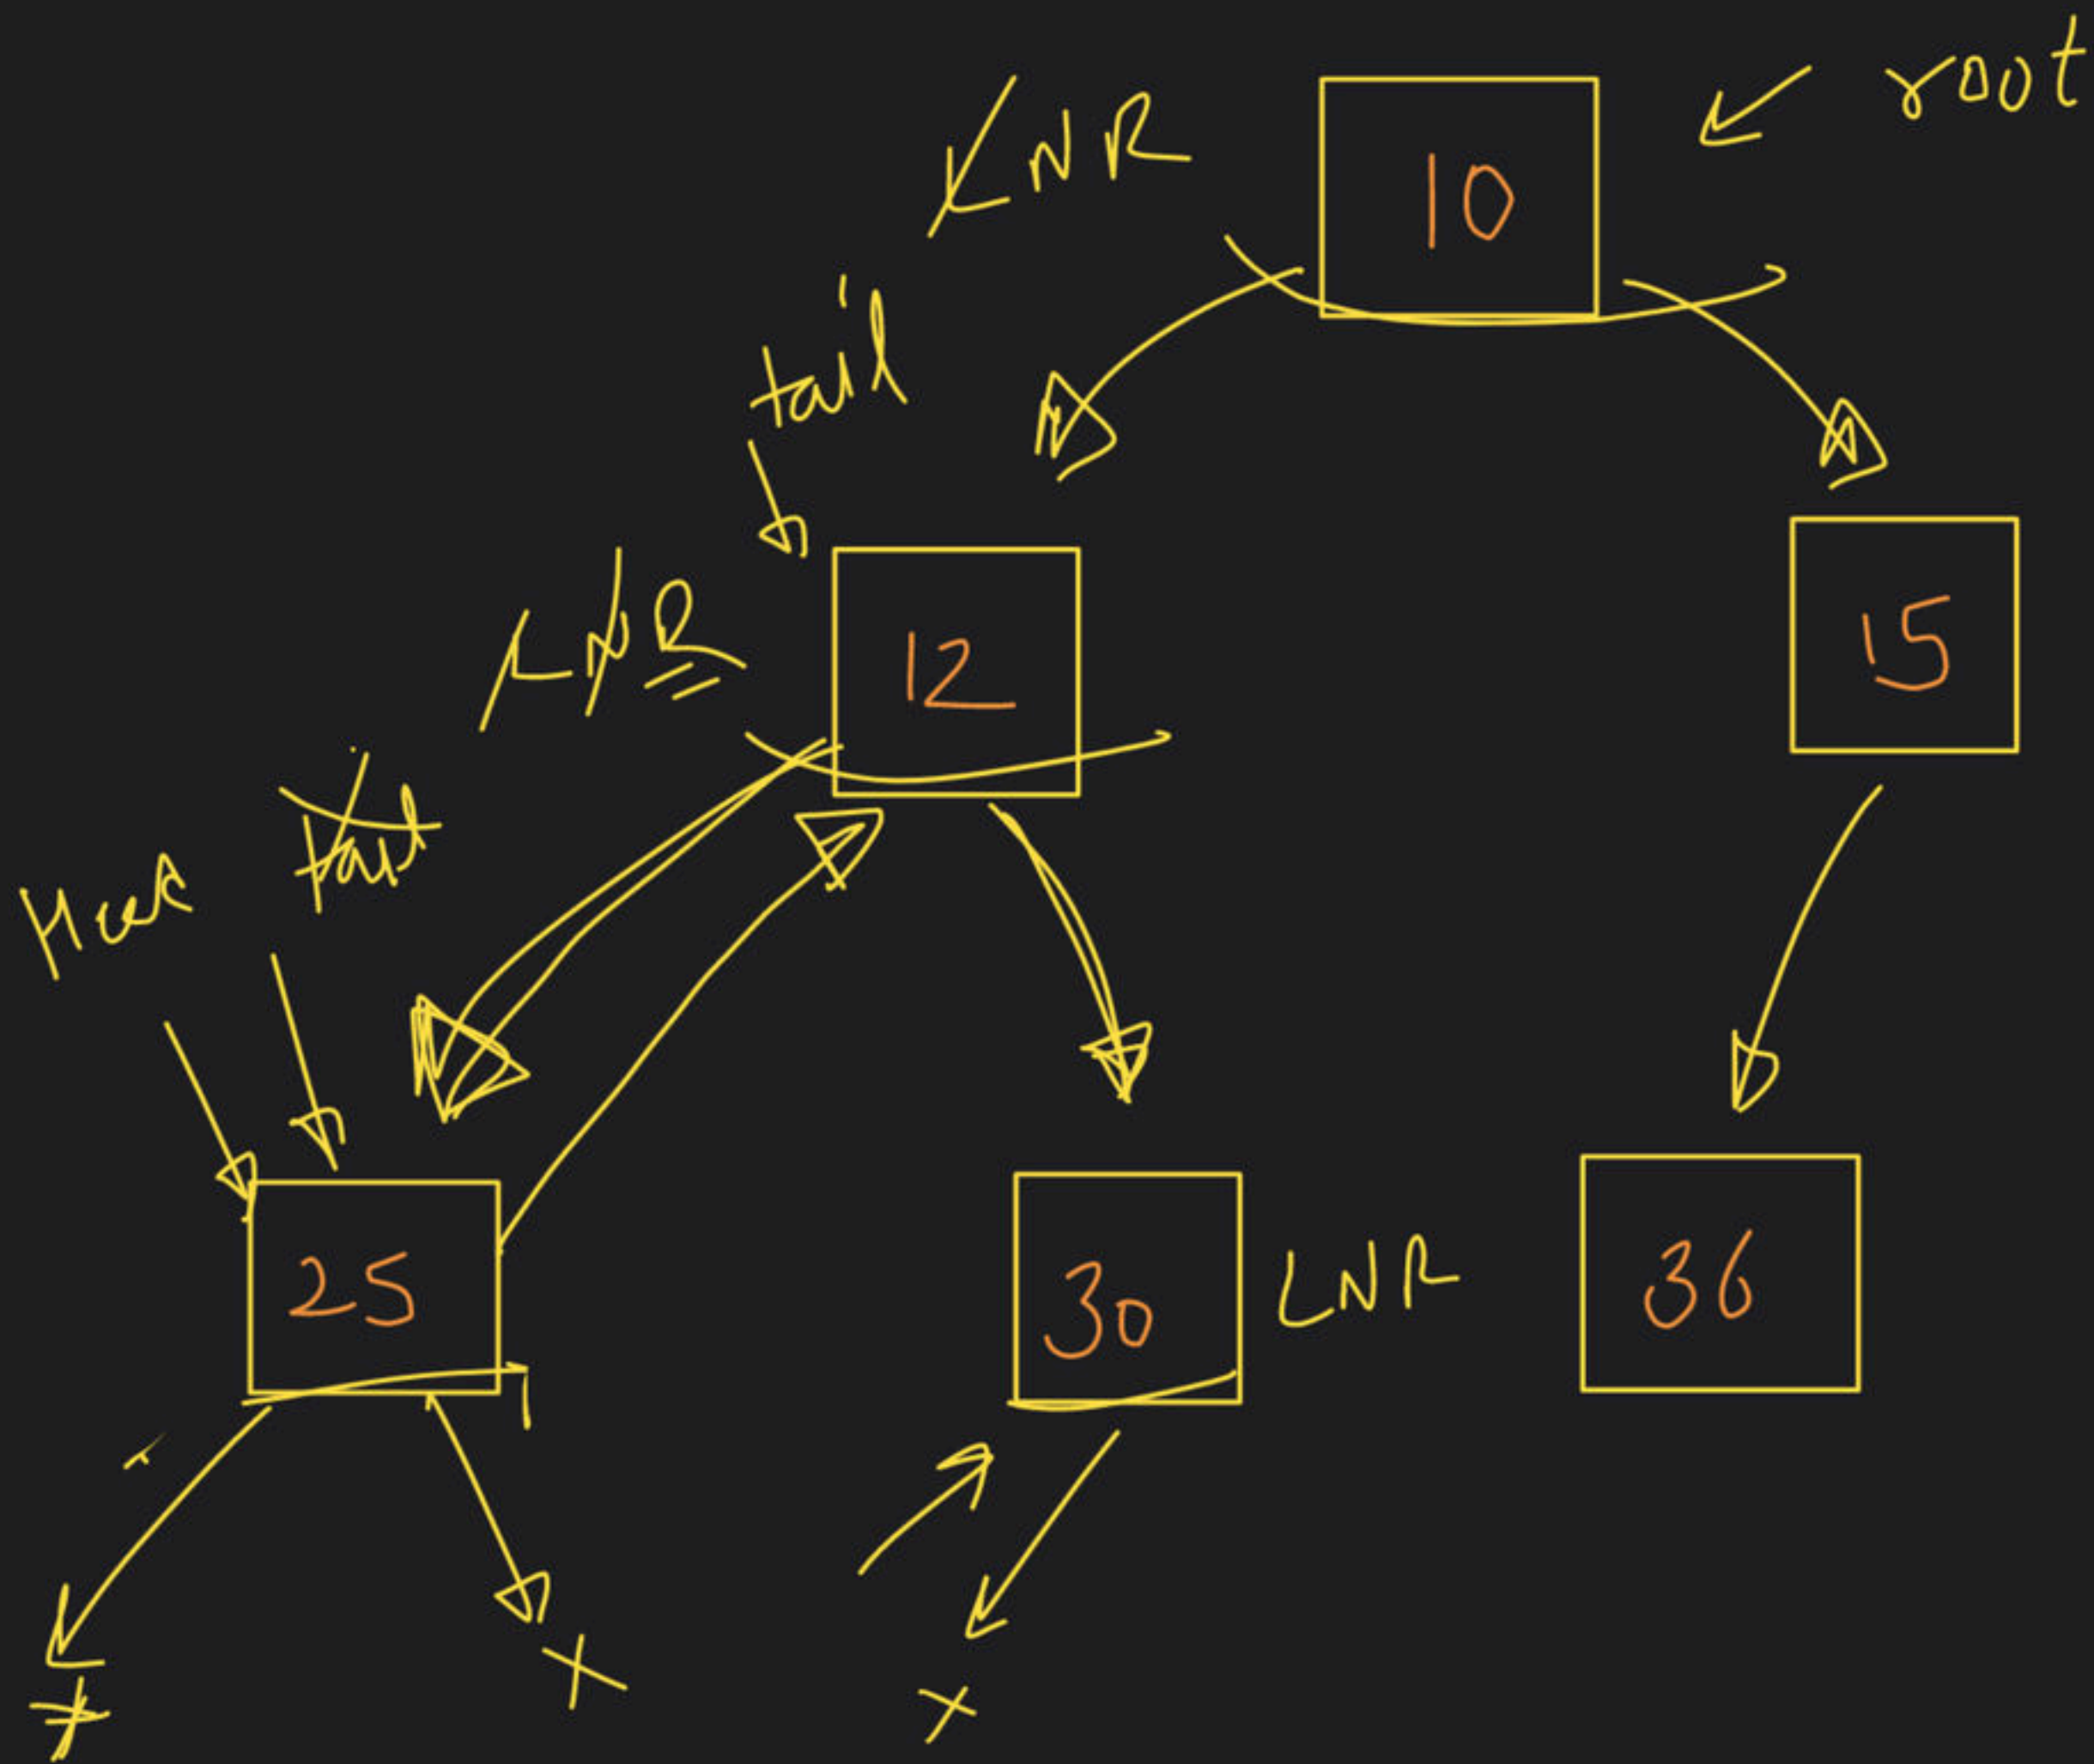

LNR

head
X
—
tail
X
—

~~LINK~~

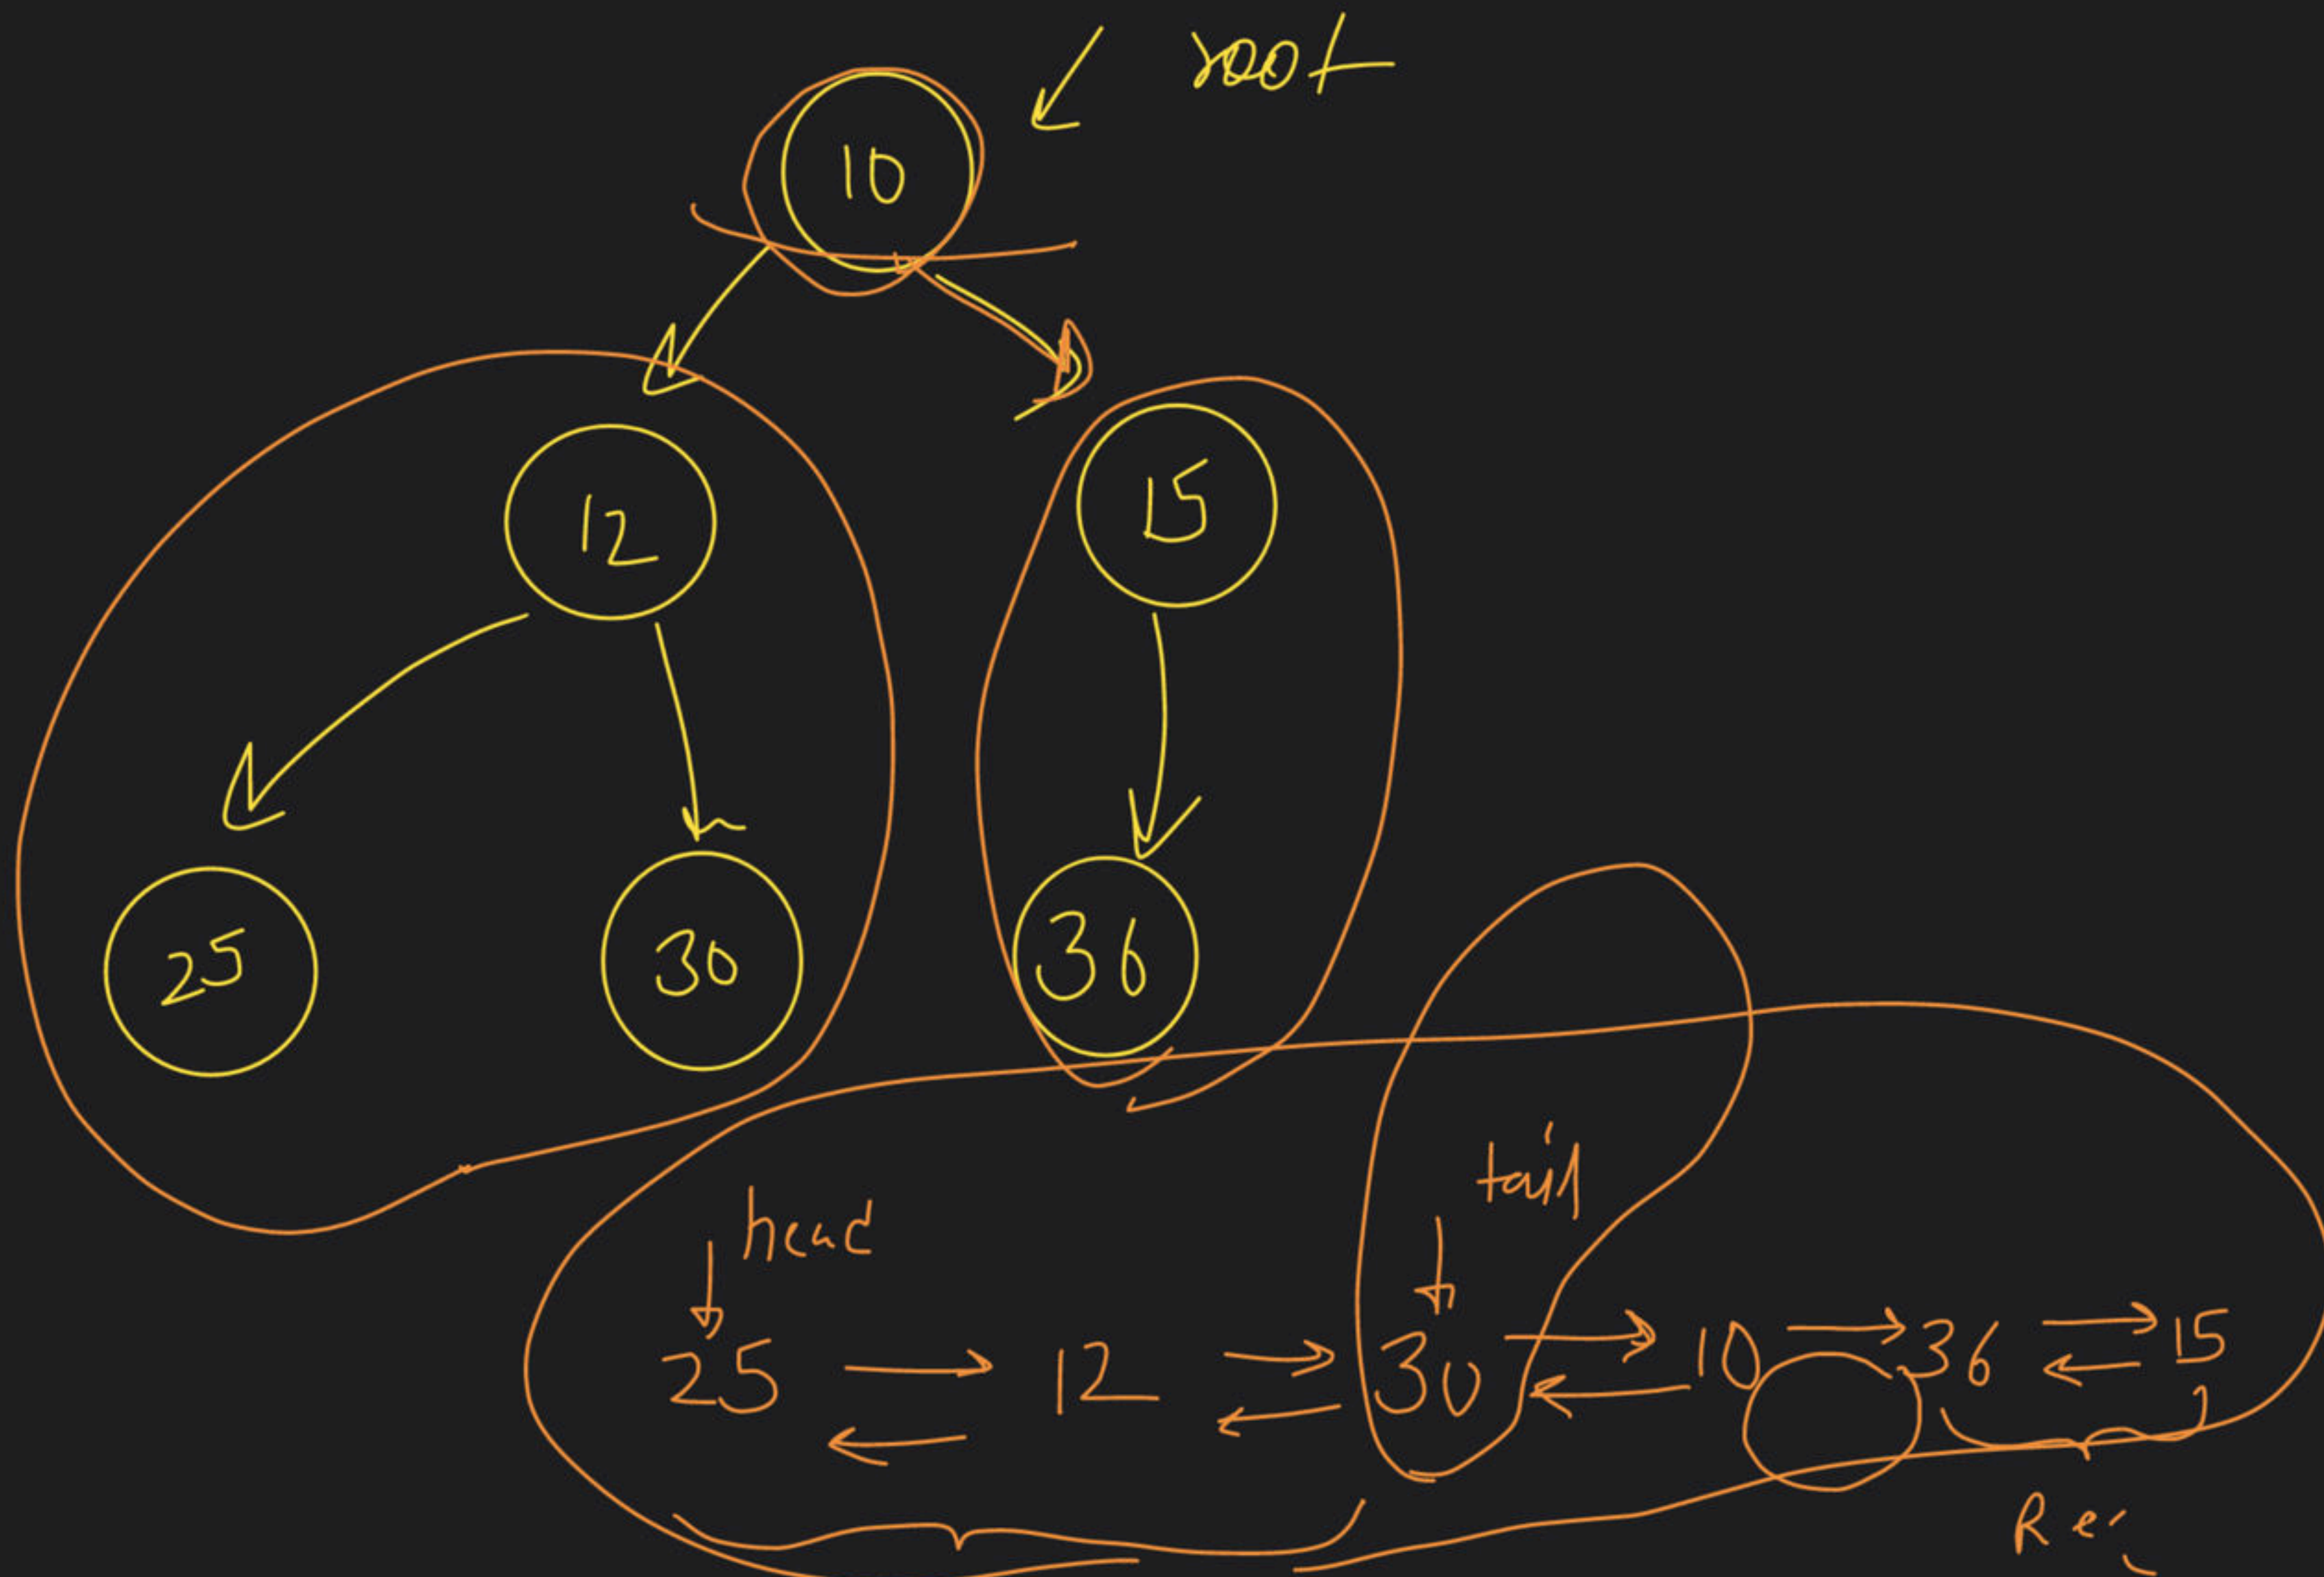


DLL



~~BST~~

BT

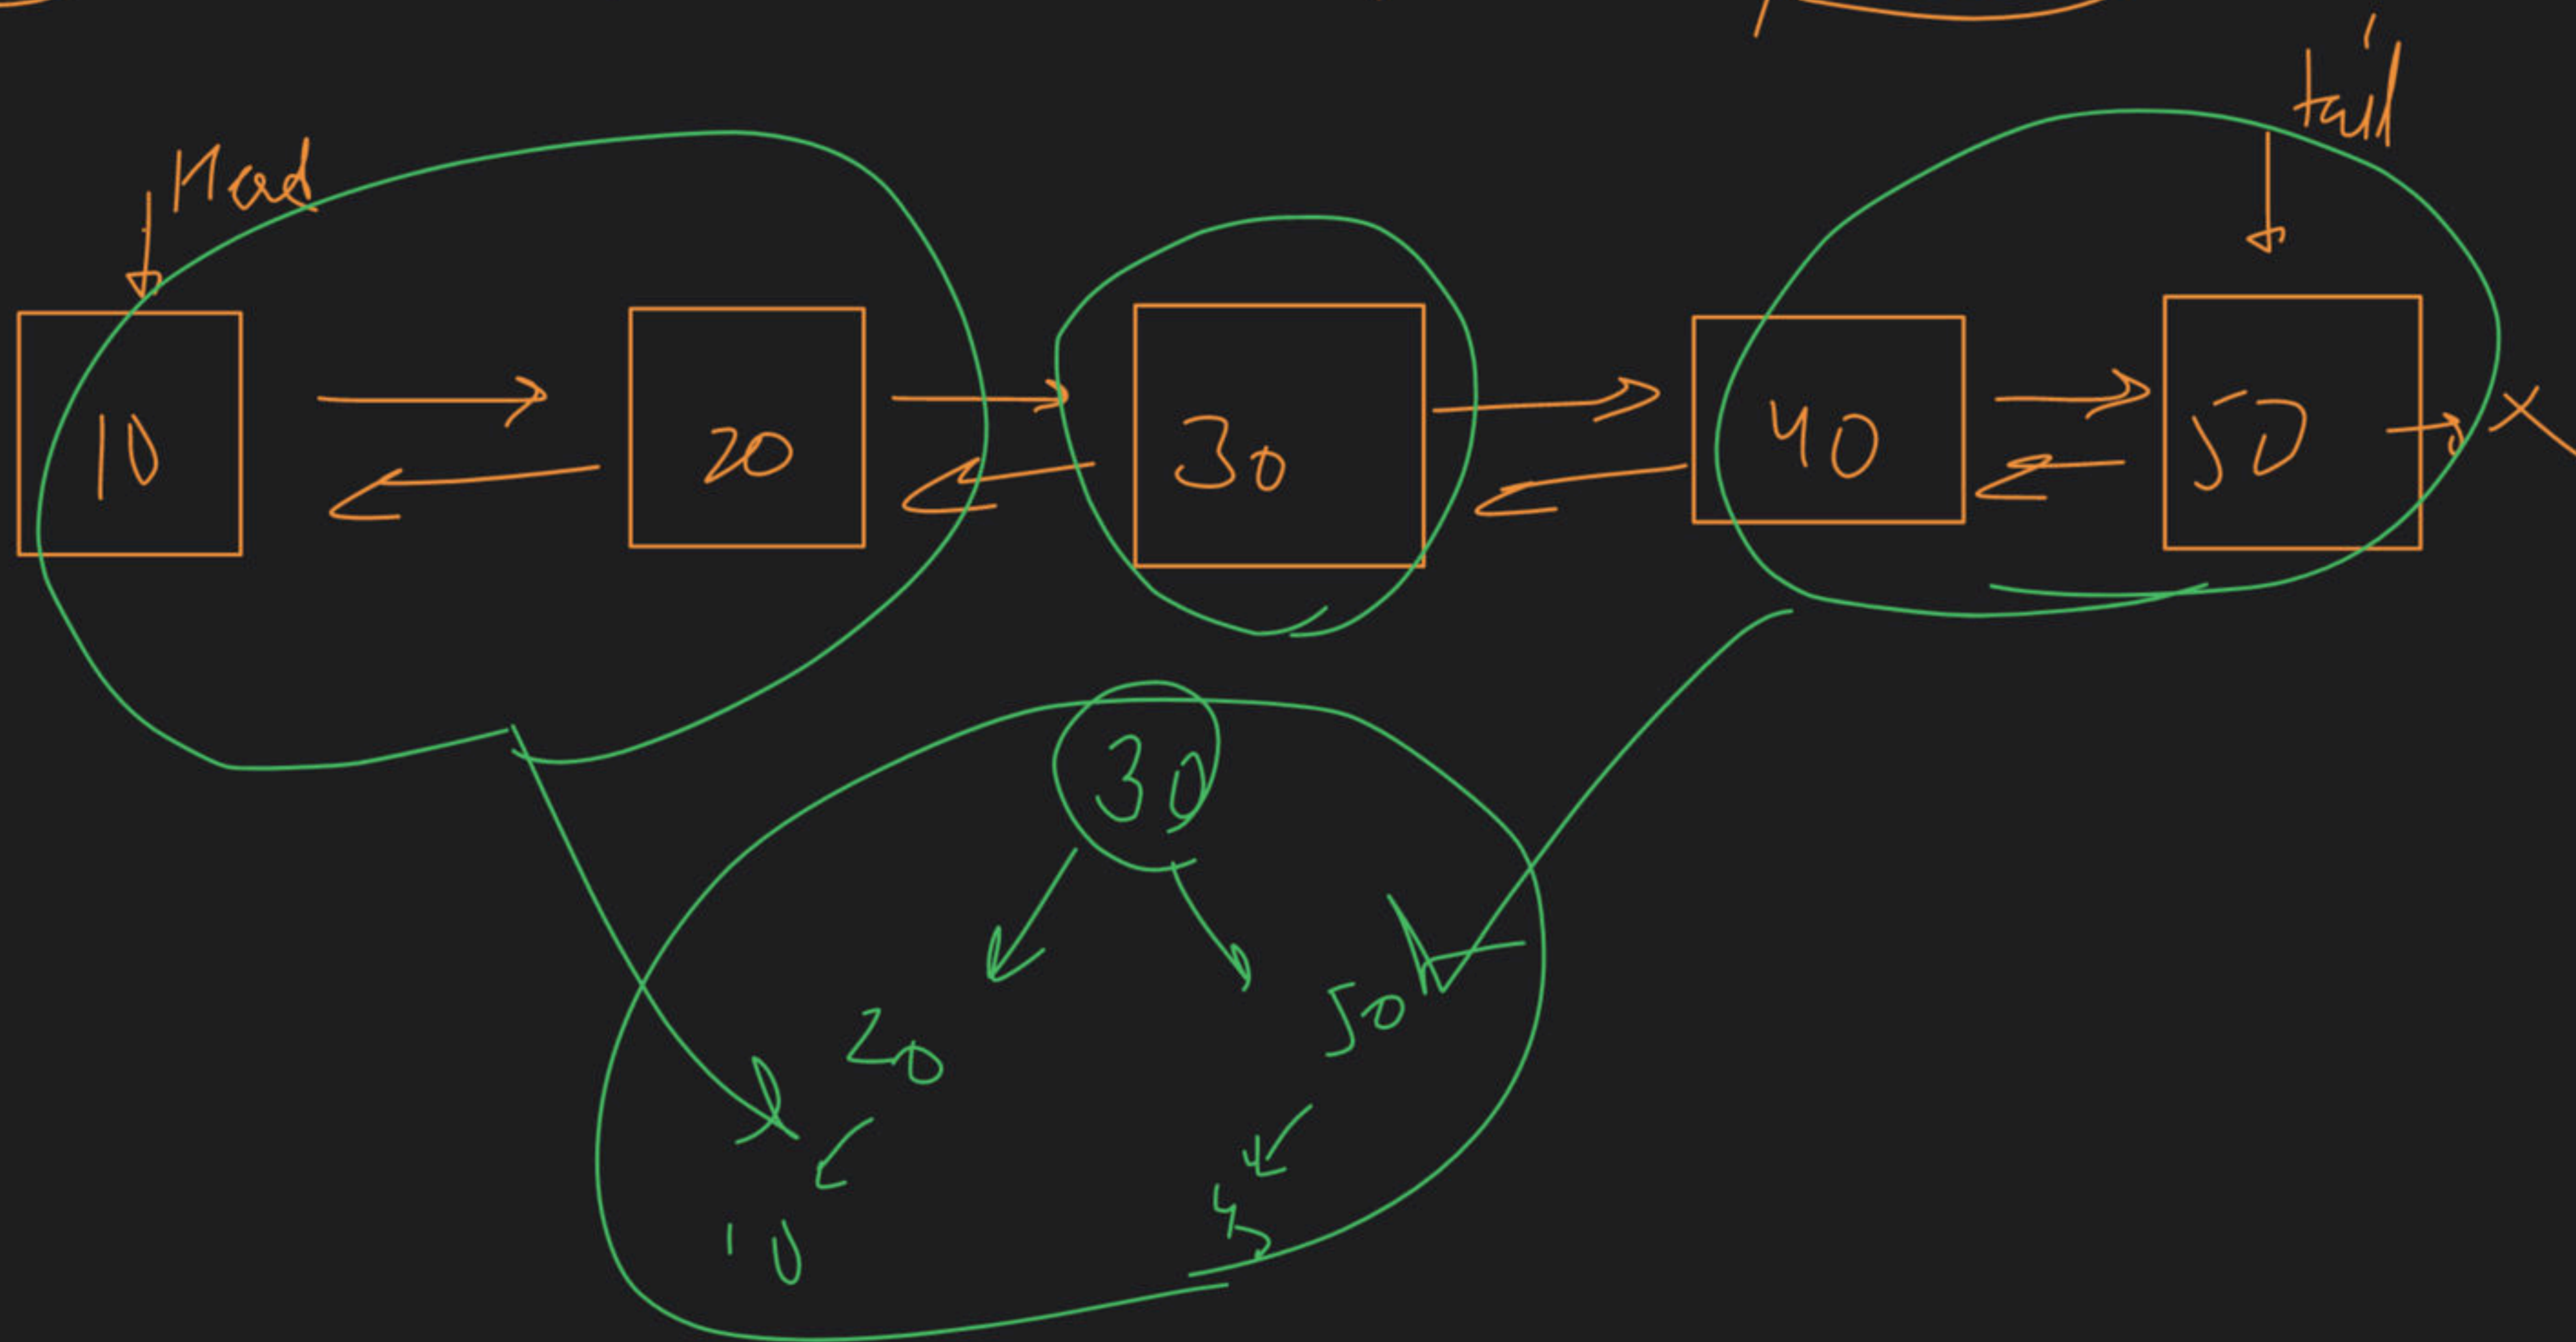




Left SubT = solve (head, 2.)

Left Subtree = Solu (head, 1)

~~Left Subtree~~ = ^x Solu (head, 0)

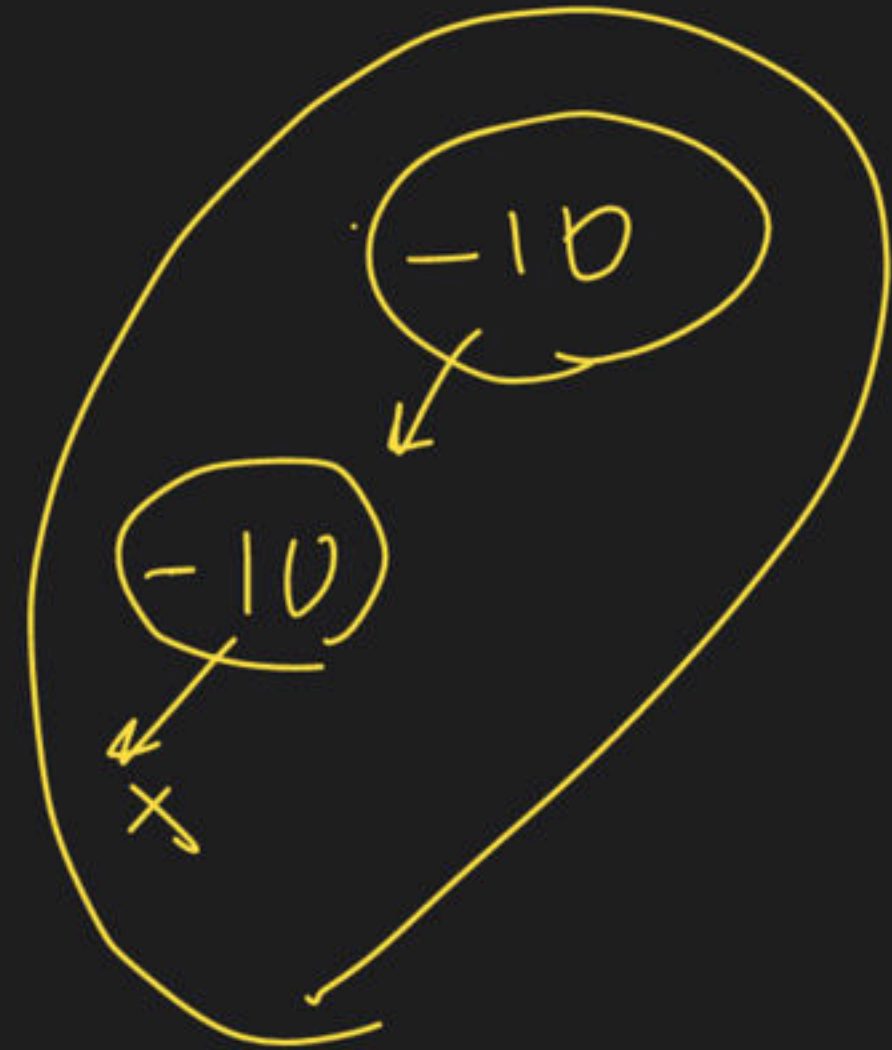

→ Last

$$1S + RV + RS$$

minVal
maxVal
is BST
sum

maxVal

left → BST

10

minVal

right → BST

5

sum

sum

20

maxVal

minVal

→ Inod

Populate inorder successor





























