

Linked List I



Lecture Flow

- Pre-requisites
- Definition and Introduction
- Types of Linked Lists
- Arrays vs Linked Lists
- Common Operations on Linked Lists
- Practice Questions



Pre-requisites

1. Arrays
2. Pointers

Definitions



Linked List is a linear data structure that stores value and grows dynamically

Linked List consists of nodes where each node contains a data field and a reference(link) to the next node in the list



Node

- stores the **value** and the **reference to the next node**.
- The simplest linked list example


```
class Node:
    def __init__(self, value):
        self.value = value
        self.next = None # Type: Node
```

Types of Linked List

Singly Linked List is when nodes have only next's node reference.



Doubly Linked List is when nodes have both previous and next node reference.



Why do we need linked list when we have arrays?



Why Linked List when you have Arrays?

- Arrays by default **don't grow** dynamically
- **Inserting** in the **middle** of an array is **costly**
- **Removing** elements from the **middle** of array is **costly**

Arrays vs Linked List

Array	Linked List
Fixed size	Dynamic size
Insertions and Deletions are inefficient	Insertions and Deletions are efficient
Random access	No random access
Possible waste of memory	No waste of memory
Sequential access is faster	Sequential access is slow

Common Operations on Linked List

Traversing a Linked List

- **Start with the head** of the list. Access the content of the head node if it is not null
- Go to the **next node(if exists)** and access the node information
- **Continue until no more nodes** (that is, you have reached the last node)

Problem

Write a function that returns an array representation of a given linked list.

```
a = Node(1)
```

```
b = Node(2)
```

```
c = Node(3)
```

```
a.next = b
```

```
b.next = c
```



[1, 2, 3]


Implementation

```
def convertToArray(self, head) -> list:  
  
    array = []  
  
    currentNode = head  
  
    while currentNode:  
        array.append(currentNode.val)  
        currentNode = currentNode.next  
  
    return array
```

Inserting a node in linked list

Insert at the beginning

- If list is empty
 - make new node the head of the list
- Otherwise
 - connect new node to the current head
 - make new node the head of the list.


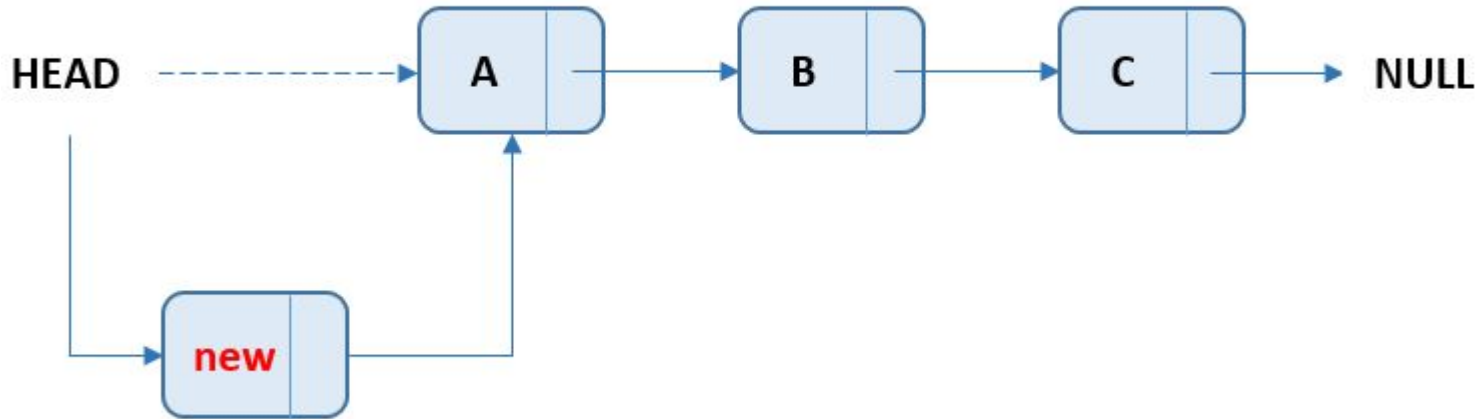


Implementation

```
def insert(self, head, new_data):  
    # if head is already None  
    if not head:  
        return Node(new_data)  
    # Put in the data in a new node  
    new_node = Node(new_data)  
    # Make next of new Node as head  
    new_node.next = head  
    # Move the head to point to new Node  
    head = new_node  
    return head
```

Insert at any position

- Find the insert position and the previous node
- And then make the next of new node as the next of previous node
- Finally, make the next of the previous node the new node

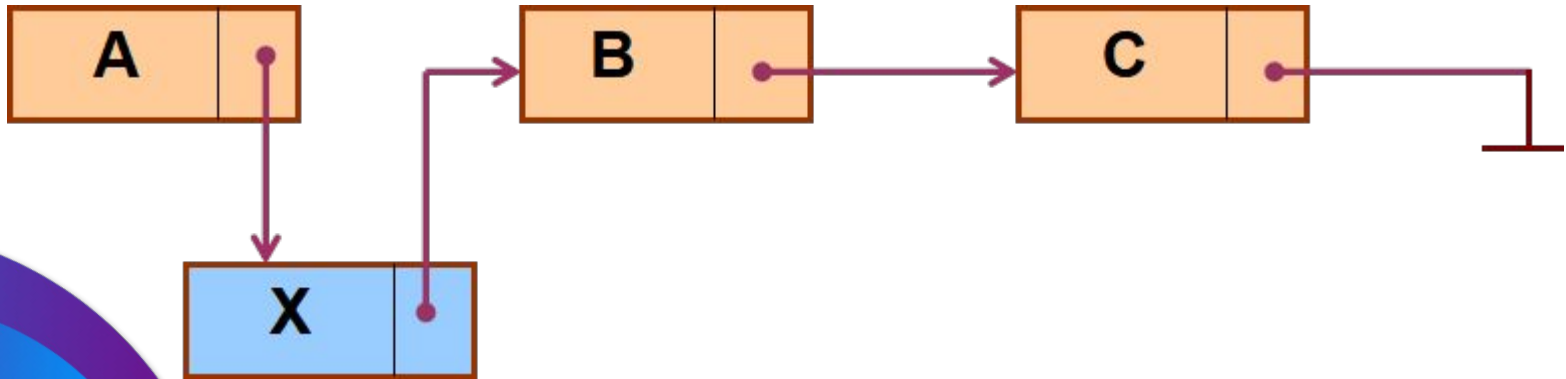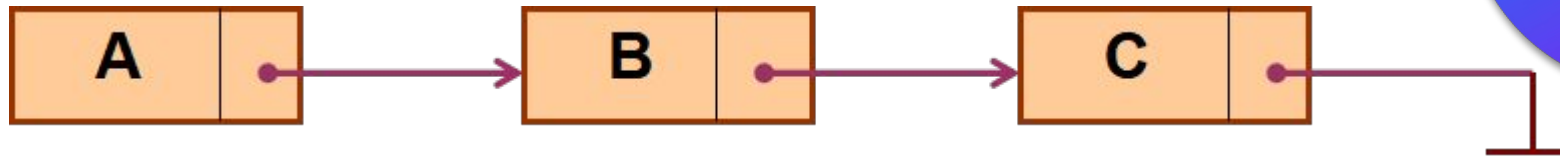

Implementation

```
def insert(self, head, new_data, prev_node):  
  
    # Put in the data  
  
    new_node = Node(new_data)  
  
    # Make next of new Node as next of prev_node  
  
    new_node.next = prev_node.next  
  
    # make next of prev_node as new_node  
  
    prev_node.next = new_node
```



**Can we merge the two insertions into one
function?**

How?





Yes, we can use Dummy Node before the head.


Dummy Node

- is a node that points to the head of a linked list which will be discarded at the end
- When to use a Dummy Node?
 - if you are potentially modifying the head of linked list, use dummy node

Delete a node from the linked list

Delete a node at the beginning

- Make the **second node as head**
- **Discard the memory allocated** for the first node.


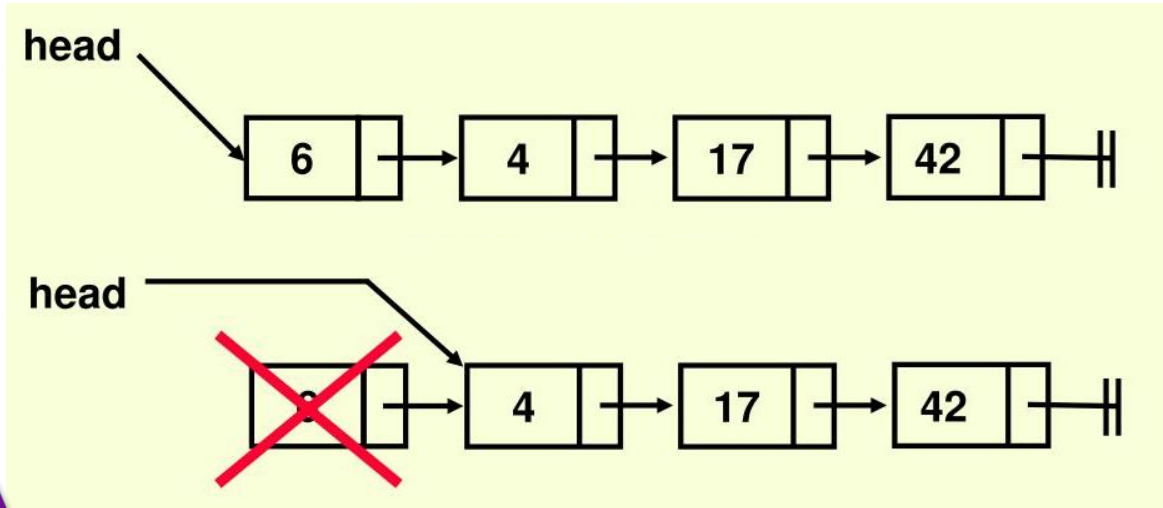


Implementation

```
def removeFirstNode(head) :  
  
    if not head:  
  
        return None  
  
    # Move the head pointer to the next node  
  
    head = head.next  
  
    return head
```

Delete a node at any position

- Find a match the node to be deleted
- Get the previous node
- Make the previous node next point to the next of the deleted node

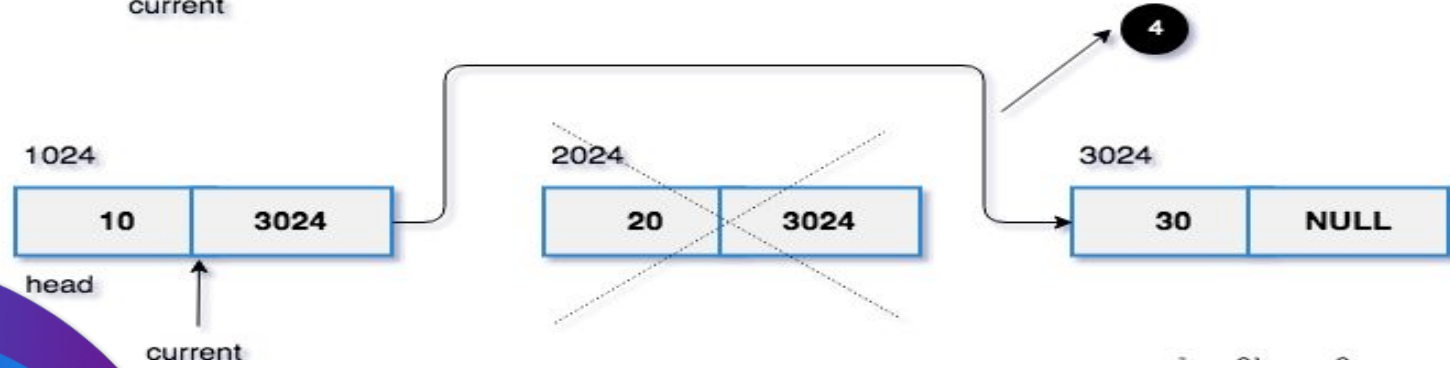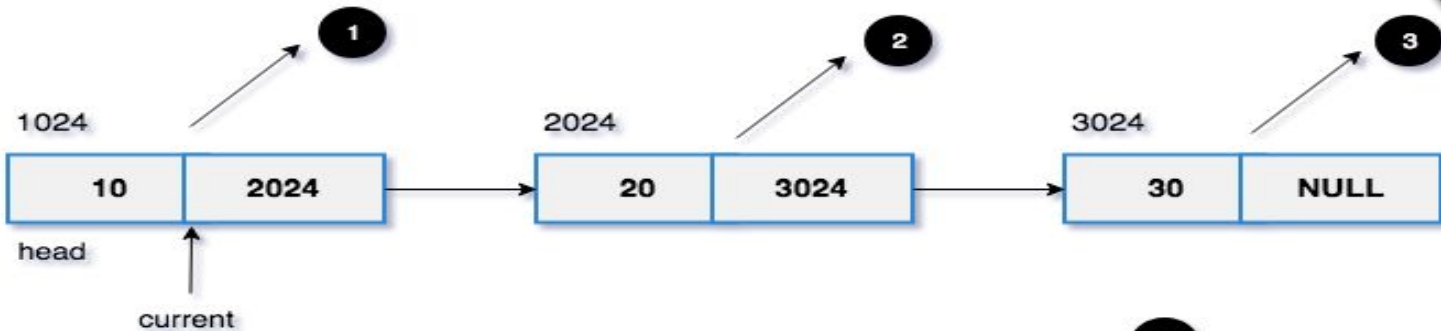

Implementation

```
def deleteNodeAtGivenPosition(self, position, head):  
    if self.head is None:  
        return  
  
    index = 0  
    current = head  
  
    while current.next and index < position:  
        previous = current  
        current = current.next  
        index += 1  
  
    previous.next = current.next
```




**Can we avoid using two approaches when
we are deleting nodes? How?**



Yes again! We can use Dummy Node.



Checkpoint - [Link](#)



problem

Remove Linked List Element

Linked List Class

- The LinkedList class serves as the container for the nodes.
- The `__init__` method initializes an empty linked list with a head pointing to None.

```
class LinkedList:  
    def __init__(self):  
        self.head = None
```

Pair Programming

Design Linked List (implement deleteAtIndex)

Resources

- [Leetcode Explore Card](#): has excellent track path with good explanations
- Leetcode Solution ([Find the Duplicate Number](#)) : has good explanation about Floyd's cycle detection algorithm with good simulation
- Elements of Programming Interview book: has a very good Linked List Problems set

A background image of a vast, hazy mountain range. The mountains are layered, with the closest ones in dark blue and the farthest ones fading into a light blue mist. A small, green valley with a winding road is visible in the lower-left foreground.

If you fell down
yesterday, stand
up today.

H. G. Wells