



Winners with sink and gate compute the class late

The middle of a random-init network is already class-decodable, also in the final network; the scale-only winner keeps a random-like profile. kdyck arms. Probe: class token + mean patch token, 20 training / 10 validation images per class. Lens: final norm + head on the class token.


probe, epoch 29

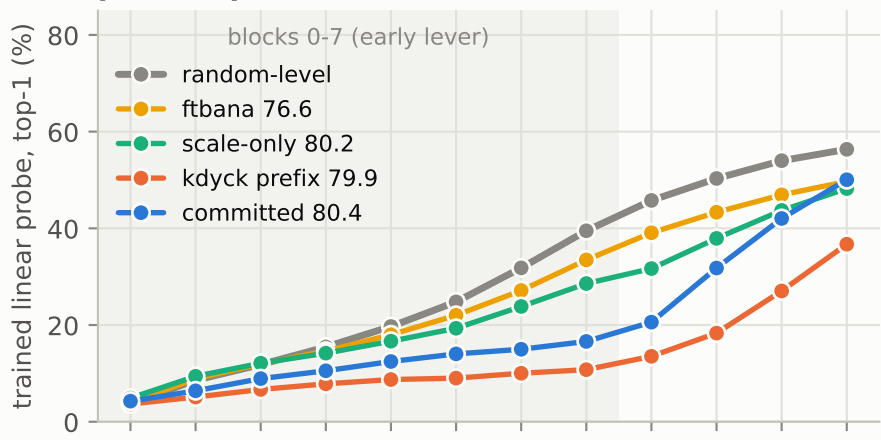

probe, epoch 299

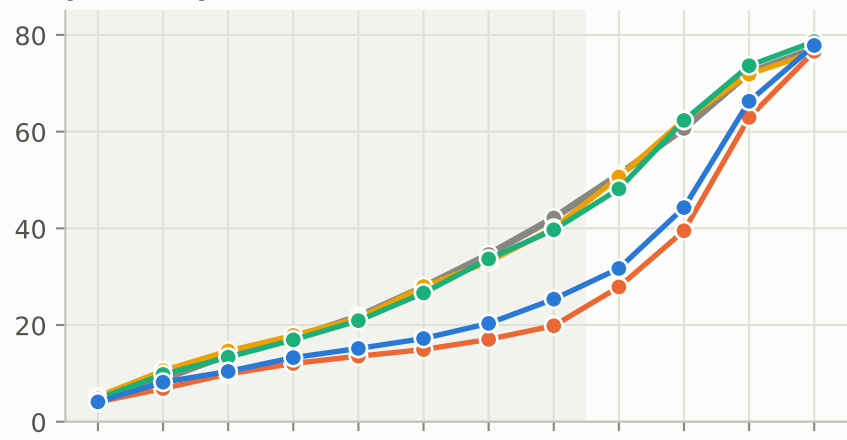

lens, epoch 29

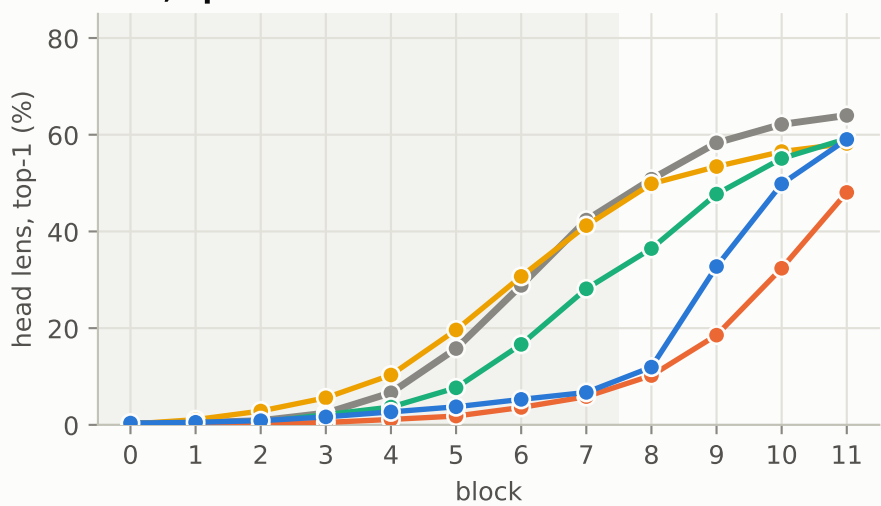

lens, epoch 299

