UKAS QUALITY MANAGEMENT 005

SYSTEM CERTIFICATION ISO 9001:2008 SGS

ACROW

Formwork Technology

Acrow Tech Form System

ACROW MISR Provides Full Site Service Based On More Than 35 Years Experience In The Field

ACROW
Formwork Technology

Contents

Product Description	2
Forming walls with Tech-Form	3
Tech Form Panels	4
Wall Formwork Accessories	5
Length Adjustment	7
Inter-Panel Connection	8
Wall Offsets	10
T - Junctions	11
DW 16 Tie System	12
Extension Units	13
Column Formwork	17
With Tech-Form Column Panels	19
Components	20

ACROW
Formwork Technology

Product Description

Being one of the largest formwork and scaffolding companies in Egypt, We are introducing the Tech- form panel system. The tech-form panel system with its' highly engineered steel profile is specifically designed to suit a variety of concrete walls and columns applications adapting it to any structure.

The panels are manufactured and designed to be more durable, economical with high capacity and flexibility that ensures higher cost efficiency and faster workflow. Moreover, the ingenious panel size-grid makes for optimum adaptability for different construction site situations. Finally, the superb powder quality coating finishing provides the system with a unique protection which results in a longer life span.

Forming Walls With Tech-Form

Acrow Tech-form panel system is simply a panel formwork that is used for forming the walls and columns with different dimensions. It is one of the best systems to be used in case of large-area crane-assisted gang-forming.Tech-form panel system is a versatile and flexible system that eases the formwork for any layout. The Tech-form panels can be used both vertically and horizontally. However, it requires only one part for all panel connections. In addition, the Tech-form conti-lock (TFCL) allows compensation up to 10 cm and height extensions up to 4.50 m without any need for additional bracing.

Permitted Fresh-concrete pressure: 80 KN/m²
Concrete Density: 25 KN/m²
Hydrostatic pour height: 3.20 m

Accessories such as tech-form stop end tie and compensation waler are used to make solution for fast and safe stop-ends. Moreover, handrail posts and scaffolding brackets provide safe pouring conditions.

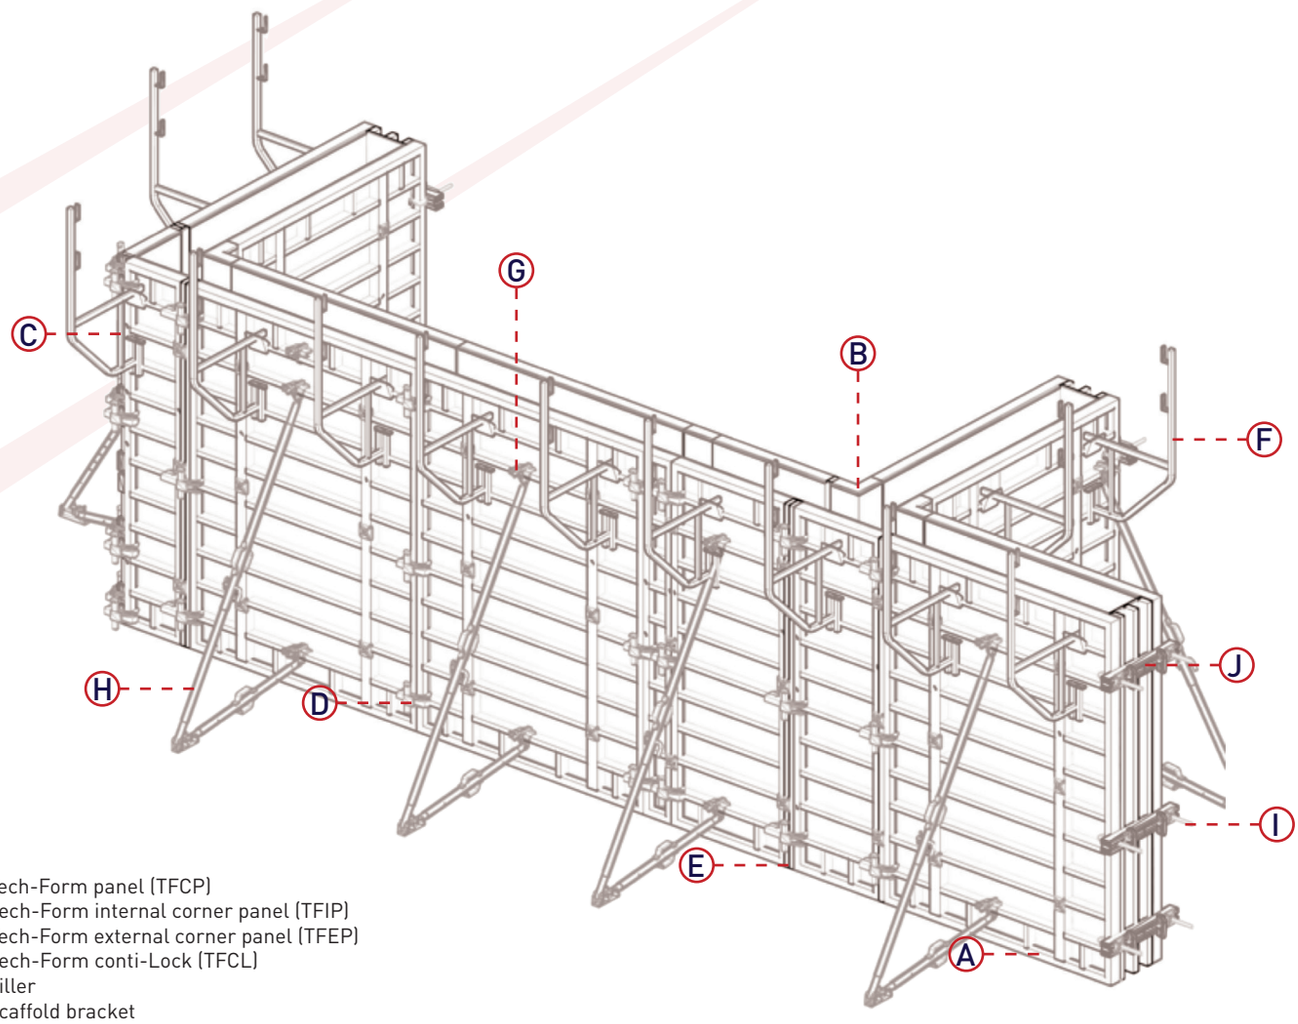

A- Tech-Form panel (TFCP)
B- Tech-Form internal corner panel (TFIP)
C- Tech-Form external corner panel (TFEP)
D- Tech-Form conti-Lock (TFCL)
E- Filler
F- Scaffold bracket
G- Tech-Form Shore connector
H- Push Pull Props
I- Tech-Form Stop end tie
J- Tech-Form Compensation waler

Tech Form Panels

HEIGHT [cm]	WIDTH [cm] 240	120	90	60	30	TFEC	TFIC
330	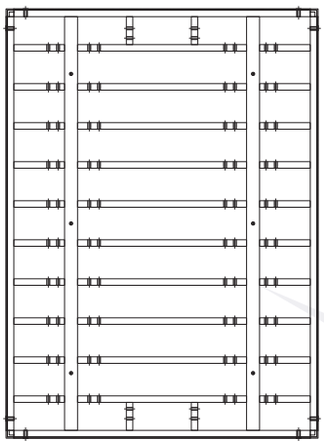	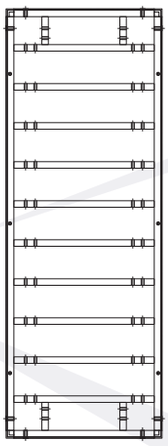					
240							
120							
90							
60							

Wall Formwork Accessories

Tech-Form Stop End Tie

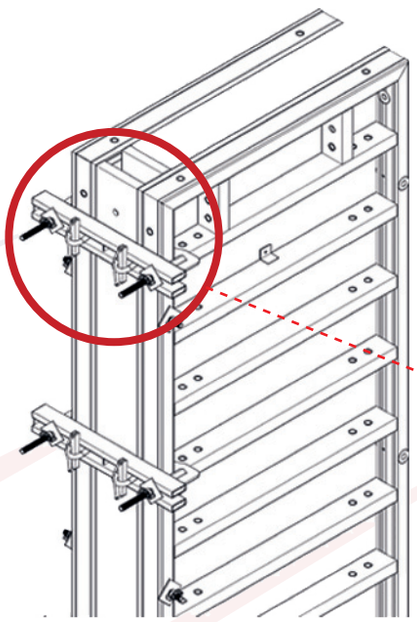

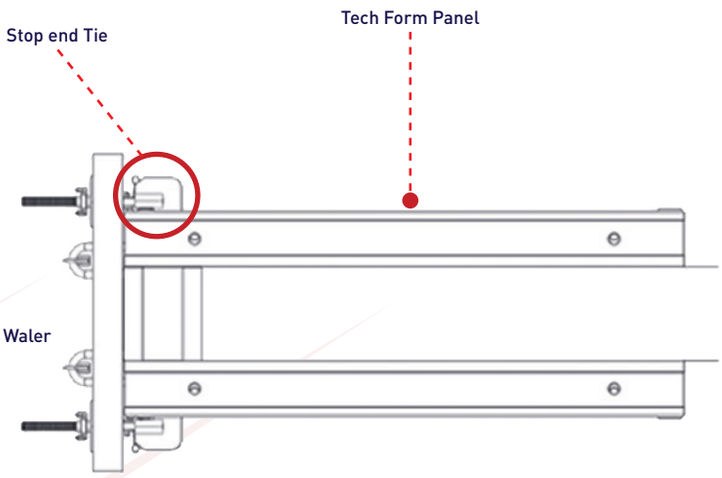

Scaffold Bracket

- Since safety during concreting is a must, the wide working access bracket enables for a safe and faster working environment with an allowable load of 150 KG/m².

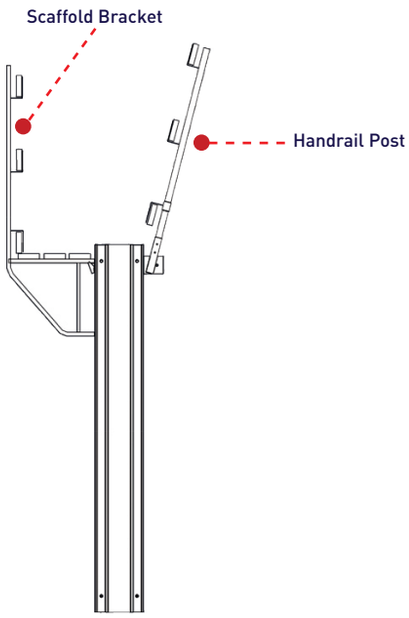

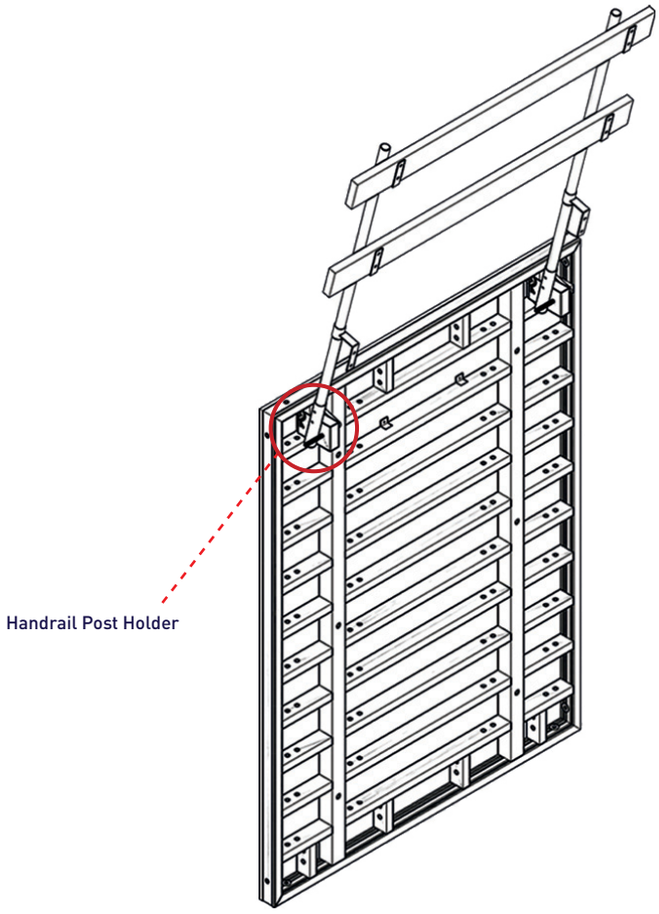

Wall Formwork Accessories

Tech-Form clamp (tfc)



- TFC primarily creates fast, self-aligning and tension proof joints between panels. EFC doesn't require the use of any other internal panel connections; it is simply the non-loose parts TFC and a hammer to perform the job.

Tech-Form Shore connector



- Tech-form shore connector connects the push pull props to the Tech-form panels. In addition, it can be fixed either to the horizontal or the vertical ribs of the panels providing the system with much more flexibility.

Handrail Post Holder



- The handrail post holder connects the handrail post to the negative side to the wall where no walkway will be required.

Tech-Form conti-lock (tfcl)



- Accordingly, TFCL has actually the same function as the TFC. But, it has another advantage of filling closures up to 100 mm. In addition, it could be directly placed over the cross bar.

Waler stop



- The water stop is primarily used in combination with the universal waler.

Tech-Form Lifting Hook

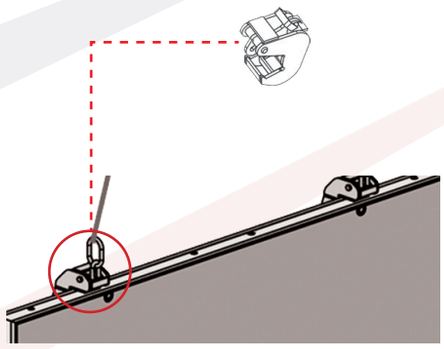

- Tech-form lifting hook enables the use of 2 units either individual panels or large gang forms (up to 20 m²) where it also ensure a safely lifting and moving (by crane) which actually results in a dramatically saving in both the time and effort. Special thanks to the self-locking system where it enable automatic hook locking after being attached to the panel. The allowable load for the eco-form lifting hook is 750 KG/ Hook and maximum of 60º between lifting chains.

Tech-Form Stop End Tie



- Tech-form stop end tie connects the compensation waler to the tech-form panel which supports the forming timber that is used as a stop end.

Tech-Form compensation waler



- Tech-form compensation waler fills in closures up to 300 mm in which it transfers the tie forces and aligns the panels at the same time. Special thanks to the movable hooking system which enables forming any closure up to this pre-defined range.

Length Adjustment

Quick and Easy Solution Up to100 mm

- Closures can be bridged easily and economically with fitting timbers. With the Tech-Form Conti-Lock, the panels are joined so that they are resistant to tensile forces, and are aligned at the same time. The TFCL is placed directly over the cross profile.

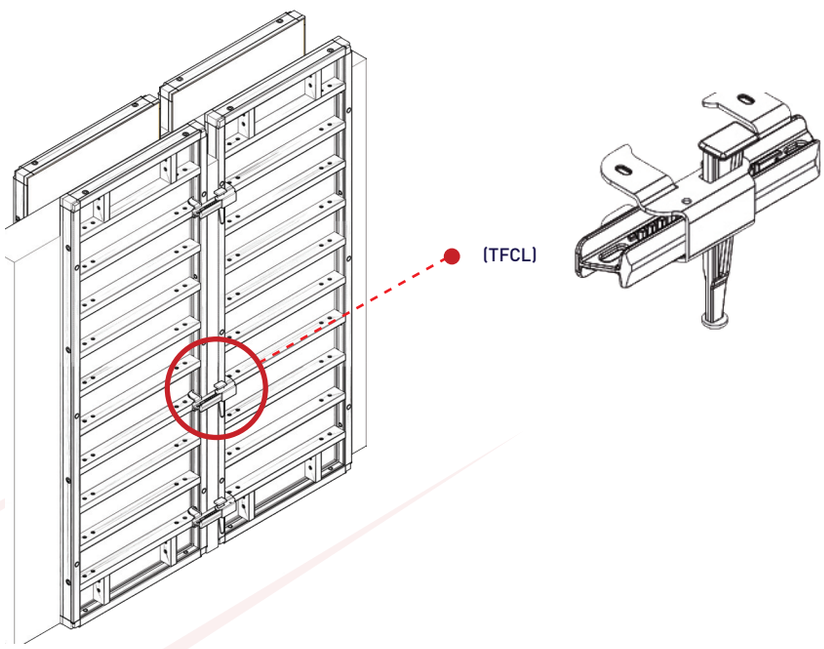

Economical Solution

- With Tech-form filler panel (TFFP); closures up to 60 – 360 mm could be formed.
  Tech form filler panel (TFFP) (3.30 * 0.40 m)
  Tech-form filler panel (TFFP) (1.20 * 0.40 m)

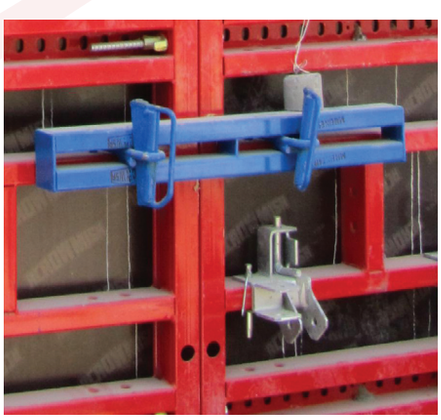

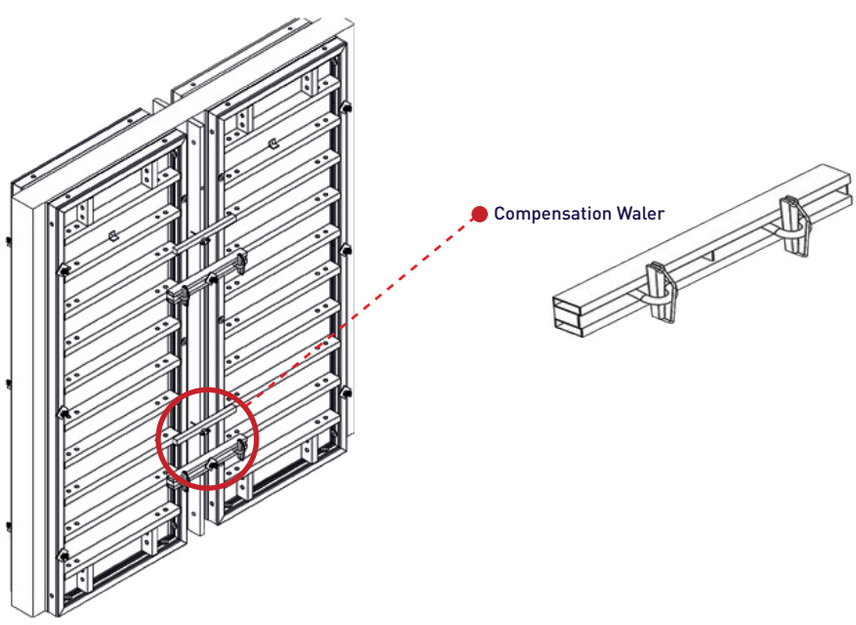

Inter-Panel Connection

Simple Inter-Panel Connections

With the Tech-Form Clamp (TFC)



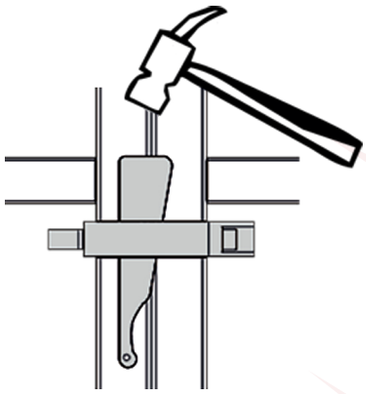

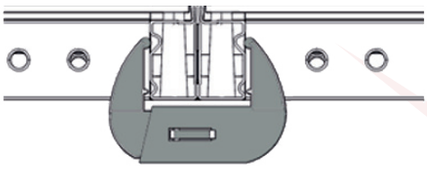

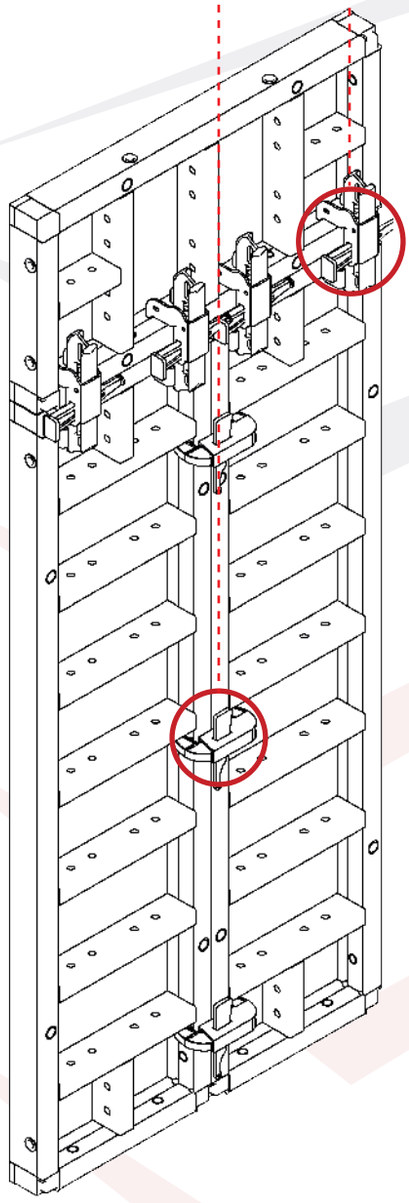

self-aligning inter-panel connections and make-up

With the Tech-Form conti - lock (TFCL)



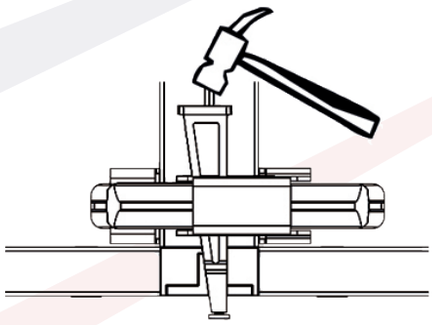

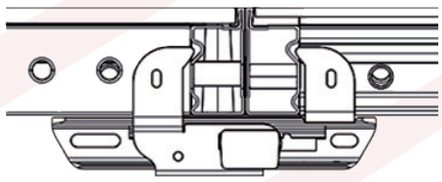

Inter-Panel Connection

More of the uses of (Tech - Form Clamp) (TFC)

Vertical stacking with moulded timber

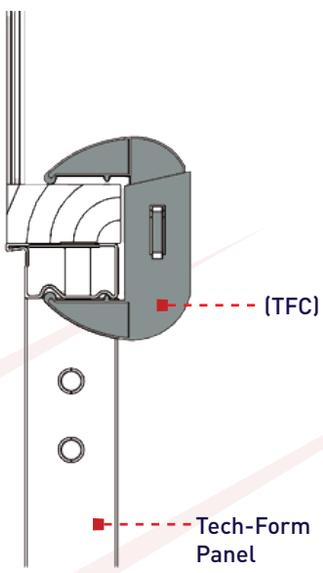

More of the uses of (Tech - Form Conti Lock) (TFCL)

Inter - panel joints

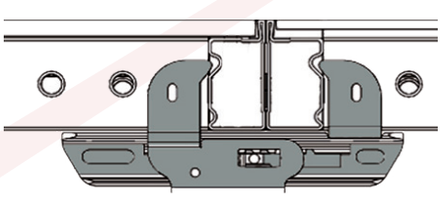

Make up to 10 cm

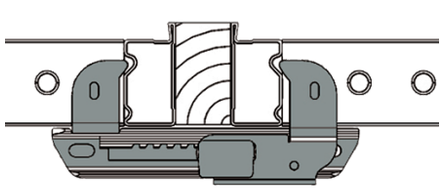

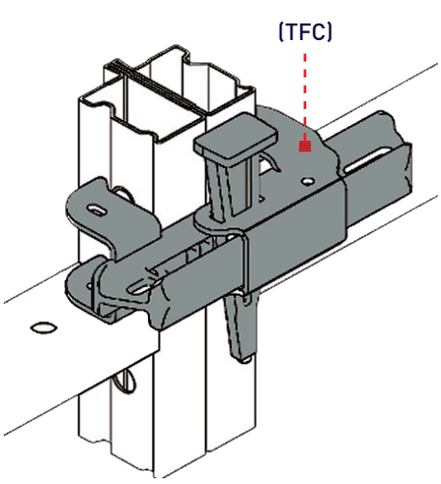

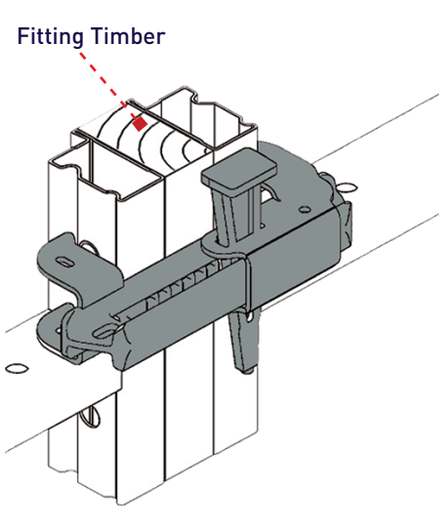

Wall Offsets

Up To Max 870 mm

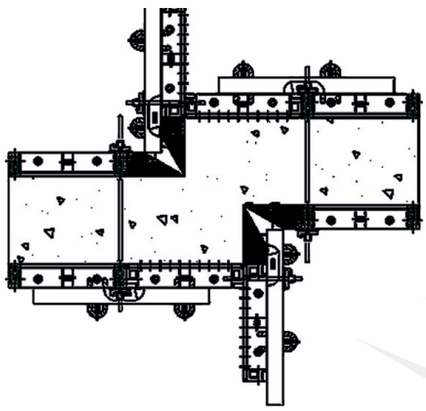

Up To Max 200 mm

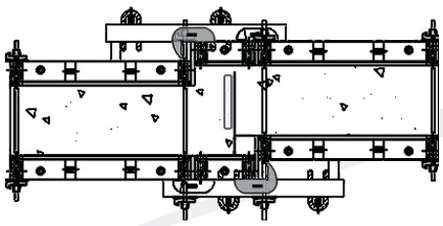

Panel Rotation

Tech-form panels have inset tie points and
can
be used on their sides without an problems .

Panels Description

(TFP) 3.30X2.40 m
(TFP) 3.30x1.20 m
(TFP) 3.30x0.90 m
(TFP) 3.30x0.60 m
(TFP) 3.30x0.30 m

(TFP) 2.40x1.20 m
(TFP) 2.40x0.90 m
(TFP) 2.40x0.60 m
(TFP) 2.40x0.30 m

(TFP) 1.20x1.20 m
(TFP) 1.20x0.90 m
(TFP) 1.20x0.60 m
(TFP) 1.20x0.30m

(TFP) 0.90x0.90 m
(TFP) 0.90x0.60 m
(TFP) 0.90x0.30 m

(TFP) 0.60x0.60 m
(TFP) 0.60x0.30 m

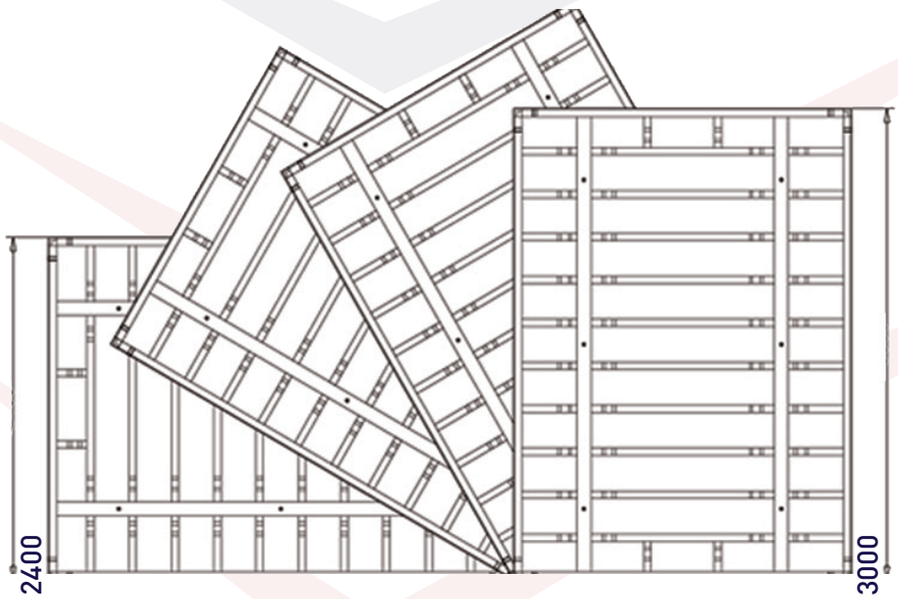

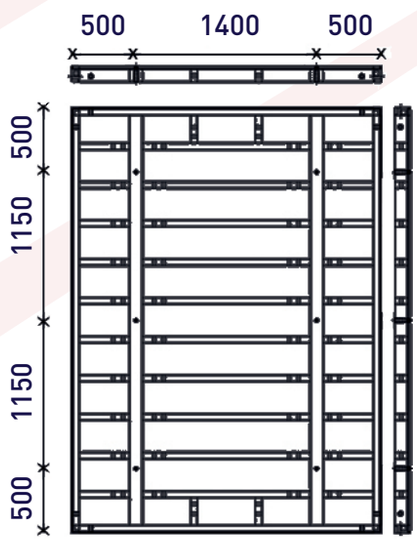

T-Junctions

Basic Rules for T junctions:

- Wall Thiknesses 200 - 400 mm
- External formwork : With panel (TFP) 90
- Internal formwork : With Tech-Form internal corner (TFIC)
- It can be adapted to wall thickness using Tech-form wall thickness compensation.

200

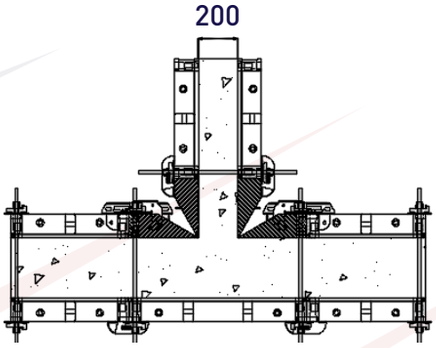

Wall Thikness 200 mm

250

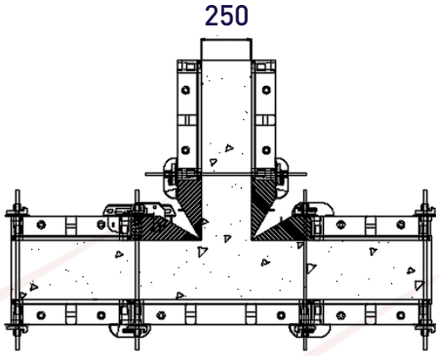

Wall Thikness 250 mm

300

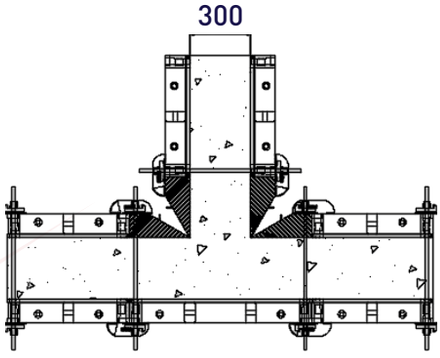

Wall Thikness 300 mm

350

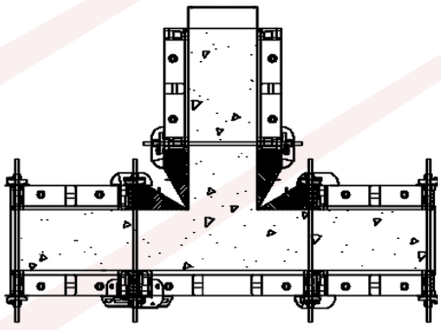

Wall Thikness 350 mm

400

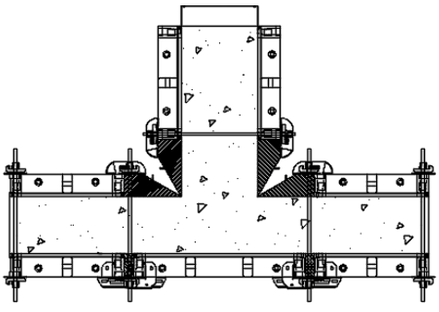

Wall Thikness 400 mm

DW 16 Tie System

The Acrow DW 16-Tie system is primarily used with soldiers requiring minimum number of ties. Moreover, the basis for the assembly is the continuous thread high tensile steel rod. Finally, the wing nut is designed to freely spin on the fast threaded rod in order to effectively speed the time for the formwork erection and stripping.

1- THRU D W 16 TIE SYSTEM : there is no lost items

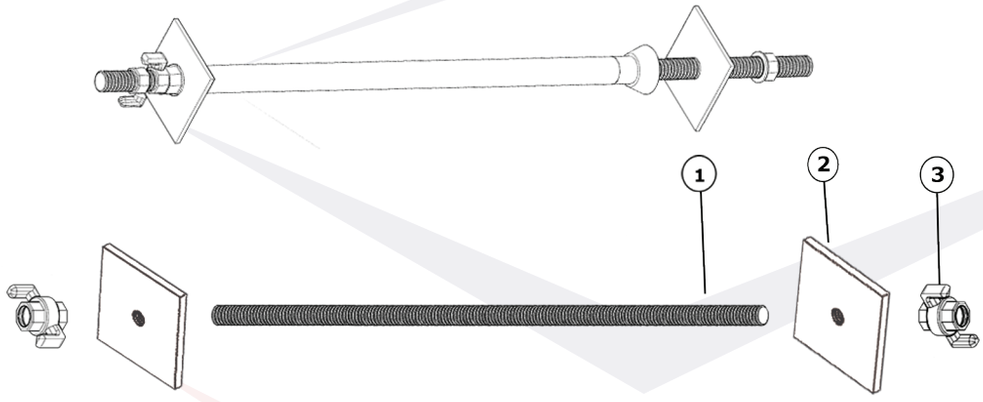

2 - WATER SEAL D W 16 tie system

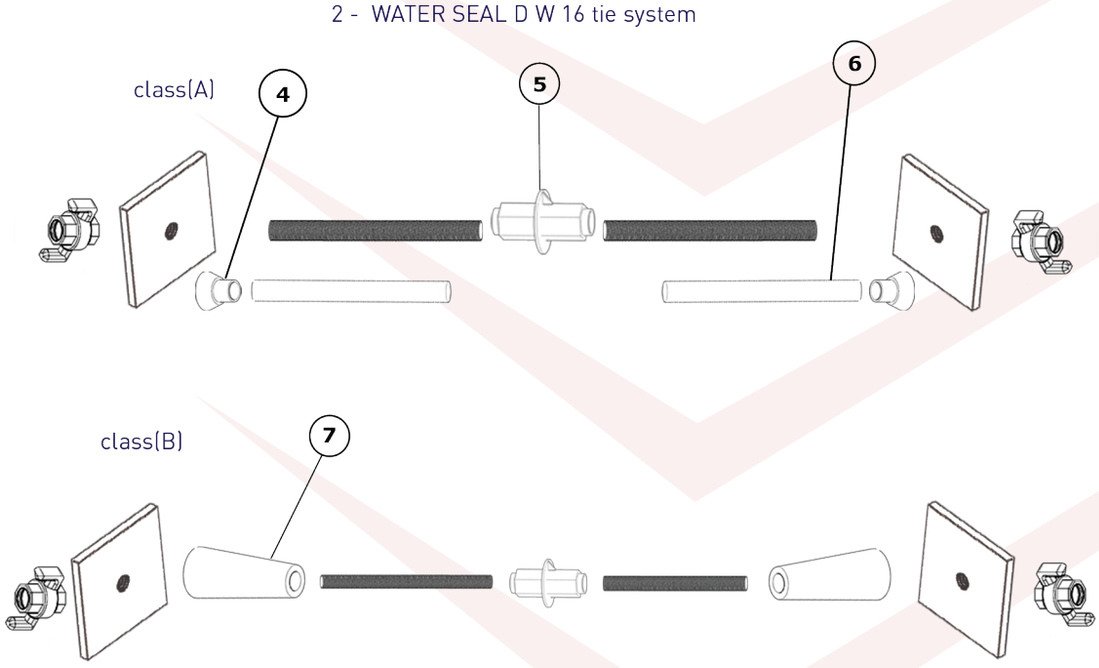

1- D W16 tie rod 2- Steel washer 3- Wing nut 4- Plastic cone 5-Water barrier 6- Palstic tube 7- Steel cone

Extension Units

Height	Width 330	240	120	90	60	30
240						
270						
300						
330						
360	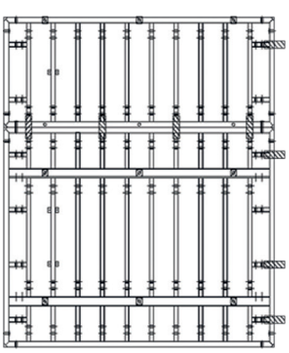	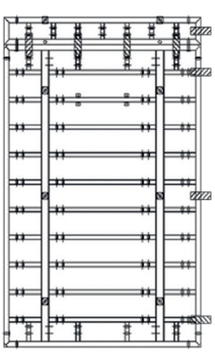				

Extension Units

Height \ Width	330	240	120	90	60	30
390						
420						
450						
480	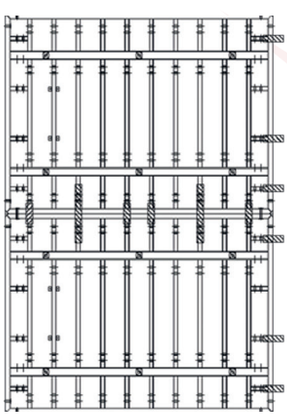	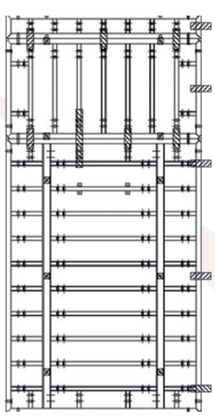				

Extension Units

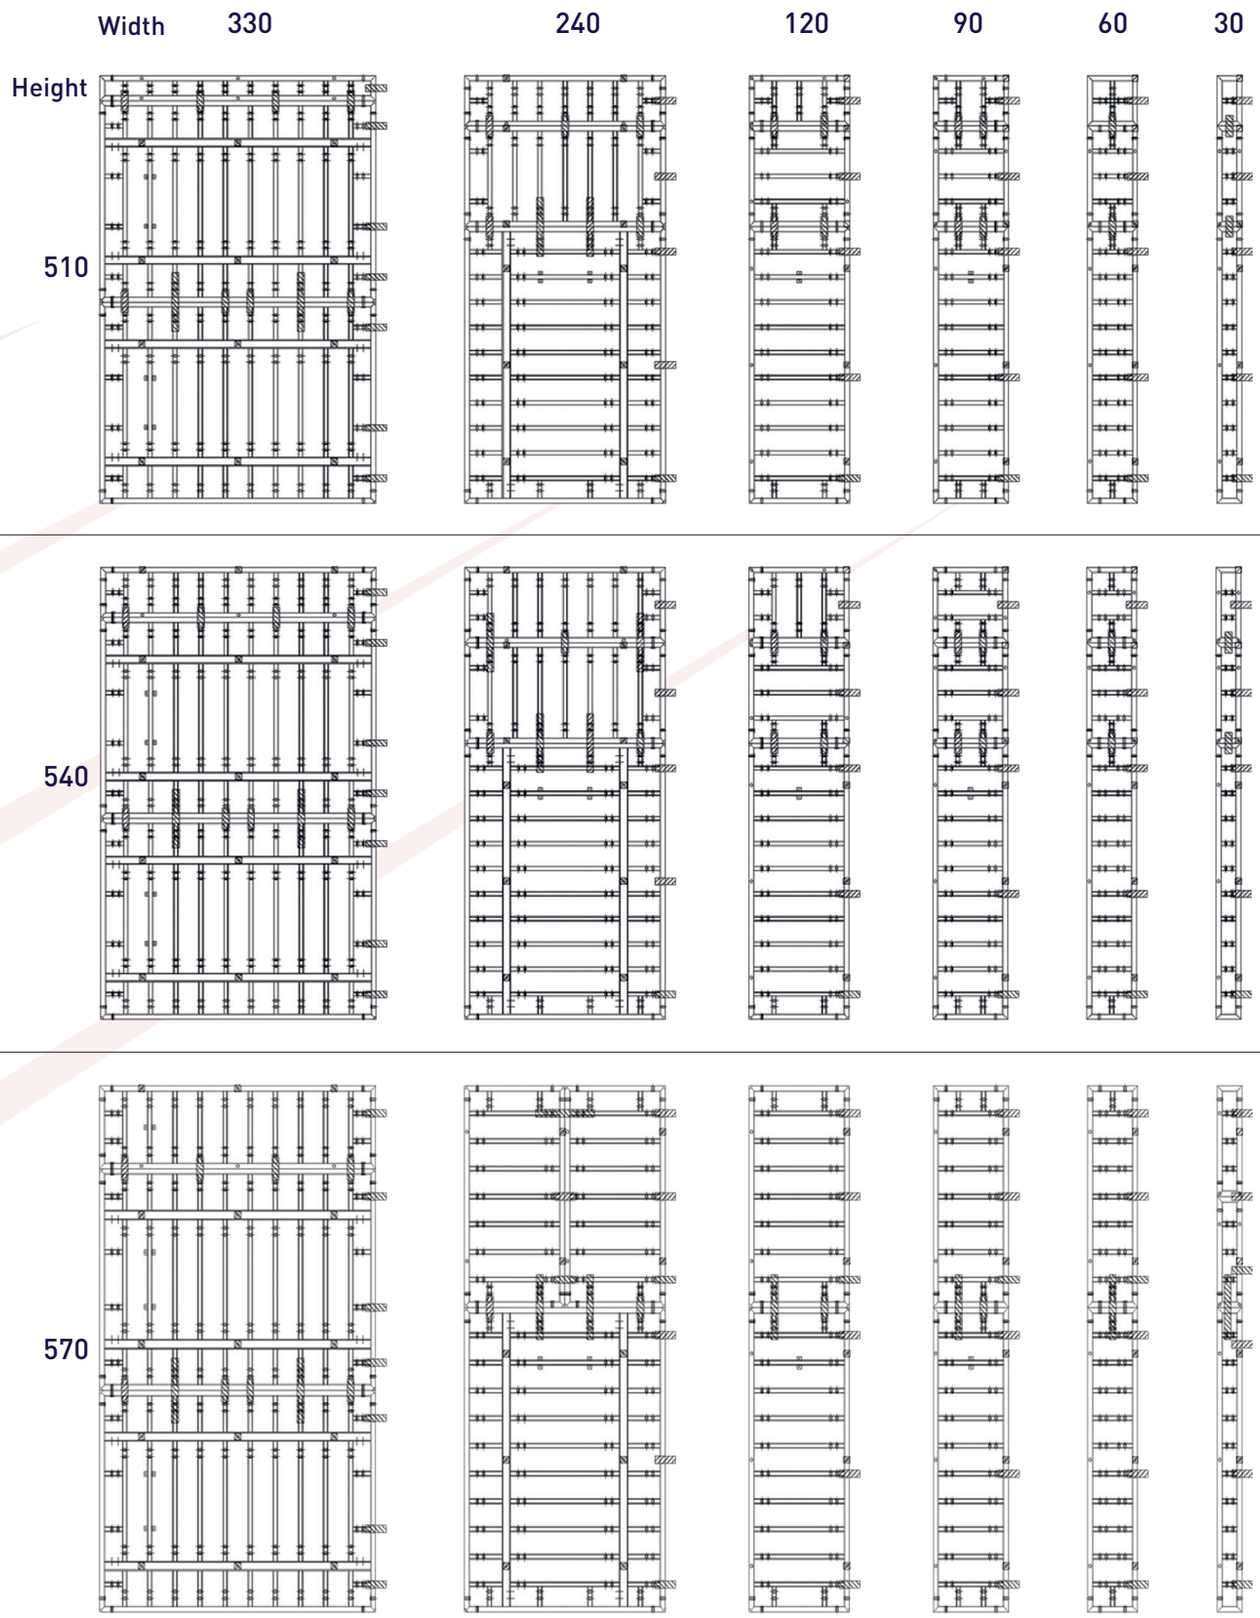

Extension Units

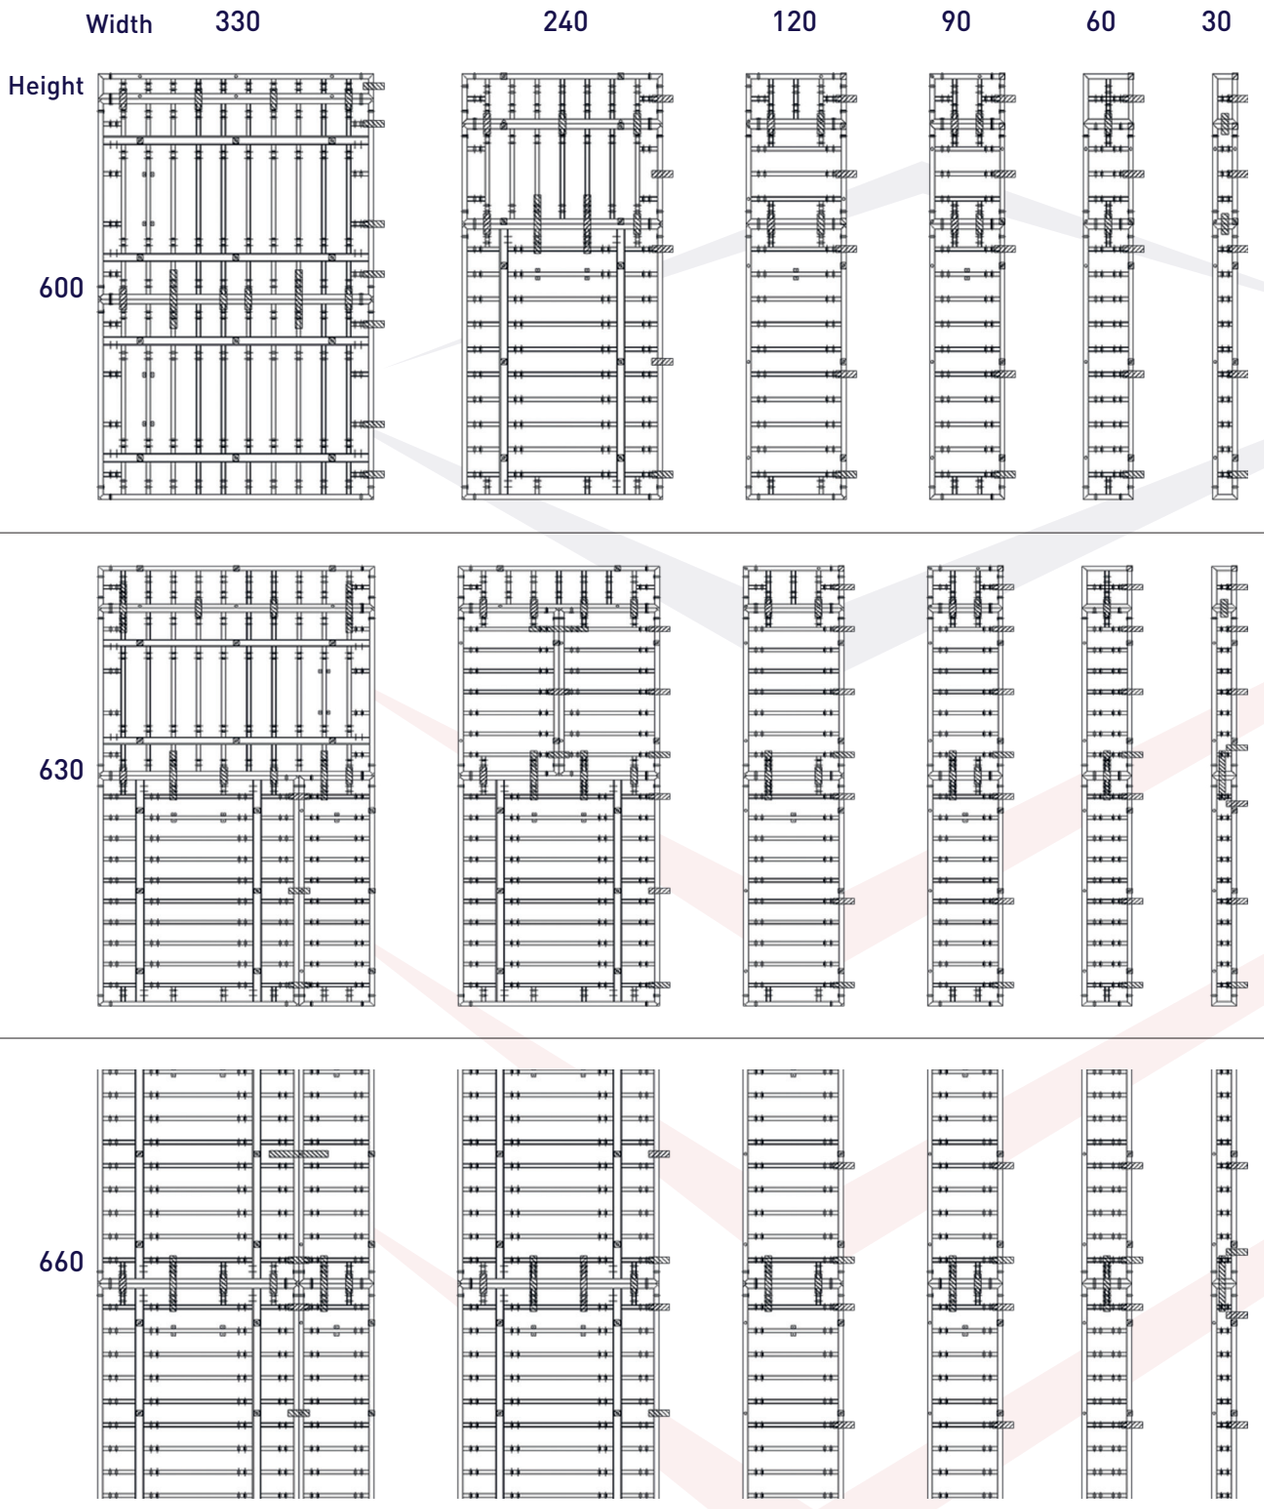

Column Formwork

Acrow Eco-form is simply a light weight panel formwork that is used for forming walls and columns with different dimensions. it is the ideal system for large-area crane-assisted gang-forming

Permitted fresh-concrete pressure:
100 KN/m²
Concrete density:
25 KN/m².
hydrostatic pour-height of
4.00 m.

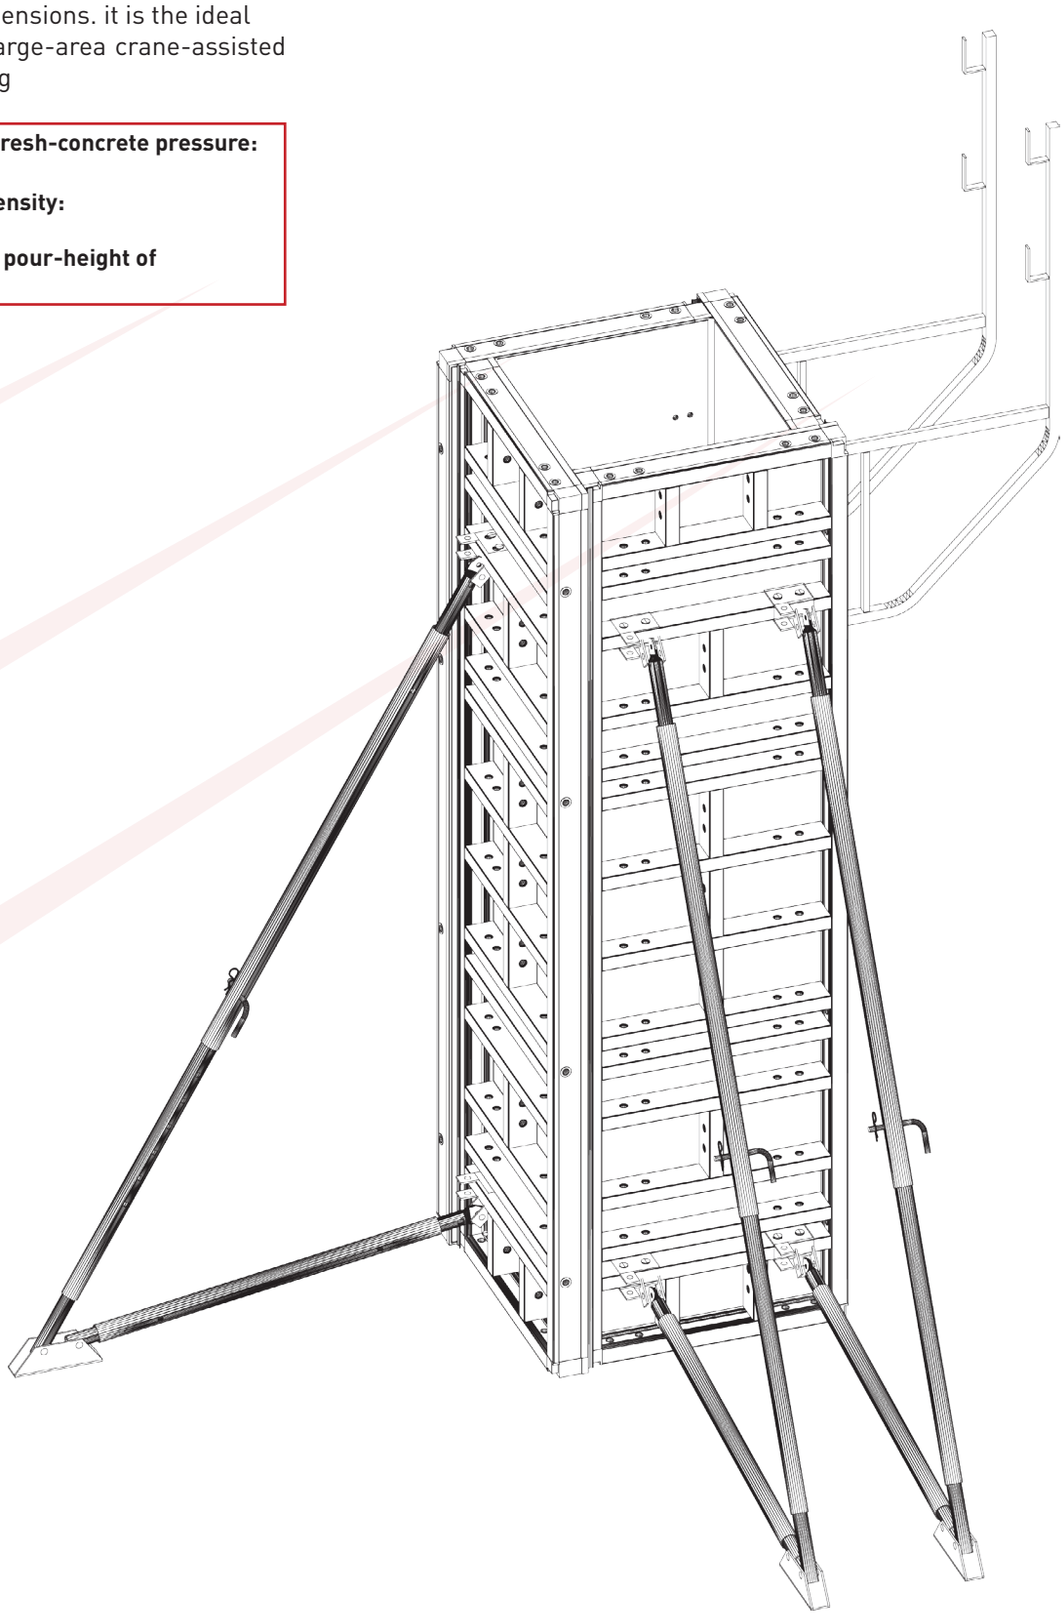

Column Formwork







HEIGHT [cm]	WIDTH [cm] 120	90	60
330	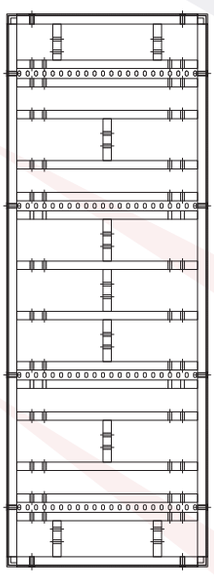	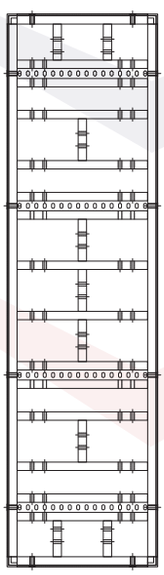	
120			
60			

With Tech-Form Column Panels

The 5.0 cm hole-grid enables forming different sizes of columns. It has a cross section up to 105 cm *105 cm. Moreover, combining panels with heights 3.30 m, 1.20 m and 0.60 m could enable achieving different height grids.

Tech-Form panel (TFCP) 3.30 m x 1.20 m

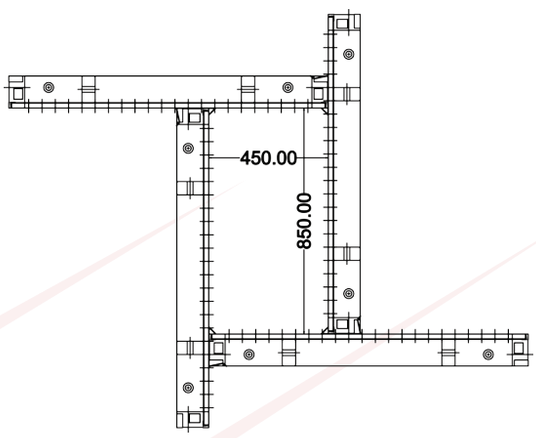

Example: Column (0.45 m x 0.85 m)

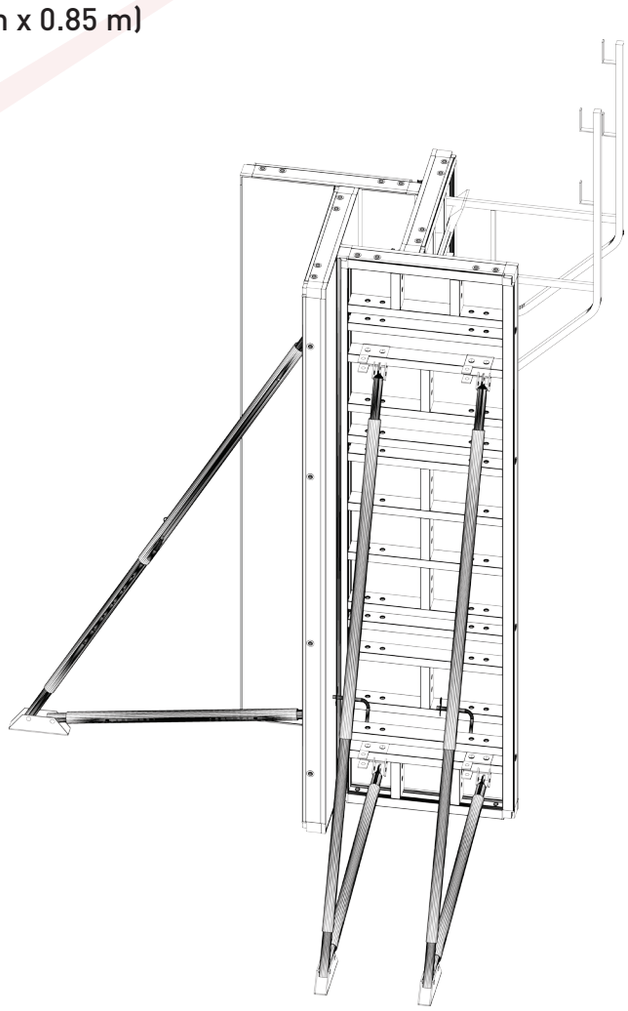

Components

Item	Description	Code no.	Weight (kg)
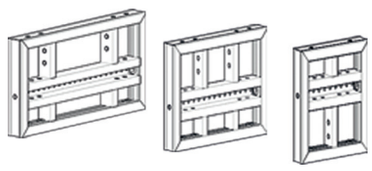	(TFCP) 0.60 X 1.20 M (TFCP) 0.60 X 0.90 M (TFCP) 0.60 X 0.60 M	6221177034085 6221177034092 6221177034108	64.00 51.50 37.00
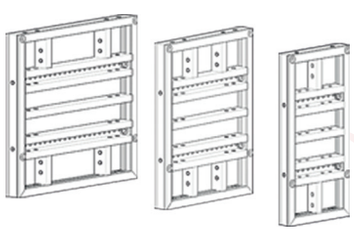	(TFCP) 1.20 X 1.20 M (TFCP) 1.20 X 0.90 M (TFCP) 1.20 X 0.60 M	6221177034047 6221177034054 6221177034061	110.50 82.50 64.50
	(TFCP) 3.30 X 1.20 M (TFCP) 3.30 X 0.90 M (TFCP) 3.30 X 0.60 M	6221177034009 6221177034016 6221177034023	262.00 213.00 160.50

Components

Item	Description	Code no.	Weight (kg)
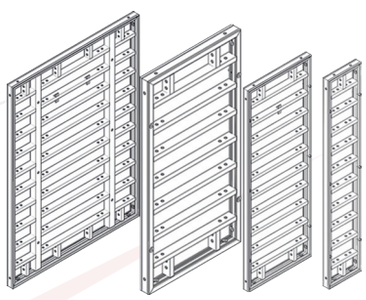	(TFP) 3.30X2.40 m	6221177033989	467.50
	(TFP) 3.30x1.20 m	6221177033934	213.50
	(TFP) 3.30x0.90 m	6221177033910	175.50
	(TFP) 3.30x0.60 m	6221177033880	134.50
	(TFP) 3.30x0.30 m	6221177033842	90.50
	(TFP) 2.40x1.20 m	6221177033972	190.00
	(TFP) 2.40x0.90 m	6221177033965	132.00
	(TFP) 2.40x0.60 m	6221177033958	100.50
	(TFP) 2.40x0.30 m	6221177033941	67.00
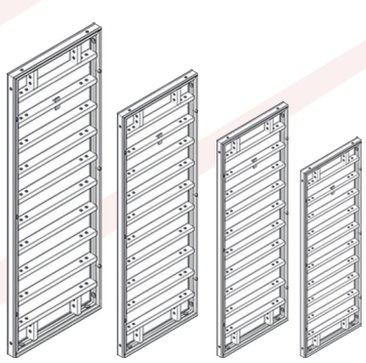	(TFP) 1.20x1.20 m	6221177033927	91.50
	(TFP) 1.20x0.90 m	6221177033903	75.50
	(TFP) 1.20x0.60 m	6221177033873	56.50
	(TFP) 1.20x0.30m	6221177033835	36.50
	(TFP) 0.90x0.90 m	6221177033897	61.50
	(TFP) 0.90x0.60 m	6221177033866	45.50
	(TFP) 0.90x0.30 m	6221177034313	29.00
	(TFP) 0.60x0.60 m	6221177033859	34.00
	(TFP) 0.60x0.30 m	6221177034306	20.50

Components

Item	Description	Code no.	Weight (kg)
	Handrail Post	6221177054564	6.20
	Push Pull PPS 131 Push Pull PPS 132 Push Pull PPS 161 Push Pull PPS 162 Push Pull PPS 201 Push Pull PPS 202 Push Pull PPS 252 Push Pull PPS 302 Push Pull PPS 352	6221177014254 6221177014261 6221177014278 6221177014285 6221177014292 6221177014308 6221177014315 6221177014322 6221177014339	8.60 11.40 9.80 12.40 13.10 13.30 15.00 19.00 23.10
	Rivet Pin = 17 mm	6221177012298	0.25
	Spring Clip large Spring Clip small	6221177022617 6221177022624	0.03 0.01
	Double Base Plate	6221177000813	2.40

Components

Item	Description	Code no.	Weight (kg)
	(TFFP) 3.30 X 0.40 M (TFFP) 1.20 X 0.40 M	6221177034153 6221177034160	58.00 24.00
	Compensation Waler	6221177034276	12.00
	Tech Form Shore Connector	6221177034252	4.00
	Tech Form Crane Hook	6221177039349	6.00
	Single Base Plate	6221177000882	1.45

Components

Item	Description	Code no.	Weight (kg)
	Tech Form Coupler (TFC)	6221177034283	11.00
	Tech Form Conti Lock (TFCL)	6221177054533	4.50
	Tech Form Stop End Tie	6221177054694	2.00
	Universal Waler	6221177034276	12.00
	Handrail Post holder	6221177054564	1.50

Components

Item	Description	Code no.	Weight (kg)
	Scaffold Bracket	6221177034269	11.00
	Stacking Device	6221177054649	4.50
	(TFIC) 3.30 X 0.30X 0.30 M (TFIC) 2.40 X 0.30X 0.30 M (TFIC) 1.20 X 0.30X 0.30 M (TFIC) 0.90 X 0.30X 0.30 M	6221177034177 6221177034184 6221177034191 6221177034207	152.00 110.00 60.00 49.00
	Waler Stop	6221177034294	4.50

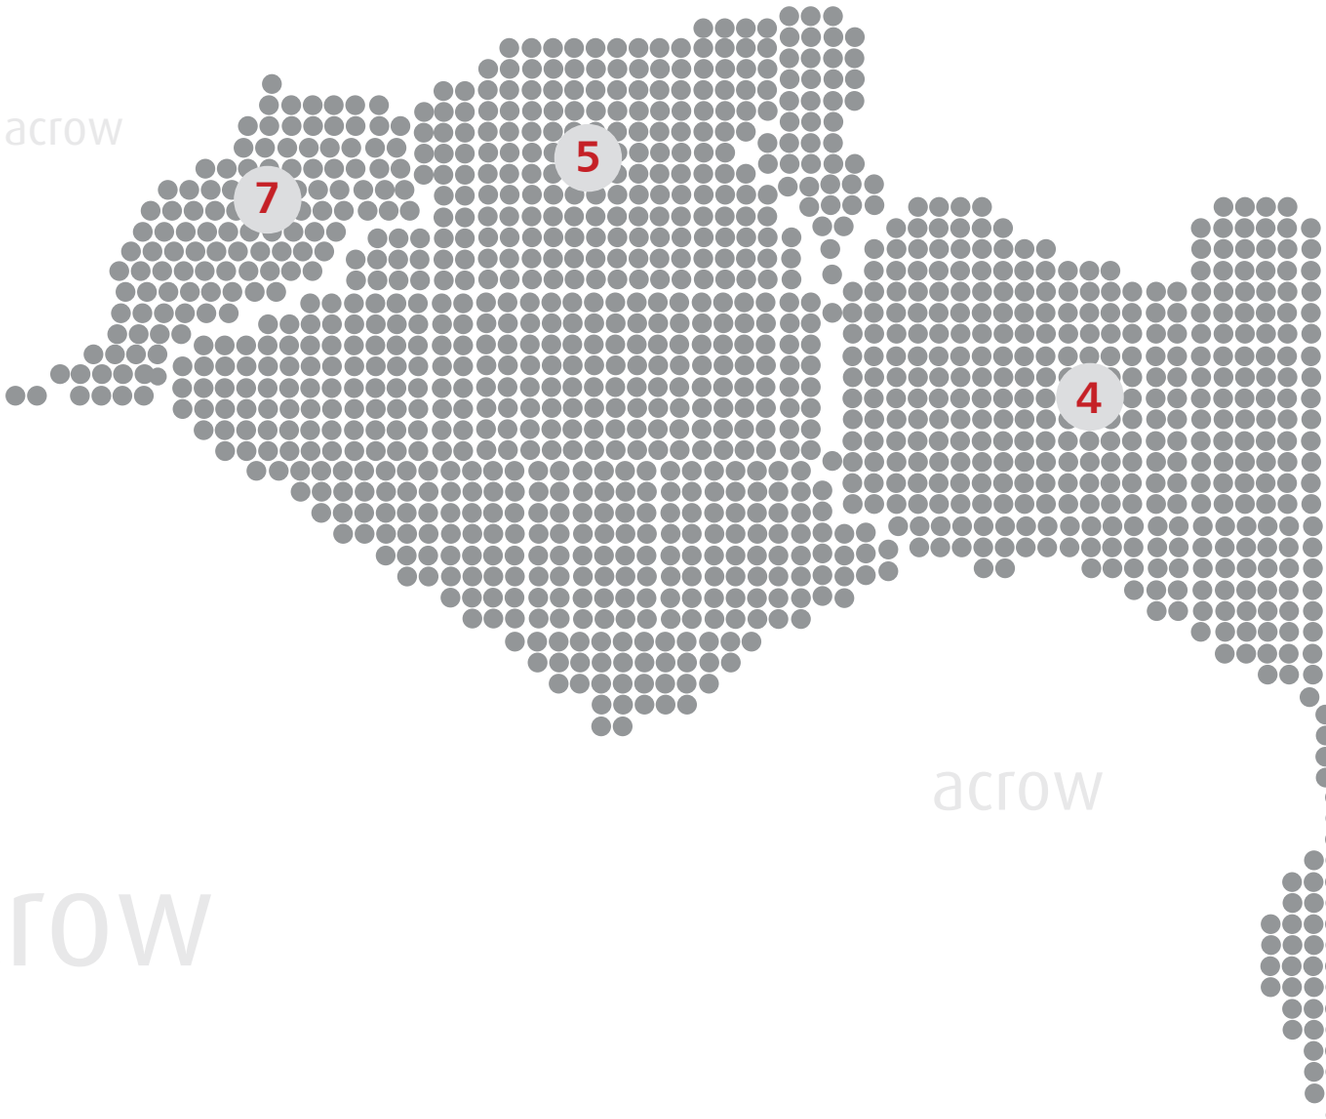

1 Egypt

Acrow Misr
Head Office, Factory:
Wady Houf, Helwan
Tel: +202 23690 616 / 23690 739
+202 23695 700 / 23699 976
Fax: +202 23695 260
E.mail: info@acrow.co

Alex Branch
27 Dr. mahmoud Daoud st.,
Tel: +203 4200 289
E.mail: acrowalex@acrow.co

Port Said Branch
El freepor Bulding
Tel: +2066 3232542
acrowportsaid@acrow.co

2 KSA

Acrow Al saudia Ltd co.
P.O.Box : 305746-Riyadh-11361
Saudi Arabia Riyadh branch:
Tel : +966 1 2160504
Fax : +966 1 2160503
Email : acrowriyadh@acrow.co

Jeddah branch:
Tel : +966 2 639 16 24
Fax :+966 2 691 85 45
Email : acrowjeddah@acrow.co

Damam branch:
Tel: +966 3 8054151

3 Kuwait

Khalid Ali, Al Kaharafi
& Bros. Co. W.LL
Tel: +965 4813 127 / 4817 289
Fax: +965 4835 501
E.mail: acrowkuwait@acrow.co

4 Libya

Acrow Tripoli
Tel: +218 91 411 6873 / 91 331 9367
Fax: +218 21 351 3838
E.mail: acrowlibya@acrow.co

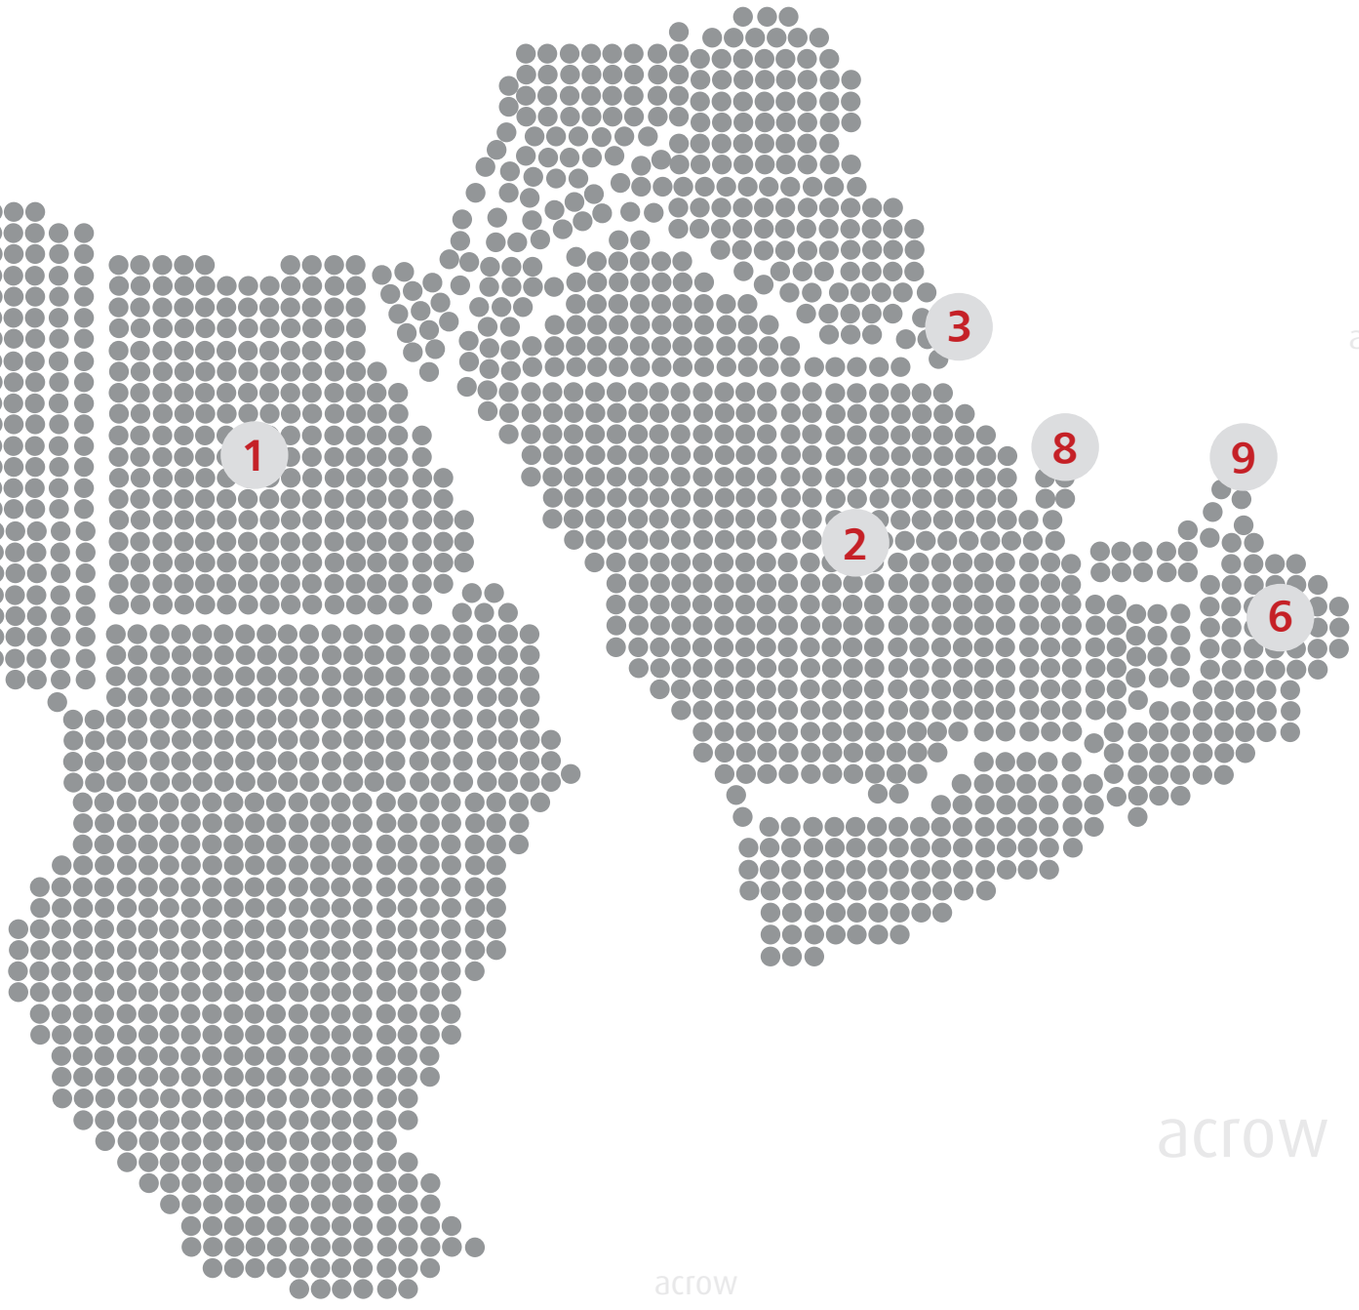

acrow

5 **Algeria**
ACROW-DZ COMPANY
Tel: +213 (0) 21 75 54 74/63/64
Tel: +213 (0) 21 50 55 58
Fax: +213 (0) 21 50 55 58
Address : Siege Social cité des travailleurs
lot. 09 groupe 02 Dar El beida, Alger
Email : acrow-dz@acrow.co

6 **Oman**
Acrow Muscat
Tel: +968 9828 76 82
E.mail: acrowmuscat@acrow.co

7 **Morocco**
38 Rue Abou El Waqt, Res
Haydar El Jarrah, Rez
Chausser No. 10
Casblanca
e-mail: acrowmorocco@acrow.co

8 **UAE**
Acrow Gulf
Tel: +971 4343 94 98
Fax: +971 4343 95 98
E.mail: acrowgulf@acrow.co

9 **Qatar**
Acrow Qatar
Tel: +974 4582 357
Fax: +974 4582 376
E.mail: acrowqatar@acrow.co

ACROW
Formwork Technology

Acrow H20 & solider


Acrow One shutter solider

Acrow V.M.C

Acrow Tech-Form

Acrow Cuplock

Acrow Bridge table form

Acrow Circular column

Acrow climbing system

Acrow shorbrace Table form

Acrow Big steel panel

Acrow European prop


Acrow Vari form


Acrow Prop table form

Acrow frame

Acrow early striking system

Acrow Ring lock

www.acrow.co

02/2013, Code No.: 2007050061043